



OLI®

Good Vibrations
*When you need it
Where you need it*

Electric Motovibrators



roydisa



WAMGROUP®



2 years warranty
(electric parts included)
Ex-stock delivery

MVE Standard Range

- » II3D temp. 100°C from size 10 to 50 and 135°C from size 60 to 90 – IP66
- » Class II Div. 2 Group F, G T6 conform to UL 1836 and CSA C22.2 NO25 – TENV NEMA4

MVE-E Increased Safety Range

- » Atex II2GD Zone 1/21
- » Protection IP 66
- » Up to 10 kW (2-4-6-8 poles)

MVE-D Explosion Proof Range

- » II2 GD Ex d IIB T4 Ex tD A21 IP66 T135°C
- » Ex d IIB T4 Gb
- » Ex tD A21 IIIC T135°C Db IP66

www.roydisa.es

DELEGACIONES:

SANTIAGO – Tel. 981 587033
VIGO – Tel. 986 238430

CORUÑA – Tel.981 270307
ORENSE – Tel.988 235430

LUGO – Tel. 982 209827





OLI®

Good Vibrations
*When you need it
Where you need it*



Pneumatic Vibrators & Flow Aids



Pneumatic Vibrators Turbine OT-Type Roller OR-Type Ball S-Type

- » Maintenance-free
- » Explosion-proof
- » Anodized aluminium body
- » Vast range (more than 20 models)



Pneumatic Hammers PS-Type

- » Produces violent blow on wall on which it is installed



Combined Hammer Blasts PJ-Type

- » Instantaneous hammering
- » Extended vibration
- » Extended and intermittent airshot along silo wall




Air Cannons PG-Type

- » Energy generated: 4.2 ~ 153 J



Vibrating Bin Aerators VB-Type / VBE-Type / VBM-Type Fluidization Pads & Nozzles (I100-Type / U025-Type / U060-Type)

- » Highly abrasion-resistant
- » Maintenance-free
- » Suitable for all powders and granular materials

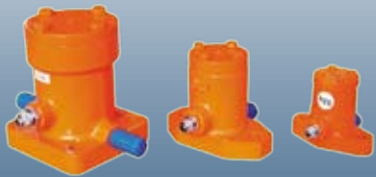


Pneumatic Impact Vibrators P-Type

- » High impact force
- » Limited air consumption
- » Lubrication not essential
- » Flameproof



Pneumatic Piston Vibrators F-Type

- » Immediate start and stop
- » Low noise level
- » Limited air consumption
- » No maintenance required
- » Flameproof

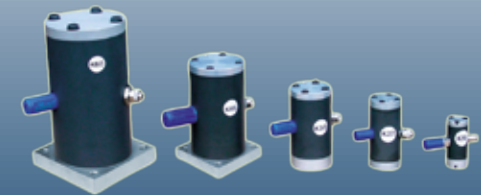

Pneumatic Internal Piston Vibrators K-Type

- » Lubrication-free
- » Low noise level
- » Operating temperature: -20°C ~ 130°C (-4°F ~ 266°F)

