



Made for Motion



Drive Technology

- Couplings
- Torque limiters
- Clamping elements
- Torque measuring systems

The new 2D/3D Publisher as an extension of our online tools

Having calculated the right product by means of the coupling configurator, you can be provided with the result as a 2D, 3D, dimensional drawing or as a 3D-PDF file as of


now. What is special: Clicking the download the requested drawings and models are generated in real time in the background.



Online tools

Tailor-made to your specifications -
make use of our online tools

Our newcomers

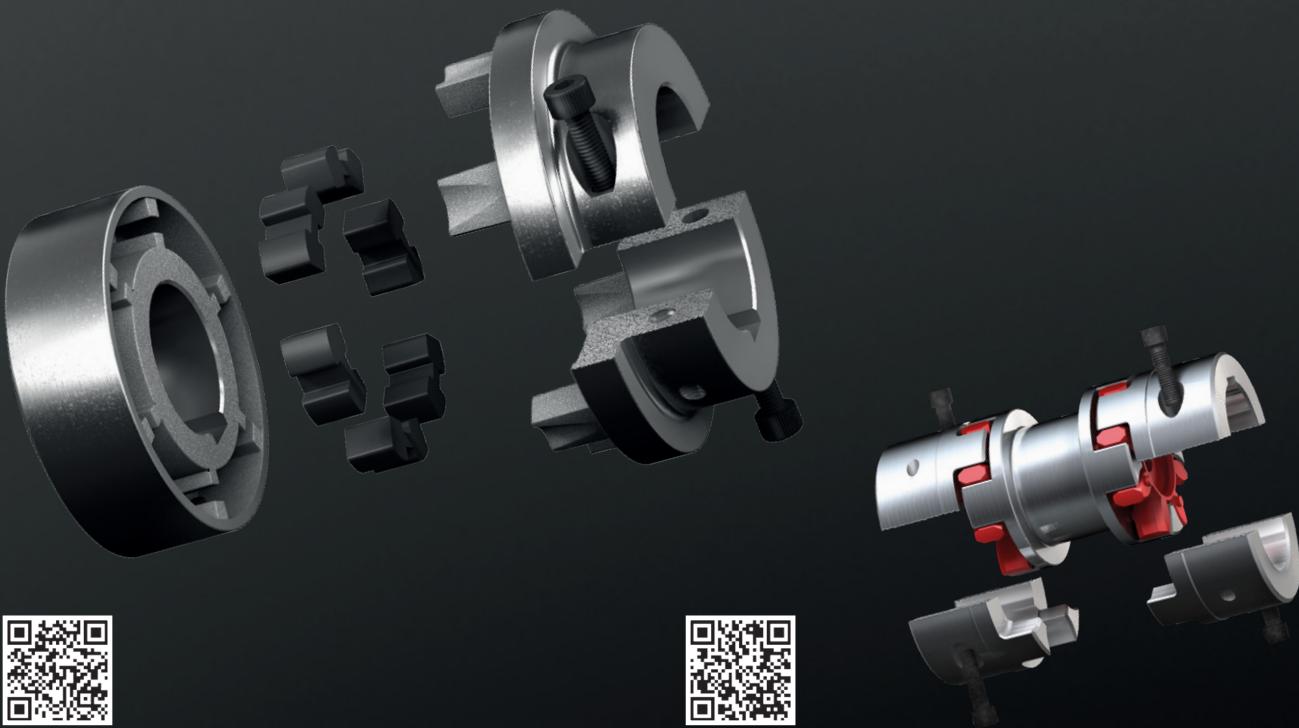

ROFLEX® SH and ROTEX® ZS-DKM-SH

ROFLEX®, a torsionally flexible, fail-safe shaft coupling for torsionally vibration-damping power transmission. Available as a standard type or with split hubs for radial assembly and disassembly. SPLIT hubs with double-cardanic couplings such as ROTEX® ZS-DKM-SH allow for compensating for larger radial displacements.



EVOLASTIC®

All-round coupling with special displacement properties and for uncoupling vibrations, as an example for the use in frequency-controlled and I. C.-engine drives, intermediate shafts and PTO.



SINULASTIC®

Highly modular and flexible coupling range for reducing torsional vibrations in main drives such as gensets, hydraulic pumps, compressors and gearboxes.

Those who value KTR as a manufacturer will love us as a partner.

KTR provides the mechanical and plant engineering with an extensive portfolio of high-quality drive and hydraulic components as well as braking and cooling systems. We are pleased to be at your service during the designing stage and develop tailor-made solutions for you. Perfectly organized logistics, global presence via 24 subsidiary companies and more than 90 distribution partners along with an international network consisting of 8 production sites are the prerequisite for quick delivery. When it comes to service we ensure short distances along with competent and personal support.






Made for Motion



**„Innovation and tradition
are the key components of
our product portfolio and
KTR's corporate culture.“**

Nicola Warning, CEO of KTR

**Wherever motion is essential,
we have the right answer.**

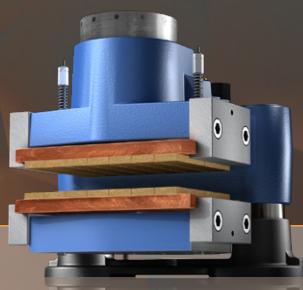

Drive Technology

Mechanical components are and will remain essential in drive technology. The industry's demands on components grow continuously: energy efficiency, power density, ease of servicing and electrification. Our portfolio includes couplings and torque limiters, clamping sets and universal joints as well as torque measuring shafts.



Brake systems

Our hydraulic and electromechanical brake systems are globally used in various industries. Customer preference and parameters of the application decide on the selection of the right brake.



Hydraulic components

For almost 50 years we have provided the industry with a continuously growing range of hydraulic components from our in-house development and manufacturing: accurate selection, high-quality processing, quick availability.



Cooling systems

As a customised product or standard solution, multimedium or oil/air cooler, for mobile machines or stationary hydraulics, optionally available as a marine or ATEX version, powerful and efficient.



OUR INDUSTRIES



Wind power



Construction and agricultural machines



Pumps and compressors




Indoor materials handling



Machine tools



Hydraulics

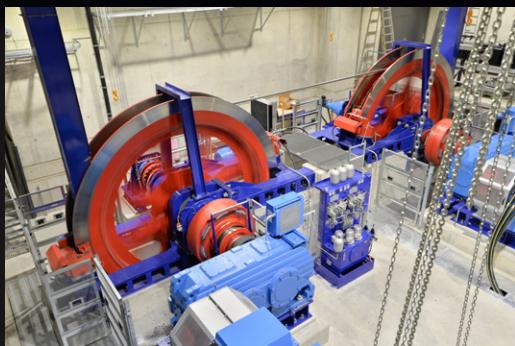

General drive technology



Marine / shipbuilding



Stationary power generation

SUMMARY OF PRODUCTS/INDUSTRIES



COUPLINGS

Flexible jaw and pin & bush couplings

ROTEX®		■			■	■	■	■	■	■	■	■	■	■	■	■	■
ROFLEX®																	
POLY-NORM®																	
POLY																	
REVOLEX® KX-D								■									

Gear couplings

BoWex®						■									■	■	■
GEARex®															■	■	■

Backlash-free servo couplings

ROTEX® GS	■	■	■				■								■	■	■
ROTEX® GS P / HP																	
KTR-STOP® NC																	
TOOLFLEX®		■													■	■	■
RADEX®-NC															■	■	■
COUNTEX®		■													■	■	■

Steel laminae couplings

RADEX®-N		■													■	■	■
RIGIFLEX®-N															■	■	■
RIGIFLEX®-HP															■	■	■

Highly flexible shaft couplings

EVOLASTIC®				■	■	■	■	■	■						■	■	■
BoWex® HEW Compact																	

Flange couplings for I. C.-engines

Pump mounting flange				■	■	■	■	■	■						■		
BoWex® FLE-PA / FLE-PAC				■	■	■	■	■	■						■		
MONOLASTIC®				■	■	■	■	■	■						■		
BoWex-ELASTIC®				■	■	■	■	■	■						■	■	
SINULASTIC®				■	■	■	■	■	■						■	■	

Magnetic couplings

MINEX®-S															■	■	■
----------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---	---	---

TORQUE LIMITERS

RUFLEX®						■	■	■	■						■	■	■
KTR SI/KTR SI Compact							■								■	■	■
SYNTEX®/SYNTEX®-NC															■	■	■

CLAMPING SETS

CLAMPEX®		■				■	■	■	■						■	■	■
----------	--	---	--	--	--	---	---	---	---	--	--	--	--	--	---	---	---

TORQUE MEASURING SHAFTS

DATAFLEX®			■	■	■		■								■	■	■
-----------	--	--	---	---	---	--	---	--	--	--	--	--	--	--	---	---	---



SUMMARY OF PRODUCTS / SPECIFICATIONS

	<i>Max. torque [Nm]</i>	<i>Max. circumferential speed [m/s]</i>	<i>Max. bore diameter [mm]</i>	<i>Torsionally rigid</i>	<i>Flexible</i>	<i>Highly torsionally flexible</i>	<i>Backlash-free</i>	<i>Maintenance-free</i>	<i>Fail-safe</i>	<i>Shear type</i>	<i>Compact dimensions</i>	<i>Double-cardanic</i>	<i>Single-cardanic</i>	<i>Hightech</i>
COUPLINGS														
Flexible jaw and pin & bush couplings														
ROTEX®	35,000	60	200		■			■	■	■	■	■	■	■
ROFLEX®	5,000	35	120		■			■	■	■	■	■	■	■
POLY-NORM®	67,000	35	280		■			■	■	■	■	■	■	■
POLY	6,100	35	145		■			■		■			■	■
REVOLEX® KX-D	1,350,000	60	650		■		■	■	■	■	■	■	■	■
Gear couplings														
BoWex®	2,500	30	125	■			■		■	■	■	■	■	■
GEARex®	2,750,000	-	520	■				■		■	■	■	■	■
Backlash-free servo couplings														
ROTEX® GS	5,850	80	110		■		■	■	■	■	■	■	■	■
KTR-STOP® NC														
TOOLFLEX®	600	40	65	■			■	■		■	■	■	■	■
RADEX®-NC	300	35	55	■			■	■			■	■	■	■
COUNTEX®	1	40	14	■			■	■			■	■	■	■
Steel laminae couplings														
RADEX®-N	280,000	65	330	■			■	■			■	■	■	■
RIGIFLEX®-N	280,000	100	400	■			■	■			■	■	■	■
RIGIFLEX®-HP	330,000	200	380	■			■	■			■	■	■	■
Highly flexible shaft couplings														
EVOLASTIC®	5,600	60	140			■	■	■	■		■	■	■	■
BoWex® HEW Compact	8,400		125		■		■	■		■	■	■	■	■
Flange couplings for I. C.-engines														
BoWex® FLE-PA / FLE-PAC	6,600	50	125	■				■			■	■	■	■
MONOLASTIC®	1,850	50	60		■			■			■	■	■	■
BoWex-ELASTIC®	70,000		275			■		■			■	■	■	■
SINULASTIC®	25,000		240		■	■	■	■			■	■	■	■
Magnetic couplings														
MINEX®-S	1,000		90		■			■						
TORQUE LIMITERS														
RUFLEX®	12,000		140							■				■
KTR-SI	8,200		100											
KTR-SI FRE	60,000		200											
KTR-SI FRA	2,600		80											
SYNTEX®	400		50			■					■			
SYNTEX®-NC	550		60			■					■			
KTR-SI Compact	3,100		80		■									
CLAMPING SETS														
CLAMPEX®	7,394,000		1,000			■	■				■			■
TORQUE MEASURING SHAFTS														
DATAFLEX®	50,000	-	-	■			■	■						

For legend of certificate please refer to flapper on the cover

INDEX OF SUBJECTS

A	All-steel gear couplings	P. 184 et seqq.
B	Backlash-free couplings	P. 126, 156, 174, 182, 184 et seqq. 210 et seqq.
	Ball ratchet couplings	P. 290 et seqq.
	Basic programme	P. 36, 37, 38, 39, 40, 63, 64, 67, 69, 74, 78, 79
	Bellow-type couplings	P. 156
C	Cam couplings	P. 26 - 76, 126
	Coatings	P. 40, 78
	Corrosion protection	P. 38, 40, 78
	Curved-tooth gear couplings®	P. 88, 208, 226, 260 et seqq.
	Clamping hubs	P. 44, 91, 134, 136, 160, 162, 176, 211, 255 et seqq.
	Clamping ring hubs	P. 43, 138, 164, 178, 256
	Clamping sets	P. 59, 82, 318 et seqq.
	Clamping system	P. 43, 44, 46, 47, 49, 50, 154
D	Double-cardanic shaft couplings	P. 49, 50, 51, 53, 148, 220 et seqq. 176 et seqq., 184 et seqq.
	Distance couplings	P. 49, 50, 53, 72, 75, 88, 150
	Drop-out center design couplings	P. 49, 50, 53, 72, 75, 146
E	Elastomer couplings	P. 26 - 85, 208, 210 et seqq., 252 et seqq.
	External clamping sets	P. 344 et seqq.
F	Fail-safe shaft couplings	26 - 85 excluding 73 - 76, 210 et seqq.
	Flange couplings	P. 52, 215, P. 219, 252 et seqq., 266
	Flexible couplings	P. 26 - 85
G	Gear couplings	P. 88
H	Half shell drop-out center design couplings	P. 45, 46, 47, 49, 50, 53, 65, 69, 72, 74, 75 146, 148
	Hermetic sealings	P. 264 et seqq.
	Highly flexible couplings	S. 208, 210 et seqq., 226, 252 et seqq.
I	Idle rotation couplings	P. 290 et seqq.
	Internal clamping sets	P. 326 et seqq.
	Intermediate shafts	P. 49, 50, 51, 53, 72, 75, 150 et seqq., 172 et seqq., 184 et seqq., 220 et seqq.
J	Jaw couplings	P. 26 - 76, 126
L	Laminae couplings	P. 175, 184 et seqq.
	Magnetic couplings	P. 264 et seqq.
	Metal bellow-type couplings	P. 156
	Miniature couplings	P. 38, 134, 158, 176, 182
	Miniature clamping sets	P. 328 et seqq., 330 et seqq., 332 et seqq., 340 et seqq.
	Mounting flanges	P. 52, 184 et seqq., 227
	O	
	Overload couplings/Overload systems	P. 60, 281 et seqq.
	P	
	Permanent-magnetic couplings	P. 264 et seqq.
	Precision couplings	P. 126, 156, 174, 182
	Precision joints	P. 356 et seqq.
	R	
	Ratchet couplings	P. 290 et seqq.
	Rigid shaft couplings	P. 352 et seqq.
	S	
	Safety couplings with retaining elements	P. 290 et seqq.
	Safety couplings	P. 60, 290 et seqq.
	Servo couplings	P. 126, 156, 174, 182
	Servo laminae couplings	P. 174
	Shaft-hub-connections	
	Shaft couplings	P. 26 - 85, 318 et seqq. P. 26 - 85, 88, 126, 156, 174 - 181, 184 et seqq., 210 et seqq., P. 60
	Shear pin couplings	P. 48, 49, 73 - 76, 252 et seqq.
	Shear-type couplings	P. 57, 83, 98
	Shifting hubs	P. 366
	Speed measuring shafts	P. 40, 195, 264 et seqq.
	Stainless steel couplings	P. 174, 184 et seqq.
	Steel laminae couplings	P. 40, 41, 79, 134, 139, 184 et seqq.
	Steel shaft couplings	P. 36, 37, 92
	Stock programme of finish bores	P. 49, 50, 53, 72, 75, 150, 172, 184 et seqq., 220 et seqq.
	Spacer couplings	P. 32, 33, 34, 127
	Spiders	P. 32, 33, 34, 127
	Spider hardness	
	T	
	Taper clamping ring hubs	P. 43, 138, 164
	Taper clamping sleeves	P. 42, 68, 258
	Torsionally flexible couplings	P. 26 - 85, 134, 158, 182
	Torque limiters	P. 60, 281 et seqq., 284 et seqq.
	Torque measuring shafts	P. 366
	Torsionally stiff couplings	P. 88, 156, 174, 182, 184 et seqq.
	U	
	Universal clamping sets	P. 318 et seqq.
	Use in potentially explosive atmospheres	P. 26 - 85, 126, 184 et seqq., 264 et seqq.

Summary of Products

Couplings

Flexible jaw and pin & bush couplings	26
Gear couplings	86
Backlash-free servo couplings	122
Steel laminae couplings	184
Highly flexible shaft couplings	206
Flange couplings	224
Magnetic couplings	264

Hydraulic clamping system

Safety clamping and braking system	154
------------------------------------	-----

Torque limiters

Torque limiters	284
Overload systems	290
Backlash-free overload systems	302

Clamping elements and precision joints

Clamping sets	320
Clamping nut	354
Precision joints	356

Torque measuring technology

Torque measuring shafts	368
-------------------------	-----



COUPLING SELECTION ACCORDING TO DIN 740 PART II

Coupling types

Flexible jaw couplings

ROTEX®	Flexible coupling (see page 26)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Fail-safe - Compact dimensions - Axial plug-in
ROFLEX®	Flexible coupling (see page 63)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Shear type - Axial plug-in
POLY-NORM®	Flexible coupling (see page 65)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Fail-safe - Compact dimensions - Axial plug-in
POLY	Flexible, shear type coupling (see page 73)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Shear type - Axial plug-in

Gear couplings

BoWex®	Torsionally stiff curved-tooth gear coupling® (see page 88)
	<ul style="list-style-type: none"> - Torsionally stiff - Maintenance-free - Shear type - Compact dimensions - Single-cardanic or double-cardanic - Axial plug-in

Highly flexible shaft couplings

EVOLASTIC®	Highly flexible coupling (see page 206)
	<ul style="list-style-type: none"> - Highly flexible - Maintenance-free - Fail-safe - Axial plug-in - Backlash-free
BoWex® HEW Compact	Highly flexible shaft coupling (see page 222)
	<ul style="list-style-type: none"> - Highly flexible - Maintenance-free - Shear type - Compact dimensions - Single-cardanic - Axial plug-in

Flange couplings for I. C.-engines

BoWex-ELASTIC®	Highly flexible flange coupling (see page 244)
	<ul style="list-style-type: none"> - Flexible to highly flexible - Maintenance-free - Shear type - Compact dimensions - Single-cardanic - Axial plug-in
SINULASTIC®	Highly flexible flange coupling (see page 252)
	<ul style="list-style-type: none"> - Highly flexible - Maintenance-free - Shear type - Damping vibrations - Very compact dimensions - Axial plug-in
MONOLASTIC®	One-piece, flexible flange coupling (see page 240)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Shear type - Compact dimensions - Single-cardanic - Axial plug-in
BoWex® FLE-PA/-PAC	Torsionally stiff flange coupling (see page 228)
	<ul style="list-style-type: none"> - Torsionally stiff - Maintenance-free - Shear type - Compact dimensions - Single-cardanic - Axial plug-in

COUPLING SELECTION ACCORDING TO DIN 740 PART II

Terminology of coupling selection

Description	Symbol	Definition resp. explanation
Rated torque of coupling [Nm]	T _{KN}	Torque that can be continuously transmitted over the entire permissible speed range
Maximum torque of coupling [Nm]	T _{K max}	Torque that can be transmitted as dynamic load $\geq 10^5$ times respectively $5 \cdot 10^4$ as vibratory load over the entire operating life of the coupling
Vibratory torque of coupling [Nm]	T _{KW}	Torque amplitude of the permissible periodical torque fluctuation with a frequency of 10 Hz and a basic load of T _{KN} respectively dynamic load up to T _{KN} .
Damping power of coupling [W]	P _{KW}	Permissible damping power with an ambient temperature of +30 °C
Rated torque of machine [Nm]	T _N	Stationary rated torque on the coupling
Rated torque of driving side [Nm]	T _{AN}	Rated torque of machine, calculated on the basis of rated power and rated speed
Rated torque of load side [Nm]	T _{LN}	Maximum figure of the load torque calculated on the basis of power and speed
Peak torque of machine [Nm]	T _S	Peak torque on the coupling
Peak torque of driving side [Nm]	T _{AS}	Peak torque with torque shock on driving side, e. g. tilting moment of the electric motor
Peak torque of load side [Nm]	T _{LS}	Peak torque with torque shock on load side, e. g. braking
Vibratory torque of machine [Nm]	T _W	Amplitude of the vibratory torque effective on the coupling

Description	Symbol	Definition resp. explanation
Damping power of machine [W]	P _W	Damping power which is effective on the coupling due to the load generated by the vibratory torque
Engine power [kW]	P	Rated power of drive
Speed [rpm]	n	Rated speed of engine
Rotational inertia coefficient of driving side	M _A	Factor considering the mass distribution with shocks and vibrations generated on the driving or load side
Rotational inertia coefficient of load side	M _L	
Mass moment of inertia of driving side [kgm ²]	J _A	Total of moments of inertia existing on the driving or load side referring to the coupling speed
Mass moment of inertia of load side [kgm ²]	J _L	
Mass moment of inertia of coupling [kgm ²]	J _{KA}	Mass mom. of inertia of the coupl. half on drive side
	J _{KL}	Mass mom. of inertia of the coupl. half on load side
Starting factor	S _Z	Factor considering the additional load caused by the starting frequency per hour
Shock factor on driving side	S _A	Factor considering the shocks arising depending on the application (e. g. starting shocks)
Shock factor on load side	S _L	
Temperature factor	S _T	Factor considering the lower loading capacity resp. larger deformation of an elastomer part under load particularly in case of increased temperatures
Operating factor	S _B	Factor considering the different demands on the coupling dependent on the application
Screw tightening torque [Nm]	T _A	Tightening torque of screw

Temperature factor S _T										
	-40 °C/+30 °C	≤ +40 °C	≤ +50 °C	≤ +60 °C	≤ +70 °C	≤ +80 °C	≤ +90 °C	≤ +100 °C	≤ +110 °C	≤ +120 °C
ROTEX®										
T-PUR®	1.0	1.0	1.2	1.3	1.45	1.6	1.8	2.1	2.5	3.0
PUR	1.0	1.0	1.3	1.4	1.55	1.8	2.2	—	—	—
PA	1.0	1.0	1.0	1.0	1.2	1.4	1.6	—	—	—
EVOLASTIC®										
NR	1.0	1.0	1.0	1.25	1.4	1.6	—	—	—	—
POLY-NORM®										
NBR 78 Shore A	1.0	1.2	1.3	1.4	1.6	1.8	—	—	—	—
POLY										
NBR (cuboid)	1.0	1.2	1.3	1.4	1.6	1.8	—	—	—	—
BoWex®										
PA 6.6	1.0	1.0	1.0	1.0	1.2	1.4	1.6	1.8	—	—
PA-CF	1.0	1.0	1.0	1.0	1.1	1.2	1.4	1.6	1.9	2.2
BoWex® HEW Compact	1.0	1.0	1.0	1.0	1.1	1.4	1.7	—	—	—
BoWex-ELASTIC®										
Standard	1.0	1.0	1.0	1.0	1.1	1.4	1.7	—	—	—
SINULASTIC®										
NR	1.0	1.0	1.0	1.25	1.4	1.6	—	—	—	—
MONOLASTIC®										
Standard	1.0	1.0	1.0	1.0	1.1	1.4	1.7	—	—	—
BoWex® FLE-PA/-PAC										
PA 6 GF	1.0	1.0	1.0	1.0	1.0	1.0	1.2	1.4	1.6	1.8
PA-CF	1.0	1.0	1.0	1.0	1.1	1.2	1.4	1.6	1.9	2.2

For the selection with PEEK spider a temperature factor is not necessary. For temperature factors for PA spiders see page 32.
With temperatures below -40 °C please consult with KTR.

Starting factor S _Z				
ROTEX®, POLY-NORM®, POLY, BoWex®, BoWex® HEW Compact, EVOLASTIC®				
Starting frequency per hour	< 100	< 200	< 400	< 800
S _Z	1.0	1.2	1.4	1.6
BoWex-ELASTIC®, SINULASTIC®				
Starting frequency per hour	< 10	< 60	< 120	> 120
S _Z	1.0	1.5	2.0	On request

Operating factor S _B	
Hydrostatic drives for BoWex® FLE-PA, MONOLASTIC®	
Applications	S _B
Wheel loaders	1.6
Compact loaders	1.6
Hydraulic excavators	1.4
Mobile cranes	1.6
Graders	1.5
Vibration rollers	1.4
Forklift trucks	1.6
Concrete mixer trucks	1.3
Concrete pumps	1.4
Asphalt finishers	1.4
Concrete cutters	1.4
Road milling machines	1.4

Shock factor S _A /S _L		
ROTEX®, POLY-NORM®, POLY, BoWex®, BoWex® HEW Compact, BoWex-ELASTIC®, EVOLASTIC®, SINULASTIC®		
Moderate shocks	1.5	
Average shocks	1.8	
Heavy shocks	2.5	

Permissible load on feather keyway of the coupling hubs

The shaft-hub-connection needs to be verified by the customer.

Permissible surface pressure according to DIN 6892 (method C)			
Cast iron (GJL)	225 N/mm ²	Sintered steel	180 N/mm ²
Nodular iron (GJS)	225 N/mm ²	Aluminium diecast (Al-D)	110 N/mm ²
Steel	250 N/mm ²	Aluminium wrought products (Al-H)	200 N/mm ²
Polyamide	30 N/mm ² (up to +40 °C)	For other steel materials p _{perm.}	0.9 • R _E (R _{p0,2})

COUPLING SELECTION ACCORDING TO DIN 740 PART II

Coupling selection

The coupling selection is based on DIN 740 part 2. The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling. The torques specified $T_{KN}/T_K \text{ max}$ refer to the couplings. The shaft-hub-connection needs to be verified by the customer.

1. Drives without periodical torsional vibrations

For example centrifugal pumps, fans, screw compressors, etc. The coupling selection is based on reviewing the rated torque T_{KN} and the maximum torque $T_K \text{ max}$:

1.1 Loading generated by rated torque

Considering the ambient temperature the permissible rated torque T_{KN} of the coupling must at least equal the rated torque of the machine T_N .

$$T_N [\text{Nm}] = 9550 \cdot \frac{P [\text{kW}]}{n [\text{rpm}]}$$

$$T_{KN} \geq T_N \cdot S_t$$

1.2 Loading generated by torque shocks

The permissible maximum torque of the coupling $T_K \text{ max}$ must at least equal the total of the peak torque T_S and rated torque of the machine T_N taking into account the shock frequency S_Z and the ambient temperature S_t . This applies in case if the rated torque of the machine T_N is superimposed by a shock process. Knowing the mass distribution, direction and kind of shock it is possible to calculate the peak torque T_S . For drives with A. C. motors and big masses on the load side we recommend to run a calculation of the peak starting torque by our simulation program.

$$T_{K \text{ max}} \geq T_S \cdot S_Z \cdot S_t + T_N \cdot S_t$$

$$\text{Shock on drive side} \\ T_S = T_{AS} \cdot M_A \cdot S_A$$

$$\text{Shock on load side} \\ T_S = T_{LS} \cdot M_L \cdot S_L$$

$$M_A = \frac{J_L}{(J_A + J_L)}$$

$$M_L = \frac{J_A}{(J_A + J_L)}$$

2. Drives with periodical torsional vibrations

For drives subject to torsional vibrations, e. g. diesel engines, piston compressors, piston pumps, generators etc. it is necessary to perform a torsional vibration calculation for a selection ensuring a safe operation. If requested, we will perform the torsional vibration calculation and the coupling selection in our company. For the necessary details refer to KTR standard 20004.

2.1 Loading generated by rated torque

Considering the ambient temperature the permissible rated torque T_{KN} of the coupling must at least equal the rated torque of the machine T_N .

$$T_{KN} \geq T_N \cdot S_t$$

2.2 Passing through the resonance range

Considering the temperature the peak torque T_S arising when passing through the resonance range must not exceed the maximum torque $T_K \text{ max}$ of the coupling.

$$T_{K \text{ max}} \geq T_S \cdot S_t$$

2.3 Loading generated by vibratory torque shocks

Considering the ambient temperature the permissible vibratory torque T_{KW} of the coupling must not be exceeded by the biggest periodical vibratory torque T_W with operating speed. With higher operating frequencies $f > 10 \text{ Hz}$ the heat generated by damping in the elastomer is considered as damping power P_W . The permissible damping power P_{KW} of the coupling depends on the ambient temperature and must not be exceeded by the damping power generated.

$$T_{K \text{ max}} \geq T_W \cdot S_t$$

$$P_{KW} \geq P_W$$

With torsionally stiff couplings the damping power can be ignored.

Coupling selection of BoWex® FLE-PA, MONOLASTIC® and EVOLASTIC®

1. Loading generated by rated torque

For drives with small mass moments of inertia on the load side (hydrostatic drives) the selection can be simplified using operating factors.

$$T_{KN} \geq T_N \cdot S_B \cdot S_t$$

Please note:

For drives subject to torsional vibrations, e. g. diesel engines, piston compressors, piston pumps, generators etc. it is necessary to perform a torsional vibration calculation for a selection ensuring a safe operation. This applies in particular with large mass moments of inertia on the load side. If requested, we will perform the torsional vibration calculation and the coupling selection in our company.

COUPLING SELECTION ACCORDING TO DIN 740 PART II

Example of calculation

Requested: Axial plug-in coupling damping vibrations → ROTEX®
 Applications: Connection of IEC standard motor and screw compressor
 → Coupling selection following page 16, item 1: Drives without periodical torsional vibrations

Given: Details of driving side

A. C. motor:	Size 315 L	→ $S_A = 1.8$ (see page 15)
Motor power:	$P = 160 \text{ kW}$	
Speed:	$n = 1485 \text{ rpm}$	
Moment of inertia of driving side:	$J_{\text{Motor}} = 2.9 \text{ kgm}^2$	
Starting frequency:	6 times per hour	→ $S_Z = 1.0$ (see page 15)
Ambient temperature:	+70 °C	→ $S_t = 1.45$ using T-PUR® (see page 15)
Peak torque (starting torque) T_{AS}	= $2 \cdot T_{\text{AN}}$	

Given: Details of load side

Screw compressor	
Rated torque of load side:	$T_{LN} = 930 \text{ Nm}$
Moment of inertia of load side:	$J_{\text{Compressor}} = 6.8 \text{ kgm}^2$

Calculation

1.1 Loading generated by rated torque

● Rated torque of drive T_{AN}

$$T_{\text{AN}} = 9550 \cdot \frac{P [\text{kW}]}{n [\text{rpm}]} \rightarrow 9550 \cdot \frac{160 \text{ kW}}{1485 \text{ rpm}} = 1029 \text{ Nm}$$

● Rated torque of load side T_{LN}

$$T_{KN} \geq T_{LN} \cdot S_t \rightarrow 930 \text{ Nm} \cdot 1.45 = 1348.5 \text{ Nm} \rightarrow T_{KN} \geq 1348.5 \text{ Nm}$$

● Coupling selection

ROTEX® size 90 - spider 92 Shore A with:

Mass moments of inertia of page 62

$$T_{KN} = 2400 \text{ Nm}$$

$$J_{KA} = 0.0673 \text{ kgm}^2$$

$$T_{K \max} = 4800 \text{ Nm}$$

$$J_{KL} = 0.0673 \text{ kgm}^2$$

1.2 Loading generated by torque shocks

● Shock on driving side without load torque being superimposed

$$\begin{aligned} T_{K \max} &\geq T_S \cdot S_Z \cdot S_t + T_N \cdot S_t \rightarrow T_N = 0 \\ \text{Shock on drive side } T_S &= T_{AS} \cdot M_A \cdot S_A \\ M_A &= \frac{J_L}{(J_A + J_L)} \rightarrow \frac{6.8673 \text{ kgm}^2}{2.9673 \text{ kgm}^2 + 6.8673 \text{ kgm}^2} \rightarrow M_A = 0.7 \\ J_A &= J_{\text{Motor}} + J_{KA} \rightarrow 2.9 \text{ kgm}^2 + 0.0673 \text{ kgm}^2 \rightarrow J_A = 2.9673 \text{ kgm}^2 \\ J_L &= J_{\text{Compressor}} + J_{KL} \rightarrow 6.8 \text{ kgm}^2 + 0.0673 \text{ kgm}^2 \rightarrow J_L = 6.8673 \text{ kgm}^2 \\ \text{Starting torque } T_{AS} &= 2 \cdot T_{\text{AN}} \rightarrow 2 \cdot 1029 \text{ Nm} = 2058 \text{ Nm} \\ \rightarrow \text{Shock on drive side } T_S &= 2058 \cdot 0.7 \cdot 1.8 = 2593.1 \text{ Nm} \end{aligned}$$

$$\rightarrow T_{K \max} \geq 2593.1 \text{ Nm} \cdot 1 \cdot 1.45 = 3760 \text{ Nm}$$

$$T_{K \max} \text{ with } 4800 \text{ Nm} \geq 3760 \text{ Nm} \quad \checkmark$$

Result

The coupling is sufficiently dimensioned.

Please note:

The shaft-hub-connection has to be verified by the customer separately!

COUPLING SELECTION BASED ON OPERATING FACTORS

Coupling types

Laminae couplings

RADEX®-N	Steel laminae coupling (see page 184)
	<ul style="list-style-type: none"> - Torsionally stiff - Backlash-free - Maintenance-free - Compact dimensions - Single-cardanic or double-cardanic - All-steel
RIGIFLEX®-N	Steel laminae coupling (see page 184)
	<ul style="list-style-type: none"> - Torsionally stiff - Backlash-free - Maintenance-free - Double-cardanic - All-steel - Coupling in accordance with API 610, API 671 optionally
RIGIFLEX®-HP	High-performance steel laminae coupling (see page 184)
	<ul style="list-style-type: none"> - Torsionally stiff - Backlash-free - Maintenance-free - Double-cardanic - All-steel - Coupling design as per API 671

Pin & bush couplings

REVOLEX® KX-D	Flexible pin & bush coupling (see page 28)
	<ul style="list-style-type: none"> - Flexible - Maintenance-free - Fail-safe - Compact dimensions - Axial plug-in

Gear couplings

GEARex®	All-steel gear coupling (see page 86)
	<ul style="list-style-type: none"> - Torsionally stiff - Fail-safe - Compact dimensions - Double-cardanic - High power density - All-steel

Terminology of coupling selection

Description	Symbol	Definition resp. explanation
Rated torque of coupling [Nm]	TKN	Torque that can be continuously transmitted over the entire permissible speed range
Maximum torque of coupling [Nm]	TK max	Torque that can be transmitted as dynamic load $\geq 10^5$ times respectively $5 \cdot 10^4$ as vibratory load over the entire operating life of the coupling
Vibratory torque of coupling [Nm]	TKW	Torque amplitude of the permissible periodical torque fluctuation with a frequency of 10 Hz and a basic load of TKN respectively dynamic load up to TKN.
Rated torque of machine [Nm]	TN	Stationary rated torque on the coupling
Peak torque of machine [Nm]	TS	Peak torque on the coupling

Description	Symbol	Definition resp. explanation
Engine power [kW]	P	Rated power of drive
Speed [rpm]	n	Rated speed of engine
Starting factor	Sz	Factor considering the additional load caused by the starting frequency per hour
Direction factor	SR	Considers the torsional direction
Temperature factor	St	Factor considering the lower loading capacity particularly in case of increased temperatures
Operating factor	SB	Factor considering the different demands on the coupling dependent on the application

COUPLING SELECTION BASED ON OPERATING FACTORS

Factors

Temperature factor S_t													
		-30 °C/ +30 °C	≤ +40 °C	≤ +60 °C	≤ +80 °C	≤ +150 °C	≤ +200 °C	≤ +230 °C	≤ +270 °C				
REVOLEX® KX-D		1.0	1.2	1.4	1.8	—	—	—	—				
GEARex®		1.0	1.0	1.0	1.0	—	—	—	—				
RADEX®-N, RIGIFLEX®-N, RIGIFLEX®-HP		1.0	1.0	1.0	1.0	1.0	1.10	1.25	1.43				
Starting factor S_z				Direction factor S_R									
Starting frequency per hour	< 10	< 25	< 50	Same torsional direction		1.0							
S_z	1.0	1.2	1.4	Alternating torsional direction		1.7							
Operating factor S_B													
Application					Application								
Construction machines					Mixers								
Manoeuvre hoists	1.50 - 2.00				Constant density				1.75 - 2.25				
Swing gears	1.50 - 2.00				Variable density				2.00 - 2.50				
Miscellaneous winches	1.50 - 2.00				Grinders								
Filters, cable winches	1.75 - 2.25				Centrifugal mills				1.75 - 2.00				
Multi-bucket excavators	1.75 - 2.25				Beater mills				1.75 - 2.00				
Running gears (caterpillar)	1.75 - 2.25				Autogenous mills				1.75 - 2.00				
Impellers	1.75 - 2.25				Hammer and ball mills				2.00 - 2.50				
Cutter drives	2.00 - 2.50				Food industry								
Elevators	1.50 - 2.00				Sugarcane harvesters				1.25 - 1.50				
Conveyors					Sugar-beet harvesters				1.25 - 1.50				
Bucket elevators	1.50 - 2.00				Sugar-beet washing				1.25 - 1.50				
Elevators	1.75 - 2.25				Kneading machines				1.75 - 2.00				
Hauling winches	1.50 - 2.00				Sugarcane breakers				1.75 - 2.00				
Apron conveyors	1.25 - 1.75				Sugarcane mills				1.75 - 2.00				
Rubber belt conveyors (bulk)	1.25 - 1.75				Oil industry								
Boom plate bucket conveyors	1.25 - 1.75				Filter presses for paraffin				1.50 - 2.00				
Rotary conveyors	1.50 - 1.75				Rotary furnaces				1.75 - 2.00				
Steel plate conveyors	1.50 - 1.75				Paper machines								
Worm conveyors	1.25 - 1.50				Couch rolls				1.75 - 2.25				
Steel belt conveyors	1.75 - 2.00				Calanders				1.75 - 2.25				
Conveyors	1.75 - 2.00				Wet presses				1.75 - 2.25				
Rubber belt conveyors (bulk)	1.75 - 2.00				Pumps								
Inclined lifts	1.75 - 2.00				Radial pumps				1.25 - 1.75				
Shaking slides	2.00 - 2.25				Centrifugal pumps (light liquid)				1.50 - 2.00				
Generators					Centrifugal pumps (viscous liquid)				2.25 - 2.50				
Frequency converters	1.75 - 2.00				Gear and vane pumps				1.50 - 1.75				
Generators	1.50 - 2.00				Piston pumps, plunger pumps and press pumps				2.00 - 2.50				
Rubber & nylon industry					Agitators								
Rubber calanders and rolling mills	1.25 - 2.00				Light liquid				1.25 - 1.50				
Mixers	1.25 - 2.00				Viscous liquid				1.50 - 1.75				
Extruders	1.25 - 2.00				Liquid with constant density				1.25 - 1.50				
Lifters/cranes					Liquid with variable density				1.50 - 2.00				
Bridge cranes for steel industry	2.00 - 2.25				Textile industry								
Cranes (heavy load operation)	2.00 - 2.25				Winders				1.25 - 1.75				
Running gears	1.75 - 2.25				Printing and dyeing machines				1.25 - 1.75				
Lifting gears	1.75 - 2.25				Shredders				1.50 - 2.00				
Woodworking machinery					Fans, ventilators and blowers								
Planing machines	1.50 - 1.75				Light-weight fans				1.25 - 1.75				
Barking machines	1.75 - 2.00				Large fans				1.75 - 2.50				
Saw frames	1.75 - 2.00				Centrifugal fans				1.25 - 1.50				
Compressors					Industrial fans				1.25 - 1.50				
Centrifugal compressors	1.50 - 2.00				Rotary blowers				1.25 - 1.75				
Rotary compressors	1.50 - 2.00				Fans (axial/radial)				1.25 - 1.75				
Turbo compressors	2.00 - 2.50				Fans for cooling towers				1.50 - 2.00				
Piston compressors	2.50 - 3.00				Wastewater treatment plants								
Metal industry					Rakes				1.25 - 1.50				
Wire pulls	1.25 - 1.50				Worm pumps				1.25 - 1.50				
Winders	1.25 - 1.50				Concentrators				1.25 - 1.50				
Winding drums	1.50 - 2.00				Mixers				1.25 - 1.75				
Wire drawing machines	2.00 - 2.50				Aerators				1.75 - 2.00				
Plate shears	2.00 - 2.50				Machine tools								
Block pushers	2.00 - 2.50				Scissors				1.50 - 2.00				
Blooming and slabbing	2.00 - 2.50				Dressing rollers				1.50 - 2.00				
De-scalers	2.00 - 2.50				Bending machines				1.50 - 2.00				
Hot-rolling mills	2.00 - 2.50				Hole punching machines				1.75 - 2.50				
Cold-rolling mills	2.00 - 2.50				Levelling machines				1.75 - 2.50				
Billet shears	2.00 - 2.50				Hammers				1.75 - 2.50				
Plugging machines	2.00 - 2.50				Presses				1.75 - 2.50				
Continuous casting machines	2.00 - 2.50				Forging presses				1.75 - 2.50				
Shifting devices	2.00 - 2.50				Other								
Application	2.00 - 2.50				Equipment for transport of persons				2.00 - 2.50				
Roller tables (heavy-weight)	2.00 - 2.50				Rock crushers				2.50 - 3.00				
Mixers	Constant density Variable density				Rolling mill drives				2.00 - 2.50				

COUPLING SELECTION BASED ON OPERATING FACTORS

Coupling selection

The coupling selection is based on operating factors. The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling. The shaft-hub-connection needs to be verified by the customer.

1. Drives without periodical torsional vibrations

For example centrifugal pumps, fans, screw compressors, etc. The coupling selection is based on reviewing the rated torque T_{KN} and the maximum torque $T_{K \max}$:

1.1 Loading generated by rated torque

Considering the operating factor, $T_N [Nm] = 9550 \cdot \frac{P [kW]}{n [rpm]}$ the ambient temperature and the torsional direction, the permissible rated torque T_{KN} of the coupling must at least equal the rated torque of the machine T_N .

2. Drives with periodical torsional vibrations

For drives subject to torsional vibrations, e. g. diesel engines, piston compressors, piston pumps, generators etc. it is necessary to perform a torsional vibration calculation for a selection ensuring a safe operation. If requested, we will perform the torsional vibration calculation and the coupling selection in our company. For the necessary details refer to KTR standard 20004.

1.2 Loading generated by torque shocks

Taking into account all relevant factors, the permissible maximum torque of the coupling $T_{K \max}$ must at least equal the total of the peak torque T_S and rated torque of the machine T_N . This applies if the rated torque of the machine T_N is superimposed by a shock process. For drives with A. C. motors and big masses on the load side we recommend to run a calculation of the peak starting torque by our simulation program.

COUPLING SELECTION BASED ON OPERATING FACTORS

Example of calculation

Requested: Double-cardanic steel laminae coupling for bridging a shaft distance dimension → RADEX®-N
Applications: Connection of IEC standard motor and radial pump
→ Coupling selection following page 20, item 1: Drives without periodical torsional vibrations

Given: Details of driving side

A. C. motor:	Size 315 L
Motor power:	P = 200 kW
Speed:	n = 1500 rpm
Starting frequency:	6 times per hour → S _Z = 1.0 (see page 19)
Ambient temperature:	+65 °C → S _t = 1.0 (see page 19)
Peak torque (starting torque) T _{AS}	= 2 • T _{AN}
Diameter of motor shaft:	80 mm

Given: Details of load side

Radial pump	→ S _B = 1.5 (see page 19)
Rated torque of load side:	T _{LN} = 930 Nm
Diameter of pump shaft:	75 mm
Distance dimension of motor shaft - pump shaft (DBSE)	= 250 mm
Direction of torque:	same → S _R = 1.0 (see page 19)

Calculation

1.1 Loading generated by rated torque

● Rated torque of drive T_{AN}

$$T_{AN} = 9550 \cdot \frac{P \text{ [kW]}}{n \text{ [rpm]}} \rightarrow 9550 \cdot \frac{200 \text{ kW}}{1500 \text{ rpm}} = 1273 \text{ Nm}$$

● Loading generated by rated torque

$$T_{KN} \geq T_{AN} \cdot S_B \cdot S_t \cdot S_R \rightarrow 1273 \text{ Nm} \cdot 1.5 \cdot 1 \cdot 1 = 1348.5 \text{ Nm} \rightarrow T_{KN} \geq 1909.5 \text{ Nm}$$

1.2 Loading generated by torque shocks

● Shock on driving side without load torque being superimposed

$$T_{K \max} \geq (T_N + T_S) \cdot S_Z \cdot S_t \cdot S_R \rightarrow T_N = 0$$

Starting torque T_{AS} = 2 • T_{AN} → 2 • 930 Nm = 1860 Nm

$$\rightarrow T_{K \max} \geq 1860 \text{ Nm} \cdot 1 \cdot 1 \cdot 1 = 1860 \text{ Nm}$$

● Coupling selection

$$T_{KN} = 2400 \text{ Nm}$$

$$T_{K \max} = 4800 \text{ Nm}$$

Result

The coupling is sufficiently dimensioned.

Please note:

The shaft-hub-connection has to be verified by the customer separately!

COUPLING SELECTION ACCORDING TO DIN 740 PART II WITH SPECIFIC FACTORS

Coupling types

Backlash-free servo couplings

ROTEX® GS	Backlash-free, flexible jaw coupling (see page 126)
	<ul style="list-style-type: none"> - Backlash-free and flexible - Maintenance-free - Fail-safe - Compact dimensions, high power density - Single-cardanic or double-cardanic - Axial plug-in - High speeds
TOOLFLEX®	Backlash-free, torsionally stiff metal bellow-type coupling (see page 156)
	<ul style="list-style-type: none"> - Backlash-free and torsionally stiff - Maintenance-free - Shear type - Compact dimensions - Double-cardanic - Axial plug-in (as an option) - All-metal coupling
RADEX®-NC	Backlash-free, torsionally stiff servo laminae coupling (see page 174)
	<ul style="list-style-type: none"> - Backlash-free and torsionally stiff - Maintenance-free - Compact dimensions - Single-cardanic or double-cardanic - All-metal coupling
COUNTEX®	Backlash-free, torsionally stiff shaft encoder coupling (see page 182)
	<ul style="list-style-type: none"> - Backlash-free and torsionally stiff - Maintenance-free - Compact dimensions - Double-cardanic - Axial plug-in
ROTEX® GS HP	Backlash-free high-speed coupling (see page 142)
	<ul style="list-style-type: none"> - Backlash-free and flexible - Maintenance-free - Compact dimensions - Axial plug-in - Severely high speeds

Terminology of coupling selection

Description	Symbol	Definition resp. explanation	Description	Symbol	Definition resp. explanation
Rated torque of coupling [Nm]	TKN	Torque which can be continuously transmitted over the entire permissible speed range, taking into account the factors	Rotational inertia coefficient of driving side	MA	Factor considering the mass distribution with shocks and vibrations generated on the driving or load side
Maximum torque of coupling [Nm]	TK max	Torque which can be transmitted over the entire service life of the coupling as dynamic load $\geq 10^5$ or vibratory load $5 \cdot 10^4$ taking into account the factors	Rotational inertia coefficient of load side	ML	
Rated torque of machine [Nm]	TN	Stationary rated torque on the coupling	Mass moment of inertia of driving side [kgm^2]	JA	Total of moments of inertia existing on the driving or load side referring to the coupling speed
Rated torque of driving side [Nm]	TAN	Constantly occurring driving torque as per the data indicated by the motor manufacturer	Mass moment of inertia of load side [kgm^2]	JL	
Peak torque [Nm]	TS	Peak torque on the coupling	Mass moment of inertia of coupling [kgm^2]	JKA	Mass mom. of inertia of the coupl. half on drive side
Peak torque of driving side [Nm]	TAS	Peak torque with torque shock on driving side, e. g. starting torque of the servo motor as per the data specified by the motor manufacturer	JKL	JKL	Mass mom. of inertia of the coupl. half on load side
Peak torque of load side [Nm]	TLS	Peak torque with torque shock on load side, e. g. braking	Mass moment of inertia [kgm 2]	JMot/JSp/JHS	Mass moment of inertia of the motor/mass moment of inertia of the spindle/mass moment of inertia of the main spindle
Screw tightening torque [Nm]	TA	Tightening torque of screw	Temperature factor	St	Factor considering the lower loading capacity or larger deformation of an elastomer part under load particularly with increased temperatures
Friction torque [Nm]	TR	Torque that can be transmitted through the frictionally engaged shaft-hub-connection	Operating factor	SB	Factor considering the different demands on the coupling dependent on the application

COUPLING SELECTION ACCORDING TO DIN 740 PART II WITH SPECIFIC FACTORS

Factors

Temperature factor S_t																												
	-50 °C	-40 °C	-30 °C	-20 °C/ +30 °C	≤ +40 °C	≤ +50 °C	≤ +60 °C	≤ +70 °C	≤ +80 °C	≤ +90 °C	≤ +100 °C	≤ +110 °C	≤ +120 °C	≤ +200 °C														
ROTEX® GS																												
Polyurethane 80 ShA-GS	1.0	1.0	1.0	1.0	1.2	1.3	1.4	1.55	1.8	-	-	-	-	-														
Polyurethane 92 ShA-GS	-	1.0	1.0	1.0	1.2	1.3	1.4	1.55	1.8	2.2	-	-	-	-														
Polyurethane 98 ShA-GS	-	-	1.0	1.0	1.2	1.3	1.4	1.55	1.8	2.2	-	-	-	-														
Polyurethane 57 ShD-GS	-	-	1.0	1.0	1.2	1.3	1.4	1.55	1.8	2.2	-	-	-	-														
Polyurethane 64 ShD-GS	-	-	-	1.0	1.2	1.3	1.4	1.55	1.8	2.2	3.0	3.0	-	-														
Polyurethane 72 ShD-GS	-	-	-	1.0	1.2	1.3	1.4	1.55	1.8	2.2	3.0	3.0	-	-														
PUR 52 Sh-D-GS FiPUR	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.2	1.3	1.4	1.55	1.8	2.2	-														
Hytrel 64 Sh-D-H-GS	1.0	1.0	1.0	1.0	1.2	1.3	1.4	1.5	1.6	1.8	2.0	2.3	2.8	-														
Hytrel 72 Sh-D-H-GS	1.0	1.0	1.0	1.0	1.2	1.3	1.4	1.5	1.6	1.8	2.0	2.3	2.8	-														
TOOLFLEX®																												
Size 5 to 12	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	-	-	-														
Size 16 to 65	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.1														
RADEX-NC®																												
EK and DK	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.1														
ROTEX® GS HP																												
Polyurethane 98 ShA-GS	-	-	1.0	1.0	1.2	1.3	1.4	1.55	1.8	2.2	-	-	-	-														
Operating factor S_B																												
ROTEX® GS*																												
Backlash-free drives																												
Main spindle drive of machine tools	2.0 - 5.0																											
Moderate shocks	Grinders, small milling machines/drills 1.5 - 2.5																											
Average shocks	Milling machines/drills with interrupted cut 2.0 - 3.0																											
Heavy shocks	Milling machines etc. 2.5 - 3.5																											
Positioning drives																												
Ball screw drive/toothed belt drive	2.5 - 4.0																											
Gearbox	i 3 - ≤ 5 8.0																											
	i > 5 - ≤ 7 5.0																											
	i > 7 3.0																											
Servo-hydraulic drives																												
With pulsating load ¹⁾	1.2 - 1.3																											
With vibratory load ²⁾	1.3 - 1.5																											
TOOLFLEX®, RADEX-NC																												
Uniform motion	1.5																											
Unequal motion	2.0																											
Shock motion	2.5 - 4.0																											
For drives on machine tools (servo motors) values from 1.5 - 2.0 must be applied.																												
ROTEX® GS HP																												
Main spindle drive	2.0 - 3.0																											
Starting factor S_Z																												
Starting frequency per hour																												
< 20	1.0																											
< 60	1.2																											
< 120	1.4																											
< 180	1.6																											
< 240	1.8																											
> 240	2.0																											

Coupling selection

The coupling selection of the backlash-free servo couplings is based on DIN 740 part 2, but with specific factors. The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling. The shaft-hub-connection needs to be verified by the customer.

The size of the coupling must be selected such that the following conditions are met.

1. Backlash-free drives

$$T_{KN} \geq T_N \cdot S_t \cdot S_B \quad \text{and}$$

$$T_{KN} \geq T_S \cdot S_t \cdot S_B$$

$$\text{In case of load torque: } T_{KN} \geq T_S \cdot S_t \cdot S_B + T_N \cdot S_t$$

Considering the ambient temperature and the operating factor, the permissible rated torque T_{KN} of the coupling must at least equal the rated torque of the machine T_N .

Considering the ambient temperature and the operating factor, the permissible rated torque T_{KN} of the coupling must at least equal the peak torque arising.

The following applies for the peak torque T_S :

$$\text{Shock on drive side} \\ T_S = T_{AS} \cdot M_A \cdot S_Z$$

$$\longrightarrow M_A = \frac{J_L}{(J_A + J_L)}$$

2. Servo-hydraulic drives

$$T_{KN} \geq T_{AS} \cdot S_t \cdot S_B$$

Considering the ambient temperature and the operating factor, the permissible rated torque T_{KN} of the coupling must at least equal the peak torque of the driving side T_{AS} .

$$S_t \cdot S_B \text{ with use of aluminium at least 1.5.}$$

Please note:

For general applications (not backlash-free applications) please observe coupling selection according to DIN 740 part 2 (page 14 et seqq.).

COUPLING SELECTION ACCORDING TO DIN 740 PART II WITH SPECIFIC FACTORS

Example of calculation for positioning drives

Requested: Backlash-free coupling damping vibrations → ROTEX® GS

Applications: Connecting servo motor and ball screw drive for backlash-free positioning

→ Coupling selection following page 23, item 1: Backlash-free drives

Given: Details of driving side


Servo motor

Rated torque T_{AN} : 43 Nm

Max. driving torque T_{AS} : 144 Nm

Moment of inertia J_{Mot} : 0.0108 kgm²

Diameter of motor shaft: 32 k6 without feather keyway

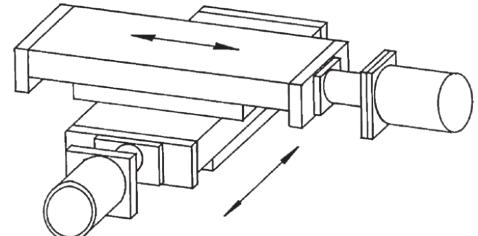

Ball screw

Ambient temperature: +40 °C → $S_t = 1.2$ (see page 23)

Starts per minute: 15 → $S_Z = 1.0$ (see page 23)

Given: Details of machine on driven side

Ball spindle J_{SP} : 0.0038 kgm²

Spindle pitch s : 10 mm

Diameter of spindle shaft: 30 k6 without feather keyway

Mass of slide + workpiece m_{SI} : 1030 kg

No load torque available

Required: High torsional stiffness → $S_B = 4$ (see page 23)

Calculation

1. Backlash-free drives

● Loading by rated torque (pre-selection)

$$T_{KN} \geq T_{AN} \cdot S_t \cdot S_B \rightarrow 43 \text{ Nm} \cdot 1.2 \cdot 4 \rightarrow T_{KN} \geq 206.4 \text{ Nm}$$

● Coupling selection (pre-selection)

ROTEX® GS 38

Spider 98 Shore A with clamping ring hubs 6.0 light:

Mass moments of inertia of page 136

$T_{KN} = 325 \text{ Nm}$

$J_{KA} = 0.000517 \text{ kgm}^2$

$T_K \text{ max} = 650 \text{ Nm}$

$J_{KL} = 0.000517 \text{ kgm}^2$

● Load by maximum driving torque, not including load torque

$$T_{KN} \geq T_S \cdot S_t \cdot S_B$$

$$\begin{aligned} & \rightarrow T_S = T_{AS} \cdot M_A \cdot S_Z \rightarrow 144 \text{ Nm} \cdot 0.379 \cdot 1.0 \rightarrow T_S = 54.58 \text{ Nm} \\ & M_A = \frac{J_L}{(J_A + J_L)} \rightarrow \frac{0.006917 \text{ kgm}^2}{(0.011317 \text{ kgm}^2 + 0.006917 \text{ kgm}^2)} \rightarrow M_A = 0.379 \\ & J_L = J_{SP} + J_{SI} + J_{KL} \rightarrow 0.0038 \text{ kgm}^2 + 0.0026 \text{ kgm}^2 + 0.000517 \text{ kgm}^2 \rightarrow J_L = 0.006917 \text{ kgm}^2 \\ & J_{SI} = m_{SI} \cdot \left(\frac{s}{2 \cdot \pi}\right)^2 \rightarrow 1030 \text{ kg} \cdot \left(\frac{0.01}{2 \cdot \pi}\right)^2 \rightarrow J_{SI} = 0.0026 \text{ kgm}^2 \\ & J_A = J_{Mot} + J_{KA} \rightarrow 0.0108 \text{ kgm}^2 + 0.000517 \text{ kgm}^2 \rightarrow J_A = 0.011317 \text{ kgm}^2 \end{aligned}$$

$$\rightarrow T_{KN} \geq 54.58 \text{ Nm} \cdot 1.2 \cdot 4 \rightarrow T_{KN} \geq 261.9 \text{ Nm}$$

T_{KN} with 325 Nm ≥ 261.9 Nm

● Review of shaft-hub-connection: Friction torque for clamping ring hubs type 6.0 light

The coupling has to be dimensioned in that the permissible friction torque is not exceeded during any operating condition.

$T_R \geq T_{AS}$ values T_R see page 136

Friction torque of ROTEX® GS 38 clamping ring hub 6.0 light Ø30 H7/k6 $T_R = 656 \text{ Nm} > 144 \text{ Nm}$

Result

The coupling is sufficiently dimensioned.

COUPLING SELECTION ACCORDING TO DIN 740 PART II WITH SPECIFIC FACTORS

Example of calculation for main spindle drives

Requested: Backlash-free, axial plug-in coupling for high speeds → ROTEX® GS

Applications: Connecting servo motor and main spindle in grinding machine

→ Coupling selection following page 23, item 1: Backlash-free drives

Given: Details of driving side

Servo motor

Max. continuous torque with machining T_{AN} : 130 Nm

Max. driving torque T_{AS} : 190 Nm

Max. speed: 6000 rpm

Moment of inertia J_{Mot} : 0.316 kgm²

Diameter of motor shaft: 38 k6 without feather key-way

Ambient temperature: +60 °C → $S_t = 1.4$ (see page 23)

Starting factor S_Z : < 20 rpm → $S_Z = 1.0$ (see page 23)

Given: Details of machine on driven side

Moment of inertia of load side J_{HS} : 0.1094 kgm²

Diameter of main spindle shaft: 30 k6 without feather key-way

No load torque available

Required: Average shocks → $S_B = 2.4$ (see page 23)

Calculation

1. Backlash-free drives

● Loading by rated torque (machining torque)

$$T_{KN} \geq T_{AN} \cdot S_t \cdot S_B \rightarrow 130 \text{ Nm} \cdot 1.4 \cdot 2.4 \rightarrow T_{KN} \geq 436.8 \text{ Nm}$$

● Coupling selection

ROTEX® GS 42

Spider 98 Shore A with clamping ring hubs 6.0 light:

Mass moments of inertia of page 136

$T_{KN} = 450 \text{ Nm}$

$$J_{KA} = 0.0011117 \text{ kgm}^2$$

$T_K \text{ max} = 900 \text{ Nm}$

$$J_{KL} = 0.0011117 \text{ kgm}^2$$

● Loading by maximum driving torque, without load torque (acceleration of spindle)

$$T_{KN} \geq T_S \cdot S_t \cdot S_B$$

Shock on drive side
 $T_S = T_{AS} \cdot M_A \cdot S_Z \rightarrow 190 \text{ Nm} \cdot 0.258 \cdot 1.0 \rightarrow T_S = 49.02 \text{ Nm}$

$$M_A = \frac{J_L}{(J_A + J_L)} \rightarrow \frac{0.110517 \text{ kgm}^2}{(0.317117 \text{ kgm}^2 + 0.110517 \text{ kgm}^2)} \rightarrow M_A = 0.258$$

$$J_L = J_{HS} + J_{KL} \rightarrow 0.1094 \text{ kgm}^2 + 0.0011117 \text{ kgm}^2 \rightarrow J_L = 0.110517 \text{ kgm}^2$$

$$J_A = J_{Mot} + J_{KL} \rightarrow 0.316 \text{ kgm}^2 + 0.0011117 \text{ kgm}^2 \rightarrow J_A = 0.317117 \text{ kgm}^2$$

$$T_{KN} \geq 49.02 \text{ Nm} \cdot 1.4 \cdot 2.4 \rightarrow T_{KN} \geq 164.7 \text{ Nm}$$

$$T_{KN} \text{ with } 450 \text{ Nm} \geq 164.7 \text{ Nm}$$

● Review of shaft-hub-connection: Friction torque for clamping ring hubs type 6.0 light


The coupling has to be dimensioned in that the permissible friction torque is not exceeded during any operating condition.

$$T_R \geq T_{AS} \quad \text{values } T_R \text{ see page 136}$$

Friction torque of ROTEX® GS 42 clamping ring hub 6.0 light Ø30 H7/k6 $T_R = 752 \text{ Nm} > 190 \text{ Nm}$

Result

The coupling is sufficiently dimensioned.

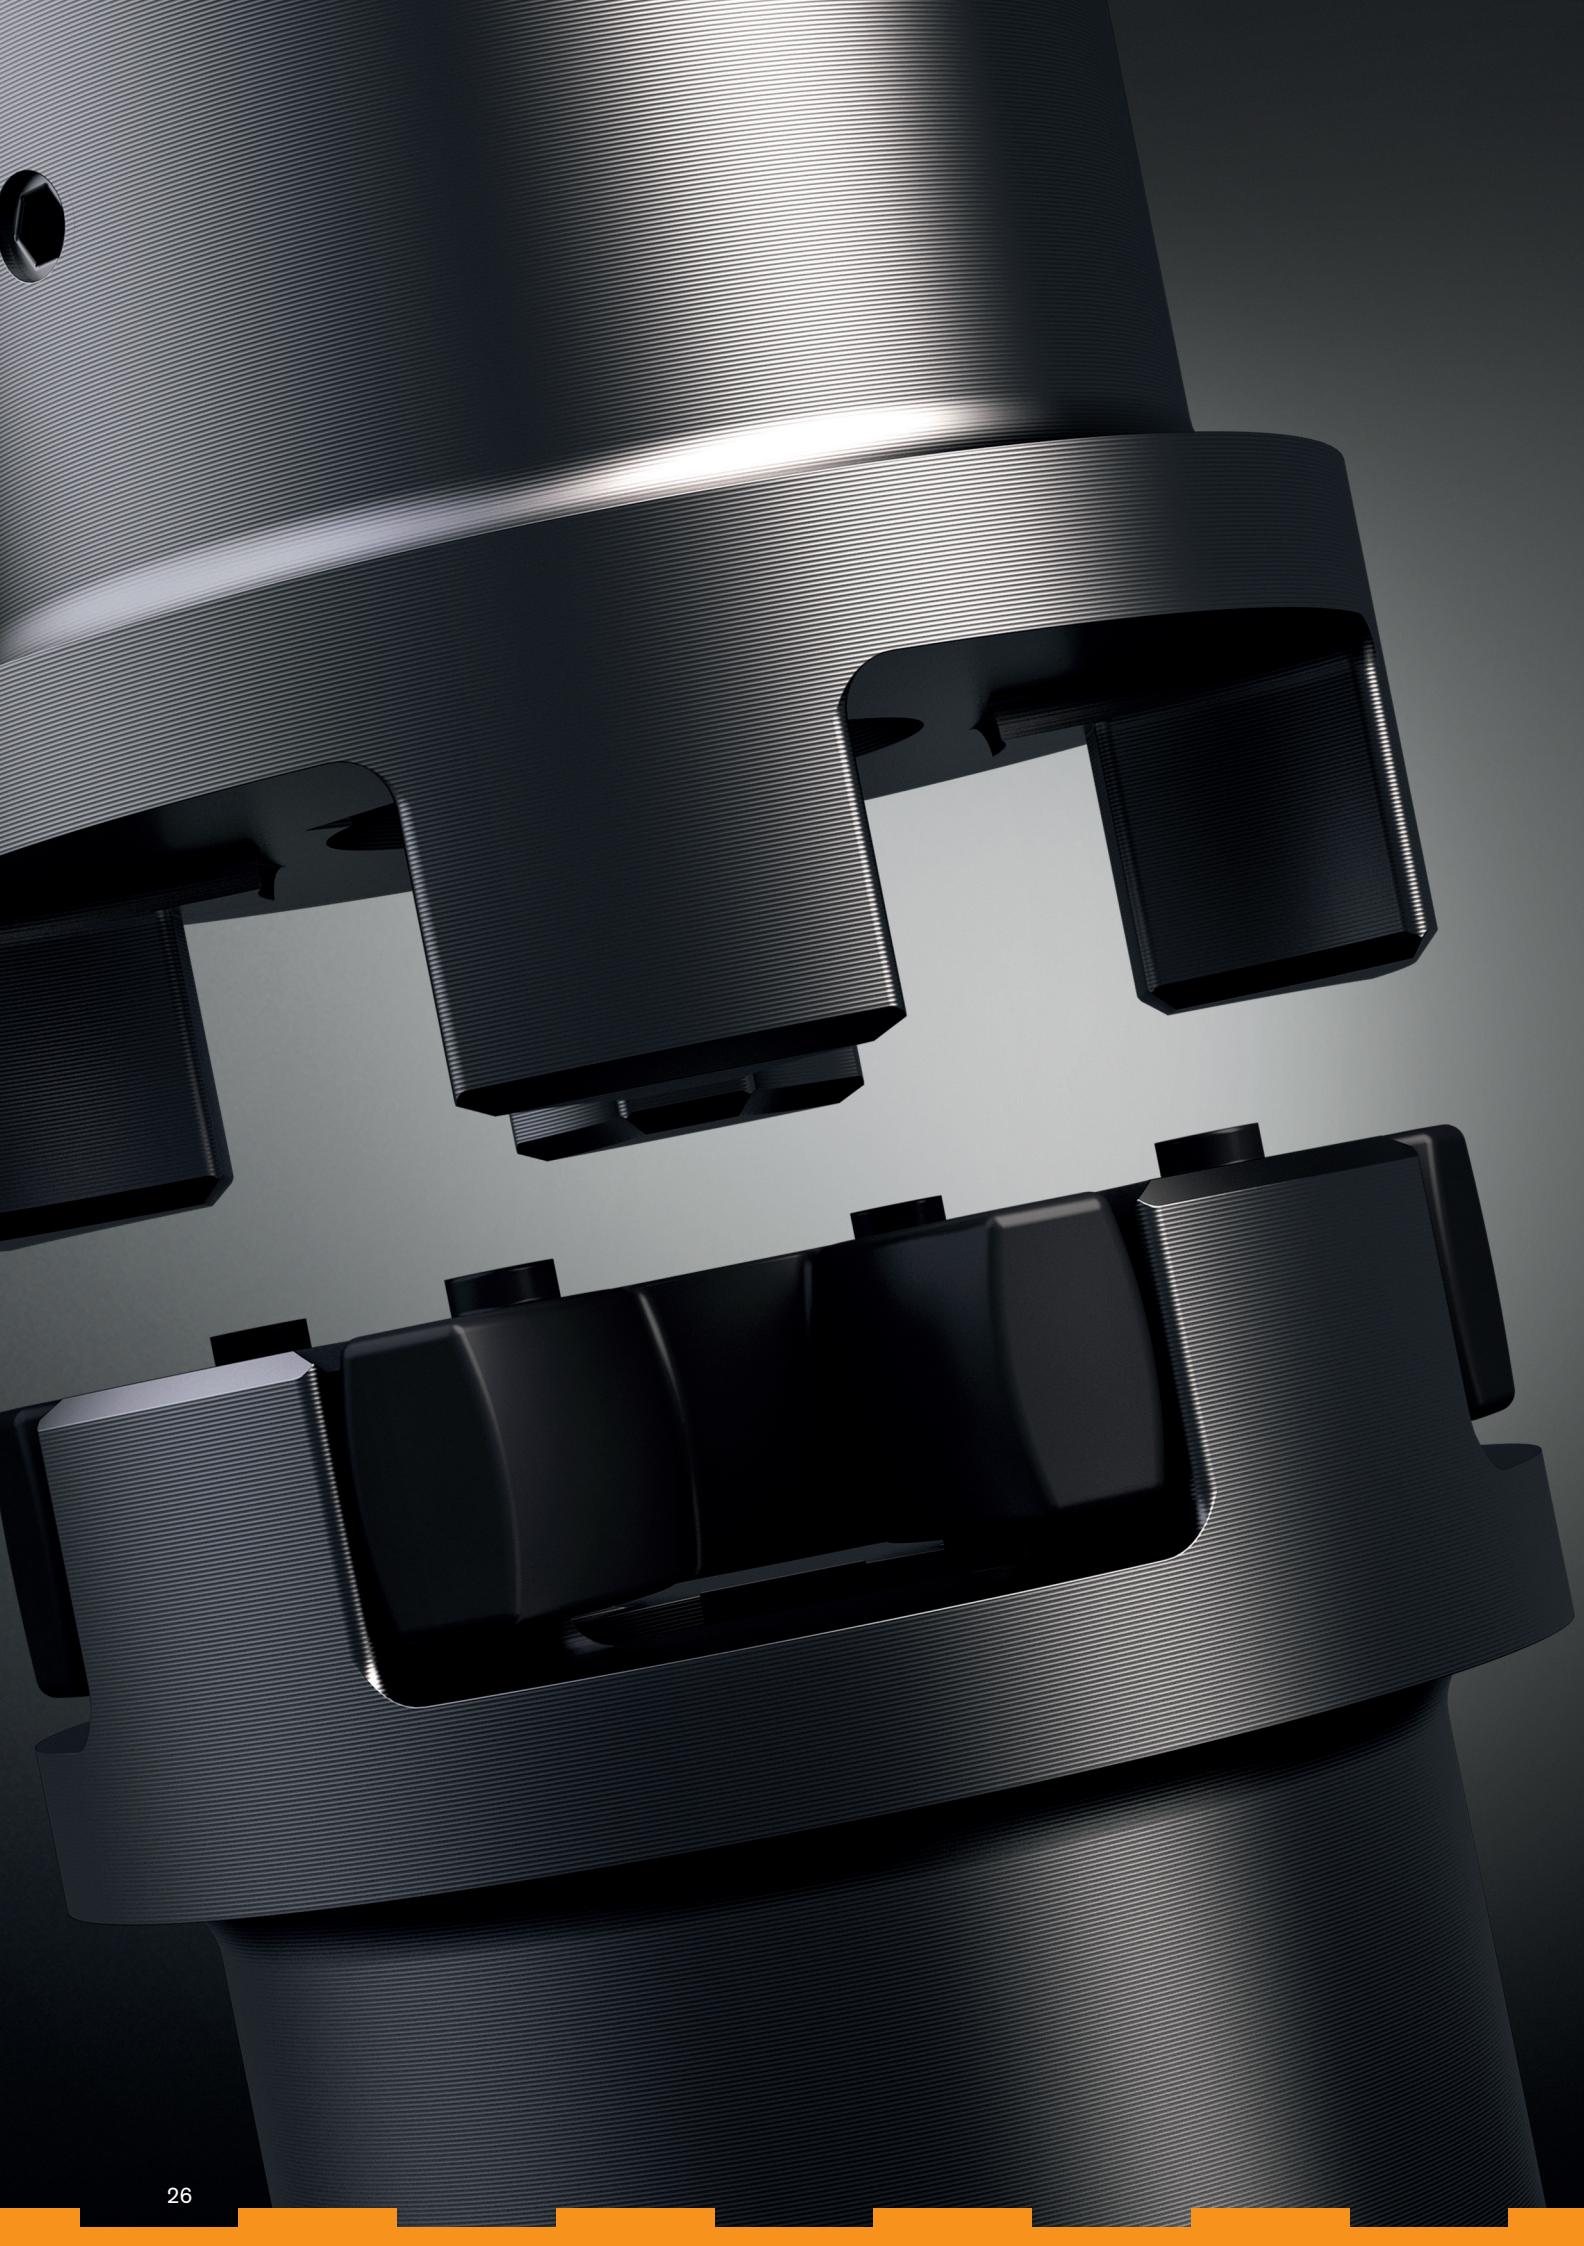

Flexible jaw and pin & bush couplings

Types and operating description

28

ROTEX®

Types of hubs	30
Displacements	31
Standard spiders	32
Special spiders	34
Selection of standard IEC motors	35
Cylindrical bores and spline bores	36
Inch bores and taper bores	37
Standard type, material aluminium + cast + sinter material	38
Standard type, material steel / stainless steel / DIN EN 10204 / marine / UL	40
Type with taper clamping sleeve	42
Type with clamping ring hubs	43
Type with clamping hubs	44
Type AFN, BFN flange programme	45
Type AH drop-out center design coupling	46
Type SH drop-out center design coupling with SPLIT hubs	47
Type SP single-cardanic shaft coupling (Non Sparking)	48
Type SP ZS-DKM-C double-cardanic shaft coupling (Non Sparking)	49
Type ZS-DKM-SH double-cardanic shaft coupling	50
Type DKM double-cardanic shaft coupling	51
Type CF, CFN, DF, DFN flange programme	52
Type ZR intermediate shaft programme	53
Type BTAN, SBAN with brake drum, brake disk	54
Type AFN-SB drop-out center design coupling with brake disk	56
Type SD shiftable coupling shiftable at standstill	57
Type FNN for mounting of fan	58
Other types with clamping sets	59
Other types with torque limiters	60
Weights and mass moments of inertia	61

ROFLEX® NEW

Type N	63
Type SH	64
POLY-NORM®	
Technical data	65
Selection of standard IEC motors	66
Type AR, two-part	67
Type AR for taper clamping sleeve	68
Type ADR, three-part	69
Type BTA, SBA with brake drum, brake disk	70
Type ADR-SB with brake disk for holding brake	71
Type AZR, standard drop-out center design coupling	72

POLY

Selection of standard IEC motors	73
Type PKZ, two-part and PKD, three-part	74
Type PKA, drop-out center design coupling	75
Displacements / elastomer sets / screws	76

REVOLEX®

Technical data	77
Type KX-D, material cast	78
Type KX-D, material steel	79
Type KX-D with brake disk	80
Type KX-D with KTR 650 clamping set	82
Technical data of pins	84
Assembly / other types	85



Please note: torque increase



Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of rated and maximum torques with some sizes of this series:

ROTEX®



ROFLEX® NEW



POLY-NORM®



POLY



REVOLEX®



FLEXIBLE JAW AND PIN & BUSH COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of flexible jaw and pin & bush couplings

					
Product	ROTEX®	ROFLEX®	POLY-NORM®	POLY	REVOLEX®
Type	Torsionally flexible jaw coupling				
Properties					
Torsionally flexible	●	●	●	●	●
Damping vibrations	●	●	●	●	●
Maintenance-free	●	●	●	●	●
Axial plug-in	●	●	●	●	●
Shear type				●	
Fail-safe	●	●	●		●
Compensating for misalignment	●	●	●	●	●
Types					
Variant diversity	very high	average	average	average	high
Special features	extensive basic programme available from stock while customised solutions can be realized	basic programme available from stock	basic programme available from stock	basic programme available from stock	extensive programme, ideal for customised solutions, for applications with high performance ranges
Applications / core industries	manifold applications, applicable in all industries	pump industry, industrial gearboxes	pump industry, industrial gearboxes	chemical pumps, high-pressure pumps, ...	industrial gearboxes, conveyor systems, industrial fans, cableways, agitators, generators, ...
surface	allover machining, very good dynamic properties	shell surface machined	shell surface machined	shell surface machined	allover machining, good dynamic properties
Torque range T_{KN} [Nm]					
Min.	1	65	40	42	4300
Max.	35,000	5,000	67,000	6,100	1,350,000
Max. circumferential speed v [m/s]					
Cast EN-GJL (dynamic balancing)	35	35	35	35	35
Steel + cast EN-GJS (dynamic balancing)	60				60
Hub materials available					
Steel (semi-finished product) » customised solutions available	●				●
Cast iron (GJL) » subject to mould	●	● ¹⁾	●	●	●
Nodular iron (GJS) » subject to mould	●		○		○
Aluminium wrought products (AI-H) » customised solutions available	●				
Aluminium diecast (AI-D)	●				
Stainless steel	●				
Corrosion-protected types	●		○	○	●
Spiders / elastomers					
Material	T-PUR®, PA, PEEK, Hytrel, ...	T-PUR® (size 68) NBR (from size 80)	NBR (up to size 180) T-PUR® (from size 200)	NBR	NR, NBR NBR electrically insulating
Degree of hardness	flexible to torsionally stiff	flexible	flexible	flexible	flexible
Temperature range in °C, min. / max. (standard)	-40 / +120	-30 / +80	-30 / +80	-30 / +80	-30 / +80
Temperature range in °C, min. / max. (special)	-40 / +250	-30 / +80	-30 / +80	-30 / +80	-50 / +80

● ≈ Standard

○ ≈ On request

¹⁾ Size 68 made of sintered steed

FLEXIBLE JAW AND PIN & BUSH COUPLINGS

TYPES AND OPERATING DESCRIPTION

Product finder of jaw and pin & bush couplings

Product	ROTEX®	ROFLEX®	POLY-NORM®	POLY	REVOLEX®	
Type		Torsionally flexible jaw coupling				Torsionally flexible pin & bush coupling
Geometries						
Design	compact	short	short	short	short	
Mass moment of inertia	low	average	average	high	average	
Shaft distance dimension	low / average	low	low	low	low	
Types (extract)						
Elastomers can be radially disassembled » without displacing driving/driven side	AFN, AH, SH, ZR, DF, DFN, CF-H	SH	ADR, ADR-SB	PKD	Standard	
Intermediate shaft types » bridging larger shaft distances	ZR, ZWN	-	-	-	customised	
Standard spacers 100 mm to 250 mm	ZS-DKM-SH	-	AZR	PKA	customised	
Shaft-to-shaft connection	Standard	N	Standard	Standard	Standard	
Flange-to-shaft connection	CF, CFN	-	-	-	customised	
Flange-to-flange connection » particularly short mounting length	DF, DNF	-	-	-	customised	
Double-cardanic » compensating for big displacements, lower restoring forces	ZS-DKM-H, ZR, ZWN	-	-	-	-	
Certifications / type examinations						
ATEX	●	●	●	●	●	
UL-listed	●					
GOST R / GOST TR	●	●	●	●	●	
DNV/GL	●				●	
ABS	●				○	
Bureau Veritas	●				○	
LR	○				○	
RS CLASS	○				○	
CCS	○				○	
ClassNK	○					

● ≈ Standard
○ ≈ On request

ROTEX®

ROFLEX®

POLY-NORM®

POLY


REVOLEX®

Flexible jaw and
pin & bush couplings

Flexible jaw couplings

Types of hubs

Since ROTEX® is used on many different applications and mounting conditions, this coupling system is available with various hub types. These types mainly differ in that they provide either positive or frictionally engaged (backlash-free) connections, but mounting situations like, for example, gear shafts with integrated transmission cams or similar applications are covered, too.




Type 1.0 hub with feather keyway and setscrew

Positive-locking power transmission, permissible torque depending on the permissible surface pressure. Not suitable for backlash-free power transmission with heavily reversing operation.

Type 1.1 hub
without feather keyway, with setscrew

Non-positive torque transmission for crimping connections and adhesive bonds. (No ATEX approval)

Type 1.3 hub
with spline bore (see page 36)




Type 4.2 hub for CLAMPEX® clamping set KTR 250

Frictionally engaged, backlash-free shaft-hub-connection for transmitting average torques.

Type 4.1 for CLAMPEX® clamping set KTR 200

Type 4.3 for CLAMPEX® clamping set KTR 400

Frictionally engaged, backlash-free shaft-hub-connection for the transmission of high torques.




Type 7.5 clamping hub type DH without feather keyway for double-cardanic connection

Frictionally engaged, backlash-free shaft-hub-connection for radial assembly of coupling. Transmittable torques depending on bore diameter. (For ATEX category 3 only)


Type 7.6 clamping hub type DH
with feather keyway for double-cardanic connection

Positive-locking power transmission with additional friction fit for radial assembly of coupling. The friction fit avoids or reduces reverse backlash. Surface pressure of the keyway connection is reduced.




FNN hub

Coupling hub to be connected to an attachment such as brake drum, brake disk and fan.




TB1 hub/TB2 hub

Coupling hub for taper clamping sleeves TB1 screwed on cam side. TB2 screwed externally.




Driving flange type 3b

Driving flange to connect to customer's component. For dimensions see page 52.



Driving flange type 3Na

Driving flange to connect to customer's component. For dimensions see page 52.




Type 2.0 clamping hub single slot without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection. Transmittable torques depending on bore diameter (see page 44). (For ATEX category 3 only)

Type 2.1 clamping hub
single slot with feather keyway

Positive-locking power transmission with additional friction fit. The friction fit avoids or reduces reverse backlash. Surface pressure of the keyway connection is reduced.

Type 2.3 clamping hub
with spline bore (see page 36)




Type 6.0 clamping ring hub (see ROTEX® GS series)

Integrated frictionally engaged shaft-hub-connection for the transmission of higher torques. Screwing on elastomer side. For details about torque and dimensions see page 43. Suitable for high speeds.

Type 6.5 clamping ring hub
(see ROTEX® GS series)

Design like 6.0, except for clamping screws externally. As an example for radial disassembly of intermediate pipe (special design).




Type 7.8 clamping hub type H without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection for radial assembly of coupling. Transmittable torques depending on bore diameter. (For ATEX category 3 only)


Type 7.9 clamping hub type H
with feather keyway

Positive-locking power transmission with additional friction fit for radial assembly of coupling. The friction fit avoids or reduces reverse backlash. Surface pressure of the keyway connection is reduced.




Type 7.1 SPLIT hub with feather keyway

SPLIT hub made of cast iron. Positive-locking power transmission with additional friction fit. The friction fit avoids or reduces reverse backlash. Surface pressure of the keyway connection is reduced.



SD hub shifting hub

Coupling hub for separating resp. switching on the driving/driven machine with downtime of the machine. Can be combined with slip ring and shiftable linkage.




Type 3Na and 4N Driving flange with flange type K



For type AFN and BFN.

With type AFN the spider can be replaced when installed without having to disassemble the driving and driven side.

Displacements

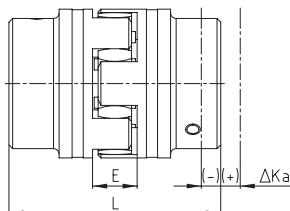Axial displacement ΔK_a 

$$L_{\max.} = L + \Delta K_a$$

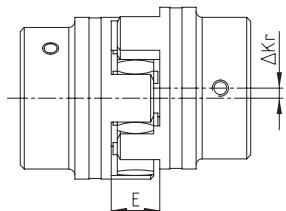Radial displacement ΔK_r Angular displacement ΔK_w [degree]

$$\Delta K_w [\text{mm}] = L_{\max.} - L_{\min.}$$

Displacements for spider 92 and 98 Shore A																	
ROTEX® size	14	19	24	28	38	42	48	55	65	75	90	100	110	125	140	160	180
Max. axial displacement ΔK_a [mm]	-0.5 +1.0	-0.5 +1.2	-0.5 +1.4	-0.7 +1.5	-0.7 +1.8	-1.0 +2.0	-1.0 +2.1	-1.0 +2.2	-1.0 +2.6	-1.0 +3.0	-1.5 3.4	-1.5 +3.8	-1.5 +4.2	-2.0 +4.6	-2.0 +5.0	-2.5 +5.7	-3.0 +6.4
Max. radial displacement with n=1500 rpm ΔK_r [mm]	0.17	0.20	0.22	0.25	0.28	0.32	0.36	0.38	0.42	0.48	0.50	0.52	0.55	0.60	0.62	0.64	0.68
Max. angular displacement with n=1500 rpm ΔK_w [degree]	1.2	1.2	0.9	0.9	1.0	1.0	1.1	1.1	1.2	1.2	1.2	1.2	1.3	1.3	1.2	1.2	1.2
ΔK_w [mm]	0.67	0.82	0.85	1.05	1.35	1.70	2.00	2.30	2.70	3.30	4.30	4.80	5.60	6.50	6.60	7.60	9.00

Displacements for spider 64 Shore D

ROTEX® size	14	19	24	28	38	42	48	55	65	75	90	100	110	125	140	160	180
Max. axial displacement ΔK_a [mm]	-0.5 +1.0	-0.5 +1.2	-0.5 +1.4	-0.7 +1.5	-0.7 +1.8	-1.0 +2.0	-1.0 +2.1	-1.0 +2.2	-1.0 +2.6	-1.0 +3.0	-1.5 +3.4	-1.5 +3.8	-1.5 +4.2	-2.0 +4.6	-2.0 +5.0	-2.5 +5.7	-3.0 +6.4
Max. radial displacement with n=1500 rpm ΔK_r [mm]	0.11	0.13	0.15	0.18	0.21	0.23	0.25	0.27	0.30	0.34	0.36	0.37	0.40	0.43	0.45	0.46	0.49
Max. angular displacement with n=1500 rpm ΔK_w [degree]	1.1	1.1	0.8	0.8	0.9	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.2	1.2	1.1	1.1	1.1
ΔK_w [mm]	0.57	0.76	0.76	0.90	1.25	1.40	1.80	2.00	2.50	3.00	3.80	4.30	5.30	6.00	6.10	7.10	8.00

Displacements for spider PA, PEEK

ROTEX® size	14	19	24	28	38	42	48	55	65	75	90	100	110	125	140		
Max. axial displacement ΔK_a [mm]	-0.5 +1.0	-0.5 +1.2	-0.5 +1.4	-0.7 +1.5	-0.7 +1.8	-1.0 +2.0	-1.0 +2.1	-1.0 +2.2	-1.0 +2.6	-1.0 +3.0	-1.5 +3.4	-1.5 +3.8	-1.5 +4.2	-2.0 +4.6	-2.0 +5.0	-2.5 +5.0	-3.0 +5.0
Max. radial displacement with n=1500 rpm ΔK_r [mm]	0.08	0.10	0.11	0.12	0.14	0.16	0.18	0.19	0.21	0.24	0.25	0.26	0.27	0.30	0.31		
Max. angular displacement with n=1500 rpm ΔK_w [degree]	0.60	0.45	0.45	0.50	0.50	0.55	0.55	0.55	0.60	0.60	0.60	0.60	0.65	0.65	0.60		
ΔK_w [mm]	0.33	0.41	0.42	0.52	0.67	0.85	1.00	1.15	1.35	1.65	2.15	2.40	2.80	3.25	3.30		

The specified permissible displacement figures of the flexible ROTEX® couplings are standard values taking into account the load of the coupling up to the rated torque T_{KN} and an operating speed $n = 1500$ rpm along with an ambient temperature of $+30^\circ\text{C}$.

The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. Detailed mounting instructions are shown on our homepage www.ktr.com.


Flexible jaw couplings

Properties of standard spiders


ROTEX® 14




ROTEX® 19




ROTEX® 24 - 65



ROTEX® 75 - 160



ROTEX® 180



Degree of hardness

92 ShA

98 ShA

64 ShD

Shore A

Increasing hardness

Shore D



Spider type (Shore hardness)	92 Shore A (T-PUR®)	92 Shore A
	 T-PUR®	
Size	14 to 180	14 to 90
Material	T-PUR®	Polyurethane (PUR)
Permissible temperature range Permanent temperature Short-term temperature	-40 °C to +120 °C -40 °C to +150 °C	-40 °C to +90 °C -40 °C to +120 °C
Properties	<ul style="list-style-type: none"> - significantly higher service life expectancy - very good temperature resistance - improved damping of vibrations - good damping, average flexibility - suitable for all hub materials 	<ul style="list-style-type: none"> - good damping, average flexibility - suitable for all hub materials

Spider type (Shore hardness)	98 Shore A (T-PUR®) ¹⁾	98 Shore A ¹⁾
	 T-PUR®	
Size	14 to 180	14 to 90
Material	T-PUR®	Polyurethane (PUR)
Permissible temperature range Permanent temperature Short-term temperature	-40 °C to +120 °C -40 °C to +150 °C	-30 °C to +90 °C -40 °C to +120 °C
Properties	<ul style="list-style-type: none"> - significantly higher service life expectancy - very good temperature resistance - improved damping of vibrations - transmission of high torques with average damping - recommended hub material: steel, GJL and GJS 	<ul style="list-style-type: none"> - transmission of high torques with average damping - recommended hub material: steel, GJL and GJS

Spider type (Shore hardness)	64 Shore D (T-PUR®)
	 T-PUR®
Size	14 to 180
Material	T-PUR®
Permissible temperature range Permanent temperature Short-term temperature	-40 °C to +120 °C -40 °C to +150 °C
Properties	<ul style="list-style-type: none"> - significantly higher service life expectancy - very good temperature resistance - improved damping of vibrations - transmission of very high torques with low damping - recommended hub material: steel and GJS

Technical data of standard spiders

92 Shore A spider made of T-PUR® and PUR

ROTEX® size	Max. speed		Torsion angle ϕ with		Torque [Nm]			Damping power P _{KW} [W] ³⁾	Relative damping ψ	Resonance factor V _R	Torsion spring stiffness C dyn. [Nm/rad]			
	v=35 m/s cast material		v=40 m/s steel		TKN	TK max	DIN 740 ¹⁾		TK max ²⁾	1.0 TKN	0.75 TKN	0.5 TKN	0.25 TKN	
	Rated TKN	Max. T _K max	Vibratory T _{KW}	DIN 740 ¹⁾			TK max ²⁾							
14	22200	25400	6.4°	10°	7.5	15	2.0	22.5	—	0.80	0.38x10 ³	0.31x10 ³	0.24x10 ³	0.14x10 ³
19	16700	19000			10	20	2.6	30	4.8		1.28x10 ³	1.05x10 ³	0.8x10 ³	0.47x10 ³
24	12100	13800			35	70	9.1	105	6.6		4.86x10 ³	3.98x10 ³	3.01x10 ³	1.79x10 ³
28	10100	11500			95	190	25	285	8.4		10.9x10 ³	8.94x10 ³	6.76x10 ³	4.01x10 ³
38	8300	9500			190	380	49	570	10.2		21.05x10 ³	17.26x10 ³	13.05x10 ³	7.74x10 ³
42	7000	8000			265	530	69	795	12.0		23.74x10 ³	19.47x10 ³	14.72x10 ³	8.73x10 ³
48	6350	7250			310	620	81	930	13.8		36.7x10 ³	30.09x10 ³	22.75x10 ³	13.49x10 ³
55	5550	6350			410	820	107	1230	15.6		50.7x10 ³	41.59x10 ³	31.45x10 ³	18.64x10 ³
65	4950	5650	3.2°	5°	625	1250	163	1875	18.0		97.1x10 ³	79.65x10 ³	60.2x10 ³	35.7x10 ³
75	4150	4750			1280	2560	333	3840	21.6		113.3x10 ³	92.9x10 ³	70.3x10 ³	41.65x10 ³
90	3300	3800			2400	4800	624	7200	30.0		190.1x10 ³	155.9x10 ³	117.9x10 ³	69.9x10 ³
100	2950	3350			3300	6600	858	9900	36.0		253.1x10 ³	207.5x10 ³	156.9x10 ³	93x10 ³
110	2600	2950			4800	9600	1248	14400	42.0		415.5x10 ³	336.9x10 ³	257.6x10 ³	177.4x10 ³
125	2300	2600			6650	13300	1729	19950	48.0		647.7x10 ³	537.3x10 ³	412.2x10 ³	277.5x10 ³
140	2050	2350			8550	17100	2223	25650	54.6		813.4x10 ³	670.2x10 ³	519.7x10 ³	351.7x10 ³
160	1800	2050			12800	25600	3328	38400	75.0		1298x10 ³	1104x10 ³	901.9x10 ³	655.7x10 ³
180	1550	1800			18650	37300	4849	55950	78.0		2327x10 ³	1981x10 ³	1618x10 ³	1176x10 ³

98 Shore A spider made of T-PUR® and PUR

ROTEX® size	Max. speed		Torsion angle ϕ with		Torque [Nm]			Damping power P _{KW} [W] ³⁾	Relative damping ψ	Resonance factor V _R	Torsion spring stiffness C dyn. [Nm/rad]			
	v=35 m/s cast material		v=40 m/s steel		TKN	TK max	DIN 740 ¹⁾		TK max ²⁾	1.0 TKN	0.75 TKN	0.5 TKN	0.25 TKN	
	Rated TKN	Max. T _K max	Vibratory T _{KW}	DIN 740 ¹⁾			TK max ²⁾							
14	22200	25400	6.4°	10°	12.5	25	3.3	37.5	—	0.80	0.56x10 ³	0.46x10 ³	0.35x10 ³	0.21x10 ³
19	16700	19000			17	34	4.4	51	4.8		2.92x10 ³	2.39x10 ³	1.81x10 ³	1.07x10 ³
24	12100	13800			60	120	16	180	6.6		9.93x10 ³	8.14x10 ³	6.16x10 ³	3.65x10 ³
28	10100	11500			160	320	42	480	8.4		26.77x10 ³	21.95x10 ³	16.6x10 ³	9.84x10 ³
38	8300	9500			325	650	85	975	10.2		48.57x10 ³	39.83x10 ³	30.11x10 ³	17.85x10 ³
42	7000	8000			450	900	117	1350	12.0		54.5x10 ³	44.69x10 ³	33.79x10 ³	20.03x10 ³
48	6350	7250			525	1050	137	1575	13.8		65.3x10 ³	53.54x10 ³	40.48x10 ³	24x10 ³
55	5550	6350			685	1370	178	2055	15.6		95x10 ³	77.9x10 ³	58.88x10 ³	34.9x10 ³
65	4950	5650	3.2°	5°	940	1880	244	2820	18.0		129.5x10 ³	106.2x10 ³	80.3x10 ³	47.6x10 ³
75	4150	4750			1920	3840	499	5760	21.6		197.5x10 ³	162x10 ³	122.5x10 ³	72.6x10 ³
90	3300	3800			3600	7200	936	10800	30.0		312.2x10 ³	256x10 ³	193.6x10 ³	114.7x10 ³
100	2950	3350			4950	9900	1287	14850	36.0		383.3x10 ³	314.3x10 ³	237.6x10 ³	140.9x10 ³
110	2600	2950			7200	14400	1872	21600	42.0		805.9x10 ³	663.1x10 ³	515.3x10 ³	360.5x10 ³
125	2300	2600			10000	20000	2600	30000	48.0		1207x10 ³	1003x10 ³	787.6x10 ³	552.5x10 ³
140	2050	2350			12800	25600	3328	38400	54.6		1549x10 ³	1283x10 ³	979.8x10 ³	674.1x10 ³
160	1800	2050			19200	38400	4992	57600	75.0		2481x10 ³	2137x10 ³	1781x10 ³	1275x10 ³
180	1550	1800			35000	70000	9100	105000	117.0		5670x10 ³	4917x10 ³	4103x10 ³	3038x10 ³

64 Shore D spider made of T-PUR®

ROTEX® size	Max. speed		Torsion angle ϕ with		Torque [Nm]			Damping power P _{KW} [W] ³⁾	Relative damping ψ	Resonance factor V _R	Torsion spring stiffness C dyn. [Nm/rad]			
	v=35 m/s cast material		v=40 m/s steel		TKN	TK max	DIN 740 ¹⁾		TK max ²⁾	1.0 TKN	0.75 TKN	0.5 TKN	0.25 TKN	
	Rated TKN	Max. T _K max	Vibratory T _{KW}	DIN 740 ¹⁾			TK max ²⁾							
14	22200	25400	4.5°	7.0°	16	32	4.2	48	9.0	0.75	0.76x10 ³	0.62x10 ³	0.47x10 ³	0.28x10 ³
19	16700	19000			21	42	5.5	63	7.2		5.35x10 ³	4.39x10 ³	3.32x10 ³	1.97x10 ³
24	12100	13800			75	150	19.5	225	9.9		15.11x10 ³	12.39x10 ³	9.37x10 ³	5.55x10 ³
28	10100	11500			200	400	52	600	12.6		27.52x10 ³	22.57x10 ³	17.06x10 ³	10.12x10 ³
38	8300	9500			405	810	105	1215	15.3		70.15x10 ³	57.52x10 ³	43.49x10 ³	25.78x10 ³
42	7000	8000			560	1120	146	1680	18.0		79.9x10 ³	65.5x10 ³	49.52x10 ³	29.35x10 ³
48	6350	7250			655	1310	170	1965	20.7		95.5x10 ³	78.3x10 ³	59.22x10 ³	35.1x10 ³
55	5550	6350			825	1650	215	2475	23.4		107.9x10 ³	88.5x10 ³	66.9x10 ³	39.66x10 ³
65	4950	5650	2.5°	3.6°	1175									

Flexible jaw couplings

Technical data and properties of special spiders

		
Description	PA	PEEK
Material	Polyamide	Polyetheretherketone
Permissible temperature range Permanent temperature Short-term temperature	-40 °C to +100 °C ¹⁾ -40 °C to +120 °C ¹⁾	up to +180 °C up to +250 °C
Properties	<ul style="list-style-type: none"> - small twisting angle and high torsion spring stiffness - transmission of very high torques with very low damping - good resistance to chemicals¹⁾ - recommended hub material: steel - high restoring forces with displacements 	<ul style="list-style-type: none"> - small twisting angle and high torsion spring stiffness - transmission of very high torques with very low damping - highly temperature-resistant, resistant to hydrolysis - good resistance to chemicals - recommended hub material: steel - high restoring forces with displacements


¹⁾different properties depending on compound

ROTEX® size	Torques		
	T _{KN} [Nm]	T _K max [Nm]	T _{KW} [Nm]
14	22	44	5.5
19	30	60	8.0
24	105	210	27.5
28	280	560	73
38	565	1130	147
42	785	1570	204
48	915	1830	238
55	1200	2400	312
65	1645	3290	427
75	2560	5130	667
90	6300	12600	1640
100	8650	17300	2250
110	10500	21000	2730
125	13000	26000	3380

Temperature factor S _t										
	-40 °C +30 °C	+40 °C	+50 °C	+60 °C	+70 °C	+80 °C	+90 °C	+100 °C	+110 °C	+120 °C
PA	1.0	1.0	1.0	1.0	1.2	1.4	1.6	—	—	—
PEEK	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

With temperatures below -40 °C please consult with KTR.

Installation of spider

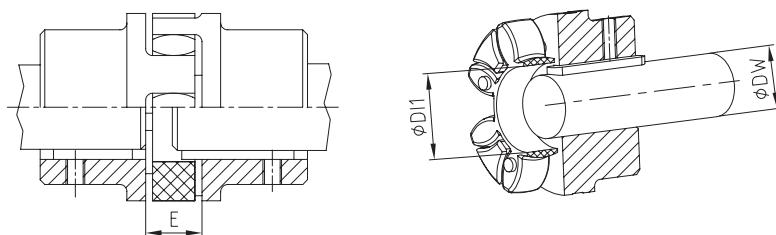


Shaft ØDW with feather key (acc. to DIN 6885 sheet 1) protruding into the spider ØDI1

Assembly dimensions																	
ROTEX® size	14	19	24	28	38	42	48	55	65	75	90	100	110	125	140	160	180
Distance dimension E	13	16	18	20	24	26	28	30	35	40	45	50	55	60	65	75	85
Dimension DI1	10	18	27	30	38	46	51	60	68	80	100	113	127	147	165	190	220
Dimension DW ²⁾	7	12	20	22	28	36	40	48	55	65	80	95	100	120	135	160	185

²⁾ If the shaft diameter is smaller than or equal to dimension DI1, one shaft end or both shaft ends may protrude with the feather keyway into the spider.

Selection of standard IEC motors

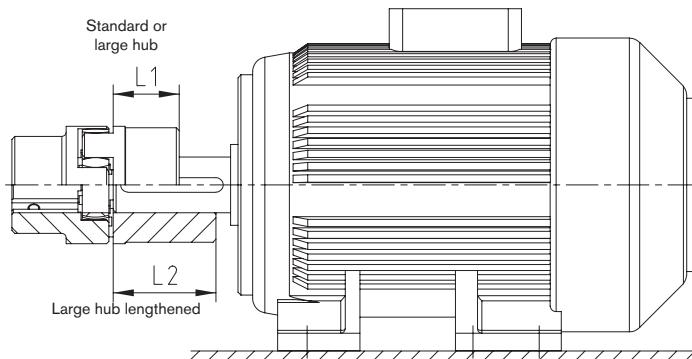

ROTEX® couplings for standard IEC motors, protection class IP 54/IP 55 (spider 92 Shore A)														
A. C. motor 50 Hz			Motor power n= 3000 rpm 2 poles		ROTEX® coupling size	Motor power n= 1500 rpm 4 poles		ROTEX® coupling size	Motor power n= 1000 rpm 6 poles		ROTEX® coupling size	Motor power n= 750 rpm 8 poles		ROTEX® coupling size
Size	Shaft end DWxLW [mm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]	
2 poles 4, 6, 8 poles	9 x 20		0.09	0.32	9 ¹)	0.06	0.43	9 ¹)	0.037	0.43	9 ¹)			14
		0.12	0.41	0.09	0.64	0.045	0.52							
63	11 x 23		0.18	0.62	14	0.12	0.88	14	0.06	0.7	14			14
		0.25	0.86	0.18	1.3	0.09	1.1	0.09	1.4					
71	14 x 30		0.37	1.3	19	0.25	1.8	19	0.18	2	19	0.12	1.8	19
		0.55	1.9	0.37	2.5	0.25	2.8	0.18	2.5					
80	19 x 40		0.75	2.5	24	0.55	3.7	24	0.37	3.9	24	0.25	3.5	19
		1.1	3.7	0.75	5.1	0.55	5.8	0.25	5.3					
90S	24 x 50		1.5	5	24	1.1	7.5	24	0.75	8	24	0.55	7.9	24
		2.2	7.4	1.5	10	1.1	12	0.75	11					
100L	28 x 60		3	9.8	28	2.2	15	28	1.5	15	28	0.75	11	28
		4	13	4	27	2.2	22	0.75	16					
112M	38 x 80		5.5	18	28	5.5	36	28	3	30	28	2.2	30	28
		7.5	25	7.5	49	4	40	3	40					
132S	42 x 110		11	36	38	11	72	38	7.5	75	38	4	54	38
		15	49	15	98	11	109	5.5	74					
160L	48 x 110		18.5	60	42	18.5	121	42	11	109	42	7.5	100	42
		22	71	22	144	15	148	11	145					
180M	55 x 110		30	97	42	30	196	42	18.5	181	42	15	198	42
		37	120	37	240	22	215	22	215					
225S	55 x 110	60 x 140	45	145	48	45	292	48	30	293	48	18.5	244	48
			55	177		55	356		37	361		22	290	
250M	60 x 140	65 x 140	75	241	55	75	484	55	45	438	55	30	392	65
			90	289		90	581		55	535		37	483	
280S	75 x 140		110	353	65	110	707	65	75	727	65	45	587	65
			132	423		132	849		90	873		55	712	
315S	80 x 170		160	513	65	160	1030	65	110	1070	65	75	971	65
		200	641	200	1290	132	1280	110	1170					
315M	85 x 170		250	802	75	250	1600	75	160	1550	75	110	1420	90
		315	1010	315	2020	200	1930	132	1710					
315	95 x 170		355	1140	90	355	2280	90	250	2410	100	200	2580	100
		400	1280	400	2570	315	3040	110	250	3220	110			
355	75 x 140	95 x 170	500	1600	90	500	3210	90	400	3850	90	315	4060	125
		560	1790	560	3580	450	4330	125	355	4570	125			
400	80 x 170	110 x 210	630	2020	100	630	4030	100	500	4810	100	400	5150	140
		710	2270	710	4540	560	5390	450	5790					
450	120 x 210		800	2560	110	800	5120	110	630	6060	140	500	6420	160
		900	2880	900	5760	710	6830	560	7190	160				
450	90 x 170	120 x 210	1000	3200	1000	6400	110	800	7690	160	630	8090		

The coupling selection is based on an ambient temperature up to +30 °C. The selection is based on a minimum safety factor of 2 to the max. coupling torque ($T_{K \max}$). A detailed selection is possible according to catalogue page 14 et seqq. Drives with periodical torque curves must be selected according to DIN 740 part 2. If requested, KTR will perform the selection. Torque T = rated torque according to Siemens catalogue M 11 · 1994/95.

1) For dimensions see ROTEX® GS series

2) For motor hub made of steel see page 40

Cylindrical bores and spline bores

		Stock programme of cylindrical finish bores [mm] H7 feather keyway acc. to DIN 6885 sheet 1 [JS9] and setscrew																																												
ROTEX® size Material	Un- bo- red	Ø6	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø75	Ø80	Ø85	Ø90	Ø100										
14	Sint	●		●	●	●	●	●	●	●																																				
	Al-H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●													
19	Sint	●																																												
	Al-D	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●												
24	St	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●												
	Sint	●																																												
28	Al-D	●																																												
	St	●																																												
38	GJL	●																																												
	St	●																																												
42	GJL	●																																												
	St	●																																												
48	GJL	●																																												
	St	●																																												
55	GJL	●																																												
	St	●																																												
65	GJL	●																																												
	St	●																																												
75	GJL	●																																												
	St	●																																												
90	GJL	●																																												
	St	●																																												

Basic programme of SAE involute splines

Spline code	Size	Pitch circle	pitch	No. of teeth	Angle	Spline code	Size	Pitch circle	pitch	No. of teeth	Angle
PH-S	5 ¹ / ₈ "	14.28	16/32	9	30°	PS-S	1 1/2"	35.98	12/24	17	30°
PI-S	3/4"	17.46	16/32	11	30°	PD-S	1 1/2"	36.51	16/32	23	30°
PB-S	7/8"	20.63	16/32	13	30°	PE-S	1 3/4"	42.86	16/32	27	30°
PB-BS	1"	23.81	16/32	15	30°	PK-S	1 3/4"	41.275	8/16	13	30°
PJ	1 1/8"	26.98	16/32	17	30°	PT-C ¹⁾	2"	47.625	8/16	15	30°
PC-S	1 1/4"	29.63	12/24	14	30°	PQ-C ¹⁾	2 1/4"	53.975	8/16	17	30°
PA-S	1 3/8"	33.33	16/32	21	30°						

Basic programme of spline bores acc. to DIN 5482

Size	Pitch circle	Module	No. of teeth	Profile correction	Size	Pitch circle	Module	No. of teeth	Profile correction
A 17 x 14	14.40	1.6	9	+0.600 ²⁾	A 35 x 31	31.50	1.75	18	+0.676
A 20 x 17	19.20	1.6	12	-0.2	A 40 x 36	38.00	1.9	20	+0.049
A 25 x 22	22.40	1.6	14	+0.550	A 45 x 41	44.00	2	22	+0.181
A 28 x 25	26.25	1.75	15	+0.302	A 50 x 45	48.00	2	24	+0.181
A 30 x 27	28.00	1.75	16	+0.327					


Basic programme of spline bores acc. to DIN 5480

Spline code	Pitch circle	Module	No. of teeth	Spline code	Pitch circle	Module	No. of teeth
20 x 1 x 18 x 8H	18.0	1	18	40 x 2 x 18 x 8H	36.0	2	18
20 x 1.25 x 14 x 8H	17.5	1.25	14	45 x 2 x 21 x 8H	41.0	2	21
25 x 1.25 x 18 x 8H	22.5	1.25	18	48 x 2 x 22 x 9H	44.0	2	22
28 x 1.25 x 21 x 8H	26.25	1.25	21	50 x 2 x 24 x 8H	48.0	2	24
30 x 2 x 14 x 8H	26.0	2	14	60 x 2 x 28 x 8H	56.0	2	28
32 x 2 x 14 x 8H	28.0	2	14	75 x 3 x 24 x 8H	72.0	3	24
35 x 2 x 16 x 8H	32.0	2	16	80 x 3 x 25 x 8H	75.0	3	25


Basic programme of spline bores acc. to DIN 9611 - ISO 500 (p.t.o. shaft connection)

Size	Width of keyway	No. of teeth	Tip circle	Root circle
1 3/8"	8.69	6	34.93	29.65
1 3/8"	—	21	34.95	34.80 ³⁾
1 3/4"	11.07	6	44.45	37.74
1 3/4"	—	20	45.20	40.20

1 3/8", 6 teeth

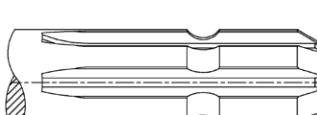

1 3/8", 6 teeth

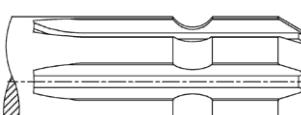

1 3/4", 20 teeth



Spline clamping hubs are often adapted to the shafts of hydraulic pump/hydraulic motor shafts. Please contact us for the respective hub length of the spline code!

¹⁾ For clamping hubs only, with plug-in hubs use code PT or PQ.


²⁾ Profile correction different from DIN

³⁾ Similar to code PA-S

Inch bores and taper bores

Stock programme of inch bores

KTR code	\emptyset bore ["]	Width of keyway ["]	\emptyset bore [mm]	Width of keyway [mm]	Keyway depth/Tolerance +0.381 [mm]	Size									
						19	24	28	38	42	48	55	65	75	90
Tb	3/8	1/8	9.525 ^{+0.0254}	3.175 ^{+0.051}	10.972										
DNB	7/16	3/32	11.112 ^{+0.0254}	2.382 ^{+0.051}	12.293										
T	1/2	3/16	12.7 ^{+0.0254}	4.762 ^{+0.051}	14.757										
Ta	1/2	1/8	12.7 ^{+0.0254}	3.175 ^{+0.051}	14.224	●	●								
DNC	17/32	1/8	13.495 ^{+0.0254}	3.175 ^{+0.051}	15.011										
Do	9/16	1/8	14.287 ^{+0.0254}	3.175 ^{+0.051}	15.824										
E	5/8	1/8	15.875 ^{+0.0254}	3.175 ^{+0.051}	17.424										
Es	5/8	5/32	15.875 ^{+0.0254}	3.968 ^{+0.051}	17.729	●	●	●							
Ed	5/8	3/16	15.875 ^{+0.0254}	4.762 ^{+0.051}	18.008	●	●	●							
DNH	11/16	3/16	17.462 ^{+0.0254}	4.762 ^{+0.051}	19.634										
Ad	3/4	1/8	19.05 ^{+0.0254}	3.175 ^{+0.051}	20.624										
A	3/4	3/16	19.05 ^{+0.0254}	4.762 ^{+0.051}	21.259	●	●	●	●						
G	7/8	3/16	22.225 ^{+0.0254}	4.762 ^{+0.051}	24.485	●	●	●	●	●	●				
F	7/8	1/4	22.225 ^{+0.0254}	6.35 ^{+0.051}	25.069		●	●	●	●	●				
Gf	15/16	1/4	23.812 ^{+0.0254}	6.35 ^{+0.051}	26.695										
H	1	3/16	25.4 ^{+0.0254}	4.762 ^{+0.051}	27.686										
Hs	1	1/4	25.4 ^{+0.0254}	6.35 ^{+0.051}	28.295		●	●	●	●					
R	1 1/16	3/16	26.987 ^{+0.0254}	4.762 ^{+0.051}	29.286		●	●	●	●					
Sb	1 1/8	1/4	28.575 ^{+0.0254}	6.35 ^{+0.051}	31.521		●	●	●	●					
Sd	1 1/8	5/16	28.575 ^{+0.0254}	7.937 ^{+0.051}	32.105										
Js	1 1/4	1/4	31.75 ^{+0.0254}	6.35 ^{+0.051}	34.721				●						
K	1 1/4	5/16	31.75 ^{+0.0254}	7.937 ^{+0.051}	35.331			●	●	●	●	●	●	●	
Ma	1 3/8	5/16	34.925 ^{+0.0254}	7.937 ^{+0.051}	38.557		●	●	●	●	●	●			
RH1	1 3/8	3/8	34.925 ^{+0.0254}	9.525 ^{+0.063}	39.141										
Cb	1 7/16	3/8	36.512 ^{+0.0254}	9.525 ^{+0.063}	40.767										
Ca	1 1 1/2	5/16	38.1 ^{+0.0254}	7.937 ^{+0.051}	41.783										
C	1 1 1/2	3/8	38.1 ^{+0.0254}	9.525 ^{+0.063}	42.392			●	●	●	●	●	●	●	
Nb	1 5/8	3/8	41.275 ^{+0.0254}	9.525 ^{+0.063}	45.618		●	●							
Ls	1 3/4	3/8	44.45 ^{+0.0254}	9.525 ^{+0.063}	48.818										
L	1 3/4	7/16	44.45 ^{+0.0254}	11.112 ^{+0.0635}	49.428										
Lu	1 7/8	1/2	47.625 ^{+0.0254}	12.7 ^{+0.0635}	53.238										
Da	1 15/16	1/2	49.212 ^{+0.0254}	12.7 ^{+0.0635}	54.864										
Ds	2	1/2	50.8 ^{+0.0254}	12.7 ^{+0.0635}	56.464										
Pa	2 1/8	1/2	53.975 ^{+0.0381}	12.7 ^{+0.0635}	59.69										
U	2 1/4	1/2	57.15 ^{+0.0381}	12.7 ^{+0.0635}	62.915										
Ub	2 3/8	5/8	60.325 ^{+0.0381}	15.875 ^{+0.076}	67.335										
Wd	3 3/8	7/8	85.725 ^{+0.0381}	22.225 ^{+0.076}	95.504										
Wf	3 5/8	7/8	92.075 ^{+0.0381}	22.225 ^{+0.076}	101.955										



Basic programme taper 1:8

Code	$D^{+0.05}$	(D2)	B^{JS9}	$T2^{+0.1}$	LK
N/1	9.7	7.575	2.4 ^{+0.05}	10.85	17.0
N/1c	11.6	9.5375	3 ^{JS9}	12.90	16.5
N/1e	13.0	10.375	2.4 ^{+0.05}	13.80	21.0
N/1d	14.0	11.813	3 ^{JS9}	15.50	17.5
N/1b	14.3	11.8625	3.2 ^{+0.05}	15.65	19.5
N/2	17.287	14.287	3.2 ^{+0.05}	18.24	24.0
N/2a	17.287	14.287	4 ^{JS9}	18.94	24.0
N/2b	17.287	14.287	3 ^{JS9}	18.34	24.0
N/3	22.002	18.502	4 ^{JS9}	23.40	28.0
N/4	25.463	20.963	4.78 ^{+0.05}	27.83	36.0
N/4b	25.463	20.963	5 ^{JS9}	28.23	36.0
N/4a	27.0	22.9375	4.78 ^{+0.05}	28.80	32.5
N/4g	28.45	23.6375	6 ^{JS9}	29.32	38.5
N/5	33.176	27.676	6.38 ^{+0.05}	35.39	44.0
N/5a	33.176	27.676	7 ^{JS9}	35.39	44.0


Basic programme taper 1:5

Code	$D^{+0.05}$	(D2)	B^{JS9}	$T2^{+0.1}$	LK
A-10	9.85	7.55	2 ^{JS9}	1.0	11.5
B-17	16.85	13.15	3 ^{JS9}	1.8	18.5
C-20	19.85	15.55	4 ^{JS9}	2.2	21.5
Cs-22	21.95	17.65	3 ^{JS9}	1.8	21.5
D-25	24.85	19.55	5 ^{JS9}	2.9	26.5
E-30	29.85	23.55	6 ^{JS9}	2.6	31.5
F-35	34.85	27.55	6 ^{JS9}	2.6	36.5
G-40	39.85	32.85	6 ^{JS9}	2.6	35.0

With code N/6 and N/6a keyway in parallel with taper.



Basic programme of taper 1:10

Code	$D^{+0.05}$	(D2)	B^{JS9}	$T2^{+0.1}$	LK
CX	19.95	16.75	5 ^{JS9}	22.08	32
DX	24.95	20.45	6 ^{JS9}	26.68	45
EX	29.75	24.75	8 ^{JS9}	31.88	50

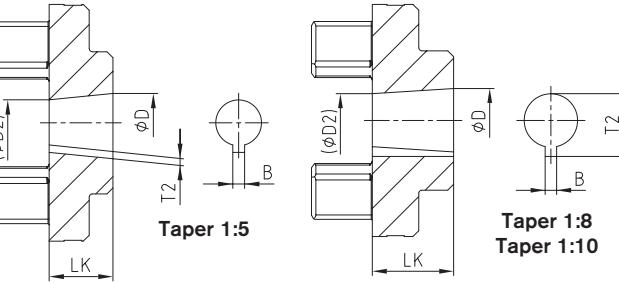

ROTEX® Standard Flexible jaw couplings

Materials: aluminium + cast + sinter material

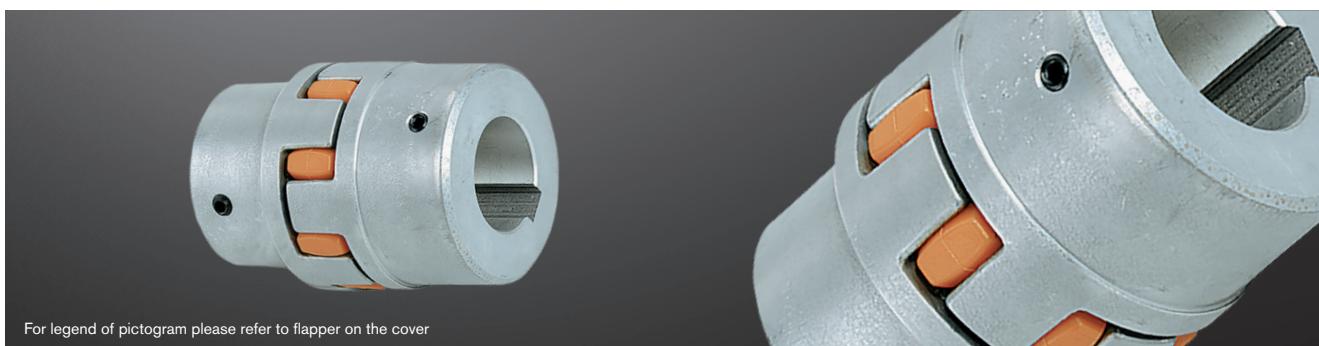

ROTEX® Sintered steel (Sint)																	
Size	Compo- nent	Spider ¹⁾ (component 2) Rated torque [Nm]			Finish bore D (min. - max.)	Dimensions [mm]											
		92 ShA	98 ShA	64 ShD		L	L1, L2	E	B1	S	DH	DI1	DN	N	G	T	T _A [Nm]
14	1a	7.5	12.5	—	0-16	35	11	13	10	1.5	30	10	30	—	M4	5	1.5
19	1a	10	17	—	0-24	66	25	16	12	2.0	40	18	40	—	M5	10	2
24	1a	35	60	—	0-28	78	30	18	14	2.0	56	27	56	—	M5	10	2

ROTEX® Aluminium diecast (Al-D)																	
19	1 1a	10	17	—	6-19 19-24	66	25	16	12	2	41	18	32 41	20	M5	10	2
24	1 1a	35	60	—	9-24 22-28	78	30	18	14	2	56	27	40 56	24	M5	10	2
28	1 1a	95	160	—	10-28 28-38	90	35	20	15	2.5	66	30	48 66	28	M8	15	10


ROTEX® Aluminium (Al-H)																	
5	1a	0.5	0.9	-	0-6	15	5	5	4	0.5	10	-	-	-	M2	2.5	-
7	1a	1.2	2.0	2.4	0-7	22	7	8	6	1.0	14	-	-	-	M3	3.5	-
9	1a	3.0	5.0	6.0	0-11	30	10	10	8	1.0	20	7.2	-	-	M4	5	1.5
12	1a	5.0	9.0	12	0-12	34	11	12	10	1.0	25	8.5	-	-	M4	5	1.5
14	1a	7.5	12.5	16	0-16	35	11	13	10	1.5	30	10.5	-	-	M4	5	1.5
19	1a	10	17	26	0-24	66	25	16	12	2.0	40	18	-	-	M5	10	2
24	1a	35	60	75	0-28	78	30	18	14	2.0	55	27	-	-	M5	10	2
28	1a	95	160	200	0-38	90	35	20	15	2.5	65	30	-	-	M8	15	10
38	1a	190	325	405	0-45	114	45	24	18	3.0	80	38	-	-	M8	15	10
42	1a	265	450	560	0-55	126	50	26	20	3	95	46	-	-	M8	20	10
48	1a	310	525	655	15-52	140	56	28	21	3.5	105	51	-	-	M8	20	10
55	1a	410	685	825	20-60	160	65	30	22	4	120	60	98 118	52	M10	20	17
65	1	625	940	1175	22-70	185	75	35	26	4.5	135	68	115 120	61	M10	20	17
75	1	1280	1920	2400	30-80	210	85	40	30	5	160	80	135 140	69	M10	25	17
90	1	2400	3600	4500	40-100	245	100	45	34	5.5	200	100	160 170	81	M12	30	40

ROTEX® Nodular iron (GJS)																	
100	1	3300	4950	6185	50-115	270	110	50	38	6	225	113	180	89	M12	30	40
110	1	4800	7200	9000	60-125	295	120	55	42	6.5	255	127	200	96	M16	35	80
125	1	6650	10000	12500	60-145	340	140	60	46	7	290	147	230	112	M16	40	80
140	1	8550	12800	16000	60-160	375	155	65	50	7.5	320	165	255	124	M20	45	140
160	1	12800	19200	24000	80-185	425	175	75	57	9	370	190	290	140	M20	50	140
180	1	18650	28000	35000	85-200	475	195	85	64	10.5	420	220	325	156	M20	50	140


= Unless any material is specified in the order, it is defined with the calculation/order.

¹⁾ Maximum torque of the coupling T_K max = rated torque of the coupling T_{KN} x 2. For selection please see page 14 et seqq.


Ordering example:	ROTEX® 38	GJL	92 ShA	1a	Ø45	1	Ø25
	Coupling size	Material	Spider hardness	Component	Finish bore	Component	Finish bore

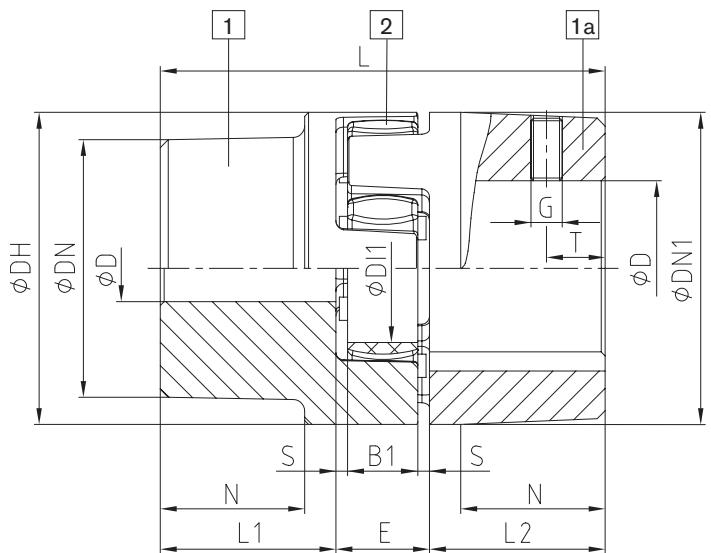Components

AI-D (thread opposite the keyway)

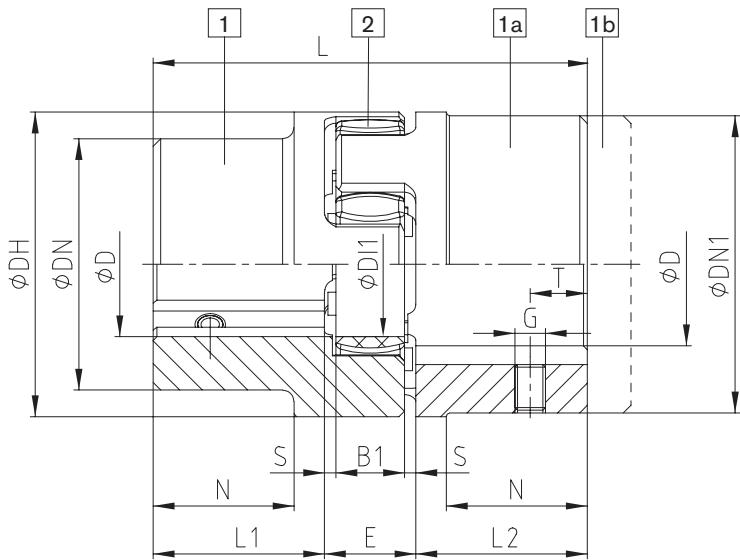

GJL / GJS (thread on the keyway)

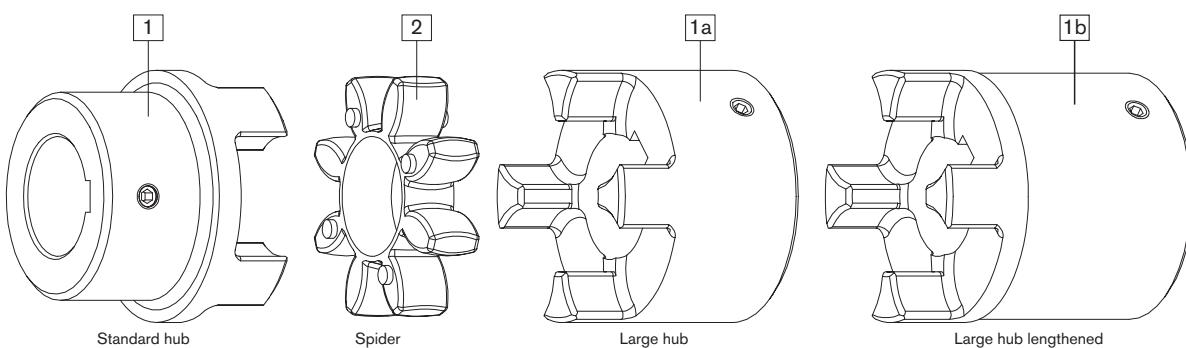

ROTEX® Standard

Flexible jaw couplings

Material steel/stainless steel



ROTEX® Steel (St)																
Size	Component	Spider ¹⁾ (component 2) Rated torque [Nm]			Finish bore D (min.-max.)	Dimensions [mm]								Setscrew		
		92 ShA	98 ShA	64 ShD		L	L1, L2	E	B1	S	DH	DI1	DN	G	T	T _A [Nm]
		7.5	12.5	16		35	11	13	10	1.5	30	10	30	M4	5	1.5
14	1a				0-16	50	18.5									
	1b	7.5	12.5	16		66	25	16	12	2	40	18	40	M5	10	2
19	1a				0-25	90	37									
	1b	10	17	21		78	30	18	14	2	55	27	55	M5	10	2
24	1a				0-35	118	50									
	1b	35	60	75		90	35	20	15	2.5	65	30	65	M5	10	2
28	1a				0-40	140	60									
	1b	95	160	200		114	45	24	18	3	80	38	70	M8	15	10
38	1				0-48	164	70									
	1b	190	325	405		126	50	26	20	3	95	46	85	M8	15	10
42	1				0-55	176	75									
	1b	265	450	560		140	56	28	21	3.5	105	51	95	M8	20	10
48	1				0-62	188	80									
	1b	310	525	655		160	65	30	22	4	120	60	110	M10	20	17
55	1				0-75	210	90									
	1b	410	685	825		185	75	35	26	4.5	135	68	115	M10	20	17
65	1				0-80	235	100									
	1b	625	940	1175		210	85	40	30	5	160	80	135	M10	20	17
75	1				0-95	260	110									
	1b	1280	1920	2400		245	100	45	34	5.5	200	100	160	M10	25	17
90	1				0-110	295	125									
	1b	2400	3600	4500		225	100	45	34	5.5	200	100	160	M12	30	40
100	1	3300	4950	6185	0-115	270	110	50	38	6	225	113	180	M12	30	40
110	1	4800	7200	9000	0-125	295	120	55	42	6.5	255	127	200	M16	35	80
125	1	6650	10000	12500	60-145	340	140	60	46	7	290	147	230	M16	40	80
140	1	8550	12800	16000	60-160	375	155	65	50	7.5	320	165	255	M20	45	140
160	1	12800	19200	24000	80-185	425	175	75	57	9	370	190	290	M20	50	140
180	1	18650	28000	35000	85-200	475	195	85	64	10.5	420	220	325	M20	50	140

=Unless any material is specified in the order, it is defined with the calculation/order.

¹⁾ Maximum torque of the coupling T_K max = rated torque of the coupling T_{KN} x 2. For selection please see page 14 et seqq.

ROTEX® Stainless steel																	
Size	Material	Spider (component 2) Rated torque [Nm]			Finish bore D (min.-max.)	Dimensions [mm]								Setscrew			
		92 ShA	98 ShA	64 ShD		L	L1, L2	E	B1	S	DH	DI1	DN	G	T	T _A [Nm]	
		10	17	21	0-25	66	25	16	12	2	40	18	40	-	M5	10	2
19	1.4305	35	60	75	0-35	78	30	18	14	2	55	27	55	-	M5	10	2
24	1.4305	95	160	200	0-40	90	35	20	15	2.5	65	30	65	-	M8	15	10
28	1.4305	190	325	405	0-48	114	45	24	18	3	80	38	70	27	M8	15	10
38	1.4305	265	450	560	0-55	126	50	26	20	3	95	46	85	28	M8	20	10
42	1.4305	310	525	655	0-62	140	56	28	21	3.5	105	51	95	32	M8	20	10

Material 1.4571 on request.


Ordering example:	ROTEX® 38	1.4305	92 ShA	1 - Ø45		1 - Ø25	
	Coupling size	Material	Spider hardness	Component	Finish bore	Component	Finish bore

ROTEX®

Flexible jaw couplings

DIN EN 10204 - 3.1 and 3.2 material test certificate

Components

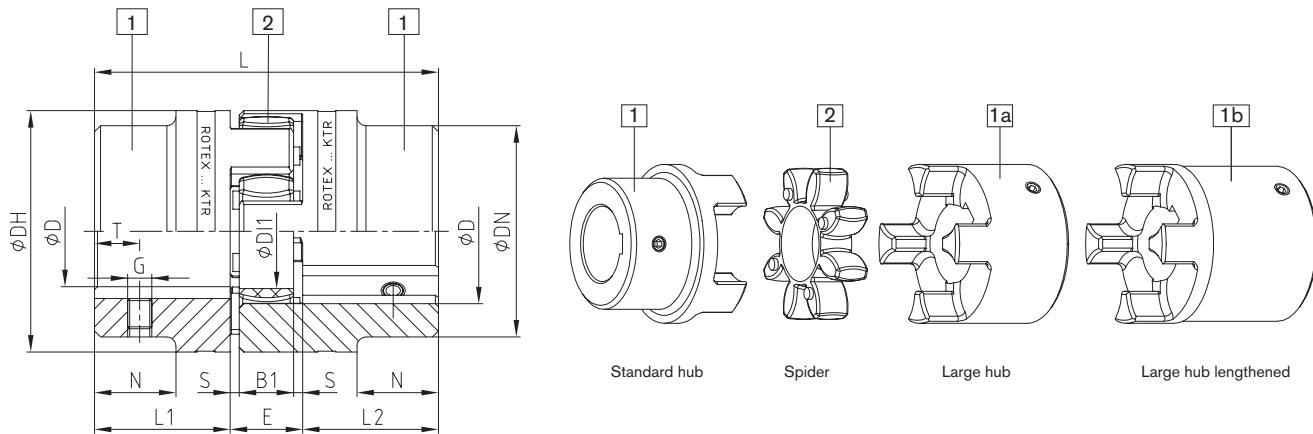

Steel (thread on the keyway)

ROTEX® Coupling hubs with test certificate¹⁾

Size	Component	Material ²⁾	Inspection certificate acc. to DIN EN 10204	Notch impact strength
19	1a	S355 ²⁾	3.1	>=27 J
24	1a	S355 ²⁾	3.1	>=27 J
28	1a	S355 ²⁾	3.1	>=27 J
38	1a	S355 ²⁾	3.1	>=27 J
42	1	S355 ²⁾	3.1	>=27 J
48	1	S355 ²⁾	3.1	>=27 J
55	1	S355 ²⁾	3.1	>=27 J
65	1	S355 ²⁾	3.1	>=27 J
75	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
90	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
100	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
110	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
120	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
140	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
160	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J
180	1	S355 ²⁾ 42CrMoS4+QT ³⁾	3.1/3.2	>=27 J

¹⁾ S355 suitable for feather key connections, 42CrMoS4+QT for oil press-fits

²⁾ Notch impact strength with -40 °C

³⁾ Notch impact strength with -20 °C

Marine programme:

Hub materials S355J2+N and 42CrMo4+QT acc. to DIN EN 10204 - 3.1+3.2, size 75 - 180 available from stock.



ClassNK

UL



Use in fire pumps
ROTEX® couplings comply with the specifications of NFPA 20 standard for the installation of stationary pumps for fire protection and due to completion of the endurance tests required they also comply with the specifications of UL 448A, flexible couplings and connection shafts for stationary fire pumps.

Sizes available:



Size	Compo- nent	Material	Spider (component 2) Rated torque [Nm]	ROTEX® UL Listed				
				Dimensions [mm]				
			92 ShA	Finish bore D (min. - max.)	L	L1, L2	E	DH
42	1	St	265	18-55	126	50	26	95
55	1	St	410	24-74	160	65	30	120
65	1	St	625	24-80	185	75	35	135
75	1	St	1280	24-95	210	85	40	160
90	1	St	2400	30-110	245	100	45	200


* for complete dimensions see table on page 40

Flexible jaw couplings

Taper clamping sleeve



Components

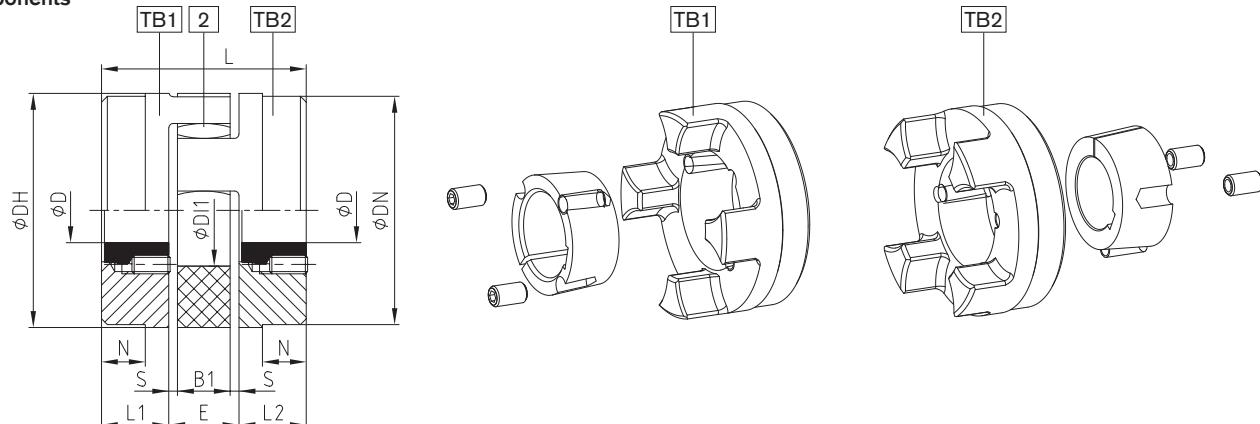

ROTEX® Shaft coupling for taper clamping sleeve

Size	Taper clamping sleeve	Dimensions [mm]								Fastening screws for taper clamping sleeves				
		L1, L2	E	B1	S	L	N	DH	DN	DI1	Size [Inch] ¹⁾	Length [mm]	Number	T _A [Nm]
24	1008	22	18	14	2.0	62	—	55	55	27	1/4"	13	2	5.7
28	1108	23	20	15	2.5	66	—	65	65	30	1/4"	13	2	5.7
38	1108	23	24	18	3.0	70	15	80	78	38	1/4"	13	2	5.7
42	1610	26	26	20	3.0	78	16	95	94	46	3/8"	16	2	20
48	1615	39	28	21	3.5	106	28	105	104	51	3/8"	16	2	20
55	2012	33	30	22	4.0	96	20	120	118	60	7/16"	22	2	31
65	2012	33	35	26	4.5	101	19	135	115	68	7/16"	22	2	31
75	• 3020	52	40	30	5.0	144	36	160	158	80	1/2"	25	49	49
											5/8"	32		
90	3020	52	45	34	5.5	149	33	200	160	100	5/8"	32	2	92
100	3535	90	50	38	6.0	230	69	225	180	113	1/2"	49	3	113
125	4545	114	60	46	7.0	288	86	290	230	147	3/4"	49	3	192

Taper clamping sleeve

Size	Summary of bore dimensions D [mm], H7 fit - feather keyway acc. to DIN 6885 sheet 1														
	Ø10	Ø11	Ø12	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28 ²⁾	Ø38	Ø40	Ø42 ²⁾
1008	Ø10	Ø11	Ø12	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28 ²⁾			
1108	Ø10	Ø11	Ø12	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28 ²⁾			
1610	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42 ²⁾
1615	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42 ²⁾
2012	Ø14	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42 ²⁾
2517	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45
3020	Ø25	Ø28	Ø30	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø75
3535	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø75	Ø80	Ø85	Ø90
4545	Ø55	Ø60	Ø65	Ø70	Ø75	Ø80	Ø85	Ø90	Ø95	Ø100	Ø105	Ø110			

• Available for type TB2 only

¹⁾ 1. BSW thread

Coupling type TB1/TB2, TB1/TB1 and TB2/TB2 possible.

Please order our separate dimension sheet (M373054).

²⁾ Bores with feather keyway (flat design) acc. to DIN 6885 sheet 3


Ordering example:

ROTEX® 38	92 ShA	1108	TB1 - Ø24		TB2 - Ø22	
Coupling size	Spider hardness	Taper clamping sleeve	Hub type	Finish bore	Hub type	Finish bore


ROTEX®

Flexible jaw couplings

Clamping ring hubs

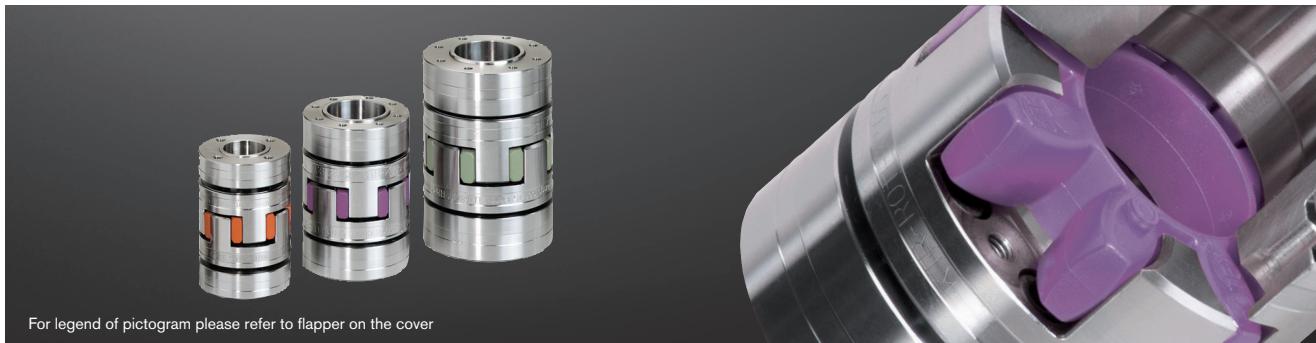

Components

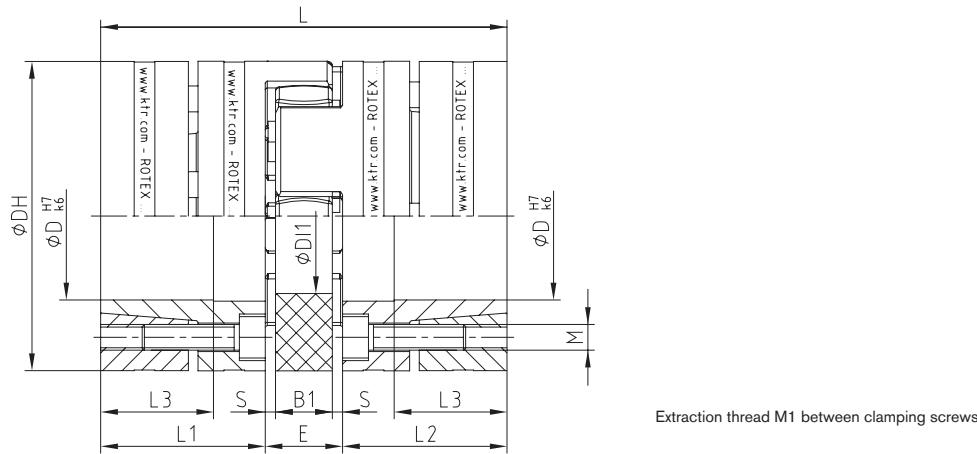

Size	Torques [Nm] ¹⁾				Dimensions [mm]								Clamping screws				Weight per hub with max. bore [kg]	Mass moment of inertia per hub with max. bore [kgm ²]			
	92 ShA		98 ShA		DH ²⁾	DI1	L	L1, L2	L3	E	B1	S	M	Z = number	TA [Nm]						
	T _{KN}	T _{K max}	T _{KN}	T _{K max}																	
19	10.0	20	17	34	40	18	66	25	18	16	12	2.0	M4	6	4.1	M4	0.179	0.44 x 10 ⁻⁴			
24	35.0	70	60	120	55	27	78	30	22	18	14	2.0	M5	4	8.5	M5	0.399	1.91 x 10 ⁻⁴			
28	95.0	190	160	320	65	30	90	35	27	20	15	2.5	M5	8	8.5	M5	0.592	4.18 x 10 ⁻⁴			
38	190.0	380	325	650	80	38	114	45	35	24	18	3.0	M6	8	14	M6	1.225	12.9 x 10 ⁻⁴			
42	265	530	450	900	95	46	126	50	35	26	20	3.0	M8	4	35	M8	2.30	31.7 x 10 ⁻⁴			
48	310	620	525	1050	105	51	140	56	41	28	21	3.5	M10	4	69	M10	3.08	52.0 x 10 ⁻⁴			
55	375	750	685	1370	120	60	160	65	45	30	22	4.0	M10	4	69	M10	4.67	103.0 x 10 ⁻⁴			
65	—	—	940	1880	135	68	185	75	55	35	26	4.5	M12	4	120	M12	6.70	191.0 x 10 ⁻⁴			
75	—	—	1920	3840	160	80	210	85	63	40	30	5.0	M12	5	120	M12	9.90	396.8 x 10 ⁻⁴			
90	—	—	3600	4500	200	104	245	100	75	45	34	5.5	M16	5	295	M16	17.70	1136 x 10 ⁻⁴			

Bore D and the respective transmittable friction torques T _R of clamping ring hub in [Nm] ¹⁾																												
Size	Ø10	Ø11	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55*	Ø60*	Ø65*	Ø70*	Ø80*	Ø90*	Ø95*	Ø100*	Ø105*
19	27	32	69	84	57	94	110																					
24			70	87	56	97	114	116	133	192																		
28				108	131	207	148	253	285	315	382	330	433	503														
38						208	353	395	439	531	463	603	593	689	793	776												
42							445	495	595	526	678	671	775	718	872	1043	1061											
48									616	704	899	896	1030	962	1160	1379	1222	1543										
55											863	856	991	918	1119	1110	1247	1277	1665	1605	2008							
65												1446	1355	1637	1635	1827	1887	2429	2368	2930								
75												1710	2053	2059	2294	2384	3040	2983	3664	4293								
90													3845	4249	4794	5858	5900	7036	8047	9247	9575	10845						

¹⁾ For selection see page 14 et seqq.

²⁾ ØDH + 2 mm with high speeds of expansion of spider

The transmittable torques of the clamping connection consider the max. fitting tolerance with shaft clearance k6/bore H7, from Ø55 G7/m6. The torque is reduced with bigger fitting tolerance. For the strength calculation of shaft/hollow shaft see KTR standard 45510 on our homepage www.ktr.com.

Ordering example:


ROTEX® GS 24	98 ShA	6.0 steel	Ø24	6.0 steel	Ø20
Coupling size	Spider hardness	Hub type	Finish bore	Hub type	Finish bore

Flexible jaw couplings


Clamping hubs



Components

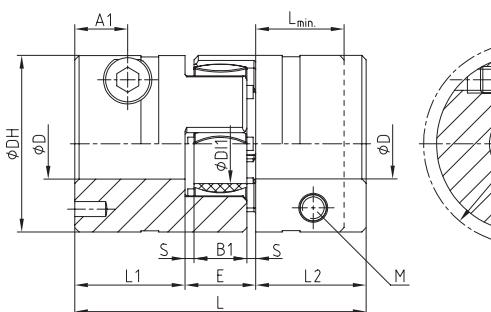

ROTEX® 19 - 28

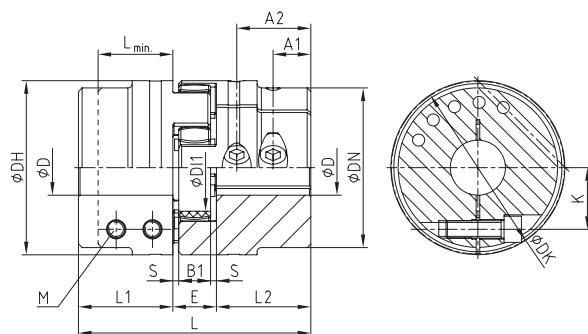


ROTEX® 38 - 90

ROTEX® as clamping hubs


Size	Dimensions [mm]													Screw DIN EN ISO 4762		
	D _{max.}	L	L ₁ , L ₂	L _{min.}	E	B ₁	S	DH	DN	DI ₁	DK	A ₁	A ₂	K	M	T _A [Nm]
19	20 ¹⁾	66	25	20	16	12	2.0	40	-	18	46.0	12	-	14.5	M6	14
24	28	78	30	25	18	14	2.0	55	-	27	57.5	12	-	20.0	M6	14
28	38	90	35	30	20	15	2.5	65	-	30	73.0	14 ²⁾	-	25.0	M8	35
38	42	114	45	35	24	18	3.0	80	70	38	77.5	19	-	26.5	M8	35
42	50	126	50	42	26	20	3.0	95	85	46	93.5	18 ²⁾	-	32.0	M10	69
48	55	140	56	46	28	21	3.5	105	95	51	105.0	21 ²⁾	-	36.0	M12	120
55	68	160	65	50	30	22	4.0	120	110	60	119.5	26	51 ²⁾	42.5 ³⁾	M12	120
65	70	185	75	55	35	26	4.5	135	115	68	132.5	33	61 ²⁾	50.0 ³⁾	M12	120
75	80	210	85	65	40	30	5.0	160	135	80	158.0	36	68 ²⁾	57.0 ³⁾	M16	295
90	90	245	100	80	45	34	5.5	200	160	100	197.0	40	80 ²⁾	72.0 ³⁾	M20	580

Bore D and the respective transmittable friction torques T_R [Nm] of ROTEX® clamping hubs type 2.0


Size	Ø8	Ø10	Ø11	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø75	Ø80	Ø85	Ø90					
19	44	46	47	51	52	53	55	57	58																										
24		59	60	64	65	66	68	70	71	73	76	77	80																						
28			139	141	144	148	150	152	157	161	163	170	174	178	185	191	200	207	213	217	222														
38				163	165	170	172	174	178	183	185	192	196	200	207	213	217	222																	
42						291	297	304	308	318	325	332	342	353	360	367	377	387	394																
48							466	476	486	491	506	516	526	542	557	567	577	592	607	618	643														
55														1185	1215	1245	1266	1286	1316	1347	1367	1417	1468	1519											
65														1316	1347	1367	1387	1417	1448	1468	1519	1569	1620	1671											
75																	2869	2926	2983	3022	3117	3213	3309	3404	3500	3595									
90																		5220	5310	5400	5460	5610	5760	5910	6060	6210	6360	6510	6660						

¹⁾With type 2.1 D_{max.}, Ø17 mm²⁾With reduced hubs dimension A1 varies resp. the number of screws changes from 2-off to 1-off³⁾A1 and A2 have a different dimension K

Type 2.0
Clamping hub single slot
without feather keyway



Type 2.1
Clamping hub single slot with
feather keyway




Type 2.3
Clamping hub with spline
bore (For a selection of our
programme of spline bores see
page 36)

Ordering example:


ROTEX® 24	98 ShA	2.1	Ø24	2.0	Ø20
Coupling size	Spider hardness	Hub type	Finish bore	Hub type	Finish bore

ROTEX® AFN and BFN Flexible jaw couplings


Flange programme



Components

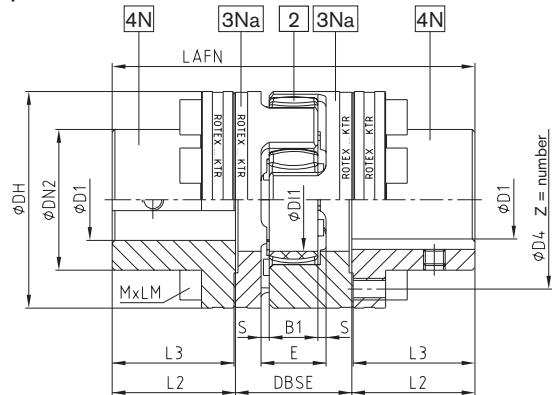

Type AFN

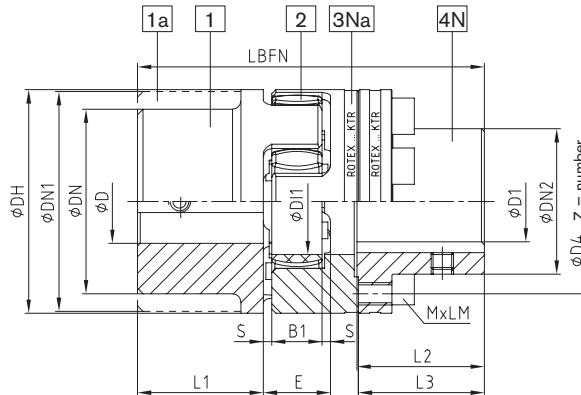

Type BFN

ROTEX® Type AFN and BFN																	
Size	Pilot bore D	Component 4N max. finish bore D1	Dimensions [mm]												Cap screws ³⁾ DIN EN ISO 4762 - 12.9		
			DH	DN2	D4	DI1	DBSE	L1, L2	E	B1	S	L3	LAFN	LBFN	MxLM	Z	pitch ²⁾
24		27	55	36	45	27	33	30	18	15	2.0	30.5	94	86	M5x16	8	10
28		30	65	42	54	30	39	35	20	15	2.5	35.5	110	100	M6x20	8	17
38		38	80	52	66	38	43	45	24	18	3.0	45.5	134	124	M8x22	8	41
42		45	95	62	80	46	48	50	26	20	3.0	51.0	150	138	M8x25	12	41
48		52	105	70	90	51	50	56	28	21	3.5	57.0	164	152	M8x25	12	41
55		60	120	80	102	60	60	65	30	22	4.0	66.0	192	176	M10x30	8	83
65		70	135	94	116	68	65	75	35	26	4.5	76.0	217	201	M10x30	12	83
75		80	160	108	136	80	75	85	40	30	5.0	86.5	248	229	M12x40	15	120
90		105	200	142	172	100	82	100	45	34	5.5	101.5	285	265	M16x40	15	295
100		115	225	158	195	113	97	110	50	38	6.0	111.5	320	295	M16x50	15	295
110		130	255	178	218	127	103	120	55	42	6.5	122.0	347	321	M20x50	15	580
125		150	290	206	252	147	116	140	60	46	7.0	142.0	400	370	M20x60	15	580
140		170	320	235	282	165	128	155	65	50	7.5	157.5	443	409	M20x60	15	580
160		200	370	270	325	190	146	175	75	57	9.0	177.5	501	463	M24x70	15	1000
180		230	420	315	375	220	159	195	85	64	10.5	198.0	555	515	M24x80	18	24x15°

¹⁾ Screw tightening torque T_A [Nm].

²⁾ Thread in the driving flange between the cams.

³⁾ Coupling is delivered not assembled.



Ordering example:

ROTEX® 24	AFN	92 ShA	4N	Ø38	4N	Ø35
Coupling size	Type	Spider hardness	Component	Finish bore	Component	Finish bore


ROTEX® AH

Flexible jaw couplings

Drop-out center design coupling

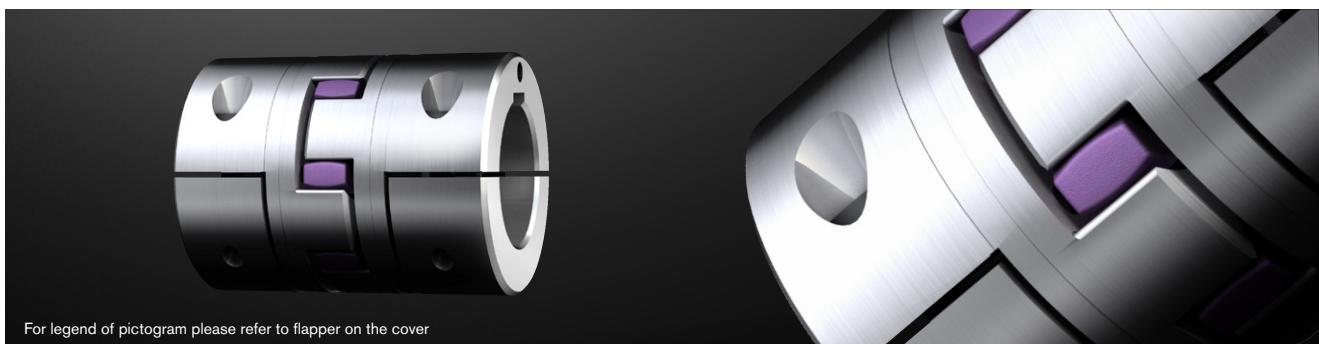

Components

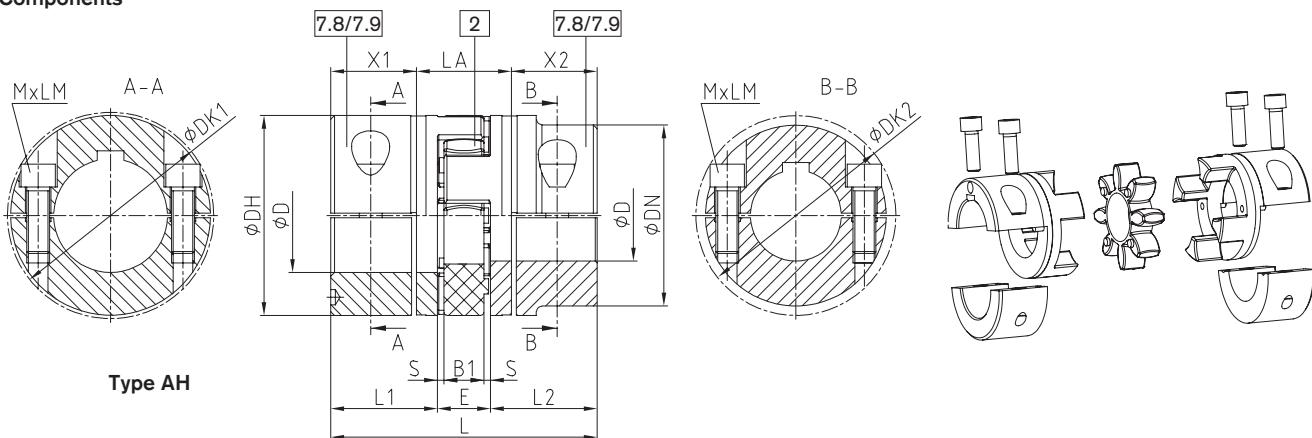

ROTEX® Type AH

Size	Max. finish bore D	Dimensions [mm]										Cap screws DIN EN ISO 4762		
		L	L1, L2	E	B1	S	DH	DN	DK1	DK2	X1, X2	LA	MxLM	Tightening torque T_A [Nm]
19	20	66	25	16	12	2.0	40	—	46	—	17.5	31	M6x16	14
24	28	78	30	18	14	2.0	55	—	57.5	—	22.5	33	M6x20	14
28	38	90	35	20	15	2.5	65	—	73	—	25.5	39	M8x25	35
38	45	114	45	24	18	3.0	80	—	83.5	—	35.5	43	M8x30	35
42	50	126	50	26	20	3.0	95	85	—	93.5	39	48	M10x30	69
	55							—	97	—			M10x35	
48	55	140	56	28	21	3.5	105	95	—	105	45	50	M12x35	120
	60							—	108.5	—			M12x40	
55	65	160	65	30	22	4.0	120	110	—	119.5	50	60	M12x40	120
	70							—	122	—			M12x45	
65	70	185	75	35	26	4.5	135	115	—	123.5	60	65	M12x40	120
	80							—	132.5	—			M12x45	
75	80	210	85	40	30	5.0	160	135	—	147.5	67.5	75	M16x50	295
	90							—	158	—			M16x50	
90	90	245	100	45	34	5.5	200	160	—	176	81.5	82	M20x60	580
100 ¹⁾	110							—	197	—			M16x50	
110 ¹⁾	120	270	110	50	38	6.0	225	180	—	185.5	84	102	M16x50	295
110 ¹⁾	120	295	120	55	42	6.5	255	200	—	208	90	115	M20x60	580
125 ¹⁾	140	340	140	60	46	7.0	290	230	—	242.5	105	130	M24x70	1000

CAUTION:

With maximum bore the feather keyways are offset to each other by approx. 5°!
Hub material up to size 90: steel, from size 100: GJS

7.8 = Half shell clamping hub without feather keyway max. circumferential speed of $v = 35$ m/s.

From a circumferential speed of $v = 25$ m/s the frictional torque of shaft/hub has to be reviewed. Please consult with KTR.

7.9 = Half shell clamping hub with feather keyway max. circumferential speed of $v = 35$ m/s. From a circumferential speed of $v = 25$ m/s dynamic balancing is required.

Speed: max. circumferential speed of 25 m/s on the outside diameter DH of the coupling

¹⁾ From size 100: 4 clamping screws for each clamping hub


Ordering example:	ROTEX® 38	AH	98 ShA	7.8	Ø38	7.8	Ø30
Coupling size	Type	Spider hardness	Hub type	Finish bore	Hub type	Finish bore	

ROTEX® SH


Flexible jaw couplings



Drop-out center design coupling with SPLIT hubs



Components

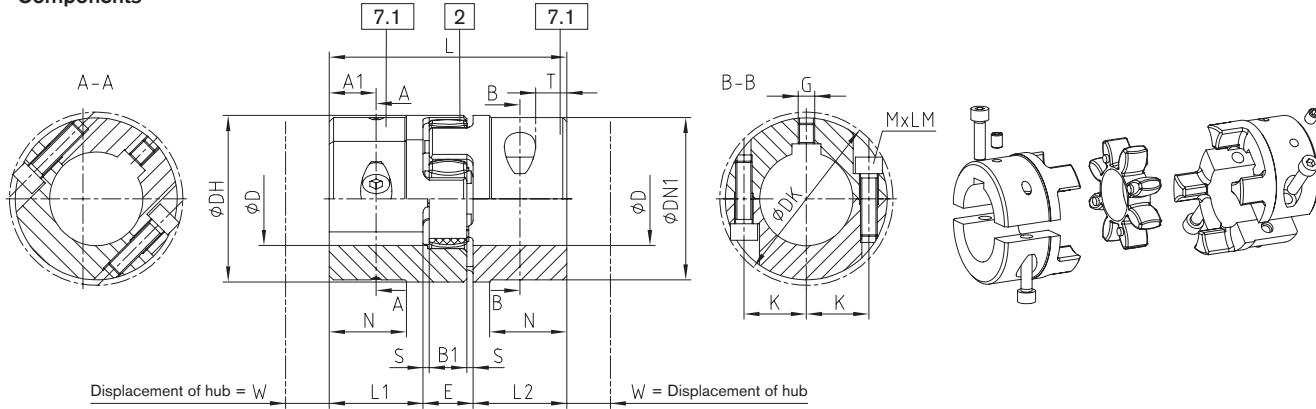

Type SH

ROTEX® Type SH Sintered steel (Sinter)

Size	Finish bore D		Dimensions [mm]													Cap screws DIN EN ISO 4762		
	Min.	Max.	L	L1, L2	E	B1	S	DH	DN1	DK	N	K	A1	T	G	W	MxLM	Tightening torque T_A [Nm]
24	0	28	78	30	18	14	2.0	55	-	57.5	-	20	15	10	M5	12	M6x20	14
28	0	38	90	35	20	15	2.5	65	-	73	-	25	17.5	15	M8	12	M8x25	34

ROTEX® Type SH Cast iron (GJL)

Size	Finish bore D		Dimensions [mm]													Cap screws DIN EN ISO 4762	
	Min.	Max.	L	L1, L2	E	B1	S	DH	DN1	DK	N	K	A1	T	G	W	MxLM
38	24	45	114	45	24	18	3.0	80	78	83.5	37	30	22.5	15	15	M8x30	34
42	24	55	126	50	26	20	3.0	95	94	97	40	30	25		15	M10x35	67
48	24	60	140	56	28	21	3.5	105	104	108.5	45	35	28		15	M12x40	115
55	24	70	160	65	30	22	4.0	120	118	122	52	40	32.5	20	15	M12x45	115
65	28	70	185	75	35	26	4.5	135	115	123.5	61	45	37.5		15	M12x40	115
	70	80							135	132.5	50	50			M10	M12x45	290
75	40	80	210	85	40	30	5.0	160	135	147	69	51	42.5	25	20	M16x50	
	80	90							160	158	57	57					
90	40	90	245	100	45	34	5.5	200	160	176	81	60	50	30	M12	M20x60	560
	90	110							200	197	72	72					

7.1 = SPLIT hub with feather keyway



Ordering example:

ROTEX® 38	SH	98 ShA	7.1	Ø38	7.1	Ø30
Coupling size	Type	Spider hardness	Hub type	Finish bore	Hub type	Finish bore


ROTEX® SP GN and EN

Flexible jaw couplings

Single-cardanic shaft coupling (Non Sparking)

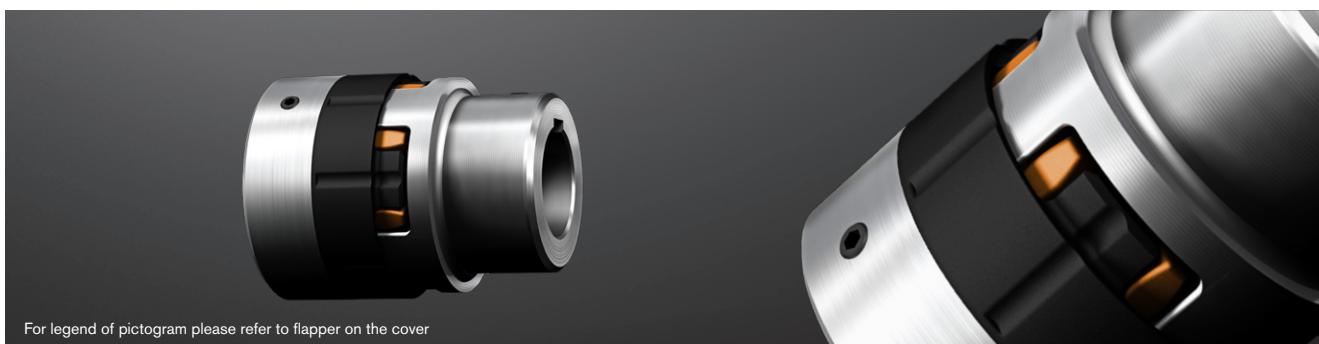

Components

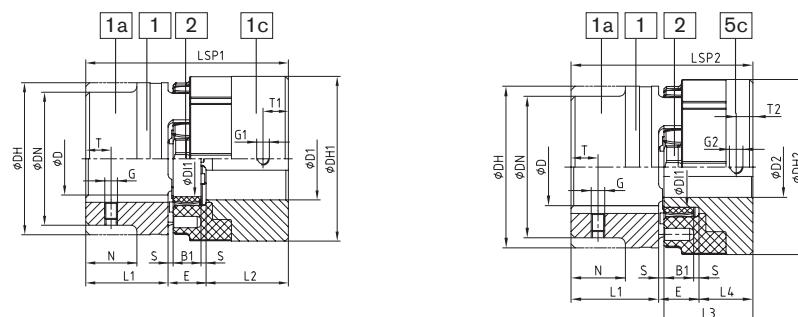

ROTEX® Standard (St) ³⁾			ROTEX® SP Type GN						ROTEX® SP Type EN								
Size	Spider ¹⁾ (component 2) Rated torque [Nm]	Component steel (St)	Component SP	Dimensions [mm] ROTEX® SP component 1c						Component SP	Dimensions [mm] ROTEX® SP component 5c						
				Max. D1 ²⁾	L2	DH1	G1	T1	LSP1		Max. D3 ²⁾	L3	L4	DH2	G2	T2	LSP2
24	35	1a	1c	28	30	61	M5	10	78	5c	19	36	22	61	M5	6	70
		1b		98							90					90	
28	95	1a	1c	32	35	72	M8	15	115	5c	22	42	26	72	M8	7	81
		1b		115							114					106	
38	190	1	1c	42	45	87	M8	15	139	5c	28	50	30	87	M8	7	99
		1b		139							126					124	
42	265	1	1c	48	50	103	M8	20	151	5c	35	56	34	103	M8	10	110
		1b		151							140					135	
48	310	1	1c	55	56	114	M8	20	164	5c	40	60	36	114	M8	10	120
		1b		164							160					124	
55	410	1	1c	65	65	130	M10	20	185	5c	45	66	40	130	M10	17	135
		1b		185							185					160	
65	625	1	1c	75	75	146	M10	20	210	5c	55	75	44	146	M10	17	154
		1b		210							210					179	

ROTEX® Standard (GJL) ⁴⁾			ROTEX® SP Type GN						ROTEX® SP Type EN								
Size	Spider ¹⁾ (component 2) Rated torque [Nm]	Component cast iron (GJL)	Component SP	Dimensions [mm] ROTEX® SP component 1c						Component SP	Dimensions [mm] ROTEX® SP component 5c						
				Max. D1 ²⁾	L2	DH1	G1	T1	LSP1		Max. D3 ²⁾	L3	L4	DH2	G2	T2	LSP2
38	190	1	1c						114	5c						99	
		1a		42	45	87	M8	15	139		28	50	30	87	M8	7	124
		1b															
42	265	1	1c						126	5c						110	
		1a		48	50	103	M8	20	151		35	56	34	103	M8	10	135
		1b															
48	310	1	1c						140	5c						120	
		1a	1c	55	56	114	M8	20	164		40	60	36	114	M8	10	144
		1b															
55	410	1	1c	65	65	130	M10	20	160	5c	45	66	40	130	M10	17	135
		1a							185		55	75	44	146	M10	17	154
65	625	1	1c	75	75	146	M10	20	210	5c	55	75	44	146	M10	17	154

¹⁾ Maximum torque of the coupling $T_K \max = \text{rated torque of the coupling } T_{KN} \times 2$. Transmittable torque according to 92 ShA.

²⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9] and setscrew

³⁾ For dimensions of standard ROTEX® hubs (St) 1, 1a, 1b see catalogue on page 40.

⁴⁾ For dimensions of standard ROTEX® hubs (GJL) 1, 1a, 1b see catalogue on page 38.


■ = Available from stock

Ordering example:	ROTEX® SP 38	GJL	92 ShA	1a	Ø45	1c	Ø42
Coupling size	Material Components 1, 1a, 1b	Spider hardness	Component	Finish bore	Component	Finish bore	



ROTEX® SP ZS-DKM-C

Flexible jaw couplings

Double-cardanic shaft coupling (Non Sparking)

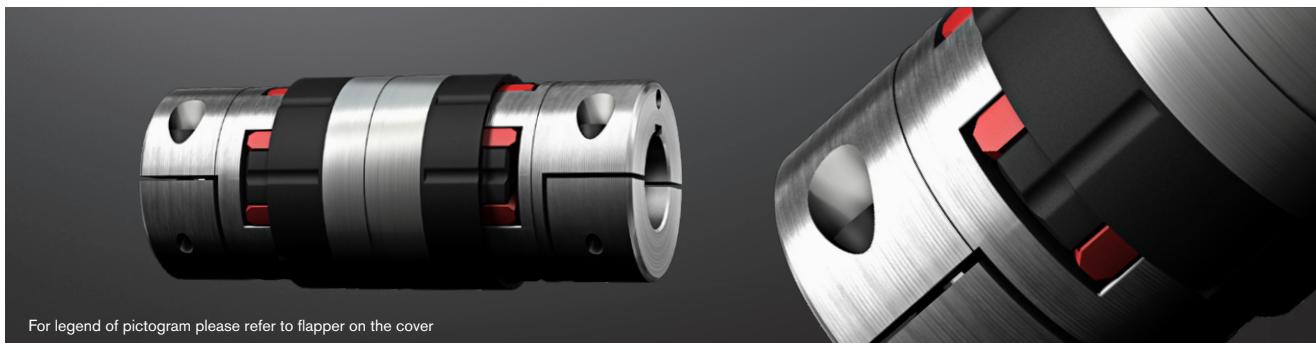

Components

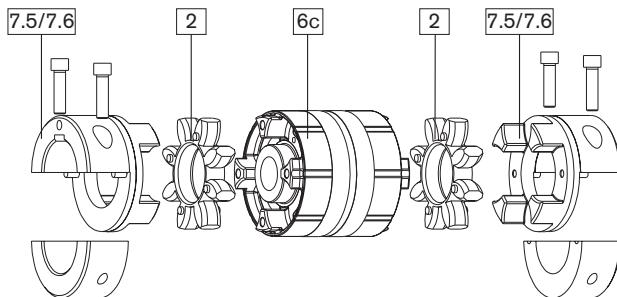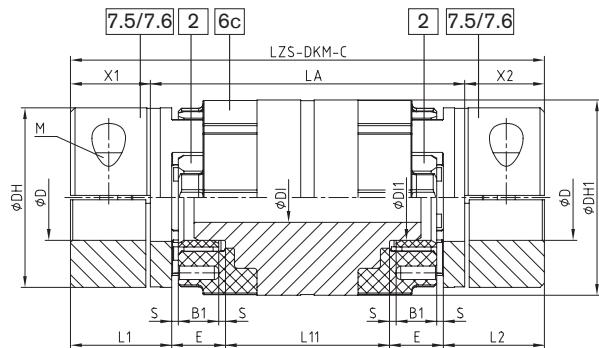


ROTEX® SP Type ZS-DKM-C

Size	Drop-out center length LA	Spider ¹⁾ (component 2) Rated torque [Nm]	Dimensions [mm] General component 7.5/7.6 steel											Dimensions [mm] ROTEX® SP Type 6c Al-H ³⁾		
			Max. finish bore D ²⁾	LZS-DKM-C	L1, L2	X1, X2	E	B1	S	DH	DH1	DI1	M	T _A [Nm]	DI	L11
24	100	35	28	145	30	22.5	18	14	2.0	55	61	27	M6	14	14	49
	140			185												89
28	100	95	38	151	35	25.5	20	15	2.5	65	72	30	M8	35	16	41
	140			191												81
38	100	190	45	171	45	35.5	24	18	3.0	80	87	38	M8	35	22	33
	140			211												73
42	100	265	55	178	50	39	26	20	3.0	95	103	46	M10	69	30	26
	140			218												66
48	140	310	60	230	56	45	28	21	3.5	105	114	51	M12	120	35	62
	140			240												50
55	180	410	70	280	65	50	30	22	4.0	120	130	60	M12	120	35	90
	200			300												110
	140			260												40
65	180	625	80	300	75	60	35	26	4.5	135	146	68	M12	120	48	50

Type 7.5 clamping hub type DH
without feather keyway for double-cardanic connection

Type 7.6 clamping hub type DH
with feather keyway for double-cardanic connection



¹⁾ Maximum torque of the coupling T_K max = rated torque of the coupling T_{KN} x 2. Transmittable torque according to 92 ShA-GS.

²⁾ Hub type 7.5 = without keyway; hub type 7.6 = with keyway acc. to DIN 6685 sheet 1 [JS9]

³⁾ Size 42 with drop-out center length L=100 mm made of steel




= Available from stock

Ordering example:	ROTEX® SP 38	ZS-DKM-C	140	98 ShA-GS	7.5	Ø38	7.5	Ø30
Coupling size	Type	Drop-out center length LA	Spider hardness	Hub type	Finish bore	Hub type	Finish bore	

ROTEX® ZS-DKM-SH

Flexible jaw couplings

Double-cardanic shaft coupling with SPLIT hubs

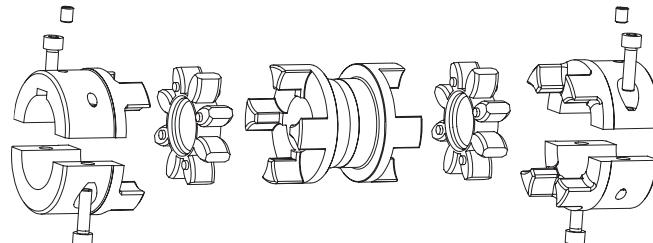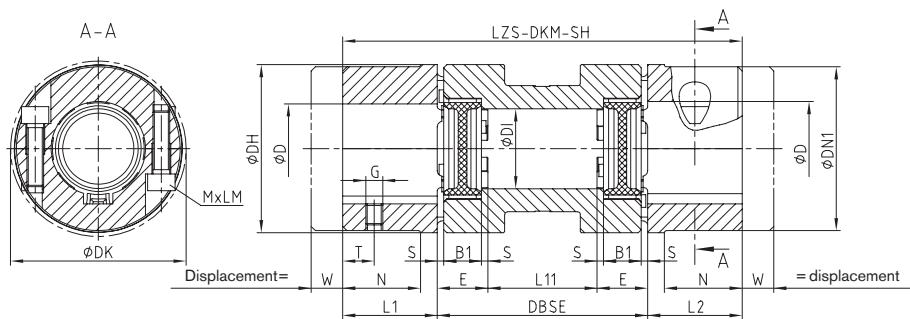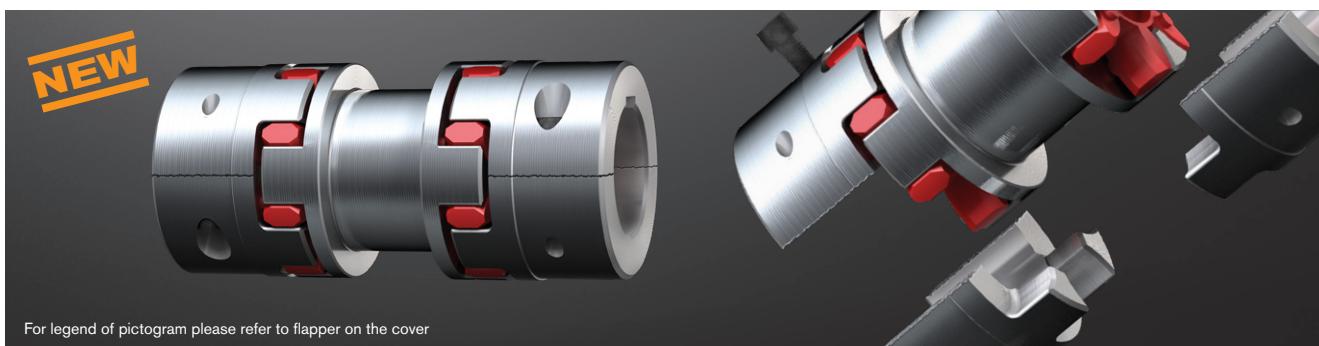

ROTEX® type ZS-DKM-SH																Max. displacements					
Size ³⁾	Drop-out center length DBSE [mm]		Finish bore D		Spider 98 ShAGS		Dimensions [mm]								Screws DIN EN ISO 4762		Axial [mm]	with n = 1500 rpm Radial [mm]	with n = 3000 rpm Angular [°]	Radial [mm]	Angular [°]
	Min.	Max.	DH	DN1	DK	D1	L1,L2	L11	E	B1	S	LZS-DKM-SH	G	W	MxLM	TA [Nm]					
24	100	0	28	35	55	-	57.5	27	30	64	18	14	2.0	160	M5	12	M6x20	14	1.4	1.43	1.07
	140							104						200						2.13	1.60
28	100	0	38	95	65	-	73	30	35	60	20	15	2.5	170	M8	12	M8x25	34	1.5	1.40	1.05
	140							100						210						2.10	1.57
38	100	24	45	190	80	78	83.5	38	45	52	24	18	3.0	190	M8	15	M8x30	34	1.8	1.33	0.99
	140							92						230						2.02	1.52
42	100	24	55	265	95	94	97	46	50	48	26	20	3.0	200	M8	15	M10x35	67	2.0	1.29	0.97
	140							88						240						2.00	1.49
48	100	24	60	310	105	104	108.5	51	56	44	28	21	3.5	212	M8	15	M12x40	115	2.1	1.26	0.94
	140							84						252						1.95	1.47
55	100	24	70	410	120	118	122	60	65	40				230	M10	15	M12x45	115	2.2	1.22	0.75
	140									80				270						1.92	1.44
200	180	24	70	410	120	118	122	60	65	120	30	22	4.0	310						2.62	1.96
	250									140				330						2.97	2.22
65	140	24	80	625	135	135	132.5	68	75	70	35	26	4.5	290	M10	15	M12x40	115	2.6	1.83	1.37
	180							110						330						2.53	1.90
75	140	40	90	1280	160	160	158	80	85	60				310	M10	20	M16x50	290	3.0	1.75	1.31
	200							100						350						2.44	1.83
90	250	40	90	1280	160	160	158	80	85	120	40	30	5.0	370						2.79	2.09
	180									170				420						3.67	2.75
90	250		40	110	2400	200	200	197	100	100	90	45	34	5.5	380	2.36	1.76				
	250							160						450	M12	20	M20x60	560	3.4	3.58	2.68

¹⁾ Maximum torque of coupling $T_K \text{ max} = \text{rated torque of coupling } T_{K\text{N}} \times 2$

²⁾ Mathematically transmittable torque with double-cardanic types acc. to 92 Sh-A GS using the higher quality spiders 98 Sh-A GS

³⁾ ROTEX®-SPLIT hub material sizes 24 and 28 = sintered steel; hub material sizes 38 to 90 = EN-GJL


⁴⁾ Hub type 7.1 = SPLIT hub with feather keyway and thread for setscrews

Ordering example:	ROTEX® 38	ZS-DKM-SH	140	98 ShA-GS	7.1 ⁴⁾	Ø 38	7.1 ⁴⁾	Ø30
Coupling size	Type	Shaft distance dimension DBSE	Spider hardness	Hub type	Finish bore	Hub type	Finish bore	


ROTEX® DKM

Flexible jaw couplings


Double-cardanic shaft coupling

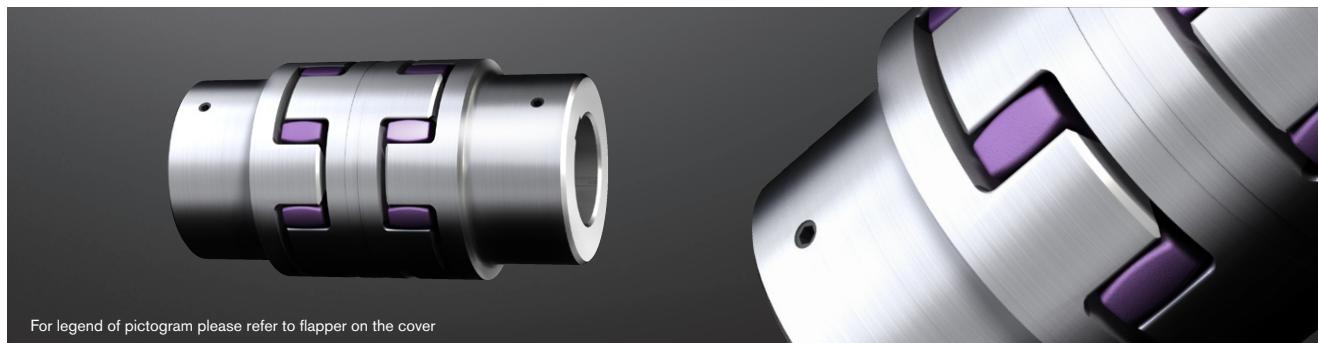

Components

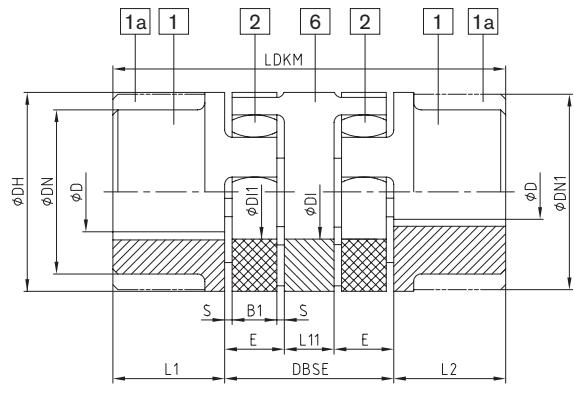

Type DKM

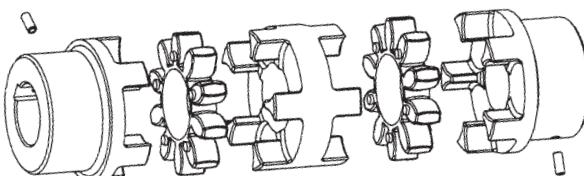

Size	D, DN, DN1	Spider ¹⁾ (component 2) Rated torque [Nm]		Dimensions [mm]								Max. displacements with $n = 1500$ rpm			
		92 ShA	98 ShA	DH	DI1	L1, L2	L11	DBSE	E	B1	S	LDKM	Radial [mm]	Angular [°]	Axial [mm]
19	Jaw coupling: page 38 to 40 Stock programme: page 36 and 37	10	17	40	18	25	10	42	16	12	2.0	92	0.45	1.0	+1.2/-1.0
24		35	60	55	27	30	16	52	18	14	2.0	112	0.59	1.0	+1.4/-1.0
28		95	160	65	30	35	18	58	20	15	2.5	128	0.66	1.0	+1.5/-1.4
38		190	325	80	38	45	20	68	24	18	3.0	158	0.77	1.0	+1.8/-1.4
42		265	450	95	46	50	22	74	26	20	3.0	174	0.84	1.0	+2.0/-2.0
48		310	525	105	51	56	24	80	28	21	3.5	192	0.91	1.0	+2.1/-2.0
55		410	685	120	60	65	28	88	30	22	4.0	218	1.01	1.0	+2.2/-2.0
65		625	940	135	68	75	32	102	35	26	4.5	252	1.17	1.0	+2.6/-2.0
75		1280	1920	160	80	85	36	116	40	30	5.0	286	1.33	1.0	+3.0/-3.0
90		2400	3600	200	100	100	40	130	45	34	5.5	330	1.48	1.0	+3.4/-3.0

¹⁾ For selection see page 14 et seqq.

Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].


Ordering example:

ROTEX® 38	DKM	GJL	98 ShA	1	Ø38	1	Ø30
Coupling size	Type	Material	Spider hard-ness	Component	Finish bore	Component	Finish bore


ROTEX® CF, CFN, DF and DFN

Flexible jaw couplings


Flange programme

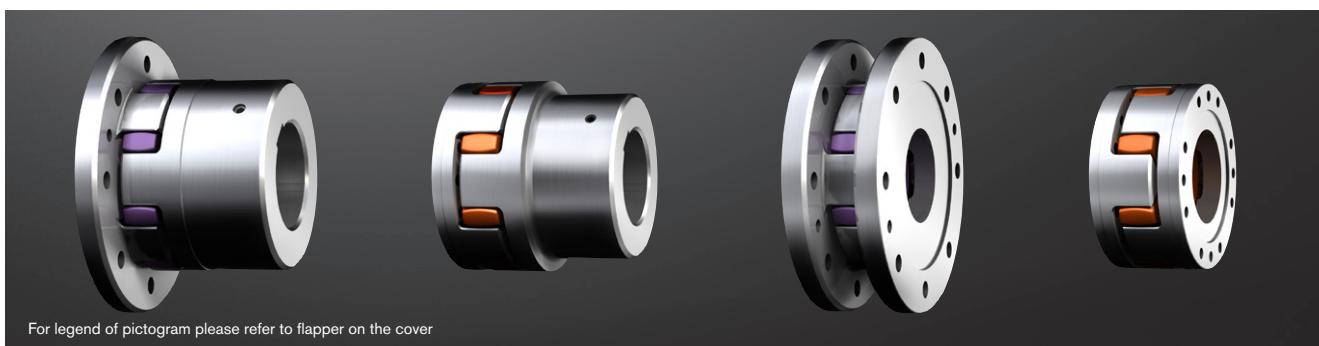


Components

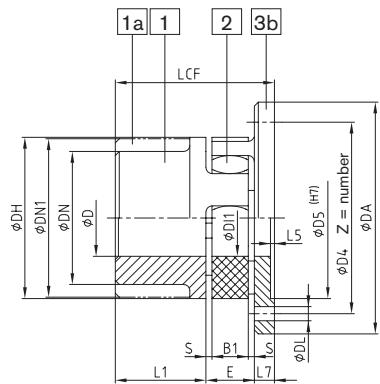


Type CF

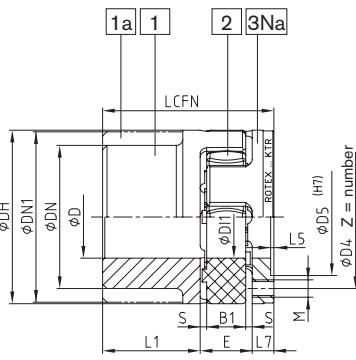

Type CFN

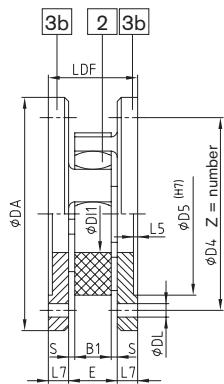

Type DF

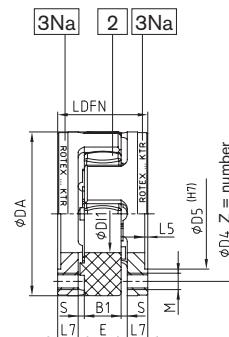

Type DFN


Size		D, DN, DN1	Dimensions general [mm]							Dimensions CF and DF [mm]							Dimensions CFN and DFN [mm]							
			DH	DI1	L1	E	B1	S	L5	L7	DA	D4	D5	Z	DL	LCF	LDF	D4	D5	M	Z	pitch	LCFN	LDNF
24			55	27	30	18	14	2.0	1.5	8	80	65	55	5	4.5	56	34	45	36	M5	8		56	34
28			65	30	35	20	15	2.5	1.5	10	100	80	65	6	6.6	65	40	54	44	M6	8	8x45°	65	40
38			80	38	45	24	18	3.0	1.5	10	115	95	80	6	6.6	79	44	66	54	M8	8		79	44
42			95	46	50	26	20	3.0	2.0	12	140	115	95	6	9.0	88	50	80	65	M8	12	16x22.5°	88	50
48			105	51	56	28	21	3.5	2.0	12	150	125	105	8	9.0	96	52	90	75	M8	12	16x22.5°	96	52
55			120	60	65	30	22	4.0	2.0	16	175	145	120	8	11.0	111	62	102	84	M10	8	8x45°	111	62
65			135	68	75	35	26	4.5	2.0	16	190	160	135	10	11.0	126	67	116	96	M10	12	16x22.5°	126	67
75			160	80	85	40	30	5.0	2.5	19	215	185	160	10	13.5	144	78	136	112	M12	15		144	78
90			200	100	100	45	34	5.5	3.0	20	260	225	200	12	13.5	165	85	172	145	M16	15		165	85
100			225	113	110	50	38	6.0	4.0	25	285	250	225	12	13.5	185	100	195	165	M16	15		185	100
110			255	127	120	55	42	6.5	4.0	26	330	290	255	12	17.5	201	107	218	180	M20	15	20x18°	201	107
125			290	147	140	60	46	7.0	5.0	30	370	325	290	16	17.5	230	120	252	215	M20	15		230	120
140			320	165	155	65	50	7.5	5.0	34	410	360	320	16	22.0	254	133	282	245	M20	15		254	133
160			370	190	175	75	57	9.0	5.0	38	460	410	370	16	22.0	288	151	325	280	M24	15		288	151
180			420	220	195	85	64	10.5	5.5	40	520	465	420	16	26.0	320	165	375	330	M24	18	24x15°	320	165

For other flange programmes see page 45.

Other types: ROTEX® CF-H

Flange drop-out center design coupling

Please order our separate dimension sheet
(M412069).

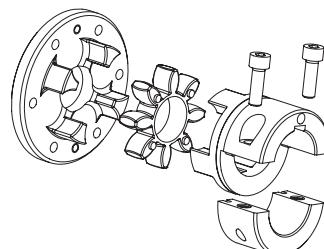


Ordering example:

ROTEX® 38	CF	92 ShA	1	GJL	Ø20
Coupling size	Type	Spider hardness	Hub side, component	Material	Finish bore

ROTEX® ZR

Flexible jaw couplings

Intermediate shaft programme

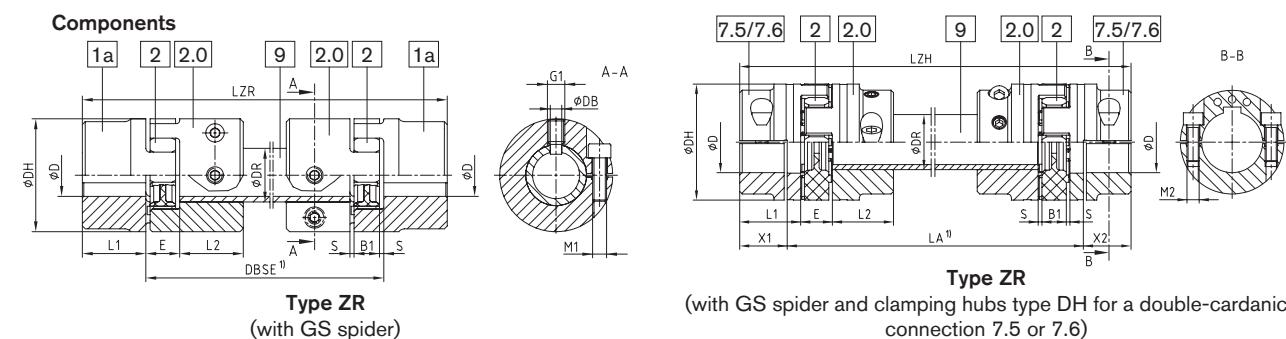

Size	Max. finish bore D		Dimensions [mm]						Intermediate pipe Torsional stiffness/nm		Clamping screw component 2.0		Clamping screw component 7.5/7.6		LZR, LZH	Min. DBSE	Min. LA	Locking screw G1	Hollow bore DB [mm]	Axial displacement [mm]	Angular displacement [degree]
	Component 1a	Component 7.5/7.6	DH	L1, L2	X1, X2	E	B1	S	DR	C ²⁾ [Nm ² /rad]	M1	T _A [Nm]	M2	T _A [Nm]							
19	25	20	40	25	17.5	16	12	2.0	Ø20x3	954.9	M6	14	M6	10	110	97	M6	4.0	1.2	0.9	
24	35	28	55	30	22.5	18	14	2.0	Ø30x4	4522	M6	14	M6	14	128	111	M8	5.5	1.4	0.9	
28	40	38	65	35	25.5	20	15	2.5	Ø35x4	7611	M8	35	M8	35	145	129	M10	7.0	1.5	0.9	
38	48	45	80	45	35.5	24	18	3.0	Ø40x4	11870	M8	25	M8	35	180	157	M12	8.5	1.8	1.0	
42	55	55	95	50	39.0	26	20	3.0	Ø45x4	17487	M10	49	M10	69	198	174	M12	8.5	2.0	1.0	
48	62	60	105	56	45.0	28	21	3.5	Ø50x4	24648	M12	86	M12	120	217	190	M16	12	2.1	1.1	
55	74	70	120	65	50.0	30	22	4.0	Ø55x4	33544	M12	120	M12	120	242	220	M16	12	2.2	1.1	
65	80	80	135	75	60.0	35	26	4.5	Ø65x5	68329	M12	120	M12	120	281	250	M16	12	2.6	1.2	
75	95	90	160	85	67.5	40	30	4.0	Ø75x5	108000	M16	295	M16	295	318	285	M16	12	3.0	1.2	

For inquiries and orders please specify the shaft distance dimension DBSE/LA along with the maximum speed to review the critical bending speed.


²⁾ Torsion spring stiffness with an intermediate pipe length of 1 m

Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

Friction torques of clamping hubs have to be considered.

Please order dimension sheet M583613.

Not permissible for crane and hoist drives

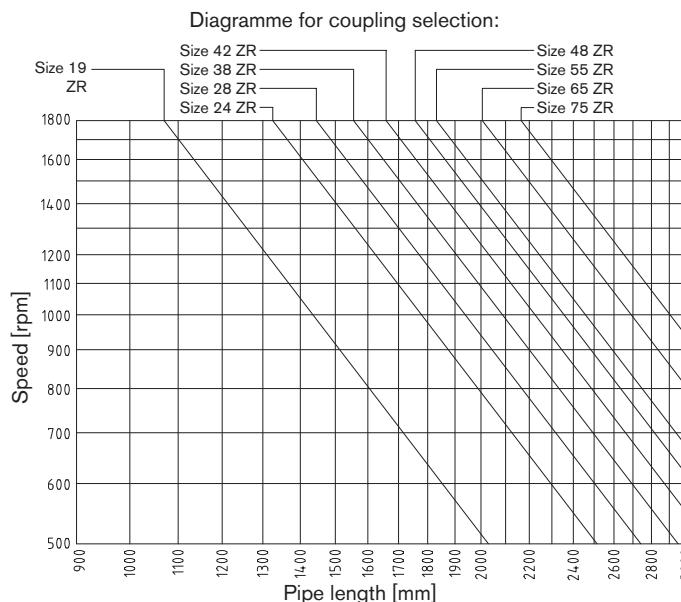


Ordering example:	ROTEX® 38	ZR	1200	98 ShA-GS	7.5	Ø38	7.5	Ø30
Coupling size	Type	Shaft distance dimension DBSE/LA	Spider hardness	Hub type	Finish bore	Hub type	Finish bore	

ROTEX® BTAN and SBAN

Flexible jaw couplings

With brake drum/with brake disk

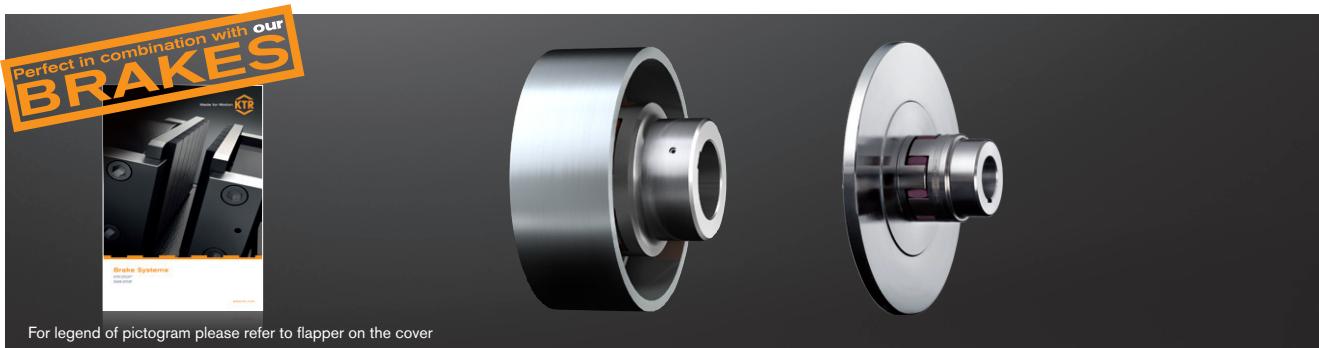

Size	Pilot bore, D, DN, DN1	Max. finish bore D1		Dimensions [mm]										
		GJS	Steel	DH	D11	D12	D4	Z	pitch ¹⁾	M	T _A [Nm]	L ₁ , L ₂	E	L
38	Jaw coupling: page 38 to 40 Stock programme: pages 36 and 37	—	37	80	38	50	66	8	8 x 45°	M8	35	45	24	114
42		—	44	95	46	60	80	12	16 x 22.5°	M8	41	50	26	126
48		—	50	105	51	68	90	12		M8	41	56	28	140
55		—	57	120	60	78	102	8	8 x 45°	M10	83	65	30	160
65		—	68	135	68	92	116	12	16 x 22.5°	M10	83	75	35	185
75		—	78	160	80	106	136	15	20 x 18°	M12	120	85	40	210
90		—	104	200	100	140	172	15		M16	295	100	45	245
100		100	—	225	113	156	195	15		M16	295	110	50	270
110		110	—	255	127	176	218	15		M20	580	120	55	295
125		130	—	290	147	204	252	15		M20	580	140	60	340

Brake drum	Type BTAN												Type SBAN												Speed rpm [V] (30 m/s)
	38	42	48	55	65	75	90	100	110	125	Speed rpm [V] (30 m/s)	Brake disk	38	42	48	55	65	75	90	100	110	125	Speed rpm [V] (30 m/s)		
160x60	14										3550	200x12.5	31.25											2800	
200x75	9	12	17	24							2800	250x12.5	31.25	34.25	39.25									2240	
250x95	1	4	9	16	25	33					2240	315x16		32.5	37.5	44.5	53.5	61.5						1800	
315x118	-5	0	7	16	24	36					1800	400x16			37.5	44.5	53.5	61.5	73.5	81.5	88.5			1400	
400x150	-18	-13	-6	3	11	23	31	38			1400	500x16				44.5	53.5	61.5	73.5	81.5	88.5	104.5	1120		
500x190				-12	-4	8	16	23	39		1120	630x20					51.5	59.5	71.5	79.5	86.5	102.5	900		
630x236					-22	-10	-2	5	21		900	710x20					51.5	59.5	71.5	79.5	86.5	102.5	800		
710x265							-13	-6	10		800	800x25								69	77	84	100	710	
800x300									-4	710	900x25											84	100	630	

¹⁾ Thread in the hub between the cams.

Other sizes on request according to dimension sheet:

BTAN: M380821


SBAN straight: M380822; cranked: M 370065

FNN hub: M 380823


Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

Ordering example:

ROTEX® 38	BTAN	Ø200x75	98 ShA	1Nd	Ø34	1	Ø30
Coupling size	Type	Brake drum Ø x width	Spider hardness	Component	Finish bore	Component	Finish bore

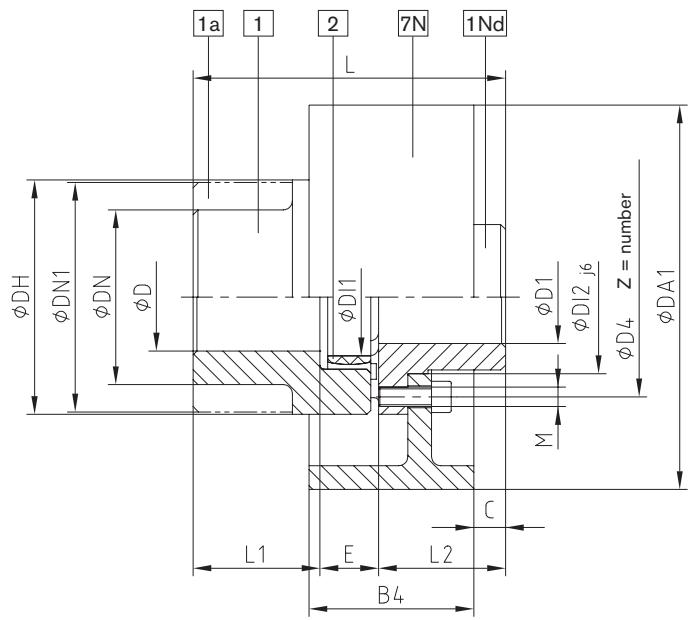Components

Brake drum
Type BTAN


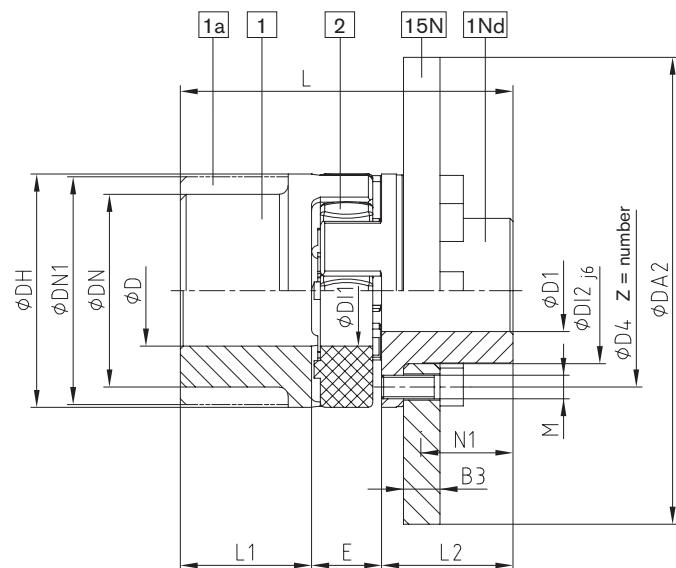


Brake disk
Type SBAN



ROTEX® AFN-SB special

Flexible jaw couplings

Drop-out center design coupling with brake disk

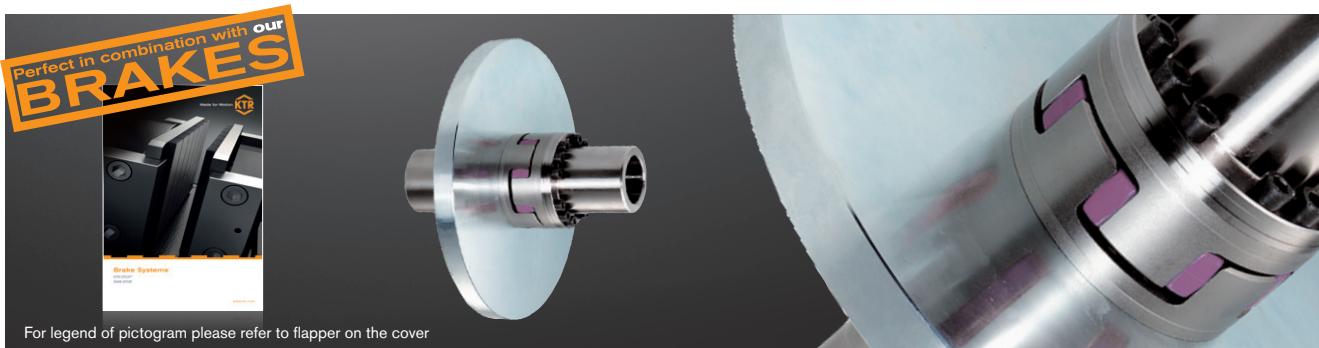

Components

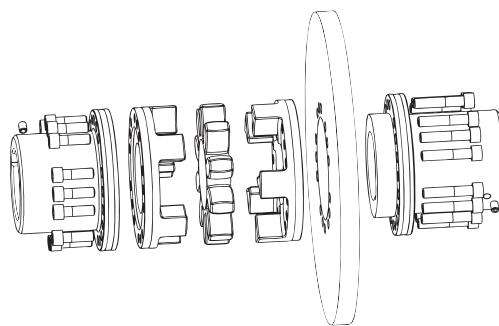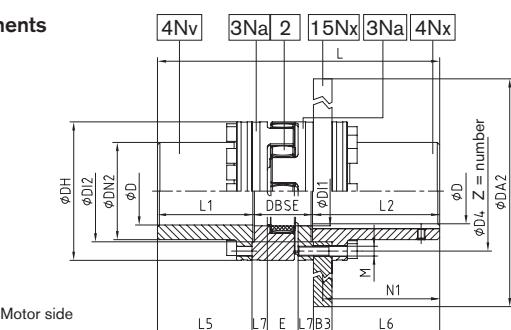

ROTEX® Type AFN-SB special

Size	Finish bore D		Dimensions [mm]										
	Min.	Max.	DH	DN2	DI2 H7/h7	D4	DI1	DBSE	E	M	Z	pitch	T _A [Nm]
65	22	70	135	94	96	116	68	65	35	M10	12	16x22.5°	83
75	30	80	160	108	112	136	80	75	40	M12	15		120
90	40	105	200	142	145	172	100	82	45	M16	15		295
100	46	115	225	158	165	195	113	97	50	M16	15		295
110	60	130	255	178	180	218	127	103	55	M20	15	20x18°	580
125	60	150	290	206	215	252	147	116	60	M20	15		580
140	60	170	320	235	245	282	165	128	65	M20	15		580
160	80	200	370	270	280	325	190	146	75	M24	15		1000
180	85	230	420	315	330	375	220	159	85	M24	18	24x15°	1000

ROTEX® Type AFN-SB special

Size	Torque with 98 ShA ¹⁾		Max. speed [rpm]	Max. braking torque ²⁾ [Nm]	Dimensions [mm]						
	TKN	TK max			L1	L2	L5	L6	L7	N	L
65	940	1880	3450	1880	113.5	166.0	112.5	135	16	150	344.5
75	1920	3840	3250	3840	133.0	166.5	131.5	135	19	150	374.5
90	3600	7200	3000	7200	165.5	206.5	164.0	175	20	190	454.0
100	4950	9900	2800	9900	155.0	206.5	153.5	175	25	190	458.5
110	7200	14400	2600	14400	203.5	212.0	201.5	180	26	195	518.5
125	10000	20000	2250	20000	200.5	212.0	198.5	180	30	195	528.5
140	12800	25600	1800	25600	247.0	252.5	244.5	220	34	235	627.5
160	19200	38400	1500	38400	229.0	252.5	226.5	220	38	235	627.5
180	28000	56000	1350	56000	198.0	252.5	195.0	220	40	235	609.5

ROTEX® Selection of coupling/brake disk

Size	Brake disk ØDA2 x B3										
	355x30	400x30	450x30	500x30	560x30	630x30	710x30	800x30	900x30	900x40	1000x40
65	x	x	x								
75		x	x	x							
90			x	x	x	x					
100				x	x	x					
110				x	x	x	x				
125						x	x	x			
140						x	x	x	x	x	x
160						x	x	x	x	x	x
180						x	x	x	x	x	x


¹⁾ For selection see page 14 et seqq. ²⁾ The maximum braking torque must not exceed the maximum torque of the coupling. ³⁾ Dimensions with a width of brake disk B3 of 40 mm.

Ordering example:	ROTEX® 90	AFN-SB special	Ø450x30	98 ShA	4Nv	Ø90	4Nx	Ø90
Coupling size	Type	Brake disk Ø x width	Spider hardness	Component	Finish bore	Component	Finish bore	Component


ROTEX® SD

Flexible jaw couplings


Shiftable coupling shiftable at standstill

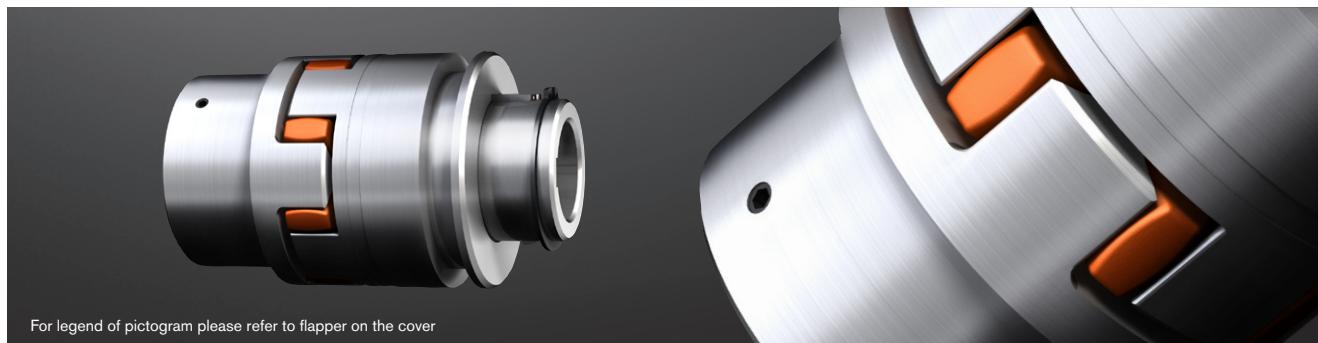

Components

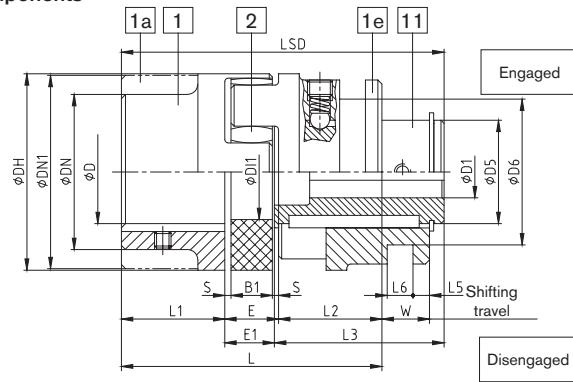

Type SD

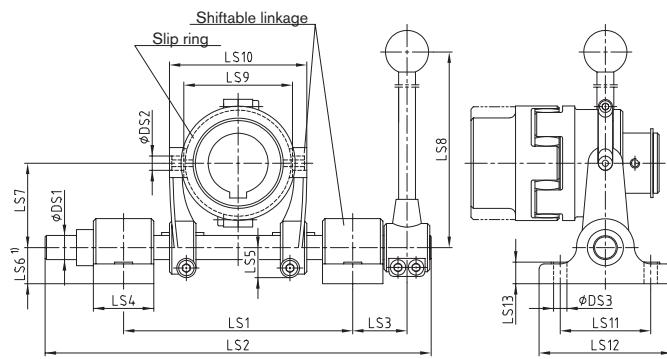

Type SD with slip ring and shiftable linkage

Upon request: Shiftable linkage available with locking pin, locking device and retrieval of shift position.

ROTEX® Type SD

Size	D, DN, DN1	Dimensions [mm]														Shifting force set in [N]	Slip ring size	Shift- able linkage size			
		Min.	Max.	DH	DI2	D5	D6±0,1	L	L1, L2	L3	L5	L6±0,1	LSD	E	E1	B1	S	W			
24		8	20	55	27	30	41	78	30	51.5	6.0	6.0	98	18	16.5	14	2.0	16.0	110	—	—
28		10	24	65	30	36	58	90	35	60.0	8.0	8.0	113	20	18.0	15	2.5	17.5	130	—	—
38	Jaw coupling: page 38 to 40 Sleek programme: page 36 and 37	12	30	80	38	45	70.5	114	45	73.0	8.0	12.5	140	24	22.0	18	3.0	21.0	150	1.1	1
42		14	35	95	46	50	70.5	126	50	82.0	8.0	12.5	156	26	24.0	20	3.0	23.0	180	1.1	1
48		15	42	105	51	60	89.5	140	56	90.5	6.0	17.5	172	28	25.5	21	3.5	24.5	200	2.2	2
55		18	50	120	60	70	112.5	160	65	103.0	6.0	18.0	195	30	27.0	22	4.0	26.0	250	3.3	3
65		20	55	135	68	80	112.5	185	75	120.0	7.0	18.0	227	35	32.0	26	4.5	30.5	280	3.3	3
75		25	65	160	80	95	130.5	210	85	135.0	6.0	20.5	257	40	37.0	30	5.0	35.0	350	4.4	3
90		28	75	200	100	110	164.5	245	100	152.0	8.0	25.5	293	45	41.0	34	5.5	39.5	350	5.5	4
100		30	80	225	113	115	164.5	270	110	169.0	14.0	25.5	325	50	46.0	38	6.0	44.0	380	5.5	4
110		35	85	255	127	125	164.5	295	120	184.0	18.5	25.5	355	55	51.5	42	6.5	48.5	450	5.5	4
125		40	100	290	147	145	210.5	340	140	208.5	18.5	30.5	404	60	55.5	46	7.0	53.0	500	6.6	5

Slip ring and shiftable linkage

Size	Size of shiftable linkage	Dimensions [mm]															Max. speed [rpm] of slip ring		
		DS1	DS2	DS3	LS1_min.	LS1_max.	LS2	LS3	LS4	LS5	LS6	LS7	LS8	LS9	LS10	LS11	LS12	LS13	
38	1	20	12	11	180	190	320	55	50	25	30	70	400	90	114	75	110	18	3280
42	1																	2550	
48	2	25			240	270	430	60		27		97.5	450	111	151				2120
55	3			17	280	310	490			32.5	40	120	600	140	180	100	140		1710
65	3							70	60					170	210			25	
75	3																	1360	
90	4																	855	
100	4	35	21		321	365	565			37.5	50	147.5	750	200	244	120	160		
110	4																		
125	5	40	25		365	410	630	80		46		190	1085	250	300				


¹⁾ With a through base plate dimension „LS6“ of the shiftable linkage size 5 to be increased by at least 10 mm.
Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

Ordering example:	ROTEX® 38	SD	With 1.1 and 1	98 Sha	1	Ø38	11	Ø28
Coupling size	Type	With slip ring 1.1 and shiftable linkage 1	Spider hard-ness	Component	Finish bore	Component	Finish bore	


ROTEX® FNN

Flexible jaw couplings


For mounting of fan

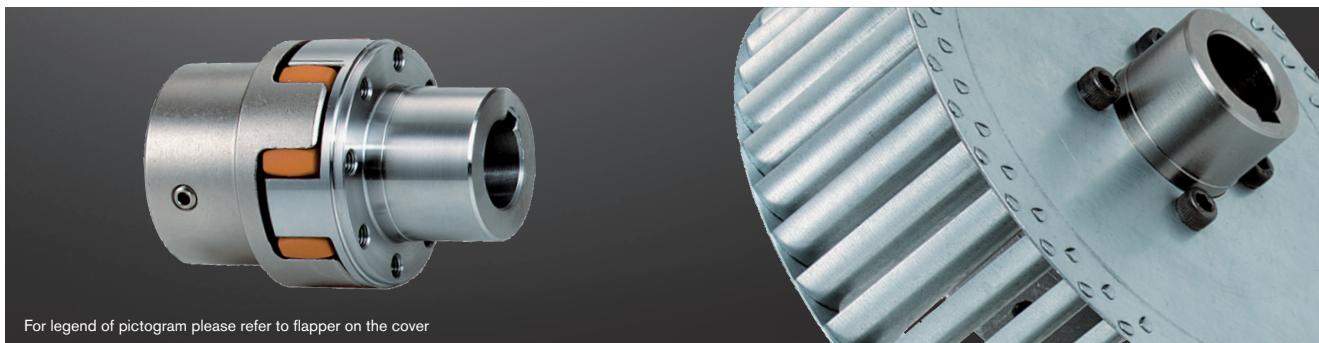

Components

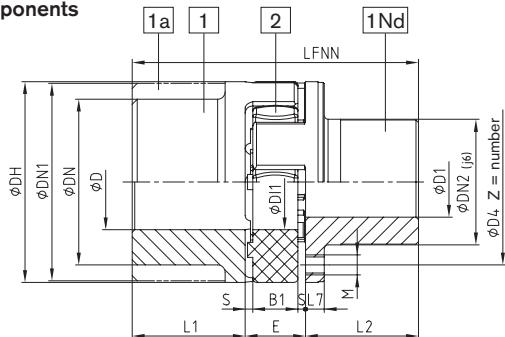

Type FNN

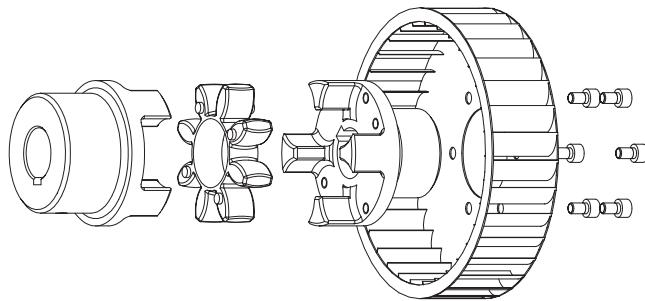

Type FNN with fan (type 1)

ROTEX® Type FNN																
Size	D, DN, DN1	Max. finish bore D1	Dimensions [mm]												pitch	LFNN
			DH	D ₂	D ₄	d _H	E	B1	S	L ₁ , L ₂	L ₇	M	Z			
28		29	65	40	54	30	20	15	2.5	35	6.5	M6	8	8x45°	90	
38		37	80	50	66	38	24	18	3.0	45	7.5	M8	8		114	
42		44	95	60	80	46	26	20	3.0	50	9.5	M8	12		126	
48		50	105	68	90	51	28	21	3.5	56	10.5	M8	12	16x22.5°	140	
55		57	120	78	102	60	30	22	4.0	65	12.5	M10	8	8x45°	160	
65		68	135	92	116	68	35	26	4.5	75	13.5	M10	12	16x22.5°	185	
75		78	160	106	136	80	40	30	5.0	85	15.5	M12	15		210	
90		104	200	140	172	100	45	34	5.5	100	18.5	M16	15	20x18°	245	


Other sizes on request.

Type 1: Fan screwed on

The ROTEX® hub can be supplied with the fan screwed on. Customised connection dimensions such as pitch circle of threads, size of threads and number or centering of fans must be specified in your inquiry.

Type 2: Fan injection-moulded

Low prices due to optimisation of production with bigger volumes.

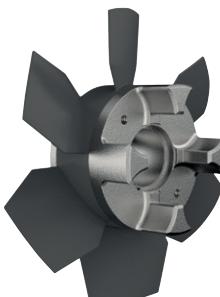


Ordering example:

ROTEX® 38	FNN	92 ShA	1	Ø38	1Nd	Ø30
Coupling size	Type	Spider hardness	Component	Finish bore	Component	Finish bore

Other types with clamping sets


Components

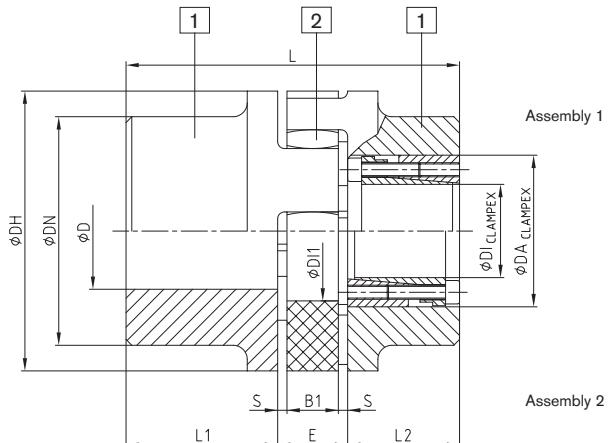

ROTEX® with clamping set CLAMPEX® KTR 200														
Size	D, DN	Hub material	CLAMPEX® KTR 200		L2	Dimensions [mm]								
			Max. size of KTR clamping set DlxDA	Transmittable torque and axial force T [Nm] FAX [kN]		Dimensions [mm]								
						L1	E	B1	S	DH	DN	DI1	L	
42			30x55	790	53	48	50	26	20	3.0	95	—	46	
48			35x60	1300	74	48	56	28	21	3.5	105	—	51	
55			45x75	2200	98	59	65	30	22	4.0	120	—	60	
65			45x75	2200	98	59	75	35	26	4.5	135	115	68	
75			50x80	3330	132	59	85	40	30	5.0	160	135	80	
90			65x95	4300	132	59	100	45	34	5.5	200	160	100	
100			65x95	4300	132	59	110	50	38	6.0	225	180	113	
110			70x110	7500	214	70	120	55	42	6.5	255	200	127	
125			80x120	8500	213	70	140	60	46	7.0	290	230	147	
140			95x135	12600	265	70	155	65	50	7.5	320	255	165	
160			110x155	16500	300	80	175	75	57	9.0	370	290	190	
180			120x165	22500	375	80	195	85	64	10.5	420	325	220	

Length = L1 + E + L2 (clamping set)


Type 4.2 with CLAMPEX® clamping set KTR 250



Frictionally engaged, backlash-free shaft-hub-connection for transmitting average torques.

Type 4.3 with CLAMPEX® clamping set KTR 400

Frictionally engaged, backlash-free shaft-hub-connection for transmitting bigger torques. Maximum size of clamping set depends on the hub collar diameter. Clamping set screw fitting possible both internally and externally. For details of calculation see CLAMPEX® catalogue.



For CLAMPEX® programme see page 280 to 315.

Flexible jaw couplings

Other types with torque limiter



ROTEX® BKN - Overload coupling, type BKN

- Torsionally flexible coupling ROTEX® with shear pin
- Load-separating with blockage/overload
- Easy replacement of shear pin
- Fracture torque to be defined individually depending on the application

Customer variant from the stock programme.
Please specify the fracture torques with your order!
For further details see dimension sheet No. 5020/000/009-760313



ROTEX® - RUFLEX® - Overload coupling

- High power density
- Large wear volume with long service life
- Easy assembly and torque setting

For further details see catalogue page 288



ROTEX® - KTR-SI - Overload coupling

- Available in a ratchet, synchronous, idle rotation and fail-safe design
- High response accuracy, even after a long operating period
- Maintenance-free

For further details see catalogue page 295




ROTEX® - KTR-SI FRE - idle rotation overload coupling

- Idle rotation overload system for high torques
- High repeatability
- Intelligent further development towards the shear pin coupling and hydraulic clamping sets

For further details see catalogue page 297

Weights and mass moments of inertia

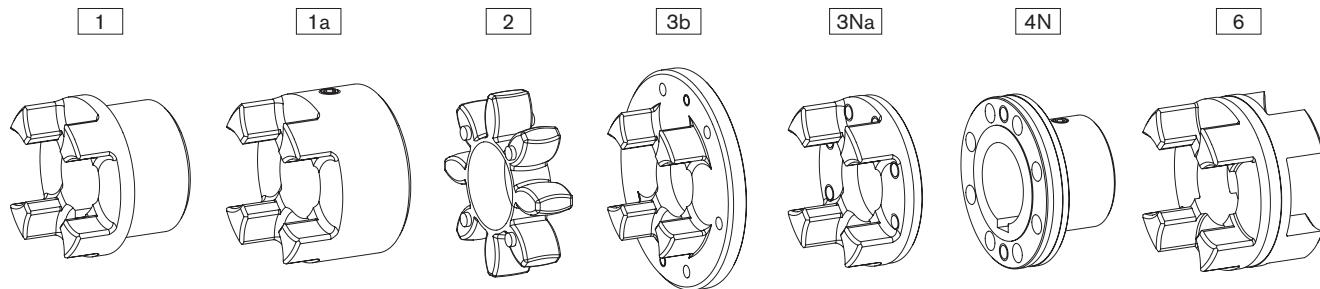


ROTEX® individual components													
Size	Standard hub				Large hub			Spider	Driving flange			Coupling flange	DKM spacer
	Component 1				Component 1a			Component 2	Component 3b	Component 3Na		Component 4N	Component 6
	Aluminium [kg] [kgm²]	GJL [kg] [kgm²]	GJS [kg] [kgm²]	St [kg] [kgm²]	Aluminium [kg] [kgm²]	GJL [kg] [kgm²]	St [kg] [kgm²]	Polyurethane (Vulkollan) [kg] [kgm²]	GJS [kg] [kgm²]	St [kg] [kgm²]	GJS [kg] [kgm²]	St [kg] [kgm²]	Aluminium [kg] [kgm²]
14	—	—	—	—	0.020	—	—	0.0044	—	—	—	—	—
	—	—	—	—	0.000003	—	—	0.0000005	—	—	—	—	—
19	0.064	—	—	—	0.074	—	0.25	0.0057	—	—	—	—	—
	0.00001	—	—	—	0.00002	—	0.00006	0.000001	—	—	—	—	—
24	0.123	—	—	—	0.174	—	0.55	0.014	0.028	0.145	—	0.30	0.14
	0.00004	—	—	—	0.00008	—	0.00023	0.000006	0.00023	0.00007	—	0.00009	0.00006
28	0.200	—	—	—	0.264	—	0.89	0.024	0.54	0.232	—	0.49	0.22
	0.00010	—	—	—	0.00019	—	0.00053	0.00001	0.0007	0.00017	—	0.0002	0.00013
38	0.44	1.16	—	1.6	0.470	1.32	1.74	0.042	0.73	—	0.313	0.87	0.35
	0.00033	0.00086	—	0.00151	0.00046	0.00135	0.00155	0.00004	0.001	—	0.00038	0.0005	0.00035
42	0.69	1.75	—	2.44	0.772	2.05	2.74	0.065	1.26	—	0.608	1.4	0.47
	0.00067	0.00178	—	0.00281	0.00111	0.00291	0.00343	0.00008	0.0032	—	0.00089	0.0011	0.00068
48	0.80	2.44	—	3.34	1.01	2.78	3.72	0.086	1.45	—	0.755	1.92	0.62
	0.0012	0.00308	—	0.00473	0.00174	0.00484	0.00570	0.00013	0.0043	—	0.001358	0.0018	0.0011
55	—	3.68	—	5.05	—	4.08	5.57	0.11	2.58	—	1.243	2.93	0.90
	—	0.00615	—	0.00948	—	0.00926	0.01193	0.00023	0.0105	—	0.002920	0.0037	0.0021
65	—	5.67	—	6.79	—	6.04	8.22	0.17	3.10	—	1.635	4.36	1.31
	—	0.01240	—	0.01516	—	0.01789	0.02079	0.00043	0.0149	—	0.004891	0.0069	0.0039
75	—	8.72	—	10.5	—	9.53	14.3	0.32	4.46	—	2.511	6.80	1.97
	—	0.02644	—	0.03269	—	0.03946	0.05069	0.001166	0.0281	—	0.01050	0.0151	0.0082
90	—	14.8	—	18.7	—	18.2	24.0	0.57	6.94	—	4.151	12.84	3.45
	—	0.06730	—	0.08742	—	0.15086	0.13151	0.00326	0.0651	—	0.02723	0.0448	0.0224
100	—	—	19.7	—	—	—	—	0.82	10.2	—	6.350	16.16	—
	—	—	0.11694	—	—	—	—	0.00592	0.1165	—	0.05273	0.0798	—
110	—	—	27.4	—	—	—	—	1.14	—	—	8.578	21.35	—
	—	—	0.20465	—	—	—	—	0.01048	—	—	0.09121	0.2824	—
125	—	—	42.3	—	—	—	—	1.56	—	—	12.598	34.33	—
	—	—	0.40727	—	—	—	—	0.01878	—	—	0.17469	0.3229	—
140	—	—	58.1	—	—	—	—	2.02	—	—	17.271	48.69	—
	—	—	0.67739	—	—	—	—	0.02989	—	—	0.29247	0.4917	—
160	—	—	84.2	—	—	—	—	3.08	—	—	26.305	71.08	—
	—	—	1.31729	—	—	—	—	0.06049	—	—	0.59436	0.9693	—
180	—	—	118.5	—	—	—	—	5.04	—	—	33.076	109.43	—
	—	—	2.30835	—	—	—	—	0.13295	—	—	0.97394	1.9650	—

Weight and mass moment of inertia each refer to the average finish bore without feather keyway.




Flexible jaw couplings

Weights and mass moments of inertia

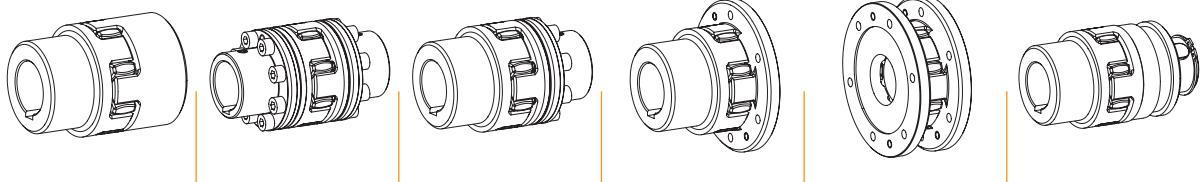

ROTEX® Complete coupling types

Size	Standard		AFN		BFN		CF		DF		SD	
	Weight [kg]	Mass moment of inertia J [kgm²]	Weight [kg]	Mass moment of inertia J [kgm²]	Weight [kg]	Mass moment of inertia J [kgm²]	Weight [kg]	Mass moment of inertia J [kgm²]	Weight [kg]	Mass moment of inertia J [kgm²]	Weight [kg]	Mass moment of inertia J [kgm²]
19	0.51	0.000121	—	—	—	—	0.44	0.00016	0.38	0.00020	0.42	0.00008
24	1.1	0.000466	0.98	0.00036	1.1	0.00041	0.84	0.00047	0.57	0.00047	1.1	0.00046
28	1.8	0.00107	1.6	0.00083	1.7	0.00095	1.5	0.00124	1.1	0.00141	1.9	0.00106
38	2.5	0.00171	2.8	0.00209	2.6	0.00193	1.9	0.00217	1.5	0.00259	3.0	0.00435
42	3.9	0.00476	4.5	0.00472	4.1	0.00419	3.1	0.00513	2.6	0.00662	4.4	0.00804
48	5.3	0.00805	5.9	0.00736	5.5	0.00684	3.9	0.00755	3.0	0.00881	6.2	0.00223
55	7.9	0.01564	8.9	0.01480	8.3	0.01369	6.4	0.01692	5.3	0.02131	9.8	0.0166
65	11.9	0.03071	12.9	0.0266	12.3	0.0259	8.9	0.02780	6.4	0.003037	14.9	0.0326
75	18.6	0.06706	20.6	0.0601	19.3	0.0572	13.5	0.0557	9.2	0.05741	23.2	0.0706
90	33.6	0.22139	37.8	0.1718	34.2	0.1551	22.3	0.1356	14.5	0.1333	40.5	0.1891
100	40.2	0.23976	49.6	0.3068	45.2	0.2737	30.9	0.2401	21.2	0.2394	46.7	0.2467
110	56.0	0.42027	67.5	0.5385	61.7	0.4793	42.9	0.4324	29.8	0.4446	61.5	0.4186
125	86.2	0.83426	102.6	1.0485	94.4	0.9413	64.4	0.8187	42.2	0.8031	96.8	0.8497
140	118.3	1.38607	141.2	1.743	129.7	1.564	90.4	1.4221	62.5	1.4580	127.8	1.368
160	171.6	2.69781	210.3	3.517	190.9	3.107	127.6	2.589	83.6	2.4805	190.3	2.723
180	242.25	4.75449	306.6	6.582	274.4	5.668	175.1	4.448	107.9	4.141	262.2	4.810

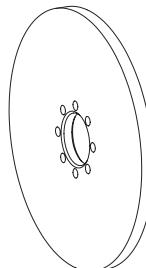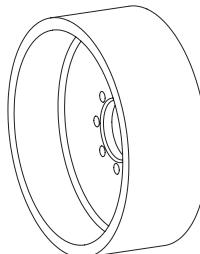

BTAN/SBAN without drum/disk		
Size	Weight [kg]	Mass moment of inertia J [kgm²]
28	0.90	0.0004
38	2.10	0.0014
42	3.24	0.0031
48	4.41	0.0053
55	6.60	0.0105
65	10.1	0.0209
75	15.4	0.0442
90	27.6	0.1224
100	36.9	0.2074
110	50.9	0.3665
125	79.1	0.7349
140	109.0	1.2292
160	161.9	2.4569
180	232.9	4.4967



Brake drum for BTAN ¹⁾		
Brake drum ØD _B x B	Weight [kg]	Mass moment of inertia J [kgm²]
160 x 60	2.12	0.01
200 x 75	3.45	0.03
250 x 95	6.87	0.08
315 x 118	14.95	0.28
400 x 150	31.20	0.89
500 x 190	60.00	2.70
630 x 236	112.00	8.01
710 x 265	161.00	14.9
800 x 300	202.00	27.2

Brake disk for SBAN ¹⁾		
Brake disk ØA x G _S	Weight [kg]	Mass moment of inertia J [kgm²]
200 x 12.5	2.928	0.015367
250 x 12.5	4.662	0.037584
315 x 16	8.618	0.111829
400 x 16	15.230	0.315206
500 x 16	23.964	0.769963
630 x 20	47.716	2.426359
710 x 20	60.934	3.915100
800 x 25	94.913	7.878998
900 x 25	118.954	12.609089
1000 x 25	148.240	19.234941


ROFLEX® N

Flexible jaw couplings

Two-part

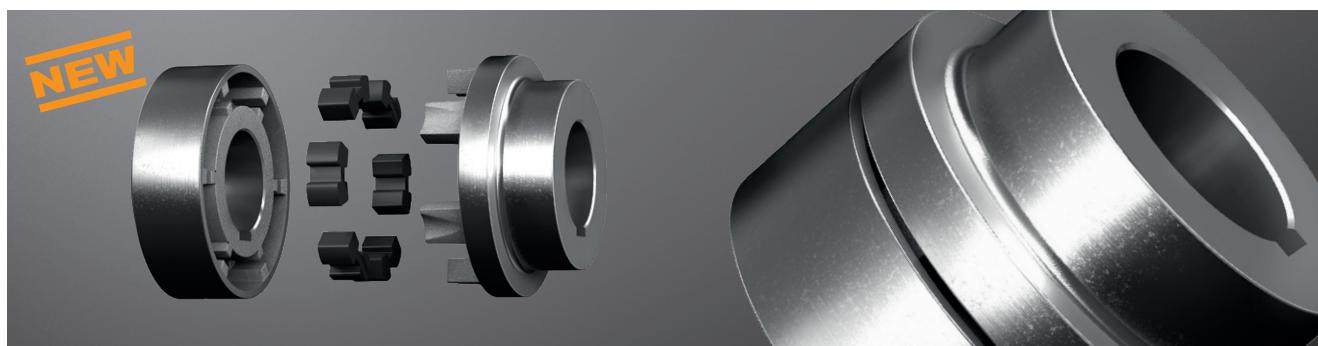

Components

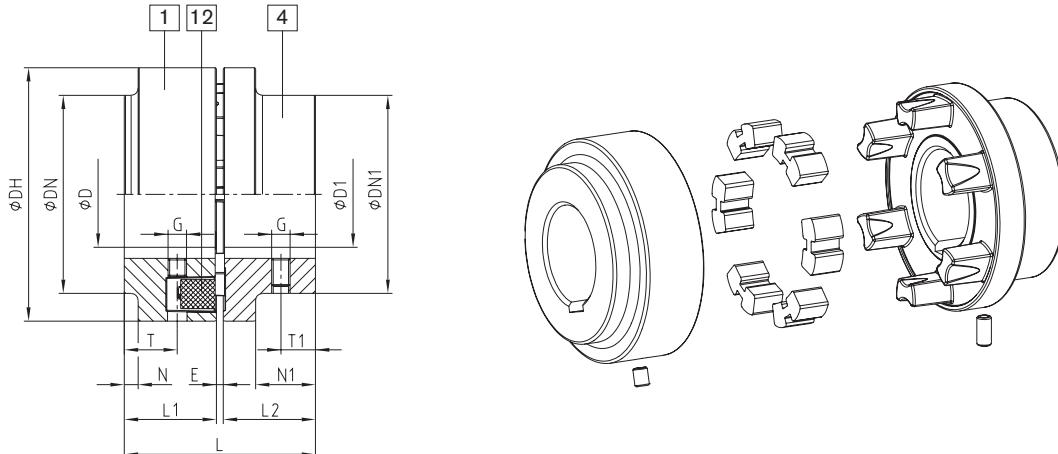

Size	Torque		Max. speed [rpm]	Dimensions												Mass moment of inertia J1 [kgm ²] ¹⁾	Mass moment of inertia J4 [kgm ²] ¹⁾	Total weight m [kg] ¹⁾		
				General						Thread for setscrews										
	T _{KN} [Nm]	T _{K max} [Nm]		D	D1	L	L1, L2	E	DH	DN	DN1	N	N1	G	T	T1	TA [Nm]			
68	65	180	8500	28	38	43	20	3	68	-	-	-	-	M5	8.5	8	2	0.00016	0.00029	0.6
80	80	220	7500	35	45	63	30	3	80	-	-	68	-	M8	20.5	12	10	0.00059	0.00055	1.2
95	125	345	6800	45	48	73	35	3	95	76	76	5	23	M8	22	15	10	0.00116	0.00120	1.9
110	205	565	6500	50	55	83	40	3	110	86	86	6	26	M8	24	18	10	0.0024	0.0024	2.9
125	315	865	5800	60	65	103	50	3	125	100	100	14	32	M8	32	20	10	0.0046	0.0052	4.5
140	450	1240	5400	70	65	113	55	3	140	100	100	21	35	M10	13	22	17	0.0062	0.0077	5.3
160	790	2170	4800	75	70	124	60	4	160	108	108	21	40	M10	13	25	17	0.014	0.013	8.1
180	1150	3160	4350	85	80	144	70	4	180	125	125	28	50	M10	16	32	17	0.021	0.023	11.0
200	1800	4950	3950	90	90	164	80	4	200	140	140	33	56	M12	20	40	40	0.038	0.044	16.3
225	2100	5775	3600	100	100	184	90	4	225	150	150	38	72	M12	22	40	40	0.06	0.06	20.4
250	3550	9765	3000	110	110	205.5	100	5.5	250	165	165	40	82	M16	24	45	80	0.11	0.10	28.2
280	5000	13750	3000	120	120	225.5	110	5.5	280	180	180	45	90	M16	28	45	80	0.19	0.16	38.1

¹⁾ Mass moments of inertia J1 and J4 as well as the total weight m refer to the maximum bore diameters


= Available from stock

Ordering example:	ROFLEX® 110	Standard	ØD1 = 48	ØD4 = 38
	Coupling size	Type	Finish bore	Finish bore


ROFLEX® SH

Flexible jaw couplings

Coupling with SPLIT hub



Components

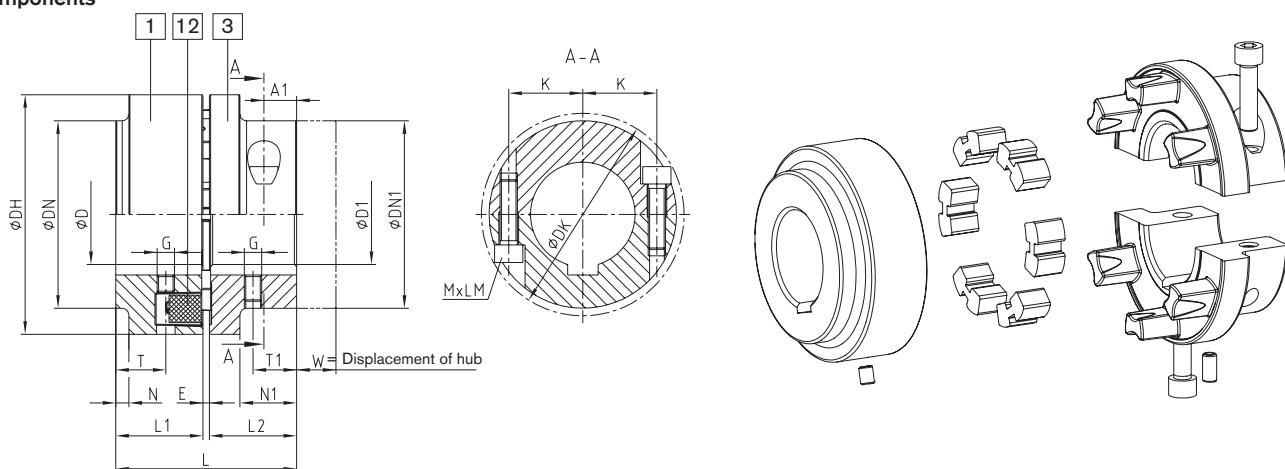

Size	Torque		Max. speed [rpm]	Dimensions																Mass moment of inertia J1 [kgm²] ¹⁾	Mass moment of inertia J3 [kgm²] ¹⁾	Total weight m [kg] ¹⁾						
				Max. finish bore		General								Thread for setscrews		Cap screws												
	T _{KN} [Nm]	T _{K max} [Nm]		D	D1	L	L1	L2	E	DH	DN	DN1	N	N1	W	G	T	T1	T _A [Nm]	MxLM	DK	K	A1	A2	T _A [Nm]			
80	80	220	7500	35	38	63	30	30	3	80	80	68	-	20	15.5	M8	20.5	12	10	M8x25	75	25	11	-	34	0.00059	0.00058	1.3
95	125	345	6800	45	42	73	35	35	3	95	76	76	5	23	18	M8	22	15	10	M8x30	82	28.5	13	-	34	0.00116	0.00123	2.0
110	205	565	6500	50	48	83	40	40	3	110	86	86	6	26	21	M8	24	18	10	M8x35	94	31.5	15	-	34	0.0024	0.0025	3.1
125	315	865	5800	60	55	103	50	50	3	125	100	100	14	32	23.5	M8	32	20	10	M10x40	108	38.5	20	-	67	0.0046	0.0052	4.5
140	450	1240	5400	70	60	113	55	55	3	140	100	100	21	35	25	M10	13	22	17	M10x35	108	39.0	10.5	25.5	67	0.0062	0.0080	5.7
160	790	2170	4800	75	65	124	60	60	4	160	108	108	21	40	30	M10	13	25	17	M12x35	118	42.5	12	29	115	0.014	0.014	8.5
180	1150	3160	4350	85	75	144	70	70	4	180	125	125	28	50	32	M10	16	32	17	M12x40	135	50	15	35	115	0.021	0.024	11.6
200	1800	4950	3950	90	85	164	80	80	4	200	140	140	33	56	34	M12	20	40	40	M16x50	153	54	17	40	290	0.038	0.044	17.8

¹⁾ Mass moments of inertia J1 and J3 as well as the total weight m refer to the maximum bore diameters

■ = Available from stock

Ordering example:

ROFLEX® 110	SH	ØD1 = 42	ØD3 = 48
Coupling size	Type	Finish bore	Finish bore

POLY-NORM®

Flexible couplings


Technical data

Size	Torque [Nm]			Max. speed [rpm] with v = 35 m/s	Torsion angle with		Torsion spring stiffness C dyn. [Nm/rad]				Max. perm. displacement [mm] ¹⁾		
	Rated torque TKN	Maximum torque TK max	Vibratory torque TKW		TKN	TK max	1.0 TKN	0.75 TKN	0.5 TKN	0.25 TKN	Axial ΔKa	Radial ΔKr	Angular ΔKw
28	40	80	16	9650			0.52x10 ⁴	0.332x10 ⁴	0.187x10 ⁴	0.09x10 ⁴	± 1.0	0.20	1.2
32	60	120	24	8550		4.5	0.782x10 ⁴	0.499x10 ⁴	0.282x10 ⁴	0.135x10 ⁴	± 1.0	0.25	1.4
38	90	180	36	7650			1.35x10 ⁴	0.864x10 ⁴	0.489x10 ⁴	0.234x10 ⁴	± 1.0	0.25	1.5
42	150	300	60	6950			2.63x10 ⁴	1.68x10 ⁴	0.947x10 ⁴	0.453x10 ⁴	± 1.0	0.25	1.7
48	220	440	88	6300			2.99x10 ⁴	1.91x10 ⁴	1.08x10 ⁴	0.516x10 ⁴	± 1.5	0.30	1.8
55	300	600	120	5650			3.85x10 ⁴	2.46x10 ⁴	1.39x10 ⁴	0.664x10 ⁴	± 1.5	0.30	2.0
60	410	820	164	5150		4.0	6.76x10 ⁴	4.31x10 ⁴	2.32x10 ⁴	1.17x10 ⁴	± 1.5	0.30	2.2
65	550	1100	220	4750			8.18x10 ⁴	5.22x10 ⁴	2.7x10 ⁴	1.41x10 ⁴	± 1.5	0.35	2.4
75	850	1700	340	4200			12.29x10 ⁴	7.84x10 ⁴	4.06x10 ⁴	2.12x10 ⁴	± 1.5	0.40	2.7
85	1350	2700	540	3650			24.31x10 ⁴	15.51x10 ⁴	7.49x10 ⁴	4.19x10 ⁴	± 1.5	0.40	3.0
90	2000	4000	800	3300			36.16x10 ⁴	23.07x10 ⁴	11.14x10 ⁴	6.24x10 ⁴	± 1.5	0.45	3.4
100	2900	5800	1160	2950			54.82x10 ⁴	34.98x10 ⁴	16.89x10 ⁴	9.46x10 ⁴	± 3.0	0.50	3.9
110	3900	7800	1560	2650			79.23x10 ⁴	50.55x10 ⁴	24.4x10 ⁴	13.67x10 ⁴	± 3.0	0.60	4.3
125	5500	11000	2200	2350		2.5	102.3x10 ⁴	65.28x10 ⁴	31.52x10 ⁴	17.65x10 ⁴	± 3.0	0.60	4.8
140	7200	14400	2880	2100			164x10 ⁴	104.7x10 ⁴	50.85x10 ⁴	28.3x10 ⁴	± 3.0	0.60	5.5
160	10000	20000	4000	1900			209.1x10 ⁴	133.4x10 ⁴	64.82x10 ⁴	36.07x10 ⁴	± 3.0	0.65	6.1
180	13400	26800	5360	1650			267.1x10 ⁴	170.4x10 ⁴	82.79x10 ⁴	46.07x10 ⁴	± 3.0	0.65	6.0
200	19000	38000	7600	1450			159.5x10 ⁴	126.2x10 ⁴	96.24x10 ⁴	60.2x10 ⁴	± 4.0	0.65	7.8
220	30000	60000	12000	1300			218.8x10 ⁴	174x10 ⁴	128.7x10 ⁴	77.84x10 ⁴	± 4.0	0.70	8.7
240	43000	86000	17200	1200		1.5	567.9x10 ⁴	438.3x10 ⁴	301.6x10 ⁴	161.9x10 ⁴	± 4.0	0.70	9.6
260	55000	110000	22000	1000			663.8x10 ⁴	539.4x10 ⁴	382.2x10 ⁴	195.5x10 ⁴	± 4.0	0.85	11.3
280	67000	134000	26800	950			773.1x10 ⁴	628.1x10 ⁴	467.9x10 ⁴	266.2x10 ⁴	± 4.0	0.95	12.2

¹⁾ Displacement with n = 1500 rpm


Radial and angular displacements may occur simultaneously. The combined sum of displacements must not exceed the values listed in the table. If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with 1500 rpm). For circumferential speeds exceeding v = 20 m/s dyn. balancing is recommended.

Axial displacement ΔKa

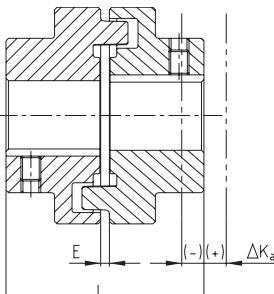


$$L_{\text{max./min.}} = L + \Delta K_a \text{ [mm]}$$

Radial displacement ΔKr

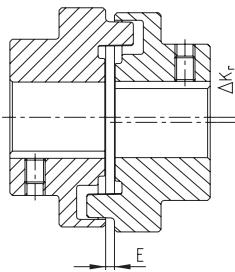

Angular displacement ΔKw

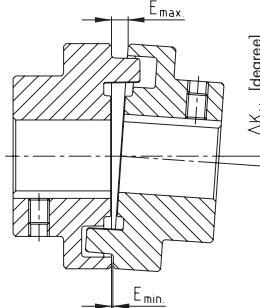

$$\Delta K_w = E_{\text{max.}} - E_{\text{min.}} \text{ [mm]}$$

Advice for assembly

With assembly the coupling halves must be mounted in that coupling and shaft are flush. Alignment must be made in that radial and angular displacement is as small as possible. The service life of coupling and bearings is extended by accurate alignment. Steps must be taken to ensure that the alignment condition does not change during any operating condition. Inevitable shaft displacements should not exceed the figures specified in the table. Angular and radial displacement may occur simultaneously. The combined sum of displacements must not exceed the values listed in the table above. See KTR assembly instructions, KTR standard 49510 on our homepage www.ktr.com.

General information about the elastomer

Material/hardness Perbunan [NBR]/78 Shore A

Permanent temperature range [°C] -30 to +80

Max. temperature (short time) [°C] -50 to +120

Operating range General engineering

Pump industry

ATEX applications

Chemical industry

Standard applications with average elasticity

Resistant to

Gasoline, diesel

Acids, bases

Use in the tropics

(Salt) water (hot/cold)

Oils, greases

Propane, butane

Natural gas, city gas




Elastomer ring NBR 78 Shore A

Elastomer ring Viton [FKM] 60 Shore A for the high-temperature range on request.

POLY-NORM®

Flexible coupling

Selection of standard IEC motors

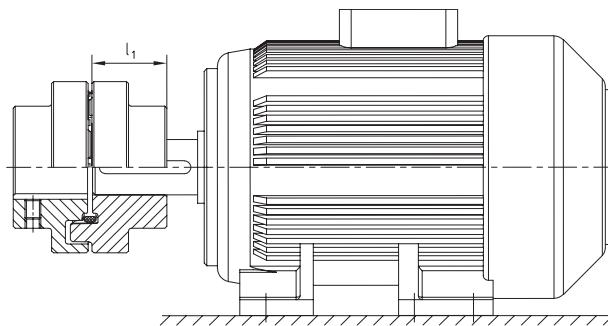

POLY-NORM® couplings for standard IEC motors, protection class IP 54/IP 55 (elastomer ring 78 Shore A)																	
A. C. motor 50 Hz		Motor power n= 3000 rpm 2 poles		PO-LY-NORM® coupling size		Motor power n= 1500 rpm 4 poles		PO-LY-NORM® coupling size		Motor power n= 1000 rpm 6 poles		PO-LY-NORM® coupling size		Motor power n= 750 rpm 8 poles		PO-LY-NORM® coupling size	
Size	Shaft end dxd [mm]	Power P [kW]	Torque T [Nm]			Power P [kW]	Torque T [Nm]			Power P [kW]	Torque T [Nm]			Power P [kW]	Torque T [Nm]		
		2 poles	4, 6, 8 poles			0.09	0.32			0.06	0.43			0.037	0.43		
56	9 x 20					0.12	0.41			0.09	0.64			0.045	0.52		
63	11 x 23					0.18	0.62			0.12	0.88			0.06	0.7		
71	14 x 30					0.37	1.3			0.18	1.3			0.18	2		0.09 1.4
80	19 x 40				28/32	0.55	2.5		28/32	0.55	3.7		28/32	0.37	3.9	0.18 2.5	28/32
90S	24 x 50					1.1	3.7			0.75	5.1			0.55	5.8		0.25 3.5
90L						1.5	5			1.1	7.5			0.75	8		0.37 5.3
100L	28 x 60					2.2	7.4			1.5	10			1.1	12		0.55 7.9
112M						3	9.8			2.2	15			1.5	15		0.75 11
112M						4	13			4	27			2.2	22		1.1 16
132S						5.5	18			5.5	36			3	30		2.2 30
132M	38 x 80				38	7.5	25		38	7.5	49		38	4	40		3 40 38
160M	42 x 110					11	36			11	72			7.5	75		4 54
160L						15	49	42		15	98			11	109		5.5 74 42
180M	48 x 110					18.5	60			18.5	121			11	109		7.5 100
180L						22	71	48		22	144			15	148		48
200L	55 x 110					30	97		55	30	196			18.5	181		11 145
225S	55 x 110	60 x 140				37	120		55	37	240			22	215		15 198 55
225M						45	145			45	292			30	293		22 290 60
250M	60 x 140	65 x 140				55	177	60		55	356			37	361		30 392 65
280S		75 x 140				75	241			75	484			45	438		37 483 75
280M						90	289	65		90	581			55	535		45 587
315S						110	353			110	707			75	727		55 712 85
315M		80 x 170				132	423		75	132	849			90	873		75 971
315L						160	513			160	1030			110	1070		90 1170 90
315		85 x 170				200	641			200	1290			132	1280		110 1420
315						250	802		85	250	1600			160	1550		132 1710
355		315	1010			315	1010			315	2020			200	1930		160 2070 100
355	75 x 140	95 x 170				355	1140	90		355	2280			315	3040		200 2580 110
355						400	1280			400	2570			400	3850		250 3220 125
400		500	1600			500	1600			500	3210			400	4810		315 4060
400		560	1790			560	1790	100		560	3580			450	4330		355 4570
400	80 x 170	630	2020			630	2020	110		630	4030			500	4810		400 5150
400		710	2270			710	2270			710	4540			560	5390		450 5790 160
450		800	2560			800	2560			800	5120			630	6060		500 6420
450	90 x 170	900	2880		125	900	2880			900	5760			710	6830		560 7190
450		1000	3200			1000	3200			1000	6400			800	7690		630 8090 180



The coupling selection is based on an ambient temperature up to +30 °C. The selection is based on a minimum safety factor of 2 to the max. coupling torque ($T_{K \max}$). A detailed selection is possible according to catalogue page 15 et seqq. Drives with periodical torque curves must be selected according to DIN 740 part 2. If requested, KTR will perform the selection.

Torque T = rated torque according to Siemens catalogue M 11 · 1994/95.



POLY-NORM® AR

Flexible couplings


Two-part

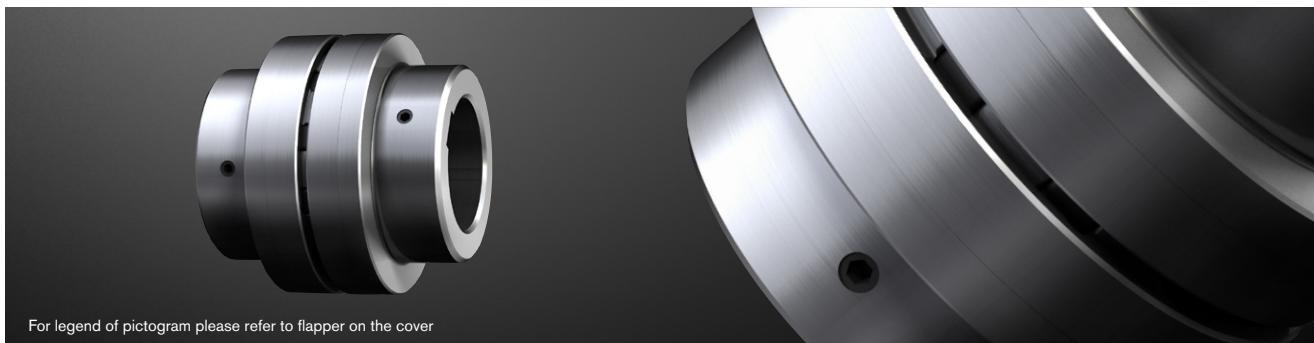

Components

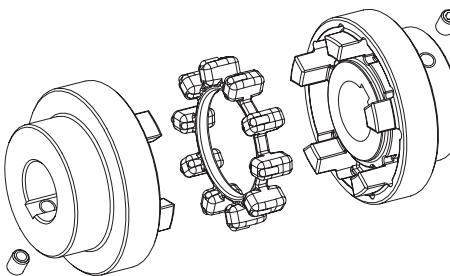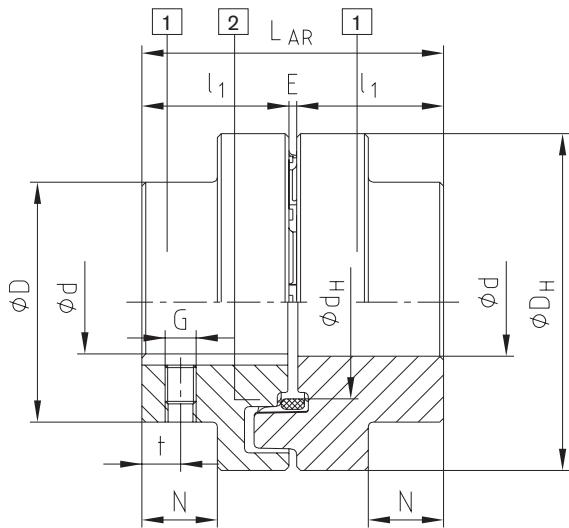

Size 28 - 125

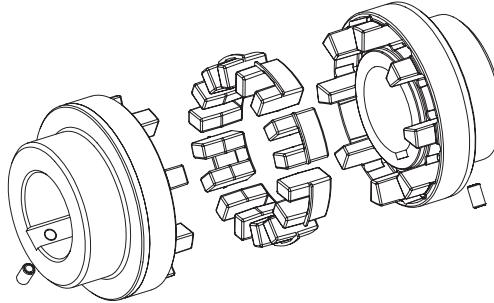

Size 140 - 280

Components of type AR:
1 = Standard hub (GJL)

2 = Elastomer ring (up to size 180: NBR 78 ShA; from size 200: T-PUR® 84 ShA)

Size	Elastomer ring ¹⁾ (component ²⁾) Torque [Nm]		Max. finish bore d ²⁾	Dimensions [mm]							Mass moment of inertia ³⁾ [kgm ²]	Weight ³⁾ [kg]		
	T _{KN}	T _{K max}		General					Setscrew ²⁾					
	L _{AR}	l ₁	E	DH	D	d _H	N	G	t					
28	40	80	12-30	59	28	3	69	46	36.5	12	M5	7	0.0004	0.9
32	60	120	12-35	68	32	4	78	53	41.5	14	M8	7	0.0008	1.4
38	90	180	19-40	80	38	4	87	62	50	19.5	M8	10	0.0016	2.0
42	150	300	19-45	88	42	4	96	69	55.5	20	M8	10	0.0026	2.7
48	220	440	19-50	101	48	5	106	78	64	24	M8	15	0.0042	3.7
55	300	600	19-60	115	55	5	118	90	73	29	M8	14	0.0070	5.5
60	410	820	19-65	125	60	5	129	97	81	33	M8	15	0.0112	6.9
65	550	1100	19-70	135	65	5	140	105	86	36	M10	20	0.0174	8.8
75	850	1700	32-80	155	75	5	158	123	100	42.5	M10	20	0.028	13.5
85	1350	2700	32-90	175	85	5	182	139	116	48.5	M10	25	0.052	19.5
90	2000	4000	32-95	185	90	5	200	148	128	49	M12	25	0.090	23.2
100	2900	5800	42-110	206	100	6	224	165	143	55	M12	25	0.160	31.9
110	3900	7800	50-120	226	110	6	250	185	158	60	M16	30	0.317	38.0
125	5500	11000	55-140	256	125	6	280	210	178	70	M16	35	0.570	55.2
140	7200	14400	65-155	286	140	6	315	235	216	76.5	M20	35	1.030	92.6
160	10000	20000	75-175	326	160	6	350	265	246	94.5	M20	45	1.746	126.9
180	13400	26800	75-200	366	180	6	400	300	290	111.5	M20	50	3.239	181.8
200	19000	38000	85-200	408	200	8	450	335	-	126	M24	50	5.728	263.7
220	30000	60000	95-220	448	220	8	500	370	-	140	M24	50	9.489	355.9
240	43000	86000	105-240	488	240	8	550	405	-	154	M24	50	14.963	466.3
260	55000	110000	115-260	530	260	10	650	440	-	158	M24	60	29.504	672.2
280	67000	134000	125-280	570	280	10	700	475	-	172	M24	60	42.451	836.6

¹⁾ Standard material Perbunan [NBR] 78 Shore A, size 140 - 280 double tooth elastomers, for selection see page 14 et seqq.


²⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9] and setscrew on the keyway

³⁾ Referring to average bore


POLY-NORM® AR

Flexible couplings

For taper clamping sleeve

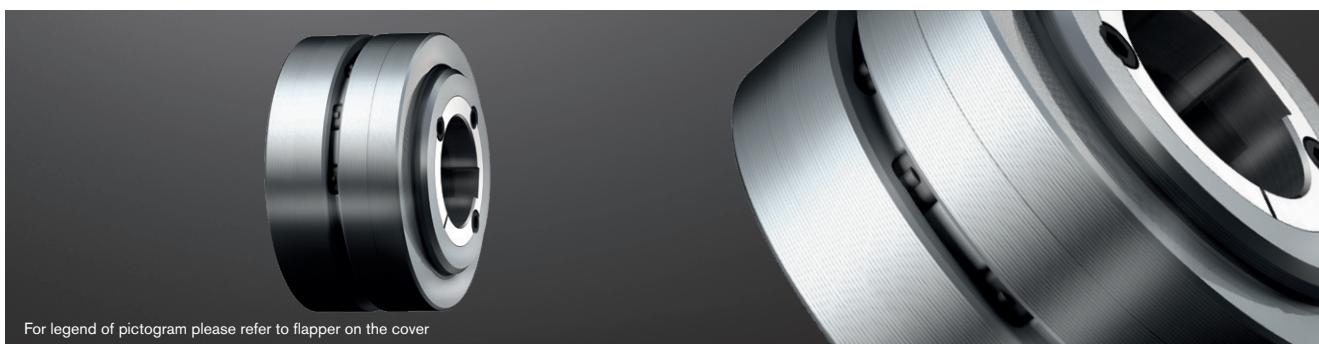

Components

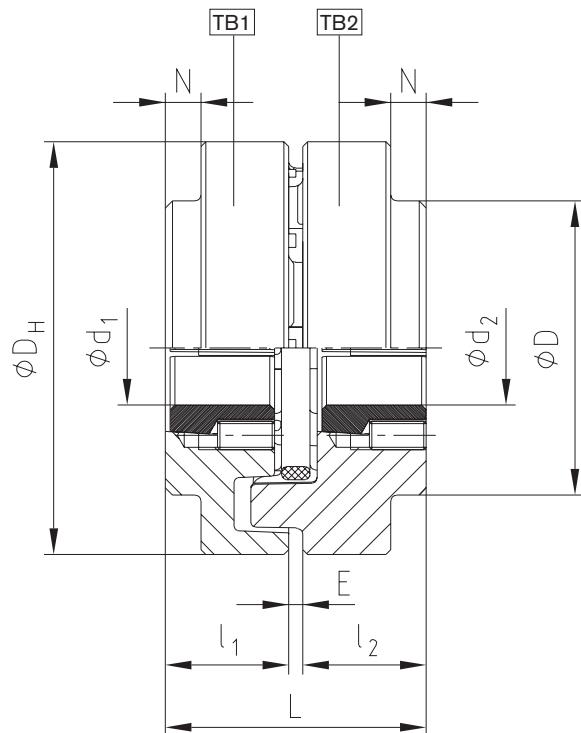

POLY-NORM® for taper clamping sleeve

Size	Taper clamping sleeve	Dimensions [mm]		Fastening screws ¹⁾ for taper clamping sleeve				Size	Taper clamping sleeve	Dimensions [mm]		Fastening screws ¹⁾ for taper clamping sleeve			
		Max. d ₁ , d ₂	l ₁ , l ₂	Size [Inch]	Length [mm]	SW [mm]	TA [Nm]			Max. d ₁ , d ₂	l ₁ , l ₂	Size [Inch]	Length [mm]	SW [mm]	TA [Nm]
32	1108	25	25.5	1/4"	13	3	5.7	75	2517	60	52.5	1/2"	25	6	49
42	1210	32	31.0	3/8"	16	5	20	85	2517	60	46.5	1/2"	25	6	49
48	1610	40	30.0	3/16"	16	5	20		3030	75	82	5/8"	32	8	90
48	1615	40	42.5	3/8"	16	5	20	90	3020	75	52.0	5/8"	32	8	92
60	2012	50	38.5	7/16"	22	6	31	100	3535	90	98.0	1/2"	38	10	115
65	2517	60	62.5	1/2"	25	6	49	125	4040	100	111.5	5/8"	45	12	172

¹⁾ Each 2 fastening screws, with 3535/4040 3-off

For coupling type TB1 screwing on cam side - TB2 screwing on collar side
Combination possible! Please order our separate dimension sheet (M407045).

Ordering example:	POLY-NORM® 38	AR	Ø38	Ø30
	Coupling size	Type	Finish bore	Finish bore


POLY-NORM® ADR

Flexible couplings

Three-part



Components

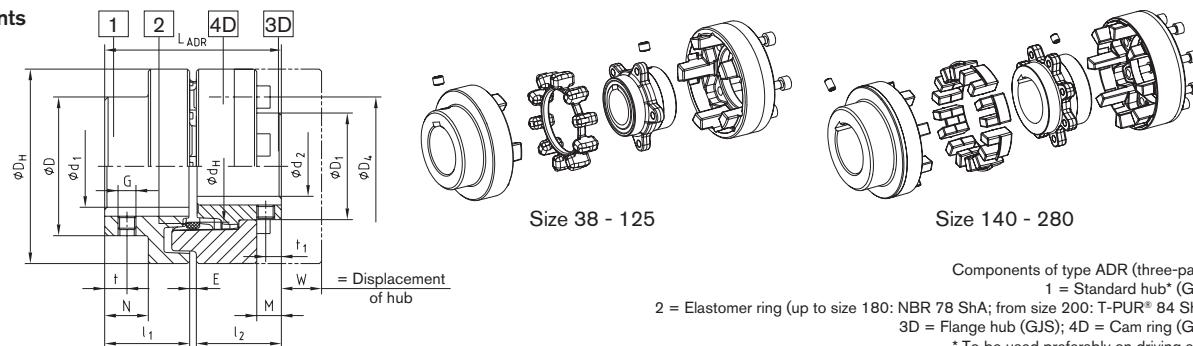

Size 38 - 125

Size 140 - 280

Components of type ADR (three-part):

1 = Standard hub* (GJL)

2 = Elastomer ring (up to size 180: NBR 78 ShA; from size 200: T-PUR® 84 ShA)

3D = Flange hub (GJS); 4D = Cam ring (GJL)

* To be used preferably on driving side

Size	Elastomer ring ¹⁾ (component 2)		Dimensions [mm]															
	T _{KN}	T _{K max}	Max. finish bore ²⁾		General										Setscrew			
			d ₁	d ₂	L _{ADR}	I _{1, I₂}	E	D _H	D	D ₁	d _H	N	M	W	G	t	t ₁	T _A [Nm]
38	90	180	40	34	80	38	4	87	62	48	50	19.5	11.0	12	M8	10	7	10
42	150	300	45	38	88	42	4	96	69	54	55.5	20	12.0	16	M8	10	7	10
48	220	440	50	44	101	48	5	106	78	62	64	24	13.7	16	M8	15	7	10
55	300	600	60	50	115	55	5	118	90	72	73	29	18.7	15	M8	14	14	10
60	410	820	65	56	125	60	5	129	97	80	81	33	22.2	14	M8	15	15	10
65	550	1100	70	60	135	65	5	140	105	86	86	36	26.7	11	M10	20	20	17
75	850	1700	80	68	155	75	5	158	123	98	100	42.5	27.8	16	M10	20	20	17
85	1350	2700	90	78	175	85	5	182	139	112	116	48.5	33.7	18	M10	25	25	17
90	2000	4000	95	85	185	90	5	200	148	122	128	49	31.5	26	M12	25	25	40
100	2900	5800	110	95	206	100	6	224	165	136	143	55	37.5	28	M12	25	25	40
110	3900	7800	50-120	105	226	110	6	250	185	150	158	60	39.5	30	M16	30	30	80
125	5500	11000	55-140	115	256	125	6	280	210	168	178	70	48.0	35	M16	35	35	80
140	7200	14400	65-155	155-135	286	140	6	315	235	195	216	76.5	47.0	59	M20	35	35	140
160	10000	20000	75-175	65-155	326	160	6	350	265	225	246	94.5	65.0	43	M20	45	45	140
180	13400	26800	75-200	65-175	366	180	6	400	300	255	290	111.5	79.0	33	M20	50	50	140
200	19000	38000	85-200	73-200	408	200	8	450	335	290	320	126	95	7	M24	50	50	240
220	30000	60000	95-220	83-220	448	220	8	500	370	320	354	140	103	8	M24	50	50	240
240	43000	86000	105-240	93-240	488	240	8	550	405	350	388	154	119	1	M24	50	50	240
260	55000	110000	115-260	103-260	530	260	10	650	440	380	445	158	109	34	M24	60	60	240
280	67000	134000	125-280	113-280	570	280	10	700	475	410	478	172	109	29	M24	60	60	240

Selection of cap screws DIN EN ISO 4762 - 12.9

Size	M x l [mm]	z = number	Pitch z x angle	D ₄ [mm]	T _A [Nm] ³⁾	Size	M x l [mm]	z = number	Pitch z x angle	D ₄ [mm]	T _A [Nm] ³⁾
38	M6x16	5	5x72	62	10	110	M16x40	8	8x45	183	210
42	M8x16	5	5x72	69	25	125	M20x40	8	8x45	202	410
48	M8x20	6	6x60	78	25	140	M20x50	8	8x45	237	410
55	M8x20	6	6x60	88	25	160	M20x55	9	9x40	267	410
60	M8x20	6	6x60	98	25	180	M20x60	10	10x36	304	410
65	M10x20	6	6x60	104	49	200	M20x60	10	10x36	342	580
75	M10x25	6	6x60	120	49	220	M24x70	10	10x36	378	1000
85	M12x25	6	6x60	138	86	240	M27x70	10	10x36	416	1500
90	M16x30	6	6x60	149	210	260	M30x90	10	10x36	480	2000
100	M16x30	6	6x60	163	210	280	M30x90	10	10x36	520	2000

¹⁾ Standard material Perbunan [NBR] 78 Shore A, size 140 - 280 double tooth elastomers, for selection see page 14 et seqq.

²⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9] and setscrew ³⁾ Screw tightening torques acc. to 8.8


Ordering example:

POLY-NORM® 65	ADR	$d_1 = \emptyset 55$	$d_2 = \emptyset 60$
Coupling size	Type	Finish bore	Finish bore

POLY-NORM® BTA and SBA

Flexible couplings

With brake drum/brake disk for brake stop

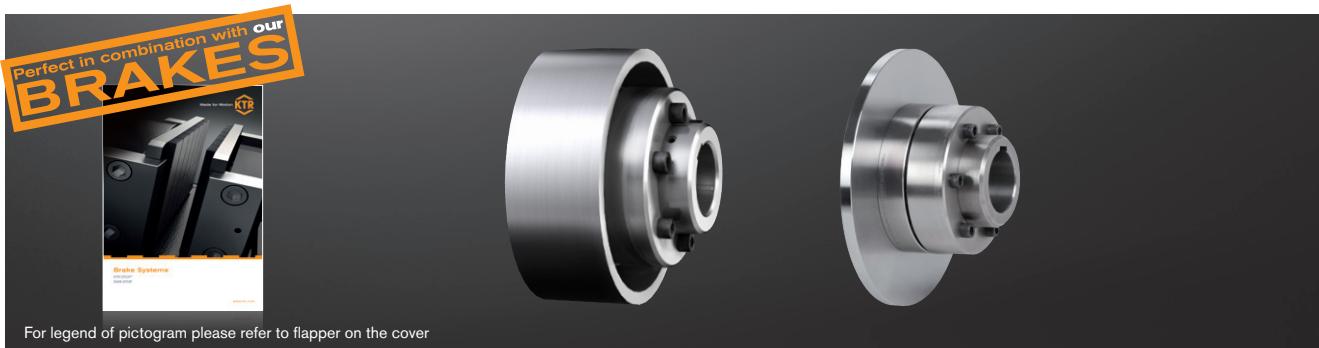

POLY-NORM® Type AR-BTA, AR-SBA, ADR-BTA and ADR-SBA

Size	Elastomer ring ¹⁾ (component 2)		D, D ₁	Max. finish bore			D _H	D ₂	D ₃	z	M ₁	l ₁ , l ₂	E	L	
	Torque [Nm]			d ₁	d ₂	d ₃									
	T _{KN}	T _{K max}													
38	90	180		40	34	38	87	61	75	5 x 72°	M6	38	4	80	
42	150	300		45	38	42	96	68	82	5 x 72°	M8	42	4	90	
48	220	440		50	44	48	106	77	92	6 x 60°	M8	48	5	101	
55	300	600		60	50	55	118	88	104	6 x 60°	M8	55	5	115	
60	410	820		65	56	60	129	96	114	6 x 60°	M8	60	5	125	
65	550	1100		70	60	65	140	104	122	6 x 60°	M10	65	5	135	
75	850	1700		80	68	75	158	121	140	6 x 60°	M10	75	5	155	
85	1350	2700		90	78	85	182	137	160	6 x 60°	M12	85	5	175	
90	2000	4000		95	85	90	200	146	174	6 x 60°	M16	90	5	185	
100	2900	5800		110	95	100	224	164	195	6 x 60°	M16	100	6	206	
110	3900	7800		50-120	105	50-110	250	184	218	8 x 45°	M16	110	6	226	
125	5500	11000		55-140	115	55-125	280	208	245	8 x 45°	M20	125	6	256	
140	7200	14400		65-155	55-135	65-140	315	233	276	8 x 45°	M20	140	6	286	
160	10000	20000		75-175	65-155	75-160	350	263	308	9 x 40°	M20	160	6	326	
180	13400	26800		75-200	65-175	75-180	400	298	349	10 x 36°	M20	180	6	366	

POLY-NORM® Type BTA

POLY-NORM® size	38 42 48 55 60 65 75 85 90 100 110 125 140 160 180	Dimensions C [mm]	Max. speed [rpm] with v = 60 m/s ³⁾	POLY-NORM® size	POLY-NORM® Type SBA															
					ØAxG	Brake disk ²⁾	Dimensions N [mm]													
ØDbxB				7150	200x12.5	13.75													5725	
Brake drum ²⁾				5725	250x12.5	13.75	14.75	18.75											4575	
160x60	4			4575	315x16		13	17	22	26	29	35.5							3625	
200x75	9 8 4			3625	400x16			17	22	26	29	35.5	41.5	42	48	54	64		2850	
250x95	17 16 20 7 3 0			2850	500x16			22	26	29	35.5	41.5	42	48	54	64			2275	
315x118	25 21 16 12 9 2.5 -3.5			2275	630x20										46	52	62	69	86	1800
400x150	34 28 25 22 15.5 9.5 9 3			1800	710x20										46	52	62	69	86	104
500x190				1600	800x25										43.5	49.5	59.5	66.5	83.5	101.5
630x236				900x25											49.5	59.5	66.5	83.5	101.5	1250
710x265																				



¹⁾ Standard material Perbunan [NBR], for selection see page 14 et seqq.

²⁾ Steel ³⁾ Dynamic balancing required

Other sizes on request

Ordering example:

POLY-NORM® 38	ADR-BTA	Ø200 x 75	d ₂ = Ø32 NnD	d ₃ = Ø25 NnD
Coupling size	Type	Brake drum Ø	Component with finish bore	Component with finish bore

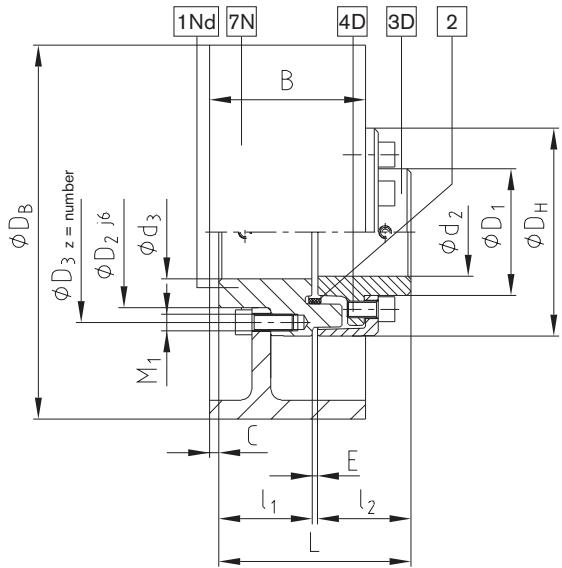
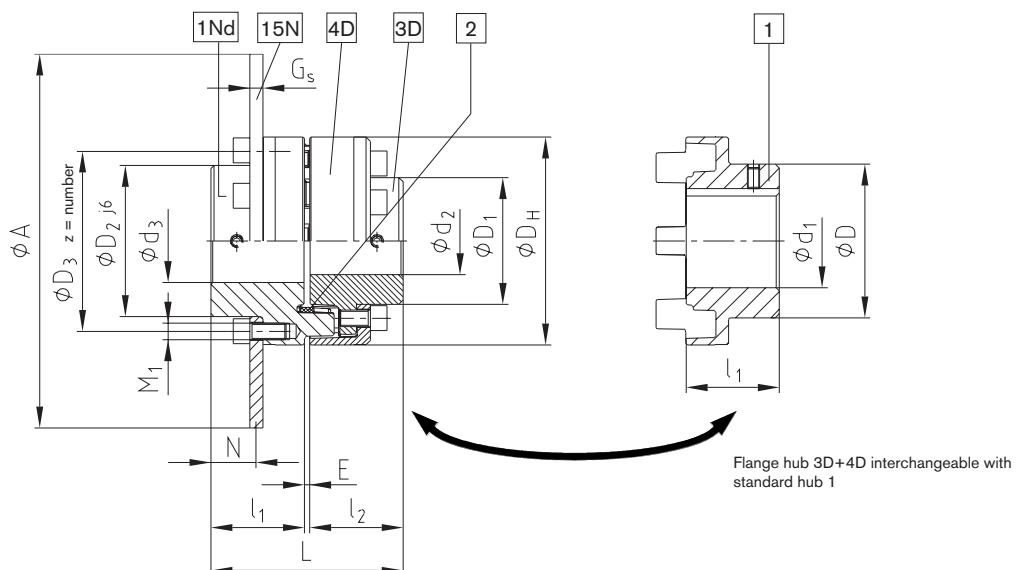
Components**Brake drum type ADR-BTA****Brake disk type ADR-SBA**

With standard hub
type AR-BTA or AR-SBA

POLY-NORM® AZR

Flexible couplings

Standard drop-out center design coupling

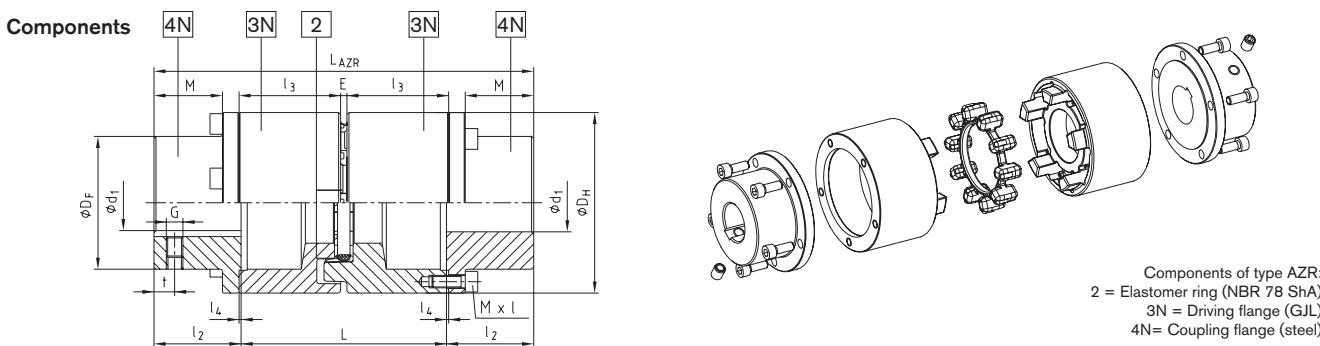

Size	Drop-out center length* L [mm]	Elastomer ring ¹⁾ (component 2) Torque [Nm]		Max. finish bore d ₁ ²⁾	Dimensions [mm]										Mass moment of inertia ³⁾ [kgm ²]	Weight ³⁾ [kg]		
					General													
		T _{KN}	T _{K max}		L _{AZR}	l ₂	l ₃	E	l ₄	D _H	D _F	M	MxL	T _A [Nm]	G	t		
28	100	40	80	34	170	35	49.5	3	1	69	46	26	M6x18	14	M5	7	0.0020	2.4
32	100	60	120	38	170	49	4	1	78	53	26	M6x18	14	M8	7	0.0042	3.2	
	140				210											0.0062	3.9	
38	100	90	180	45	184	49	4	1	87	62	33	M6x20	14	M8	10	0.0048	4.3	
	140				224											0.0068	5.1	
42	100	150	300	50	190	49	4	1	96	69	35	M6x20	14	M8	10	0.0094	5.1	
	140				230											0.0128	6.0	
48	100	220	440	55	204	49	5	1.5	106	78	41.5	M6x20	14	M8	15	0.0170	6.6	
	140				244											0.0216	7.5	
55	100	300	600	65	210	49	5	1.5	118	88	43.5	M8x25	35	M8	14	0.0188	9.4	
	140				250											0.0240	10.8	
60	100	410	820	70	290	49	5	1.5	118	88	43.5	M8x25	35	M8	15	0.0232	12.2	
	140				220											0.0326	11.2	
65	140	550	1100	75	260	60	69	5	1.5	129	97	47.5	M8x25	35	M8	15	0.0414	13.0
	180				300												0.0504	14.6
75	100	450	900	90	230	49	5	1.5	140	105	51.5	M8x25	35	M10	20	0.0564	14.0	
	140				270											0.0730	15.8	
85	140	550	1350	100	310	69	5	1.5	182	139	69.5	M10x30	69	M10	25	0.0894	17.5	
	180				350											0.0824	23.2	
90	140	850	1700	90	290	69	5	1.5	158	123	60.5	M10x30	69	M10	20	0.1008	25.6	
	180				400											0.1332	29.8	
100	140	1350	2700	100	310	69	5	1.5	182	139	69.5	M10x30	69	M10	25	0.1570	32.1	
	180				350											0.1658	35.2	
120	140	1350	4000	110	420	69	5	1.5	200	148	73.5	M12x35	120	M12	25	0.1812	40.7	
	180				430											0.2466	38.2	
140	140	1350	5800	120	340	69	6	2	224	165	83	M12x35	120	M12	25	0.3988	50.0	
	180				380											0.4450	54.8	
160	180	1350	5800	120	450	124	6	2	224	165	83	M12x35	120	M12	25	0.5465	63.2	

¹⁾ Standard material Perbunan [NBR] 78 Shore A, for selection see page 14 et seqq.

²⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9] and setscrew on the keyway

³⁾ Referring to average bore


*For other extendable lengths (L = 120/160/195/215) it is possible to combine two driving flanges 3N with various lengths. (As an example: driving flanges POLY-NORM® 85 for extendable length 140 and 250 give an extendable length of 195 mm (140 mm + 250 mm = 390 mm; 390 mm/2 = 195 mm)

Ordering example:	POLY-NORM® 42	AZR	140	Ø38	Ø42
	Coupling size	Type	Drop-out center length L	Finish bore	Finish bore

POLY

Flexible couplings

Selection of standard IEC motors

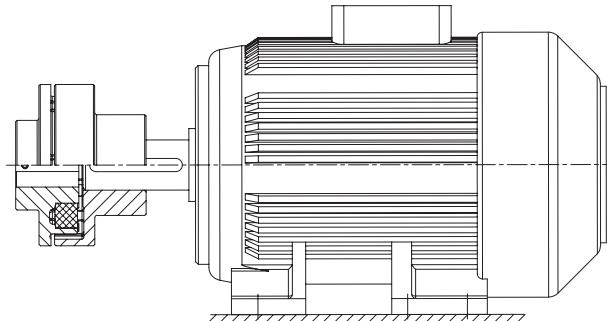

POLY couplings for standard IEC standard motors, protection class IP 54/IP 55														
A. C. motor 50 Hz			Motor power n= 3000 rpm 2 poles		POLY coupling size	Motor power n= 1500 rpm 4 poles		POLY coupling size	Motor power n= 1000 rpm 6 poles		POLY coupling size	Motor power n= 750 rpm 8 poles		POLY coupling size
Size	Shaft end dxd [mm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]		Power P [kW]	Torque T [Nm]	
56	9 x 20		0.09	0.32		0.06	0.43		0.037	0.43				
			0.12	0.41		0.09	0.64		0.045	0.52				
63	11 x 23		0.18	0.62		0.12	0.88		0.06	0.7				
			0.25	0.86	8	0.18	1.3	8	0.09	1.1	8			8
71	14 x 30		0.37	1.3		0.25	1.8		0.18	2		0.09	1.4	
			0.55	1.9		0.37	2.5		0.25	2.8		0.12	1.8	
80	19 x 40		0.75	2.5		0.55	3.7		0.37	3.9		0.18	2.5	
			1.1	3.7		0.75	5.1		0.55	5.8		0.25	3.5	
90S	24 x 50		1.5	5		1.1	7.5		0.75	8		0.37	5.3	
90L			2.2	7.4		1.5	10		1.1	12		0.55	7.9	
100L	28 x 60		3	9.8	9	2.2	15	9	1.5	15	9	0.75	11	9
						3	20					1.1	16	
112M			4	13		4	27		2.2	22		1.5	21	
132S	38 x 80		5.5	18		5.5	36		3	30	10	2.2	30	
			7.5	25	10			10	4	40		3	40	10
132M						7.5	49		5.5	55				
160M	42 x 110		11	36		11	72	12	7.5	75		4	54	
			15	49	12							5.5	74	
160L			18.5	60		15	98		11	109	14	7.5	100	14
180M	48 x 110		22	71		18.5	121	14						
180L						22	144		15	148		11	145	
200L	55 x 110		30	97		30	196	15	18.5	181	15	15	198	15
			37	120	15				22	215				
225S						37	240	17				18.5	244	17
225M	55 x 110	60 x 140	45	145		45	292		30	293	20	22	290	
250M	60 x 140	65 x 140	55	177	17	55	356	20	37	361		30	392	20
280S			75	241		75	484	20	45	438		37	483	
280M			90	289	20*	90	581		55	535	20	45	587	20
315S			110	353		110	707	22	75	727	22	55	712	22
315M			132	423	20*	132	849	25	90	873	25	75	971	25
			160	513		160	1030		110	1070		90	1170	
315L			200	641		200	1290	28	132	1280		110	1420	28
								28	160	1550		132	1710	
315			250	802		250	1600		200	1930		160	2070	30
			315	1010		315	2020		250	2410	30	200	2580	
			355	1140		355	2280	30						35
355	75 x 140	95 x 170	400	1280		400	2570		315	3040		250	3220	
			500	1600		500	3210		400	3850	35	315	4060	
			560	1790		560	3580	35	450	4330		355	4570	
400	80 x 170	110 x 210	630	2020		630	4030		500	4810		400	5150	
			710	2270		710	4540		560	5390	40	450	5790	
			800	2560		800	5120		630	6060		500	6420	
450	90 x 170	120 x 210	900	2880		900	5760	40						
			1000	3200		1000	6400							


The coupling selection is based on an ambient temperature up to +30 °C. The coupling was selected for normal operation. The couplings selected have a minimum operating factor $f_{min.} = 1.35$. Drives with periodical torque curves must be selected according to DIN 740 part 2. If requested, KTR will perform the selection.

Torque T = rated torque according to Siemens catalogue M 11 · 1994/95.


* Dynamic balancing required

POLY PKZ and PKD Flexible couplings


PKZ (two-part) and PKD (three-part)



Components

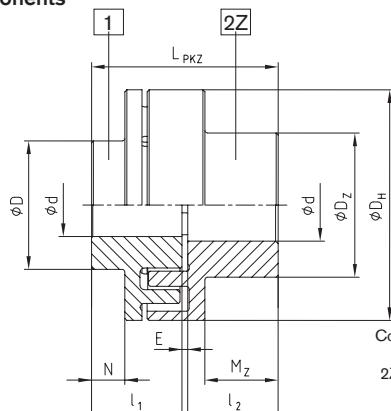


Type PKZ (Z) – (Size 8 to 30)

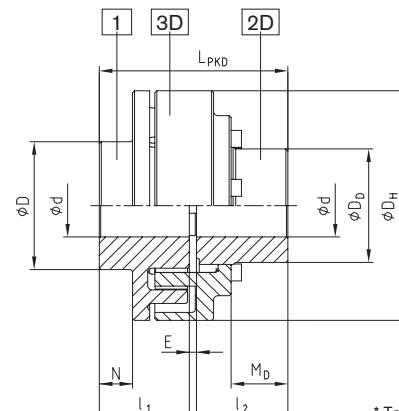

Type PKD (D) – (Size 15 to 35)

POLY Type PKZ and PKD

Size	Rated torque T _{KN} [Nm]	Max. speed n [rpm]	Max. finish bore d			Dimensions [mm]										Setscrew			Weight [kg]		
			Component 1	Component 2Z	Component 2D	D _H	D	D _Z	D _D	l ₁ , l ₂	M _Z	M _D	N	E	D ₂	D ₄ (H7/h7)	L _{PKZ} /L _{PKD}	G	t	T _A [Nm]	
8 (Z)	42	5000	20	28	—	86	43	50	—	35	25	—	3	3	—	—	73	M5	18	2	1.7
9 (Z)	72	5000	28	38	—	97	55	65	—	41	30	—	7	3	—	—	85	M8	23	10	2.7
10 (Z)	100	5000	32	42	—	107	60	70	—	45	35	—	10	4	—	—	94	M8	27	10	3.5
12 (Z)	170	5000	38	48	—	131	70	80	—	55	43	—	12	4	—	—	114	M8	30	10	5.4
14 (Z)	210	4800	45	55	—	142	80	93	—	60	46	—	17	4	—	—	124	M8	10	10	7.6
15 (Z;D)	320	4300	50	60	50	157	90	100	74.5	65	52	33	21	4	90	75	134	M8	15	10	8.6
17 (Z;D)	400	3800	60	65	60	176	100	110	87	70	56	43.5	26	4	106	90	144	M8	15	10	12
20 (Z;D)	820	3300	65	75	70	205	115	127	104	80	65	45	23	4	123	105	164	M8	15	10	20
22 (Z)	1100	3000	85	85	—	224	140	140	—	90	75	—	38	4	—	—	184	M10	20	17	25
25 (Z;D)	1600	2700	90	90	95	257	150	150	138	100	84	67	43	5	162	140	205	M12	20	40	35
28 (Z)	2500	2350	100	100	110	288	165	165	158	110	90	65	44	5	178	160	225	M12	20	40	53
30 (Z;D)	3950	2200	110	110	110	308	180	180	165	130	108	89	58	5	202	170	265	M16	20	80	66
35 (D)	6100	1850	130	—	145	373	210	—	209	160	—	102	70	5	240	210	325	M16	25	80	125

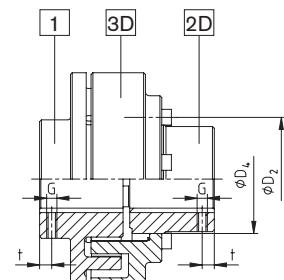

¹⁾ Maximum torque $T_{K\max} = T_{KN} \times 2$; elastomer: standard material Perbunan [NBR] 92 Shore A; hub: standard material GJL

²⁾ Speeds for $v = 30$ m/s. For circumferential speeds exceeding $v = 30$ m/s, we recommend dynamic balancing


³⁾ Referring to average bore

Ordering example:	POLY	PKD	28	d ₁ = Ø90	d ₂ = Ø80
	Coupling type	Type	Size	Finish bore component 1	Finish bore component 2


POLY PKA

Flexible couplings

Drop-out center design coupling

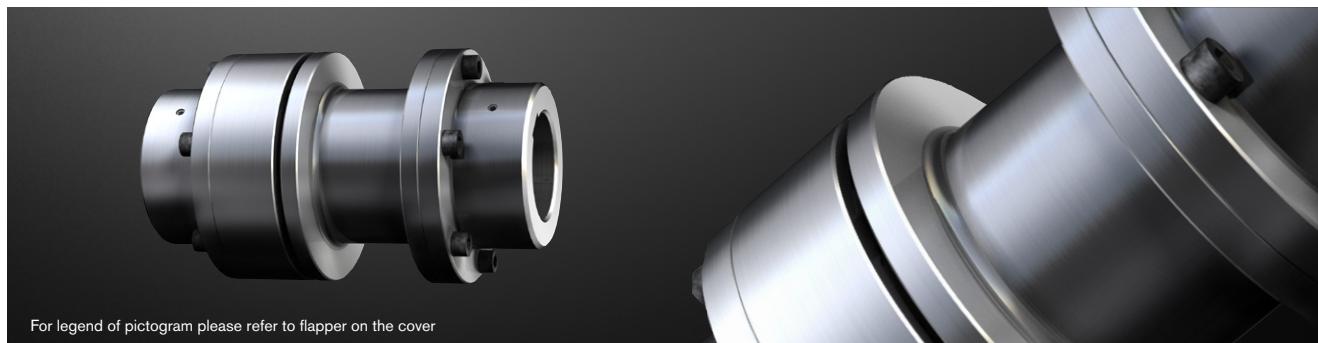

Components

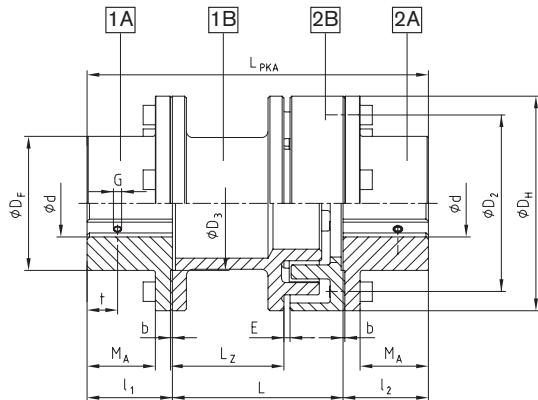

Components of type PKA:
 1A/2A = Coupling flange (steel)
 1B = Spacer (GJL)
 2B = Driving flange (GJL)
 1A and 1B to be used preferably on driving side

POLY Type PKA																		
Size	Rated torque T_{KN} [Nm]	Max. speed n [rpm]	Max. finish bore d component 1A/2A	Dimensions [mm]											Setscrew			Weight [kg]
				D_H	D_F	D_2	D_3	l_1, l_2	b	M_A	E	L	L_PKA	L_Z	G	t	T_A [Nm]	
8	42	5000	40	86	55	70	60	35	1.5	25.5	3	100	170	66	M5	15	2	3.04
9	72	5000	50	97	70	85	70	41	1.5	30.5	3	100	182	63	M8	15	10	4.26
												140	222	103		20	10	4.66
10	100	5000	55	107	78	93	80	46	1.5	35.5	4	100	192	61	M8	20	10	5.42
												140	232	101		25	10	5.88
12	170	5000	70	131	95	113	90	55	1.5	43.0	4	100	210	55	M8	20	10	9.49
												140	250	95		25	10	10.15
14	210	4800	75	142	105	125	100	60	1.5	48.0	4	100	220	54	M8	25	10	11.46
												140	260	94		25	10	12.23
15	320	4300	80	157	110	135	110	65	1.5	49.5	4	140	270	93	M8	25	10	15.63
												180	310	133		30	10	16.50
20	820	3300	110	205	150	175	130	80	2.0	61.0	4	140	300	81	M8	30	10	30.96
												180	340	121		30	10	32.18

POLY-NORM®

POLY

REVOLEX®


Ordering example:

POLY	PKA	15	140	Ø38	Ø40
Coupling type	Type	Size	Drop-out center length	Finish bore component 1A	Finish bore component 2A

POLY

Flexible couplings

Displacements / elastomer sets / screws

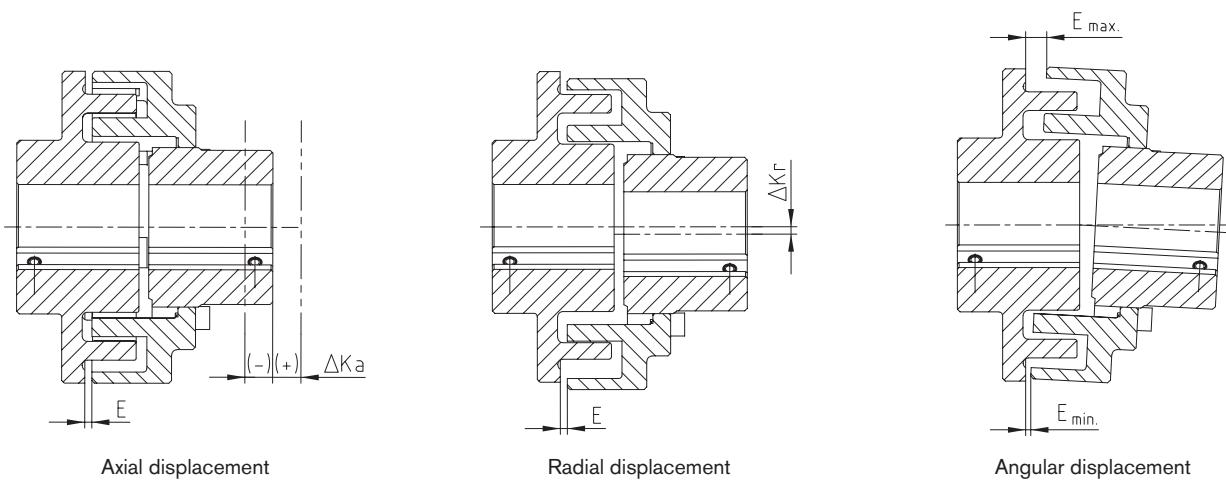


$$\Delta K_w = E_{\max.} - E_{\min.} [\text{mm}]$$

Radial and angular displacements may occur simultaneously.

The combined sum $V = \Delta K_r [\text{mm}] + (E_{\max.} [\text{mm}] - E_{\min.} [\text{mm}])$ should not exceed the values listed in the table.

Displacements [mm]														
Coupling size	8	9	10	12	14	15	17	19	20	22	25	28	30	35
Max. axial displacement ΔK_a [mm]	± 1	± 1	± 1	± 2	± 3									
Max. radial displacement ΔK_r or max. angular displacement ΔK_w or sum V	n=750 rpm	0.8	0.8	0.8	0.8	0.8	1.0	1.0	1.0	1.0	1.0	1.0	1.2	1.2
	n=1000 rpm	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1
	n=1500 rpm	0.5	0.5	0.5	0.5	0.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9

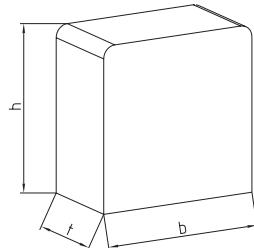

Elastomer sets NBR (cuboid)														
Coupling size	8	9	10	12	14	15	17	19	20	22	25	28	30	35
Size of set	1			2		3		3a	4	3b	4Ü	5	6Ü	7Ü
Number of sets	8	10	10	10	10	12	12	12	12	12	16	16	16	20
Dimensions of elastomer sets w x d x h [mm]	b	18.4		24.9		27.2		27.7	34.9	29.6	34.8	40	43.3	45.7
	t	10		15.3		16.1		18.4	19.6	18.4	20.1	22.2	28.6	25.0
	h	18.9		23.9		24.6		26.8	34.6	29.6	35	40.6	41.1	60.0

Type PKD - Dimensions of cap screws acc. to DIN EN ISO 4762														
Coupling size	8	9	10	12	14	15	17	19	20	22	25	28	30	35
Screw size	M	—	—	—	—	M8	M8	M8	M10	M8	M10	M10	M10	M12
	I	—	—	—	—	—	30	25	25	30	30	30	40	55
Number	—	—	—	—	—	6	6	6	6	8	8	8	8	10
Tightening torque T_A [Nm]	—	—	—	—	—	25	25	25	49	25	49	49	86	86
Type PKA - Dimensions of cap screws acc. to DIN EN ISO 4762														
Screw size	M	M6	M6	M6	M8	M8	M10	M10	—	M10	—	M10	—	—
	I	16	18	18	20	20	25	25	—	30	—	30	—	—
Number	4	5	5	5	5	6	6	—	6	—	8	—	—	—
Tightening torque T_A [Nm]	10	10	10	25	25	49	49	—	49	—	49	—	—	—




Technical data

REVOLEX® KX-D Technical data												
Size	Torque [Nm] NBR 80 ShA				Cast iron		Steel		Torsion spring stiffness C dyn. [Nm/rad]			
	Rated T _{KN}	Max. T _{KN}	Vibratory T _{KW}	T _{KN} max ¹⁾	Max. speed [rpm] with v = 35 m/s	Max. bore [mm]	Max. speed [rpm] with v = 60 m/s	Max. bore [mm]	0.25 T _{KN}	0.50 T _{KN}	0.75 T _{KN}	1.00 T _{KN}
KX-D 75	4300	8600	1720	12900	—	—	4500	100	6.73x10 ⁵	1.04x10 ⁶	1.54x10 ⁶	2.17x10 ⁶
KX-D 85	5500	11000	2200	16500	—	—	4175	110	8.66x10 ⁵	1.32x10 ⁶	1.95x10 ⁶	2.73x10 ⁶
KX-D 95	7200	14400	2880	21600	—	—	3845	125	1.11x10 ⁶	1.70x10 ⁶	2.49x10 ⁶	3.47x10 ⁶
KX-D 105	9400	18800	3760	28200	2000	110	3475	130	1.45x10 ⁶	2.21x10 ⁶	3.23x10 ⁶	4.51x10 ⁶
KX-D 120	15200	30400	6080	45600	1800	125	3100	150	1.78x10 ⁶	2.48x10 ⁶	3.54x10 ⁶	4.85x10 ⁶
KX-D 135	20000	40000	8000	60000	1600	140	2725	170	2.34x10 ⁶	3.27x10 ⁶	4.65x10 ⁶	6.36x10 ⁶
KX-D 150	25000	50000	10000	75000	1450	160	2500	190	2.94x10 ⁶	4.12x10 ⁶	5.87x10 ⁶	8.06x10 ⁶
KX-D 170	41000	82000	16400	123000	1250	180	2150	220	4.36x10 ⁶	7.91x10 ⁶	1.14x10 ⁷	1.50x10 ⁷
KX-D 190	54000	108000	21600	162000	1100	205	1900	245	5.78x10 ⁶	1.05x10 ⁷	1.52x10 ⁷	1.98x10 ⁷
KX-D 215	67500	135000	27000	202500	1000	230	1725	275	7.21x10 ⁶	1.30x10 ⁷	1.89x10 ⁷	2.47x10 ⁷
KX-D 240	98000	196000	39200	294000	900	250	1550	310	1.19x10 ⁷	2.52x10 ⁷	3.84x10 ⁷	5.17x10 ⁷
KX-D 265	134000	268000	53600	402000	800	285	1375	350	1.62x10 ⁷	3.44x10 ⁷	5.26x10 ⁷	7.07x10 ⁷
KX-D 280	170000	340000	68000	510000	720	315	1225	385	2.05x10 ⁷	4.36x10 ⁷	6.66x10 ⁷	8.97x10 ⁷
KX-D 305	205000	410000	82000	615000	675	330	1150	405	2.49x10 ⁷	5.27x10 ⁷	8.05x10 ⁷	1.08x10 ⁸
KX-D 330	265000	530000	106000	795000	625	355	1075	435	3.20x10 ⁷	6.78x10 ⁷	1.04x10 ⁸	1.40x10 ⁸
KX-D 355	350000	700000	140000	1050000	575	380	975	450	4.26x10 ⁷	8.99x10 ⁷	1.37x10 ⁸	1.85x10 ⁸
KX-D 370	430000	860000	172000	1290000	535	450	900	530	4.92x10 ⁷	1.04x10 ⁸	1.59x10 ⁸	2.14x10 ⁸
KX-D 470	520000	1040000	208000	1560000	—	—	855	520	6.25x10 ⁷	1.33x10 ⁸	2.03x10 ⁸	2.74x10 ⁸
KX-D 520	810000	1620000	324000	2430000	—	—	740	According to customer specification	9.83x10 ⁷	2.08x10 ⁸	3.18x10 ⁸	4.28x10 ⁸
KX-D 590	1000000	2000000	400000	3000000	—	—	660	According to customer specification	1.21x10 ⁸	2.56x10 ⁸	3.91x10 ⁸	5.26x10 ⁸
KX-D 650	1350000	2700000	540000	4050000	—	—	590	According to customer specification	1.63x10 ⁸	3.47x10 ⁸	5.30x10 ⁸	7.14x10 ⁸

¹⁾ ≤ 1000 load cycles

■ = Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dyn. balancing is recommended.

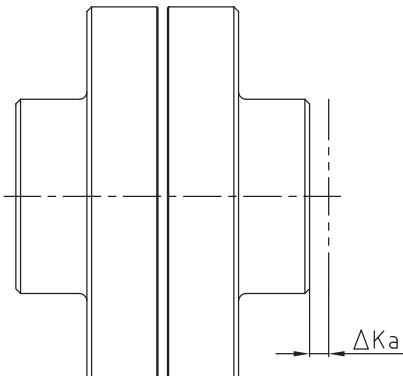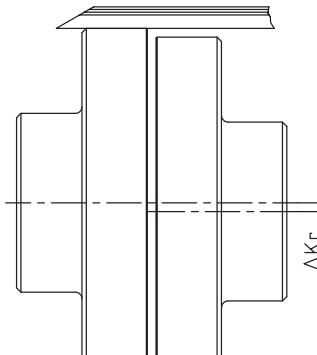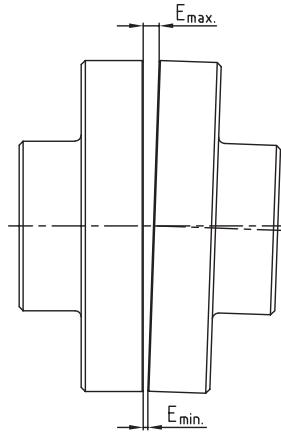Axial displacement ΔK_aRadial displacement ΔK_rAngular displacement ΔK_w

$$L_{\max/min.} = L + \Delta K_a \text{ [mm]}$$

$$\Delta K_w = E_{\max.} - E_{\min.} \text{ [mm]}$$

Displacements																						
Size (KX and KX-D)		75	85	95	105	120	135	150	170	190	215	240	265	280	305	330	355	370	470	520	590	650
Max. axial displacement ΔK _a [mm]		±1.5	±1.5	±1.5	±2	±2	±2	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5	±4	±4	±4	±4	±4	±4	±4
	250 rpm	0.95	1.1	1.1	1.2	1.3	1.4	1.5	1.7	1.9	2.0	2.2	2.5	2.7	2.9	3.1	3.3	3.5	3.8	4.4	4.9	5.4
	500 rpm	0.70	0.80	0.80	0.9	1.0	1.1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.2	2.3	2.5	2.8	3.1	3.5	3.8	3.8
Max. radial displacement ΔK _r [mm] or max. angular displacement ΔK _w [mm] with speed n	750 rpm	0.60	0.65	0.65	0.7	0.8	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.6	1.7	1.8	1.9	2.0	2.2	2.4	—	—
	1000 rpm	0.50	0.55	0.55	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.2	1.4	1.4	1.5	1.7	1.8	—	—	—	—
	1500 rpm	0.40	0.45	0.45	0.5	0.5	0.6	0.6	0.7	0.8	0.8	0.9	1.0	—	—	—	—	—	—	—	—	—
	2000 rpm	0.35	0.40	0.40	0.4	0.5	0.5	0.5	0.6	0.7	—	—	—	—	—	—	—	—	—	—	—	—
	3000 rpm	0.30	0.35	0.35	0.4	0.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—



Advice for assembly

The permissible displacement figures of the flexible REVOLEX® KX couplings specified are general standard values taking into account the load of the coupling up to the rated torque T_{KN} of the coupling and an ambient temperature of +30 °C. The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. See KTR assembly instructions, KTR standard 49410 on our homepage www.ktr.com.



REVOLEX® KX-D

Flexible pin & bush coupling

Material cast

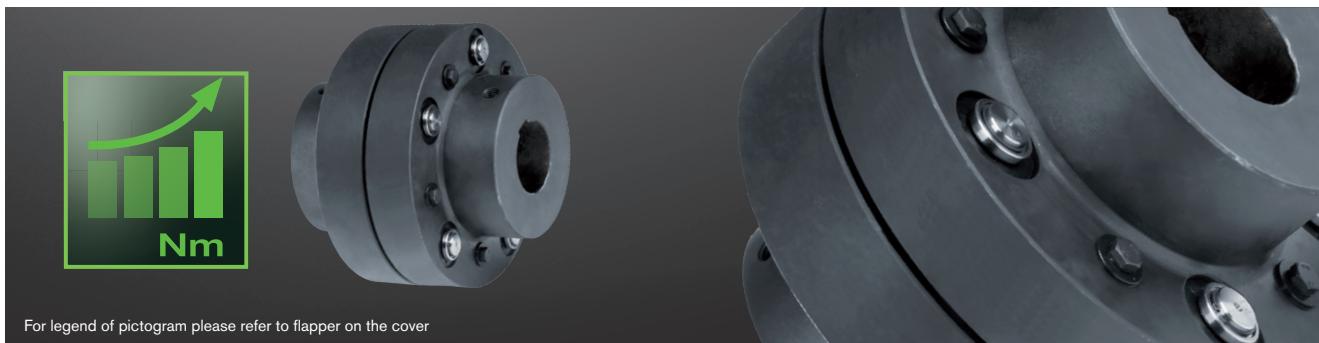

Components

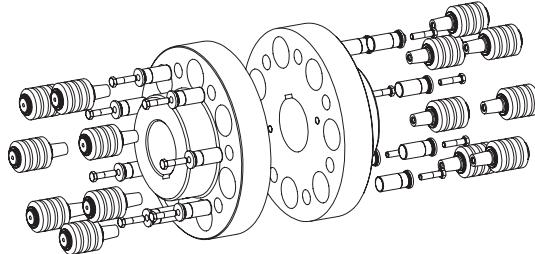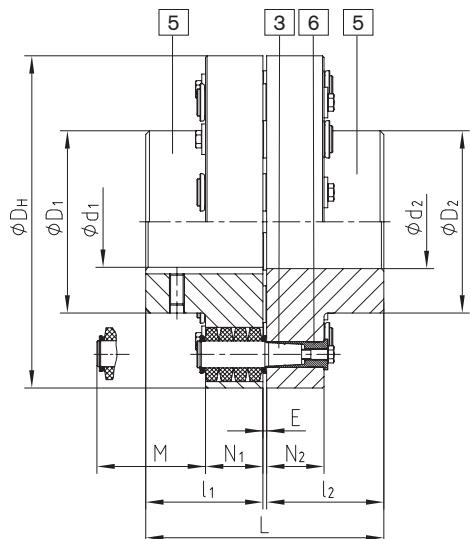

Components of type KX-D:
5 = Hub part 5
3 = Pins complete

6 = KX-D sleeve (hardened and corrosion-protected)

Size	Torque ¹⁾ [Nm]		Max. speed ²⁾ [rpm]	Finish bore (min.-max.)	Dimensions [mm]							Mass moment of inertia ³⁾ [kgm ²]	Weight ³⁾ [kg]	
	T _{KN}	T _{K max}			d ₁ , d ₂	L	l ₁ , l ₂	E	D _H	D ₁ , D ₂	N ₁ , N ₂	M*		
KX-D 105	9400	18800	2000	38-110	237	117	3	330	180	56	76	100	0.907	68
KX-D 120	15200	30400	1800	45-125	270	132	6	370	206	76	100	100	1.867	108
KX-D 135	20000	40000	1600	75-140	300	147	6	419	230	76	100	100	3.144	145
KX-D 150	25000	50000	1450	85-160	336	165	6	457	256	76	100	100	4.573	180
KX-D 170	41000	82000	1250	95-180	382	188	6	533	292	92	130	130	10.259	291
KX-D 190	54000	108000	1100	110-205	428	211	6	597	330	92	130	130	16.601	385
KX-D 215	67500	135000	1000	125-230	480	237	6	660	368	92	130	130	25.495	498
KX-D 240	98000	196000	900	140-250	534	264	6	737	407	122	170	170	50.147	760
KX-D 265	134000	268000	800	160-285	590	292	6	826	457	122	170	170	80.796	997
KX-D 280	170000	340000	720	180-315	628	311	6	927	508	122	170	170	129.979	1301
KX-D 305	205000	410000	675	180-330	654	324	6	991	533	122	170	170	170.016	1509
KX-D 330	265000	530000	625	200-355	666	330	6	1067	572	122	170	170	227.451	1755
KX-D 355	350000	700000	575	225-380	721	356	9	1156	610	164	220	220	415.259	2263
KX-D 370	430000	860000	535	225-450	773	382	9	1250	720	164	220	220	586.686	2701

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

* Drop-out center dimension required

¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

²⁾ Higher speeds on request.

³⁾ Referring to max. bore

Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dyn. balancing is recommended.

■ = Pilot bored available from stock



Ordering example:

REVOLEX® KX-D 170	GJL	Ø120	Ø150
Type and size of coupling	Material	Finish bore	Finish bore



REVOLEX® KX-D

Flexible pin & bush coupling

Material steel

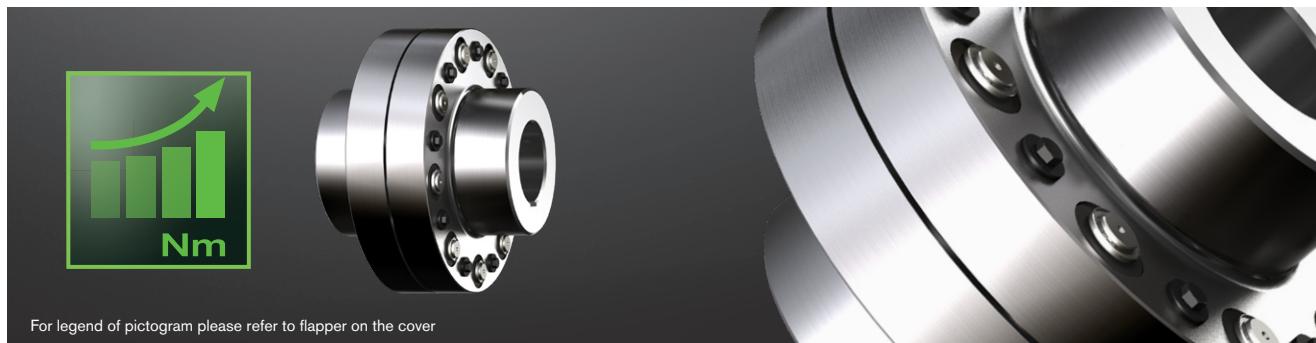

Components

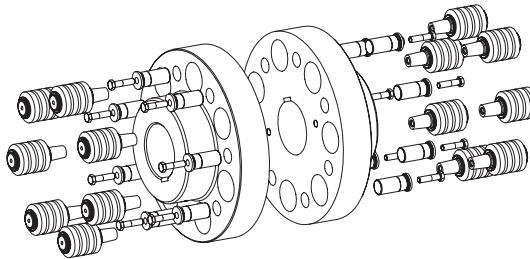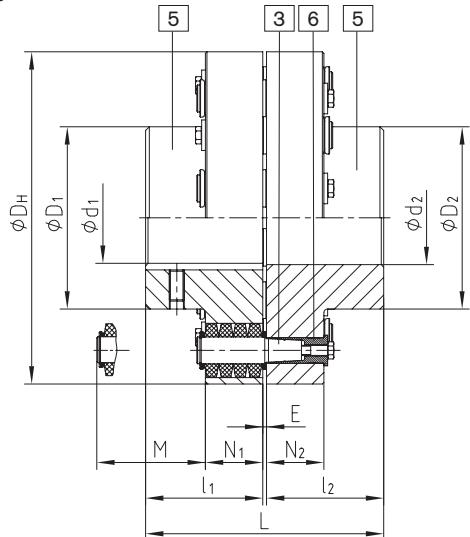

Components of type KX-D:
5 = Hub part 5
3 = Pins complete

6 = KX-D sleeve (hardened and corrosion-protected)

Size	Torque ¹⁾ [Nm]		Max. speed ²⁾ [rpm]	Finish bore (min.-max.)	Dimensions [mm]							Mass moment of inertia ³⁾ [kgm ²]	Weight ³⁾ [kg]
	T _{KN}	T _{K max}			d ₁ , d ₂	L	l ₁ , l ₂	E	D _H	D ₁ , D ₂	N ₁ , N ₂	M*	
KX-D 75	4300	8600	4500	0-100	193	95	3	255	136	56	76	0.325	39
KX-D 85	5500	11000	4175	0-110	213	105	3	274	152	56	76	0.440	46
KX-D 95	7200	14400	3825	0-125	227	112	3	298	168	56	76	0.624	56
KX-D 105	9400	18800	3475	0-130	237	117	3	330	180	56	76	0.907	80
KX-D 120	15200	30400	3100	0-150	270	132	6	370	206	76	100	1.867	124
KX-D 135	20000	40000	2725	75-170	300	147	6	419	230	76	100	3.144	165
KX-D 150	25000	50000	2500	85-190	336	165	6	457	256	76	100	4.573	205
KX-D 170	41000	82000	2150	95-220	382	188	6	533	292	92	130	10.259	322
KX-D 190	54000	108000	1900	110-245	428	211	6	597	330	92	130	16.601	431
KX-D 215	67500	135000	1725	125-275	480	237	6	660	368	92	130	25.495	559
KX-D 240	98000	196000	1550	140-310	534	264	6	737	407	122	170	50.147	833
KX-D 265	134000	268000	1375	160-350	590	292	6	826	457	122	170	80.796	1099
KX-D 280	170000	340000	1225	180-385	628	311	6	927	508	122	170	129.979	1436
KX-D 305	205000	410000	1150	180-405	654	324	6	991	533	122	170	170.016	1669
KX-D 330	265000	530000	1075	200-435	666	330	6	1067	572	122	170	227.451	1954
KX-D 355	350000	700000	975	225-450	721	356	9	1156	610	164	220	415.259	2451
KX-D 370	430000	860000	900	225-530	773	382	9	1250	720	164	220	584.686	2925
KX-D 470	520000	1040000	855	240-520 ⁴⁾	969 ⁴⁾	480 ⁴⁾	9	1340	705 ⁴⁾	164	220	785.489	3631
KX-D 520	810000	1620000	760	240-520 ⁴⁾	1089 ⁴⁾	540 ⁴⁾	9	1540	780 ⁴⁾	164	220	1264.725	5155
KX-D 590	1000000	2000000	680	260-590 ⁴⁾	1212 ⁴⁾	600 ⁴⁾	12	1735	885 ⁴⁾	164	220	2081.885	6895
KX-D 650	1350000	2700000	610	280-650 ⁴⁾	1332 ⁴⁾	660 ⁴⁾	12	1935	975 ⁴⁾	164	220	3228.297	8893

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

* Drop-out center dimension required. ¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

²⁾ Higher speeds on request. ³⁾ Referring to max. bore. ⁴⁾ Variable according to customer's requests

Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9]. If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dyn. balancing is recommended.


■ = Pilot bored available from stock

Ordering example:	REVOLEX® KX-D 170	Steel	Ø120	Ø150
	Type and size of coupling	Material	Finish bore	Finish bore

REVOLEX® KX-D SB

Flexible pin & bush coupling

With brake disk

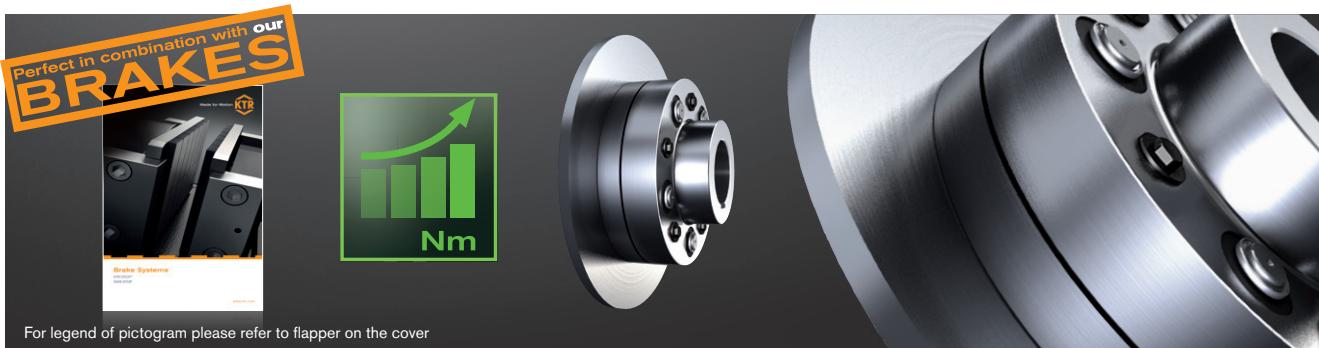

Size	Torque ¹⁾ [Nm] KX-D		Finish bore KX-D (min. - max.)		Dimensions [mm]								
	T _{KN}	T _{K max}	GJL d ₁ , d ₂	Steel d ₁ , d ₂	L	l ₁ , l ₂	E	D _H	D ₁	N ₁	N ₂	N ₃	M*
105	9400	18800	34-110	0-130	237	117	3	330	180	56	29	55	76
120	15200	30400	50-125	0-150	270	132	6	370	206	76	45	75	100
135	20000	40000	70-140	70-170	300	147	6	419	230	76	45	75	100
150	25000	50000	82-160	82-190	336	165	6	457	256	76	45	75	100
170	41000	82000	95-180	95-220	382	188	6	533	292	92	62	91	130
190	54000	108000	110-205	110-245	428	211	6	597	330	92	62	91	130
215	67500	135000	125-230	125-275	480	237	6	660	368	92	62	91	145
240	98000	196000	140-250	140-310	534	264	6	737	407	122	75	121	167

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

Selection of coupling/brake disk dimension N

Size	Brake disk ØA x b ²⁾					
	Ø560x30	Ø630x30	Ø710x30	Ø800x30	Ø900x30	Ø1000x30
	KX-D	KX-D	KX-D	KX-D	KX-D	KX-D
105	47	47				
120	42	42				
135		57	57			
150			75	75		
170			82	82		
190				105	105	
215				131	131	131
240				128	128	128

* Drop-out center dimension required

¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

²⁾ Maximum circumferential speed v = 60 m/s referring to the maximum outside diameter.


Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dynamic balancing is necessary (referring to outside diameter ØA).

Ordering example:

REVOLEX® KX 170	SB	Ø710 x 30	1 - Ø120	2SB - Ø150
Type and size of coupling	Type	Brake disk	Finish bore	Finish bore


Components

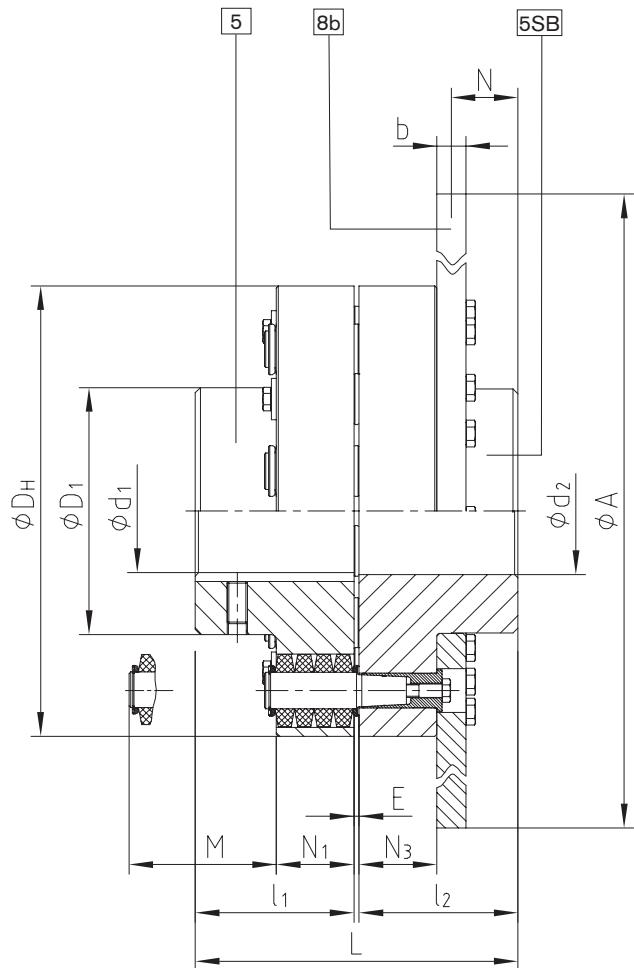

REVOLEX® KX-D with KTR 650 clamping set

Flexible pin & bush coupling

Material steel

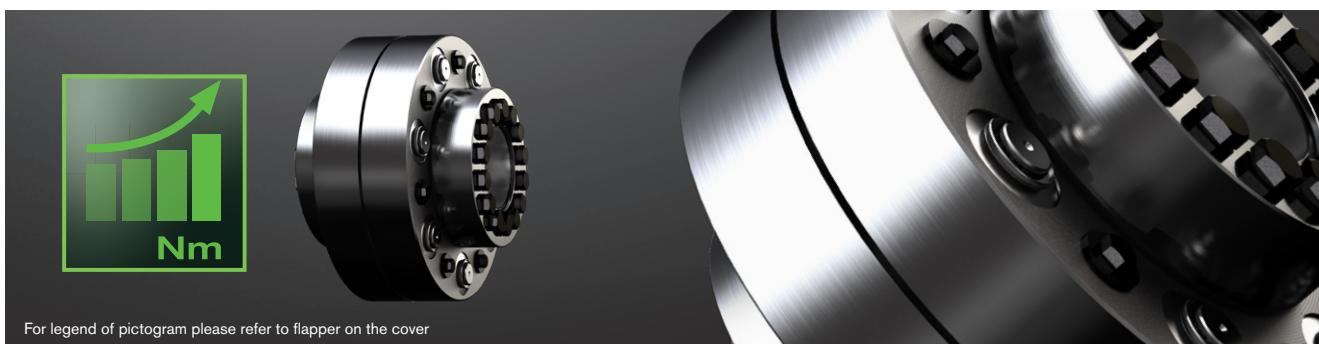

REVOLEX® KX-D						CLAMPPEX® KTR 650					
Size	D _H	L ₁ , L ₂	N	E	T _{KN} ¹⁾ [Nm]	Dimensions [mm]		Screws			Transmittable torque T [Nm]
						Max. perm. size d x D	T _K	Size	Length	Number	
105	330	123	56	3	9400	100 x 197	156	M16	75	14	250
120	370	149	76	6	15200	110 x 215	166	M20	90	10	490
135	419	157	76	6	20000	120 x 230	186	M20	90	14	490
150	457	168	76	6	25000	140 x 290	216	M20	100	16	490
170	533	205	92	6	41000	180 x 340	276	M24	130	16	840
190	597	214	92	6	54000	220 x 405	320	M27	140	18	1250
215	660	232	92	6	67500	260 x 460	356	M27	160	21	1250
240	737	254	122	6	98000	240 x 430	340	M27	150	20	1250
265	826	280	122	6	134000	320 x 550	402	M27	180	24	1250
280	927	313	122	6	170000	390 x 630	486	M30	200	24	1700
305	991	321	122	6	205000	440 x 700	534	M30	220	28	1700
330	1067	321	122	6	265000	440 x 700	534	M30	220	28	1700

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.


¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dynamic balancing is necessary (referring to outside diameter ØA).


CLAMPPEX® KTR 650							
d x D	Dimensions [mm]		Screws				Transmittable torque T [Nm]
	B1/B2	T _K	Size	Length	Number	T _A [Nm]	
100 x 215	73	166	M20	90	10	490	22400
110 x 230	81	186	M20	90	14	490	33600
120 x 290	92	216	M20	100	16	490	42100
130 x 290	92	216	M20	100	16	490	46700
140 x 320	102	234	M24	110	14	840	63600
150 x 320	102	234	M24	110	14	840	63600
160 x 340	113	276	M24	130	16	840	85800
170 x 340	113	276	M24	130	16	840	85800
180 x 370	117	290	M27	140	16	1,250	119700
190 x 370	117	290	M27	140	16	1,250	119700
200 x 405	122	320	M27	140	18	1,250	148600
210 x 405	122	320	M27	140	18	1,250	148600
220 x 430	132	340	M27	150	20	1,250	175400
230 x 430	132	340	M27	150	20	1,250	175400
240 x 460	140	356	M27	160	21	1,250	192900
250 x 460	140	356	M27	160	21	1,250	192900
260 x 485	147	360	M27	180	21	1,250	195000
270 x 485	147	360	M27	180	21	1,250	195000
280 x 520	150	380	M27	180	21	1,250	205900
290 x 520	150	380	M27	180	21	1,250	205900
300 x 550	158	402	M27	180	24	1,250	248900
310 x 550	158	402	M27	180	24	1,250	248900
320 x 570	164	424	M27	180	24	1,250	262500
330 x 570	164	424	M27	180	24	1,250	262500
340 x 610	171	454	M30	190	24	1,700	344000
350 x 610	171	454	M30	190	24	1,700	344000

Ordering example:


REVOLEX® KX-D 170	Steel	KTR 650 Ø120	KTR 650 Ø150
Type and size of coupling	Material	KTR 650 for shaft diameter	KTR 650 for shaft diameter

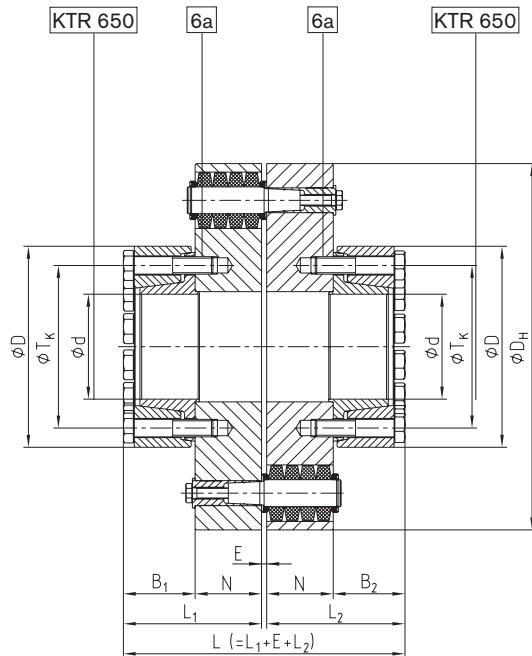Components**Other types**





Type AB with limitation of axial backlash

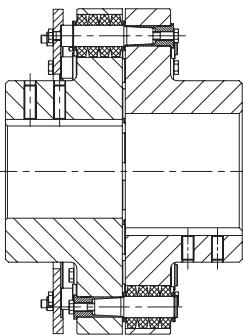

Intermediate shaft type with RADEX®-N

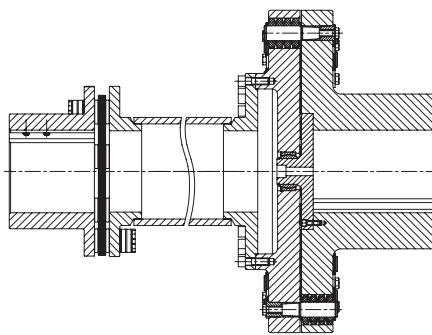


Backlash-free type

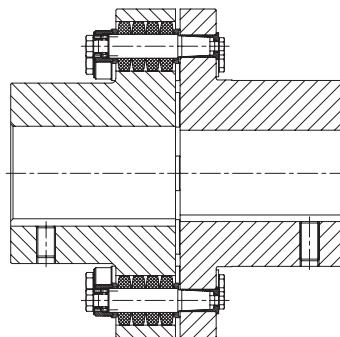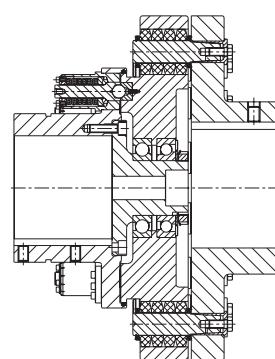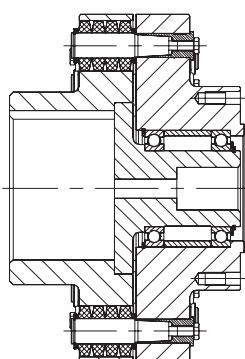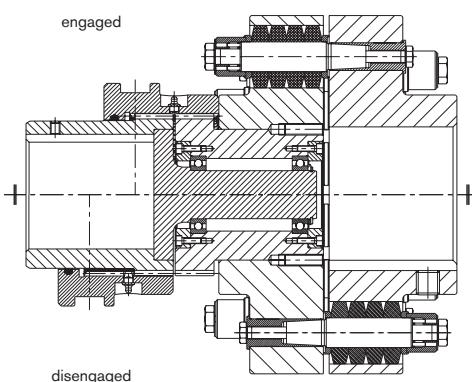Type KX-D SD
shiftable with shiftable linkageType KX-D
with cardan shaft connectionType KX-D
with KTR-SI FRE

REVOLEX® KX-D

Flexible pin & bush coupling

Technical data of pins

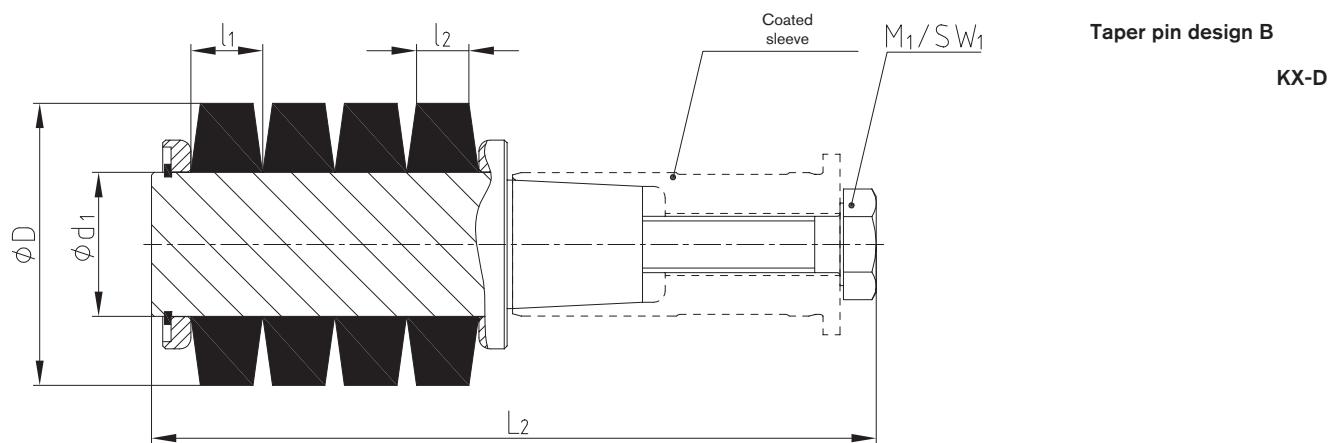


Size	Technical data										
	Size	Pin		Elastomer ring NBR 80 Shore A			Pin		Screw DIN EN ISO 4014/4017	Tightening torque T_A [Nm]	
		Number	KX-D	D	l ₁	l ₂	d ₁	L ₂	M ₁	SW ₁	
75		10									
85	3	12									
95		14		50			25.5	129	M10	16	67
105		16									
120		14									
135	4	16		63			30.7	178	M12	18	115
150		18									
170		14									
190	5	16		85.5			43.2	220	M16	24	290
215		18									
240		14									
265		16									
280	6	18		113.7			58.4	290	M24	36	970
305		20									
330		24									
355		16									
370	7	20		150			75	393	M30	46	1350
470		22									
520		18									
590	8	20		200			95	523	M36	55	2250
650		24									


General information on the elastomer rings			
Material	Perbunan [NBR]	Natural rubber [NR]	Perbunan [NBR]
Hardness	80 Shore A	80 Shore A	80 Shore A
Permanent temperature range [°C]	-30 to +80	-50 to +70	-30 to +80
Max. temperature (short time) [°C]	-50 to +120	-	-
Colour	black	black	blue
Operating range	STANDARD	sub-zero temperatures	electrically insulating and backlash-free, e. g. cableway drives

Assembly/disassembly


- ① Unscrew screw

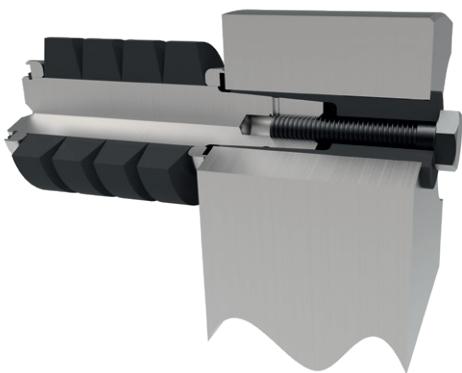


- ② Seal the screw in this area with sealing tape (e. g. Loctite® 55)




- ③ Fill the tapped hole with standard grease for 3/4

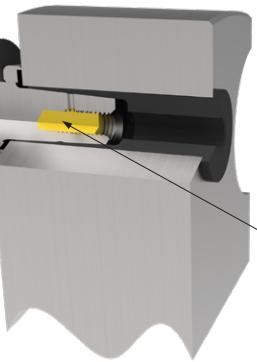

- ④ Screw in the screw (no special tools required)

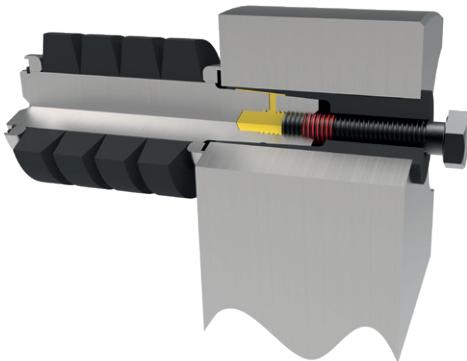

- ⑤ The hydraulic pressure is transmitted to the pin
pressing it out of the taper fit.

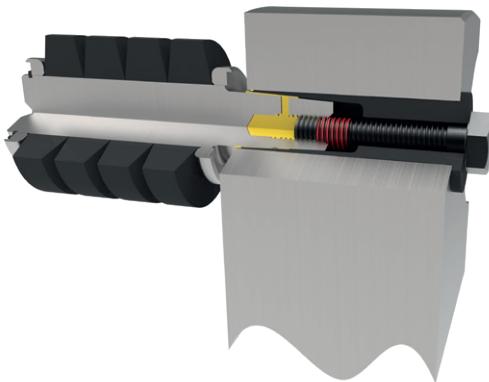



Types and operating description	88
---------------------------------	----

BoWex®

Technical data	90
Displacements	91
Cylindrical and taper bores and selection of standard IEC motors	92
Type junior and junior M plug-in couplings made of nylon	93
Type M, type I and type M...C with explosion protection	94
Type AS and type Spec.-I	96
Type SG, type SSR and type Spec.-I/CD	97
Type SD / SD-D	98
Type SD1 with slip ring and shiftable linkage	100
Type GT	102
Type ZR with a long PA sleeve	103
Type M made of corrosion-resistant materials	104
Taper bores	106
Spline hubs and inch bores	107

GEARex®

Type FA, FB and FAB	108
Type DA, DB and DAB	110
Type FBR and DBR	112
Type FH and DH	114
Type SD	116
Type FR and DR	118
Displacements	120
Flange dimensions in accordance with AGMA 9008-B00	121

Please note: torque increase

Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of rated torques with some sizes of this series.

BoWex®**GEARex®**

GEAR COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of gear couplings

Product	BoWex®	GEARex®
Type	Curved-tooth gear coupling®	All-steel gear coupling
Properties		
AGMA		●
Torsionally stiff	●	●
Damping vibrations	HEW Compact	
Maintenance-free	●	
Axial plug-in	●	
Compensating for misalignment	●	●
Fail-safe		●
Shear type	●	
Electrical insulation	●	○
Special features		
Variation	very high extensive basic programme available from stock while customised solutions can be realized	average extensive basic programme available from stock while customised solutions can be realized
Applications / core industries	pump drives, general engineering & hydraulics, food industry, ...	heavy engineering transport, logistics, cement industry, ...
Torque range T _{KN} [Nm]		
Max.	2,500	2,750,000
Speed range n [rpm] *		
Max.	14,000	8,500
Hub materials available		
Nylon	●	
Quality steel (C45)	Size 65 - 125	up to size 85
Alloyed Q & T steel (42CrMo4V)		from size 90
Sintered steel » subject to mould	Size 14 - 65	
Stainless steel	●	
Other special materials possible	●	●
Corrosion-protected types	○	○
Sleeve (standard and special)		
Material	polyamide, polyamide with carbon fibre share	-
natural rubber	highly flexible	-
Temperature range [°C] min./max.		
Standard	-40/+100	-20/+80
Special	-50/+120	-40/+120

● ≈ Standard

○ ≈ On request

* ≈ Depending on size




In KTR's Power Transmission Center the performance of our products is subjected to testing. Great emphasis is put on quality assurance.

GEAR COUPLINGS

TYPES AND OPERATING DESCRIPTION

Product finder of gear couplings

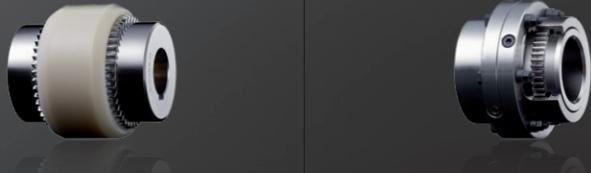


Product	BoWex®	GEAREx®
Type	Curved-tooth gear coupling®	All-steel gear coupling
Geometries		
Design	compact	short/compact
Mass moment of inertia	low	average
Shaft distance dimension	very low	very low
Types (extract)		
Shiftable coupling type	SD, SD-1, SD-D, SD-D3	SD
Flange type	-	FA, FB, FAB, FH, FR, FBR
Cover type	-	DA, DB, DAB, DH, DR, DBR
Suitable for horizontal assembly	Standard	Standard
Suitable for vertical assembly	Standard	VD
Sleeve can be disassembled radially » without displacing driving/driven side	GT	-
Intermediate shaft types » bridging larger shaft distances	ZR	FH, DH
Single-cardanic	HEW Compact	FR, DR
Double-cardanic » compensating for big displacements » lower restoring forces	Standard	Standard
Certifications/type examinations		
ATEX	●	●
DNV/GL	●	●
Bureau Veritas	●	
ABS		●
GOST R/GOST TR	●	
Curved-tooth gear principle	●	●

● ≈ Standard

Details on spline

Hub with crowned spline (BoWex® and GEAREx®)

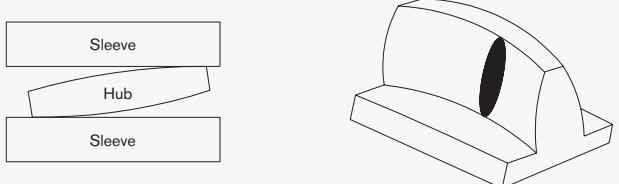

Based on the operating principle of the renowned crowned gear technology, edge pressure in the spline is avoided with angular and radial displacements.


BoWex®:

The smooth and hard surface of the BoWex® sleeve (crystalline structure) and the high thermal stability and resistance to lubricants, fuels, hydraulic liquids, solvents, etc. make polyamide an ideal material for components stressed by sliding, particularly for coupling manufacture.

GEAREx®:

In order to ensure regular and controlled lubrication in assembled condition, two connections for hydraulics are arranged opposite to each other radially on each coupling sleeve. Accordingly a complete GEAREx® coupling has four connections offset to each other by 90°.

Hub with spur toothing

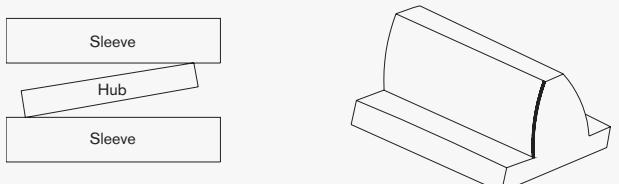


Technical data

Power, torque and speed							
Type and size		Power P [kW] / n [rpm]		Torque [Nm]			Max. speed [rpm]
		Rated	Max.	T _{KN}	T _{K max.}	T _{KW}	
Type plug-in coupling/ junior M	junior 14 / M-14	0.0005	0.010	5	10	2.5	
	junior 19 / M-19	0.0008	0.0017	8	16	4	6000
	junior 24 / M-24	0.0013	0.0025	12	24	6	
Type M I AS Spec.-I SG SSR	14	0.0010	0.003	10	30	5	14000
	19	0.0017	0.005	16	48	8	11800
	24	0.0021	0.006	20	60	10	10600
	28	0.0047	0.014	45	135	23	8500
	32	0.0063	0.019	60	180	30	7500
	38	0.0084	0.025	80	240	40	6700
	42	0.010	0.031	100	300	50	6000
	45 / 48	0.015	0.044	140	420	70	5600
	65	0.040	0.119	380	1140	190	4000
	80	0.073	0.22	700	2100	350	3150
	100	0.13	0.38	1200	3600	600	3000
	125	0.26	0.78	2500	7500	1250	2120
Type M..C GT	14	0.0015	0.0047	15	45	7.5	14000
	19	0.0025	0.0075	24	72	12	11800
	24	0.003	0.009	30	90	15	10600
	28	0.007	0.022	70	210	35	8500
	32	0.009	0.028	90	270	45	7500
	38	0.013	0.038	120	360	60	6700
	48	0.021	0.063	200	600	100	5600
	65	0.058	0.18	560	1680	280	4000
	80	0.105	0.311	1000	3000	500	3150
Type HEW Compact	T50 Sh	0.0236	0.0471	200	400	50	
	42-130 T65 Sh	0.0283	0.0565	270	540	68	7300
	T70 Sh	0.0330	0.0660	320	640	80	
	T50 Sh	0.0628	0.1257	550	1100	138	
	65-180 T65 Sh	0.0785	0.1571	740	1500	185	5500
	T70 Sh	0.0890	0.1780	860	1700	215	5500
	T50 Sh	0.1414	0.2827	1250	2500	313	
	80-225 T65 Sh	0.1728	0.3455	1600	3200	400	4400
	T70 Sh	0.2042	0.4084	1900	3800	475	
	T50 Sh	0.3141	0.6283	2750	5500	688	
	100-305 T65 Sh	0.4084	0.8168	3900	7800	975	3200
	T70 Sh	0.4712	0.9424	4500	9000	1125	
125-365	T50 Sh	0.6283	1.2565	5500	11000	1375	
	T65 Sh	0.7853	1.5707	7500	15000	1875	2900
	T70 Sh	0.8901	1.7801	8400	16800	2100	


Setscrews

Thread dimensions for setscrews, BoWex® coupling hubs with cylindrical bore.

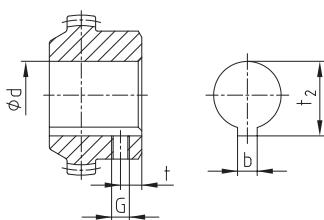

Position of the thread for setscrew BoWex® M-14 to M-24 opposite the keyway

BoWex® M-28 to I-125 on the keyway

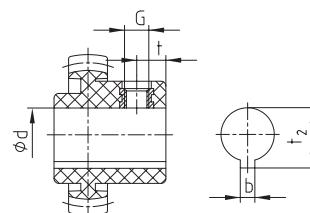


Position of thread with BoWex® junior plug-in coupling and junior M coupling

BoWex® coupling hubs							
Size Dimensions	14	28	42	65	80	100	125
Thread G	M5	M8	M10	M10	M12	M16	
Distance t	6	10	15 ¹⁾ 20	20	30	40	
Tightening torque T _A [Nm]	2	10	17	17	40	80	

BoWex® junior coupling hubs			
Size Dimensions	14	19	24
Thread G	M5	M5	M5
Hub 1b - Distance t	6	6	6
Plug-in sleeve 2b - Distance t	8	10	10
Tightening torque T _A [Nm]	1.4	1.4	1.4

¹⁾ Length of hub 55 mm t = 15 mm, 70 mm t = 20 mm

Types of hubs



Type 1.0 hub
with feather keyway and setscrew

Positive-locking power transmission, permissible torque depending on the permissible surface pressure. Not suitable for backlash-free power transmission with heavily reversing operation.

Type 1.1 hub
without feather keyway, with setscrew

Non-positive torque transmission for crimp connections and adhesive bonds. (No ATEX approval)

Type 1.3 hub
with spline bore (see page 107)



Type 2.0 clamping hub
single slot without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection. Transmittable torques depending on bore diameter.

Type 2.1 clamping hub
single slot with feather keyway

Positive-locking power transmission with additional friction fit. The friction fit avoids or reduces reverse backlash. Surface pressure of the keyway connection is reduced.


Type 2.3 clamping hub
with spline bore (see page 107)

Other hub types on request.


Displacements

BoWex® couplings are double-cardanic compensating for axial, radial and angular shaft displacements in addition to transmitting the power so that damage on the driving or driven machine is prevented.


Axial displacement

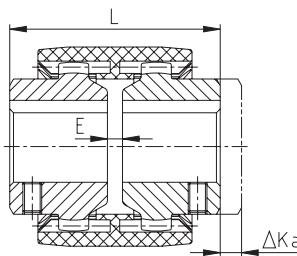


Radial displacement

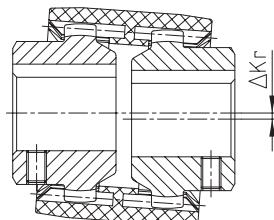

Angular displacement

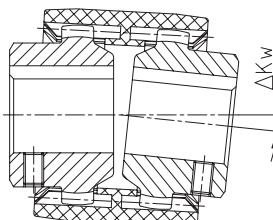

Radial and angular displacement

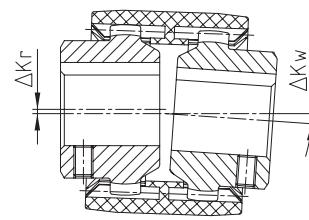

Displacements – type junior couplings

BoWex® size	Type junior plug-in coupling			Type junior M		
	14	19	24	14	19	24
Max. axial displacement ΔK_a [mm]	± 1	± 1	± 1	± 1	± 1	± 1
Max. radial displacement with $n=1500$ rpm ΔK_r [mm]	± 0.1	± 0.1	± 0.1	± 0.3	± 0.3	± 0.4
Max. radial displacement with $n=3000$ rpm ΔK_r [mm]	± 0.1	± 0.1	± 0.1	± 0.3	± 0.3	± 0.4
Max. angular displacement with $n=1500$ rpm ΔK_w [degree]	± 1.0	± 1.0	± 0.9	± 1.0	± 1.0	± 0.9
Max. angular displacement with $n=3000$ rpm ΔK_w [degree]	± 0.7	± 0.7	± 0.6	± 0.7	± 0.7	± 0.6

Displacements – type M, M.C, I, AS, Spec.-I, SG and SSR

BoWex® size	14	19	24	28	32	38	42	48	65	80	100	125
Max. axial displacement ΔK_a [mm]	± 1											
Max. radial displacement with $n=1500$ rpm ΔK_r [mm]	± 0.30	± 0.30	± 0.35	± 0.35	± 0.35	± 0.40	± 0.40	± 0.40	± 0.45	± 0.45	± 0.45	± 0.45
Max. radial displacement with $n=3000$ rpm ΔK_r [mm]	± 0.20	± 0.20	± 0.23	± 0.23	± 0.23	± 0.25	± 0.25	± 0.25	± 0.28	± 0.28	± 0.28	± 0.28
Max. angular displacement with $n=1500$ rpm ΔK_w [degree]	± 1.0	± 1.0	± 0.9	± 0.7	± 0.6	± 0.6	± 0.4					
Max. angular displacement with $n=3000$ rpm ΔK_w [degree]	± 0.7	± 0.7	± 0.6	± 0.5	± 0.4	± 0.4	± 0.3					

Displacements – type GT

BoWex® size	28	38	48	65	42-130			65-180			80-225			100-305			125-365		
	T50	T65	T70	T50	T65	T70	T50	T65	T70	T50	T65	T70	T40	T52	T65				
Max. axial displacement ΔK_a [mm]	± 1	± 1	± 1	± 1	± 2			± 2			± 2			± 2			± 2		
Max. radial displacement with $n=1500$ rpm ΔK_r [mm]	± 1	± 1	± 1.4	± 1.4	± 1.1	± 1	± 0.5	± 1.6	± 1.5	± 0.7	± 1.8	± 1.7	± 2.2	± 2.2	± 2	± 1	± 2.5	± 2.3	± 1.1
Max. radial displacement with $n=3000$ rpm ΔK_r [mm]	± 0.6	± 0.6	± 1	± 1	± 0.55	± 0.5	± 0.25	± 0.8	± 0.75	± 0.35	± 0.9	± 0.85	± 0.9	± 1.1	± 1	± 0.5	± 1.25	± 1.15	± 0.55
Max. angular displacement with $n=1500$ rpm ΔK_w [degree]	± 1	± 1	± 0.9	± 0.9	± 1	± 0.75	± 0.5	± 1	± 0.75	± 0.5	± 1	± 0.75	± 0.4	± 1	± 0.75	± 0.5	± 1	± 0.75	± 0.5
Max. angular displacement with $n=3000$ rpm ΔK_w [degree]	± 0.7	± 0.7	± 0.6	± 0.6	± 0.5	± 0.4	± 0.25	± 0.5	± 0.4	± 0.25	± 0.5	± 0.4	± 0.5	± 0.5	± 0.25	± 0.25	± 0.5	± 0.4	± 0.25

The permissible displacement figures of the BoWex® couplings specified are general standard values taking into account the load of the coupling up to the rated torque T_{KN} of the coupling. With different operating conditions please order our data sheet for displacements of BoWex® KTR-N 20140.

The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. Detailed mounting instructions are shown on our homepage www.ktr.com.

For cylindrical bores, taper/inch bores see selection of standard IEC motors

		Stock programme of cylindrical finish bores [mm] H7 feather keyway acc. to DIN 6885 sheet 1 [JS9] and setscrew																												
BoWex® Size	un/pilot bored	08	010	011	012	014	015	016	017	018	019	020	022	024	025	028	030	032	035	038	040	042	045	048	050	055	060	065	070	075
14	●■	●	●	●	●	●	●	●	●	●	●	●	●	●	●															
19	●■		●	●	●	●	●	●	●	●	●	●	●	●	●															
24	●■		●	●	●	●	●	●	●	●	●	●	●	●	●															
28	●■			●	●	●	●	●	●	●	●	●	●	●	●															
32	●■					●																								
38	●■						●																							
42	●■							●																						
48	●■								●																					
65	●■									●																				
80	●										●																			

● Standard length

■ Standard lengthened

		Taper and inch bores												Inch bores															
		Taper 1:5						Taper 1:8						Inch bores															
Code d +0.05 b JS9 t +0.2	A-10 9.85 2	B-17 16.85 3	C-20 19.85 4	D-25 24.85 5	E-30 29.85 6	N/1 9.7 2.4	N1d 14 3	N/2 17.28 3.2	N/2a 17.28 4	N/3 22 3.99	Ta 12.7 3.17 14.3	DNC 13.45 3.17 14.9	Ed 15.87 4.75 18.1	A 19.05 4.78 21.3	G 22.22 4.75 24.7	F 22.22 6.38 25.2	Bs 25.38 6.37 28.3	Hs 25.4 6.35 28.7	K 31.75 7.93 35.4										
14	●					●								●															
19		●				●								●															
24	●	●				●		●	●					●															
28	●	●				●	●	●	●					●															
32	●																									●			
38	●							●	●											●									
42	●			●				●	●	●									●		●	●							
48																													
65																										●			

Other dimensions on request.


● Standard length

A. C. motor Size	Motor power with 50 Hz n = 3000 [rpm]			Motor power with 50 Hz n = 1500 [rpm]			Motor power with 50 Hz n = 1000 [rpm]			Cylindrical shaft ends d x l [mm] 3000 ≤ 1500	
	kW	T [Nm]	BoWex® coupling	kW	T [Nm]	BoWex® coupling	kW	T [Nm]	BoWex® coupling		
56	0.09 0.12	0.32 0.41	14	0.06 0.09	0.43 0.64	14	0.037 0.045	0.43 0.52	14	9 x 20	
63	0.18 0.25	0.62 0.86		0.12 0.18	0.88 1.3		0.06 0.09	0.72 1.1		11 x 23	
71	0.37 0.55	1.3 1.9	28	0.25 0.37	1.8 2.5	28	0.18 0.25	2.0 2.7	28	14 x 30	
80	0.75 1.1	2.5 3.7		0.55 0.75	3.7 5.1		0.37 0.55	3.9 5.8		19 x 40	
90 S	1.5	5.0	24	1.1	7.5	24	0.75	8.0	24	24 x 50	
90 L	2.2	7.4		1.5	10		1.1	12			
100 L	3	9.8	48	2.2	15	48	1.5	15	48	28 x 60	
112 M	4	13		3	20		2.2	22			
132 S	5.5 7.5	18 25	38	5.5	36	38	3	30	38	38 x 80	
132 M				7.5	49		4	40			
160 M	11 15	36 49	80	11	72	100	7.5	75	100	42 x 110	
160 L	18.5	60		15	98		11	108			
180 M	22	71	125	18.5	121	125			100	48 x 110	
180 L				22	144		15	148			
200 L	30 37	97 120	65	30	196	125	18.5 22	181 215	65	55 x 110	
225 S				37	240					55 x 110	
225 M	45	145	355	45	292	355	30	293	125	60 x 140	
250 M	55	177		55	356		37	361		65 x 140	
280 S	75	241	315	75	484	315	45	438	100	75 x 140	
280 M	90	289		90	581		55	535			
315 S	110	353	80	110	707	100	75	727	125	80 x 170	
315 M	132	423		132	849		90	873			
	160	513	355	160	1030	125	110	1070	100	65 x 140	
315 L	200	641		200	1290		132	1280			
	250	801	355	250	1610	315	200	1930	125	85 x 170	
315	315	1010		315	2020		250	2420			
	355	1140	400	355	2280	315	315	3040	75 x 140	95 x 170	
355	400	1280		400	2560		315	3040			


Torque T $\hat{\wedge}$ rated torque according to Siemens catalogue.

BoWex® junior and junior M Curved-tooth gear coupling®


Plug-in coupling made of nylon (two-part and three-part)

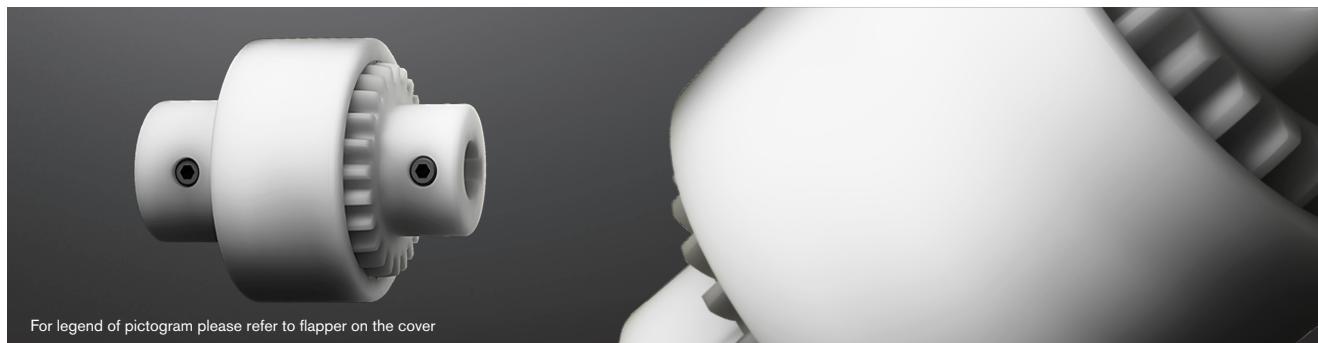

Components

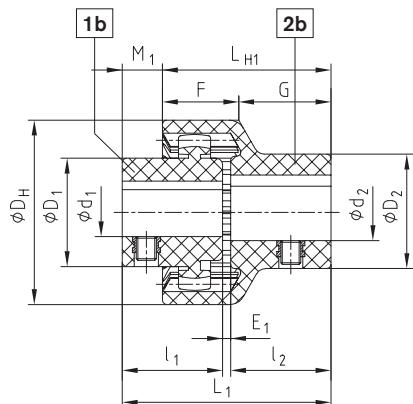

Type junior plug-in coupling (two-part)

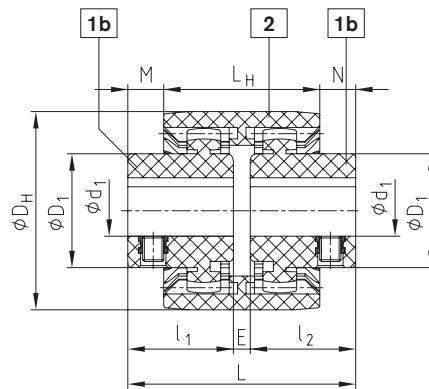

Type junior M coupling (three-part)

BoWex® junior plug-in coupling (two-part) and BoWex® junior M (three-part)												Max. speed [rpm]							
Size	Torque [Nm]		Finish bore				Dimensions [mm]												
			Hub Component 1b ¹⁾		Plug-in sleeve Component 2b ¹⁾		D _H	I ₁ , I ₂	E ₁	L ₁	L _{H1}	M ₁	F	G	E	L	L _H	M, N	
	T _{KN}	T _{K max.}	d ₁ ¹⁾	D ₁	d ₂ ¹⁾	D ₂													
14 M-14	5	10	Ø6, Ø7, Ø8, Ø9	22	Ø6, Ø7, Ø8	22	40	23	2	48	40	8	18.5	21.5	4	50	37	6.5	6000
			Ø10, Ø11	25	Ø10, Ø11	25													
			Ø12, Ø14	26	Ø12, Ø14	26													
19 M-19	8	16	Ø10, Ø11, Ø12, Ø14	27	Ø12, Ø14,	29	47	25	2	52	42	10	19.0	23.0	4	54	37	8.5	6000
			Ø15, Ø16	30	Ø15, Ø16	29													
			Ø19	32	Ø19	35													
24 M-24	12	24	Ø10, Ø11, Ø12	26			53	26	2	54	45	9	21.5	23.5	4	56	41	7.5	6000
			Ø14, Ø15, Ø16	32	Ø14, Ø16	32													
			Ø18, Ø19, Ø20	36	Ø19, Ø20	36													
			Ø24	38	Ø24	40													

¹⁾Finish bore with tolerance +0.05/-0.1; feather keyway ±0.08



Ordering example:

BoWex® junior 19	d ₁ Ø19	d ₂ Ø14
Coupling size two-part type or BoWex® junior M-19 three-part type	Finish bore	Finish bore


BoWex® M, I

Curved-tooth gear coupling®

Compact and maintenance-free

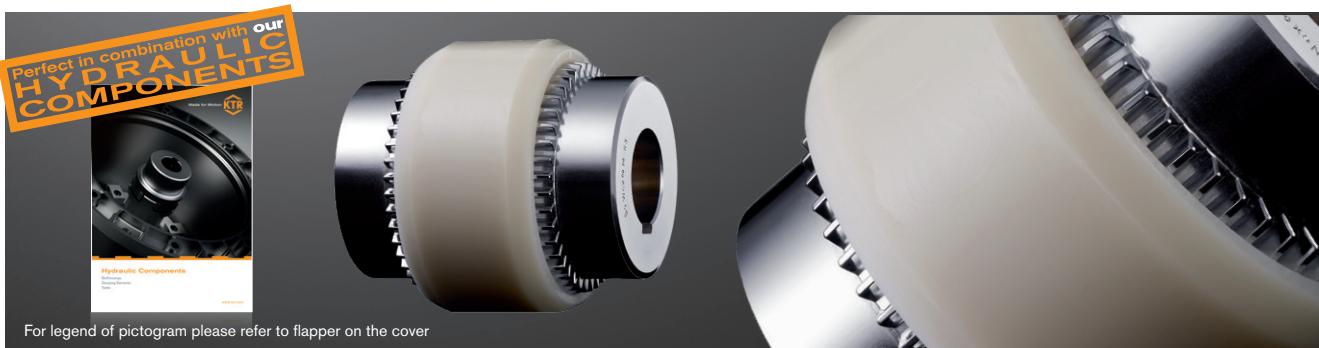

Components

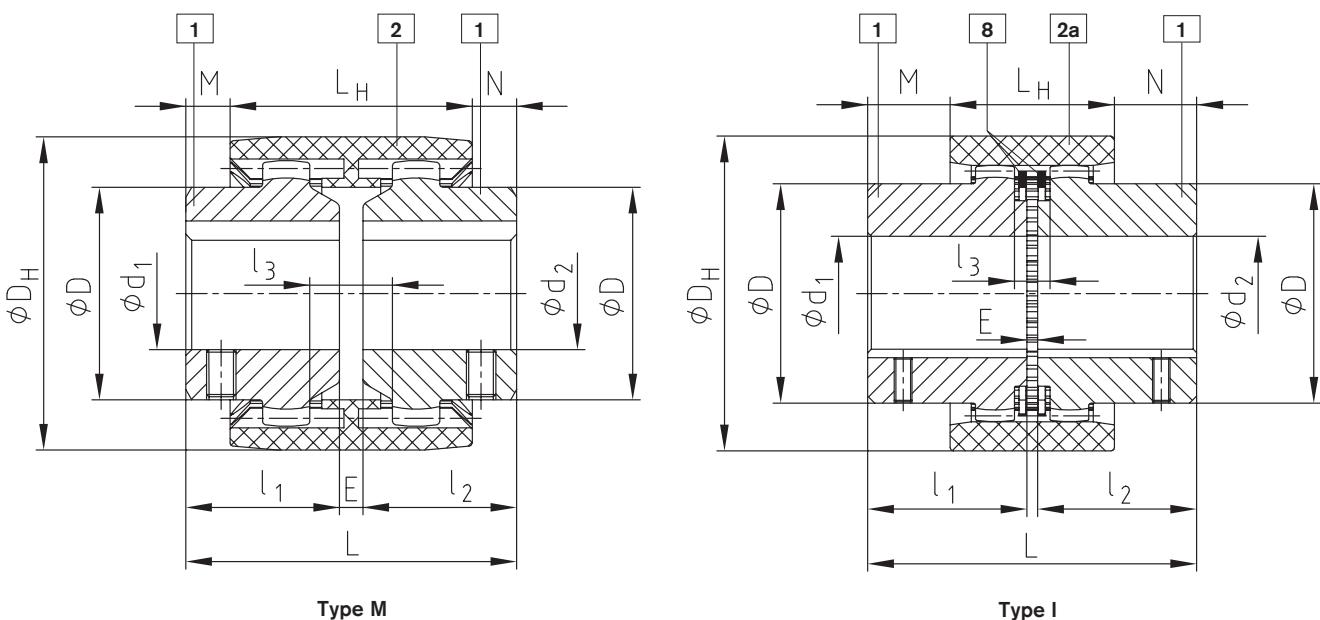

Size	Torque [Nm]			Finish bore d1, d2		Dimensions [mm]										Weight with max. bore [kg]			Mass moment of inertia J with max. bore [kgcm²]			
	T _{KN}	T _{KN} max.	T _{KW}	Pilot bored	Max.	l ₁ , l ₂	E	L	L _H	M, N	l ₃	D	D _H	Tip circle ØD _Z hub	Number of teeth	Hub lengthened max. l ₁ , l ₂	Sleeve	Hub	Total	Sleeve	Hub	Total
M-14	10	30	5	-	15	23	4	50	37	6.5	10	25	40	33	20	40	0.03	0.07	0.1	0.08	0.09	0.26
M-19	16	48	8	-	20	25	4	54	37	8.5	10	32	47	39	24	40	0.03	0.1	0.23	0.15	0.16	0.47
M-24	20	60	10	-	24	26	4	56	41	7.5	14	36	53	45	28	50	0.04	0.14	0.32	0.21	0.36	0.93
M-28	45	135	23	-	28	40	4	84	46	19	13	44	65	54	34	55	0.08	0.33	0.74	0.65	1.22	3.09
M-32	60	180	30	-	32	40	4	84	48	18	13	50	75	63	40	55	0.09	0.43	0.95	1.14	2.17	5.48
M-38	80	240	40	-	38	40	4	84	48	18	13	58	83	69	44	60	0.13	0.55	1.23	1.58	3.55	8.68
M-42	100	300	50	-	42	42	4	88	50	19	13	65	92	78	50	60	0.14	0.68	1.5	2.32	5.98	14.28
M-48	140	420	70	-	48	50	4	104	50	27	13	68	95	78	50	60	0.23	0.79	1.81	3.9	7.22	18.34
M-65	380	1140	190	21	65	55	4	114	68	23	16	96	132	110	42	70	0.55	1.9	4.35	21.2	31.8	84.8
I-80	700	2100	350	31	90	90	6	186	93	46.5	20	124	178	145	46	-	1.13	5.2	11.53	68.9	150.8	370.5
I-100	1200	3600	600	38	100	110	8	228	102	63	22	152	210	176	48	-	1.78	9.37	20.52	158.6	401.3	961.2
I-125	2500	7500	1250	45	125	140	10	290	134	78	30	192	270	225	54	-	3.88	19.44	42.76	562.9	1362.3	3287.5




Ordering example:

BoWex® M-28	d ₁ Ø20	d ₂ Ø28
Size and type of coupling	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)

BoWex® M...C

Curved-tooth gear coupling®

Compact and maintenance-free

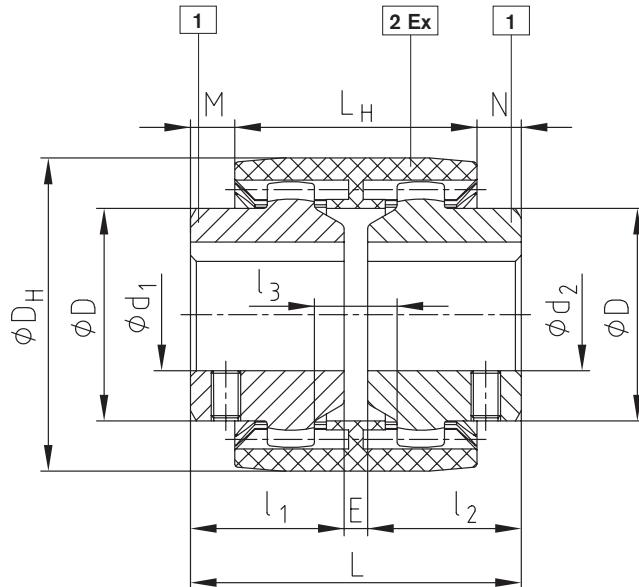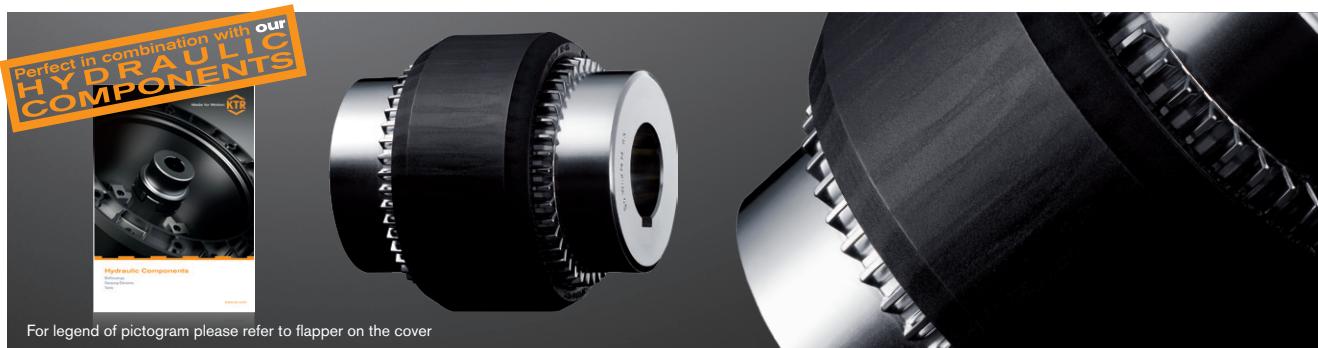

Type M...C

Size	Torque [Nm]			Finish bore d1, d2		Dimensions [mm]									Weight with max. bore [kg]			Mass moment of inertia J with max. bore [kgcm²]				
	T _{KN}	T _{KN} max.	T _{KW}	Pilot bored	Max.	I ₁ , I ₂	E	L	L _H	M, N	I ₃	D	D _H	Tip circle ØD _Z hub	Number of teeth	Hub lengthened max. I ₁ , I ₂	Sleeve	Hub	Total	Sleeve	Hub	Total
M-14C	15	45	7.5	-	15	23	4	50	37	6.5	10	25	40	33	20	40	0.03	0.07	0.1	0.08	0.09	0.26
M-19C	24	72	12	-	20	25	4	54	37	8.5	10	32	47	39	24	40	0.03	0.1	0.23	0.15	0.16	0.47
M-24C	30	90	15	-	24	26	4	56	41	7.5	14	36	53	45	28	50	0.04	0.14	0.32	0.21	0.36	0.93
M-28C	70	210	35	-	28	40	4	84	46	19	13	44	65	54	34	55	0.08	0.33	0.74	0.65	1.22	3.09
M-32C	90	270	45	-	32	40	4	84	48	18	13	50	75	63	40	55	0.09	0.43	0.95	1.14	2.17	5.48
M-38C	120	360	60	-	38	40	4	84	48	18	13	58	83	69	44	60	0.13	0.55	1.23	1.58	3.55	8.68
M-48C	200	600	100	-	48	50	4	104	50	27	13	68	95	78	50	60	0.23	0.79	1.81	3.9	7.22	18.34
M-65C	560	1680	280	21	65	55	4	114	68	23	16	96	132	110	42	70	0.55	1.9	4.35	21.2	31.8	84.8
M-80C	1000	3000	500	31	90	90	6	186	93	46.5	20	124	178	145	46	-	1.13	5.2	11.53	68.9	150.8	370.5

BoWex®

Gear couplings



GEARex®

Ordering example:


BoWex® M-28C	d ₁ Ø20	d ₂ Ø28
Size and type of coupling	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)

BoWex® AS and Spec.-I Curved-tooth gear coupling®


Compact and maintenance-free

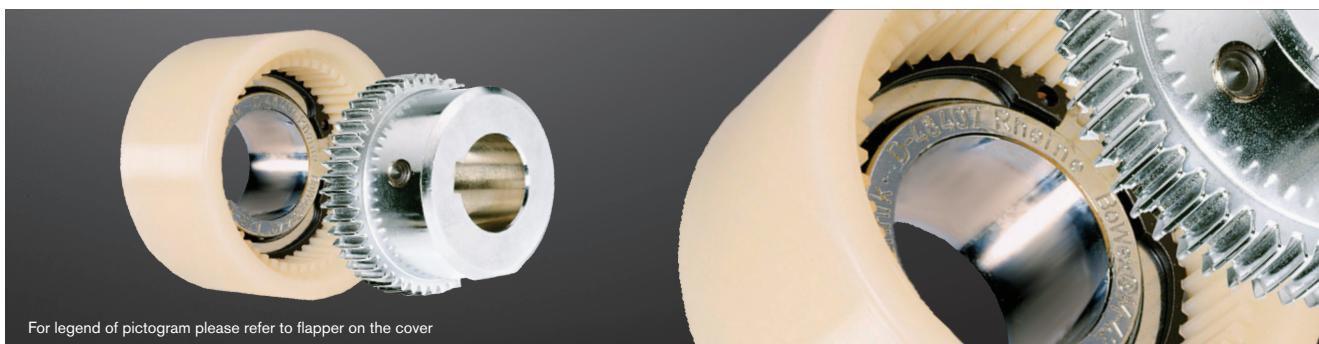

Components

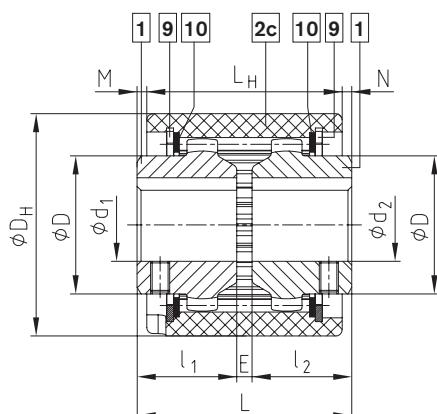

Type AS

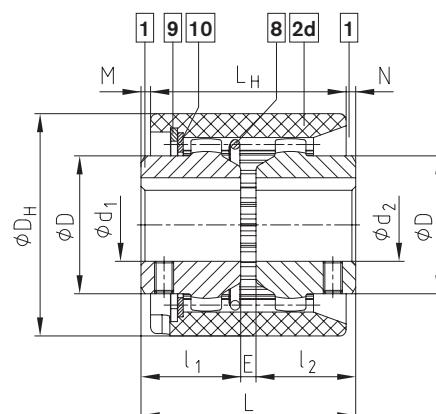

Type Spec.-I

BoWex® Type AS and type Spec.-I																		
Size	Pilot bore		Finish bore d_1, d_2	Dimensions [mm]							Weight with max. bore [kg]			Mass moment of inertia J with max. bore [kgcm^2]				
	Unbored	Pilot bored		Max.	l_1, l_2	E	L	L_H	M, N	D	D_H	Hub length, max. l_1, l_2	Sleeve	Hub	Total	Sleeve	Hub	Total
24	x	-	For finish bores see stock programme	24	26	4	56	51	2.5	36	58	50	0.11	0.14	0.39	0.38	0.36	1.10
28	x	-		28	40	4	84	56	14	44	70	55	0.16	0.33	0.82	1.54	1.22	3.98
32	x	-		32	40	4	84	58	13	50	84	55	0.21	0.43	1.07	2.75	2.17	7.09
45	x	-		45	42	4	88	60	14	65	100	60	0.27	0.63	1.53	5.49	5.66	16.81
65	-	21		65	55	4	114	84	15	96	140	70	0.84	2.10	5.00	29.83	43.96	117.8
80	-	31		90	90	6	186	93	46.5	124	178	-	1.30	5.20	11.70	83.20	150.8	384.8
100	-	38		100	110	8	228	102	63	152	210	-	2.05	9.40	20.80	184.4	401.3	987.0
125	-	45		125	140	10	290	134	78	192	270	-	4.32	19.44	43.10	620.0	1362.3	3344.6


For performance data see page 90.

Ordering example:

BoWex® 32 AS	$d_1 \varnothing 32$	$d_2 \varnothing 32$
Size and type of coupling AS or Spec.-I	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)


BoWex® SG, SSR and Spec.-I/CD Curved-tooth gear coupling®

Type with dust protection




Size	Pilot bore		Finish bore		Dimensions [mm]							
	Unbored	Pilot bored	Min.	Max.	l_1, l_2	E	L	l_H	M, N	D	D_H	Hub length. max. l_1, l_2
24 SG	x	-	10	24	36	4	76	51	12.5	36	58	50
28 SG	x	-	10	28	40	4	84	56	14	44	70	55
32 SG	x	-	12	32	40	4	84	58	13	50	84	55
45 SG	x	-	20	45	42	4	88	60	14	65	100	60
65 SG	-	21	30	65	70	4	144	84	30	96	140	-
80 SG	-	31	35	90	90	6	186	93	46.5	122	175	-
100 SG	-	38	40	100	110	8	228	102	63	150	210	-
125 SG	-	45	50	125	140	10	290	134	78	190	270	-


Setscrews with finish bored hubs only.

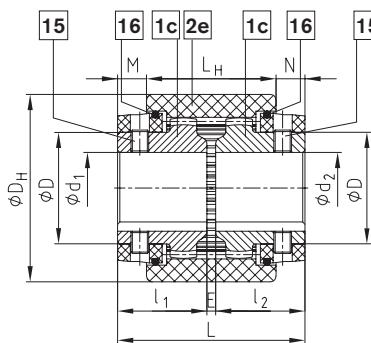

Size	Pilot bore		Finish bore		Dimensions [mm]							
	Unbored	Pilot bored	Min.	Max.	l_1, l_2	E	L	l_H	M, N	D	D_H	Hub length. max. l_1, l_2
24 SSR	x	-	10	22	26	4	56	51	2.5	35	58	50
28 SSR	x	-	10	26	40	4	84	56	14	42	70	55
32 SSR	x	-	12	30	40	4	84	58	13	48	84	55
45 SSR	x	-	20	42	42	4	88	60	14	63	100	60
65 SSR	-	21	30	65	55	4	114	84	15	95	140	70
80 SSR	-	31	35	90	90	6	186	93	46.5	120	175	-
100 SSR	-	38	40	100	110	8	228	102	63	150	210	-
125 SSR	-	45	50	125	140	10	290	134	78	190	270	-

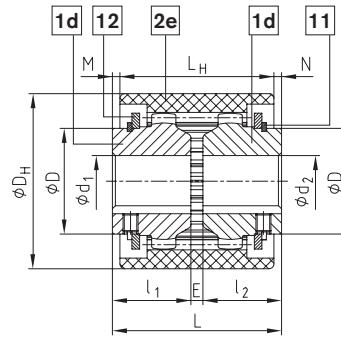

Size	Pilot bore		Finish bore		Dimensions [mm]										
	Unbored	Pilot bored	Min.	Max.	L	L_1	L_H	E	E_1	l_2	l_1	D_H	D	M	N
24 CD	x	-	10	24	70	73.5	51	4	9.0	26	40	58	36	20	2.5
28 CD	x	-	10	28	94.5	98	56	4	8.5	40	50.5	70	44	28	14
32 CD	x	-	12	32	94.5	-	58	4	8.5	40	50.5	84	50	27	13
45 CD	x	-	20	45	101.5	-	60	4	8.5	42	55.5	100	65	32	14
65 CD	-	21	30	65	123	-	84	4	10	55	64	140	96	28.5	15
80 CD	-	31	35	90	179	-	93	6	13	90	83	178	124	44	46.5

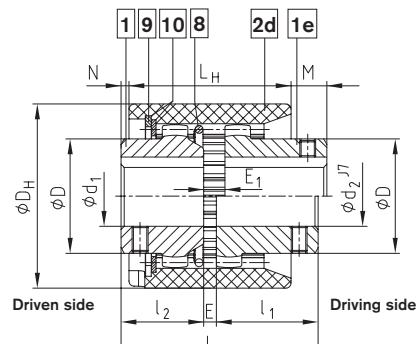

Please order dimension sheet for type Spec.-I/CDB with safety pins.
For performance data see page 90.


Ordering example:

BoWex® 45 SG	$d_1 \varnothing 22$	$d_2 \varnothing 40$
Size and type of coupling SG, SSR or Spec.-I/CD	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)

BoWex® SD/SD-D

Curved-tooth gear coupling®

Shiftable coupling (at standstill)

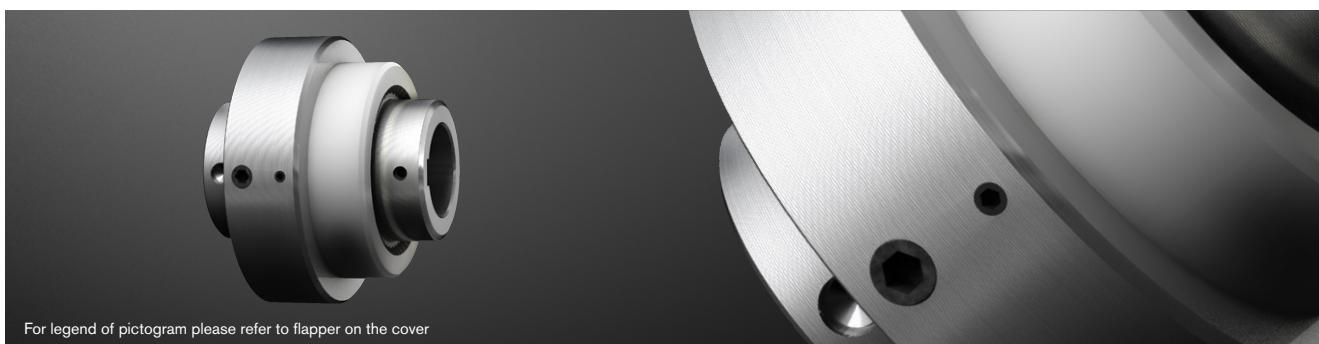

Size	Pilot bore		Finish bore d ₁ , d ₂		Dimensions [mm]												Weight with max. bore [kg]		Mass moment of inertia J with max. bore [kgcm ²]		Shifting force [N]
	Un- bored	Pilot bored	d ₁	d ₁ max.	d ₂ max.	E	l ₁	l ₂	L	L _H	l ₃	M	W	N	D	D _H	DA	Shifting hub with sleeve	Driving hub	Shifting hub with sleeve	Driving hub
	24 SD	x	-	24	24	4	26	50	80	52	31	10	19	18	36	58	78	1.08	0.14	8.23	0.36
28 SD	x	-	28	28	4	40	55	99	57	33	21.5	21.5	20.5	44	70	88	1.50	0.33	15.62	1.22	180
32 SD	x	-	32	32	4	40	55	99	58	33	20.5	21.5	20.5	50	84	100	1.85	0.43	22.87	2.17	180
45 SD	x	-	45	45	4	42	60	106	63	37	21.5	22.5	21.5	65	100	125	2.56	0.68	46.07	5.66	250
						45	50	114			29.5							0.79			
65 SD	-	26	65	65	4	55	70	129	77	37	28	25	24	95	140	156	5.07	2.30	158.99	43.96	350
80 SD	-	31	90	90	6	90	90	186	96	47	56	35	34	124	175	195	10.60	5.20	523.7	150.8	350
100 SD	-	38	100	100	8	110	110	228	113	55	72	43	43	152	210	235	18.87	9.37	1350	401.3	400
125 SD	-	45	125	125	10	140	140	290	149	70	89	52	52	192	270	298	40.40	9.44	4919	1362.3	450


Connection dimensions of BoWex® SD shifting ring (comp. 17) for mounting of: slip ring SD1 (s. catalogue on p. 89), shifting disk etc.		Dimensions [mm]			
Size	L1	L ₂		z x G	s
		48	58	4 x M6	2
24 SD	48	58	4 x M6	2	
28 SD	48	58	4 x M6	2	
32 SD	64	75	4 x M6	2	
45 SD	75	90	4 x M8	2	
65 SD	100	114	4 x M8	2	
80 SD	130	145	4 x M8	3	
100 SD	180	196	6 x M10	4	
125 SD	220	236	6 x M10	4	

Performance data/torques see type M (on page 90), max. circumferential speed v = 20 m/s, referring to ØDA
Other sizes on request


Ordering example:

BoWex® 32 SD	d ₁ Ø32	d ₂ Ø32
Size and type of coupling	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)


Components

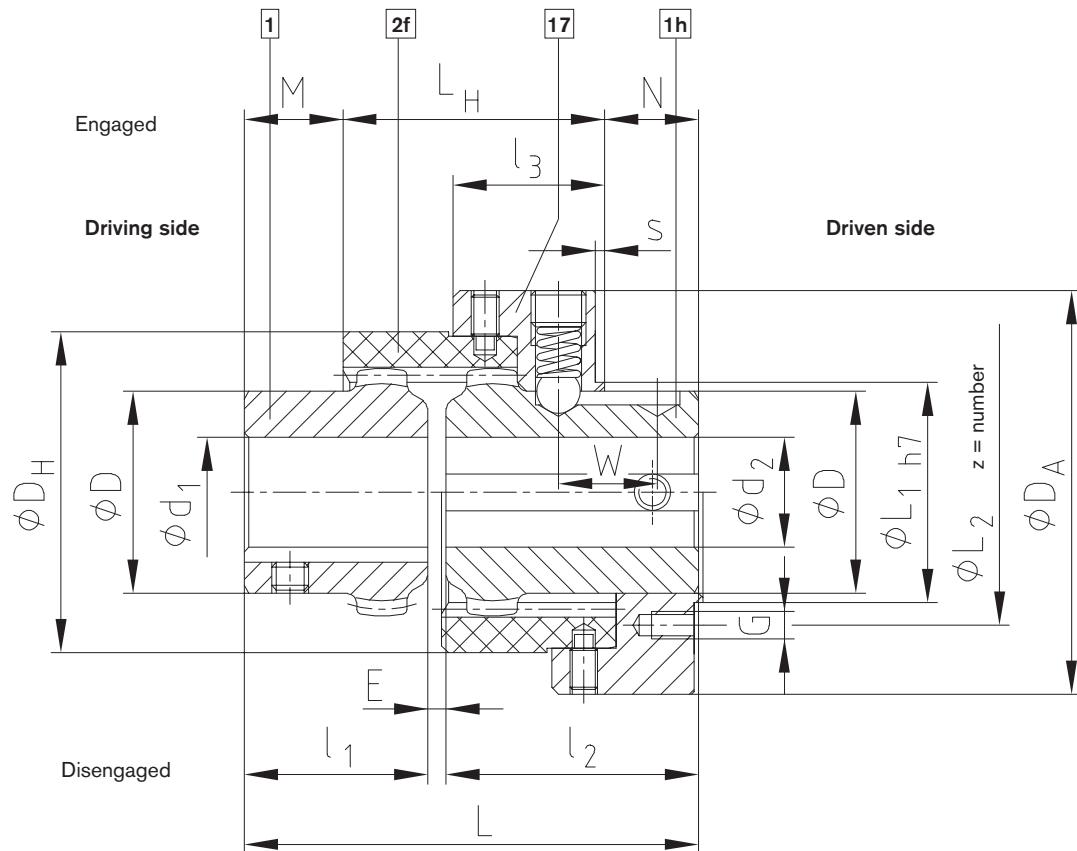

BoWex® SD

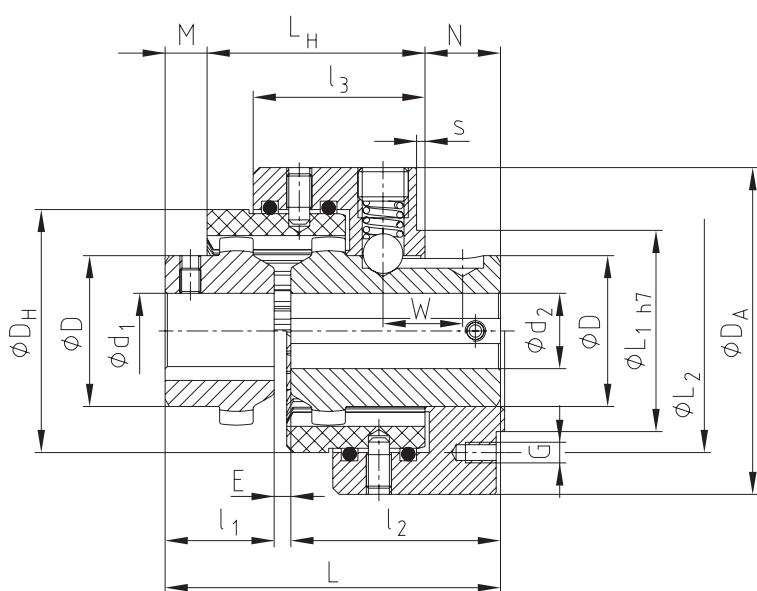

BoWex® SD-D3


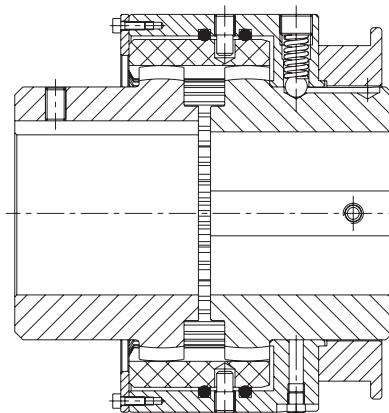


BoWex® SD-D3

BoWex® SD1

Curved-tooth gear coupling®

Shiftable coupling with shiftable linkage (at standstill)

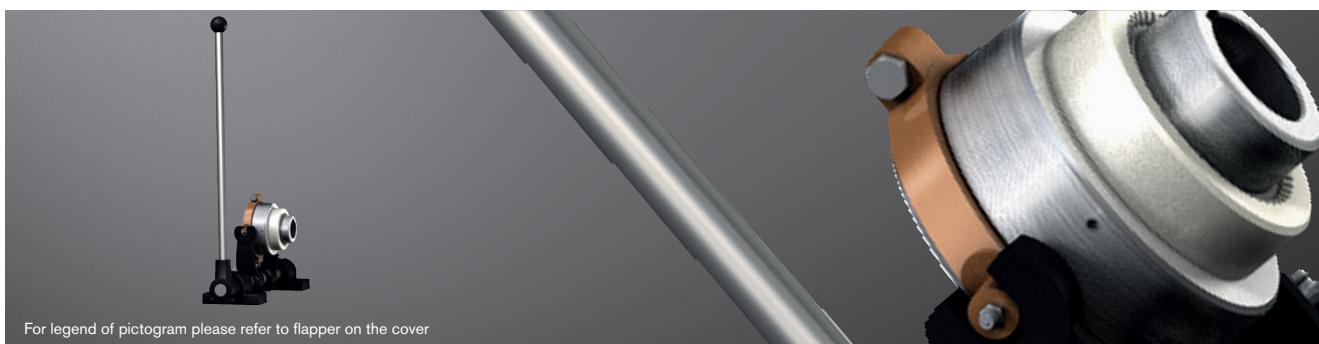

BoWex® Type SD1 and slip ring																				
Size	Finish bore			Dimensions [mm]														Shifting force [N]		
	d1	d1 max.	d2 max.	E	l1	l2	L	LG	l4	l5	M	W	t	D	DH	DA	D1			
24 SD1	24	24	4	26	50	80	67	11	46	10	19	16	36	58	78	45	70.5	78	12.5	140
28 SD1	28	28	4	40	55	99	72	11	48	21.5	21.5	16	44	70	88	45	70.5	78	12.5	180
32 SD1	32	32	4	40	55	99	78	13.5	53	20.5	21.5	21	50	84	100	60	89.5	100	17.5	180
45 SD1	45	45	4	42	60	106	84	14	58	21.5	22.5	22	65	100	125	70	112.5	125	18	250
	48	48	50	50	114	29.5		22.5	22.5	22	65	100	125	70	112.5	125	18	250		
65 SD1	65	65	4	55	70	129	103	16	61	26	25	25	96	140	156	96	130.5	145	20.5	350
80 SD1	90	90	6	90	90	186	124	18.5	75	56	35	29	124	175	195	125	164.5	182	25.5	350
100 SD1	100	100	8	110	110	228	152	28	94	72	43	39	152	210	235	174	210.5	230	30.5	400
125 SD1	125	125	10	140	140	290	193	30.5	114	89	52	44	192	270	298	214	250.5	275	35.5	450




BoWex® Type SD1 - Shiftable linkage																				
Size	Shiftable linkage size	Slip ring size	Dimensions [mm]														Dimensions with m1 max.			
			a	b	c	d	d3	d4	e	F	g1	L2	L3	m	m1 min.	m1 max.	A	B	m3	m4
24 SD1	1	1.1	110	50	18	20	11	16	30	70	55	320	400	75	180	190	90	114	55	16
28 SD1	1	1.1	140	60	25	30	20	40	97.5	60	430	450	100	240	270	111	151			
32 SD1	2	2.2															20	80	34	
45 SD1	3	3.3															140	180	90	44
65 SD1	3	4.4	160	25	35	30	13.5	50	147.5	565	750	120	321	365	200	244			100	54
80 SD1	4	5.5														365	410	300	350	
100 SD1	5	6.6														250	300	30	110	62
125 SD1	5	7.7														300	350			

¹⁾ = With a continuous base plate dimension „e“ has to be increased by at least 10 mm. The brackets of the driving and driven side have to be adjusted accordingly.
Also available as type SD-D. Other sizes on request.

Performance data/torques see type M (on page 88), max. circumferential speed v = 20 m/s, referring to ØDA

Ordering example:




BoWex® 65 SD1	d1 Ø32	d2 Ø32	4.4	3
Size and type of coupling	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Slip ring Size	Shiftable linkage Size	

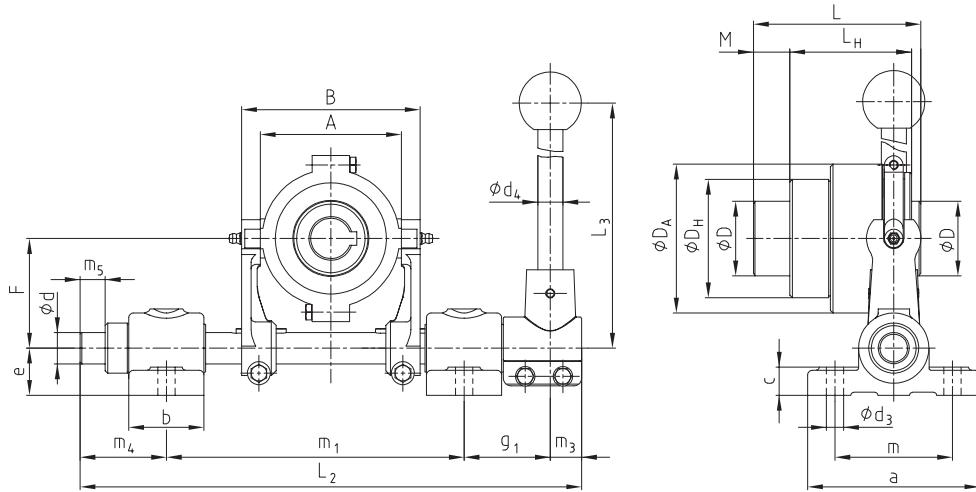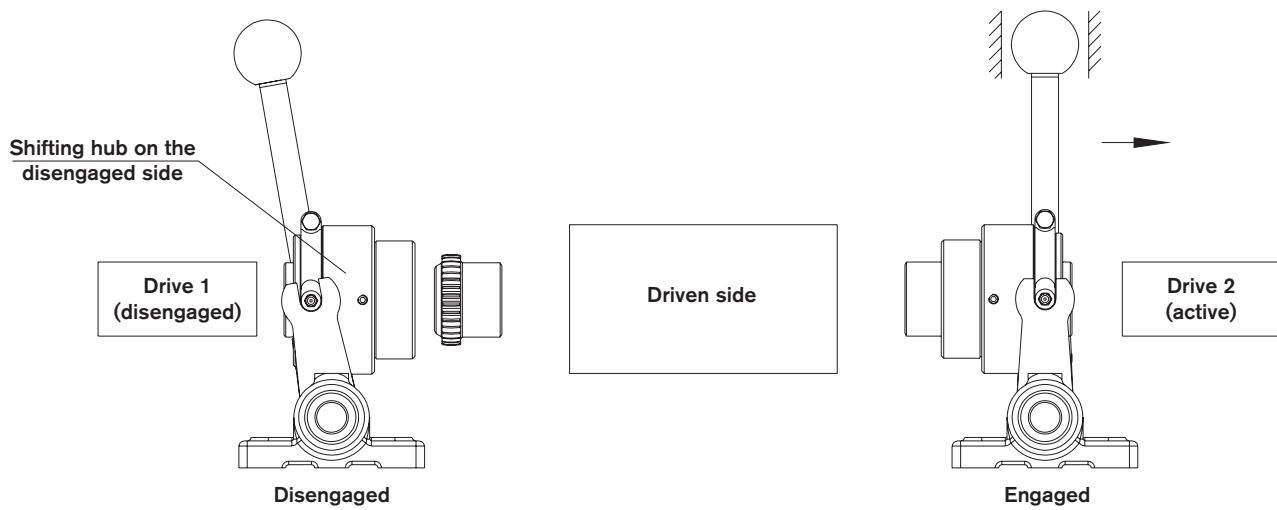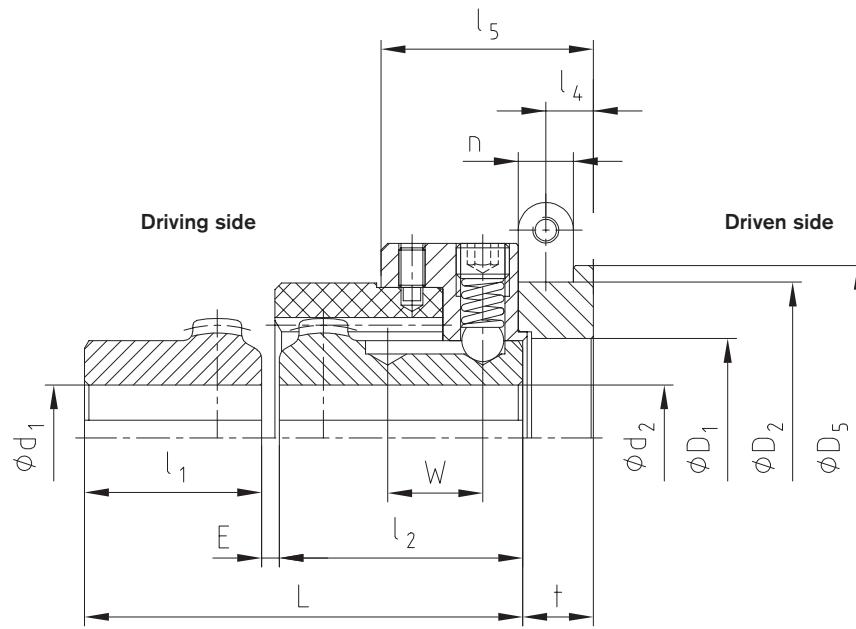

BoWex® GT

Curved-tooth gear coupling®

Split CFK sleeve for high power density

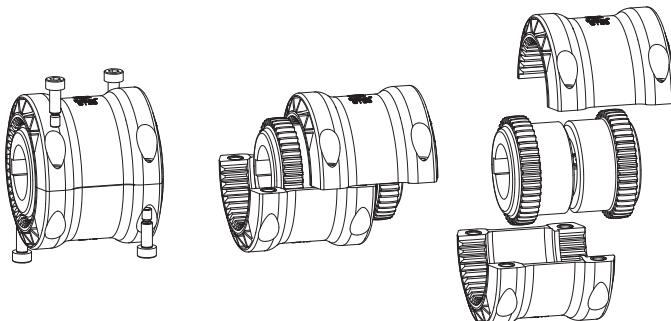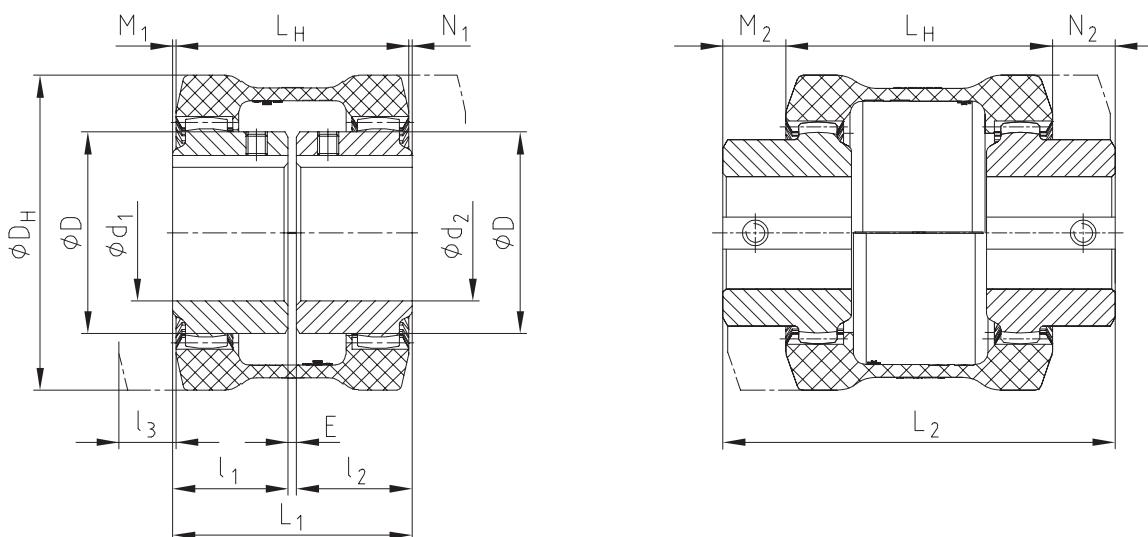

BoWex® Type GT with split sleeve

Size	Torque [Nm]			Finish bore d _{max.}		Dimensions [mm]												Weight with max. bore [kg]			Mass moment of inertia J with max. bore [kgcm ²]		
	TKN	TK max.	TKW	d ₁	d ₂	D	D _H	L _H	l ₁	l ₂	l ₃	E	L ₁	L ₂	M ₁ , N ₁	M ₂ , N ₂	Sleeve	Hub	Total	Sleeve	Hub	Total	
28	70	210	35	28	28	44	80	80	40	40	15	4	84	124	2	22	0.158	0.22	0.702	1.77	1.22	4.21	
38	120	360	60	38	38	58	98	83	40	40	18	4	84	122	0.5	19.5	0.25	0.45	1.15	4.43	3.36	11.15	
48	200	600	100	48	48	68	110	106	50	50	21	4	104	160	0	28	0.33	0.67	1.68	7.39	6.11	19.61	
65	560	1680	280	65	65	96	150	111	55	55	27	4	114	160	1.5	24.5	0.69	1.54	3.77	28.9	31.80	92.5	



l₃ = Drop-out center dimension required

Ordering example:	BoWex® GT-28		d ₁ Ø20		d ₂ Ø28	
	Size and type of coupling		Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)		Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	

BoWex® ZR


Curved-tooth gear coupling®

Bridging larger shaft distances

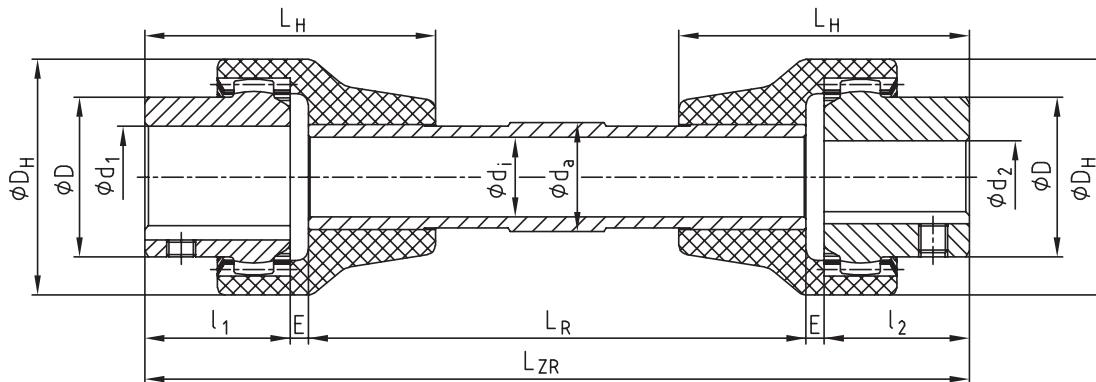

Size	Pilot bore	Finish bore	Dimensions [mm]										Torque [Nm]		
	d ₁ max. d ₂ max.	l ₁ , l ₂	Hub length. max. l ₁ , l ₂	L _H	E	L _{ZR tot.}	L _R	D	D _H	d _i	d _a	T _{KN}	T _{K max.}	T _{KW}	
14	-	14	23	40	40	3		25	40	21	25	10	20	5	
28	-	28	40	55	60	3	According to customer specification	44	66	30	26	45	90	23	
42	-	42	42	60	85	3		65	95	40	50	100	200	50	
48	-	48	50	60	85	3		68	95	40	50	140	280	70	

BoWex® ZR couplings are available up to a length of 2000 mm for serial applications only ($n_{max.} = 1000$ rpm)

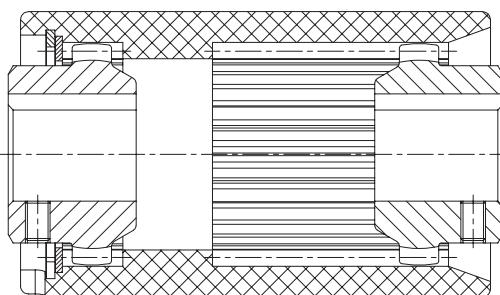


- BoWex® Spec.-I with lengthened sleeve on request
- Bridging larger shaft distances
- Axial shifting of driving and driven shaft at standstill
- Maintenance-free
- Compensating for larger displacements
- Axial plug-in
- Application range from -25 °C to +100 °C

Type Spec.-I with a long PA-sleeve

BoWex® M

Curved-tooth gear coupling®

Made of corrosion-resistant materials

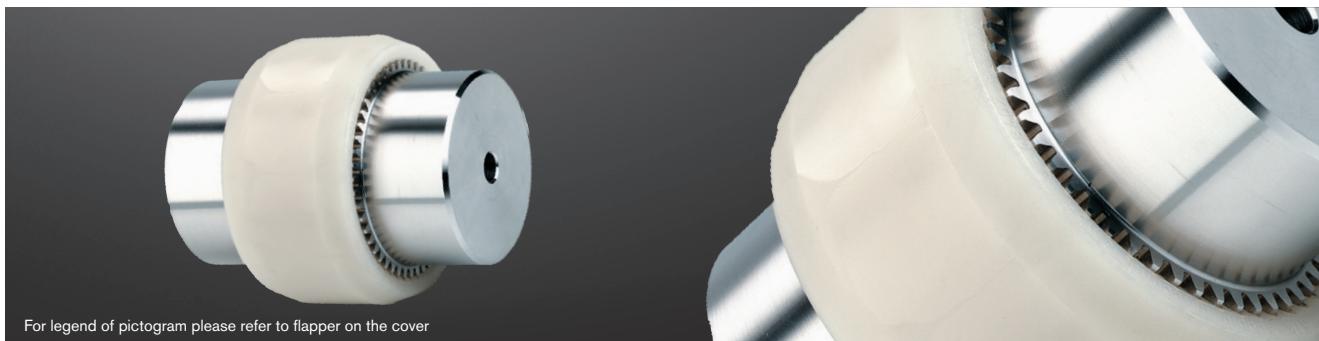

BoWex® junior plug-in coupling (two-part) and BoWex® junior M (three-part)														
Size	Finish bore				Dimensions [mm]									
	Hub Component 1b		Plug-in sleeve Component 2b		DH	l ₁ , l ₂	E ₁	E	L _{H1}	L _H	L ₁	L	M ₁	M, N
	d ₁	D ₁	d ₂	D ₂										
14 M-14	Ø6, Ø7, Ø8, Ø9	22	Ø8	22	40	23	2	4	40	37	48	50	8	6.5
	Ø10, Ø11	25	Ø10, Ø11	25										
	Ø12, Ø14	26	Ø12, Ø14	26										
19 M-19	Ø12, Ø14	27	Ø14, Ø15	29	48	25	2	4	42	37	52	54	10	8.5
	Ø16	30	Ø19	35										
	Ø19	32	Ø19	35										
24 M-24	Ø10, Ø11, Ø12	26	Ø14, Ø16	32	53	26	2	4	45	41	54	56	9	7.5
	Ø14, Ø15, Ø16	32												
	Ø18, Ø19, Ø20	36	Ø19, Ø20	36										
	Ø24	38	Ø24	40										

BoWex® Type M							
Size	Finish bore d ₁ max., d ₂ max.	Dimensions [mm]					
		DH	D	l ₁ , l ₂	E	L _H	L
M-24	24	53	36	26	4	41	56
M-38	38	83	58	40	4	48	84
M-48	48	95	68	50	4	50	104

Other coupling sizes on request. Setscrews with BoWex® junior coupling are made of V4A as a standard.
For performance data see page 88.


Applications:

Food industry, print and paper industry, textile industry, sewage technology, wash-mobiles, chemical and pharmaceutical industry, offshore units, etc. For use in aggressive environment (air, water, chemicals, etc.).


Ordering example:

BoWex® M-24 V4A	d ₁ Ø20	d ₂ Ø24
Size and type of coupling	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)


Type junior plug-in coupling (two-part)

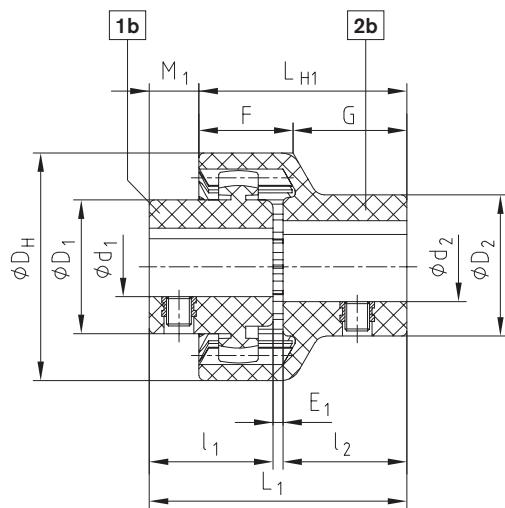

Type junior M coupling (three-part)




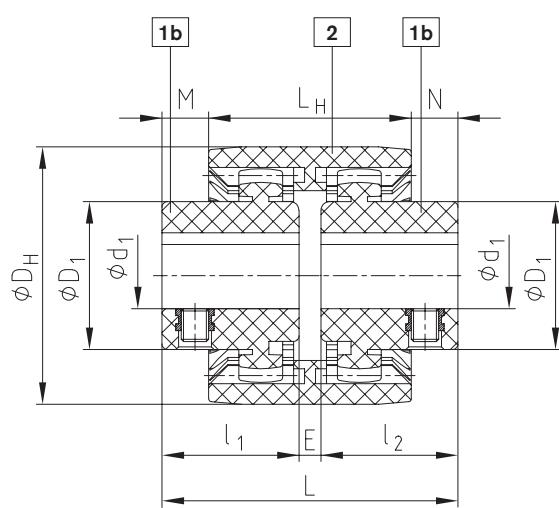


Type M (V4A)

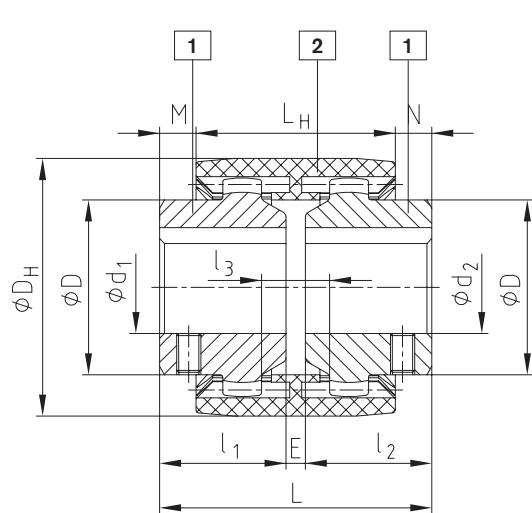

Taper bores

BoWex® with taper bore

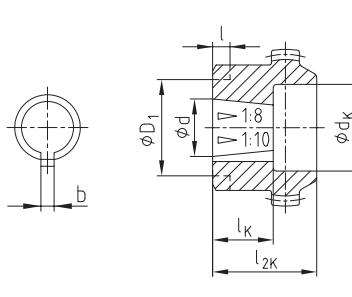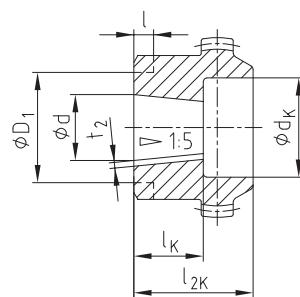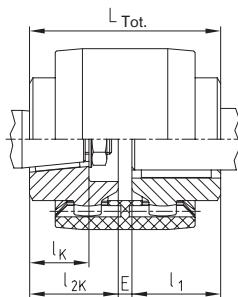

$$L_{\text{Tot.}} = l_1 + E + l_{2K}$$

see stock programme on page 90

Taper bores 1:5

Code	Dimensions [mm]				Counterbore d_K and hub length l_{2K} [mm] Recess on hub collar $D_1 \times l$ [mm]																	
	Details of bores				14		19		24		28		32		38		42		48			
	$d +0.05$	$b JS9$	$t_2 +0.1$	l_K	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}		
A-10	9.85	2	1.0	11.5	18	23	18	25	25	26	25	26	25	26	25	26						
B-17	16.85	3	1.8	18.5			25	30	28	30	36	40	36	40	36	40	45	42	45	42	45	50
C-20	19.85	4	2.2	21.5					28	36	36	40	36	40	36	40	45	42	45	42	45	50
Cs-22	21.95	3	1.8	21.5					28	36	36	40	36	40	36	40	45	42	45	42	45	50
D-25	24.85	5	2.9	26.5							36	40	36	40	36	40	45	42	45	42	45	50
E-30	29.85	6	2.6	31.5												45	55	45	55	45	55	55
F-35	34.85	6	2.6	36.5															52	60	55	60
G-40	39.85	6	2.6	41.5															52	60	65	70

Taper bores 1:8


Code	Dimensions [mm]				Counterbore d_K and hub length l_{2K} [mm] Recess on hub collar $D_1 \times l$ [mm]																	
	Details of bores				14		19		24		28		32		38		42		48			
	$d +0.05$	$b JS9$	$t_2 +0.1$	l_K	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}		
N/1	9.7 ± 0.015	2.4 +0.05	10.85	17	18	26	18	25	25	26	25	30	25	30	25	30						
N/1c	11.6	3 JS9	12.90	16.5	18	23			25	26	25	30										
N/1e	13	2.4 +0.05	13.80	21					25	30	25	30					25	30				
N/1d	14	3 JS9	15.50	17.5	20	23	25	30	28	30	28	30	28	40								
N/2	17.287	3.2 +0.05	18.24	24					28	35	36	40	36	40	36	40	45	42	45	42	45	50
N/2a	17.287	4 JS9	18.94	24					28	35	36	40	36	40	36	40	45	42	45	42	45	50
N/2b	17.287	3 JS9	18.34	24					28	35			36	40	36	40	45	42	45	42		
N/3	22.002	4 JS9	23.40	28					36	40	36	40	36	40	36	40	45	42	45	42	45	50
N/4	25.463	4.78 +0.05	27.83	36					36	50	36	50	36	50	36	50	45	50	45	50	45	62
N/4b	25.463	5 JS9	28.23	36					36	50							45	50	45	50	45	62
N/4a	27	4.78 +0.05	28.80	32.5									36	50								
N/4g	28.45	6 JS9	29.32	38.5									36	60	45	60	45	60				
N/5	33.176	6.38 +0.05	35.39	44									45	60	45	60	45	60	45	60	45	62
N/5a	33.176	7 JS9	35.39	44									45	60	45	60	45	60	45	60	45	62

Taper bores 1:10

Code	Dimensions [mm]				Counterbore d_K and hub length l_{2K} [mm]															
	Details of bores				14		19		24		28		32		38		42		48	
	$d +0.05$	$b JS9$	$t_2 +0.1$	l_K	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}	d_K	l_{2K}
CX-20	19.85	5	22.08	32					36	50			36	50	45	50	45	50		
DX-25	24.95	6	26.68	45							36	50			45	60	45	60	45	60
EX-30	29.75	8	31.88	50									45	60	45	60	45	60	45	70

Spline hubs and inch bores

BoWex® spline hubs – basic programme

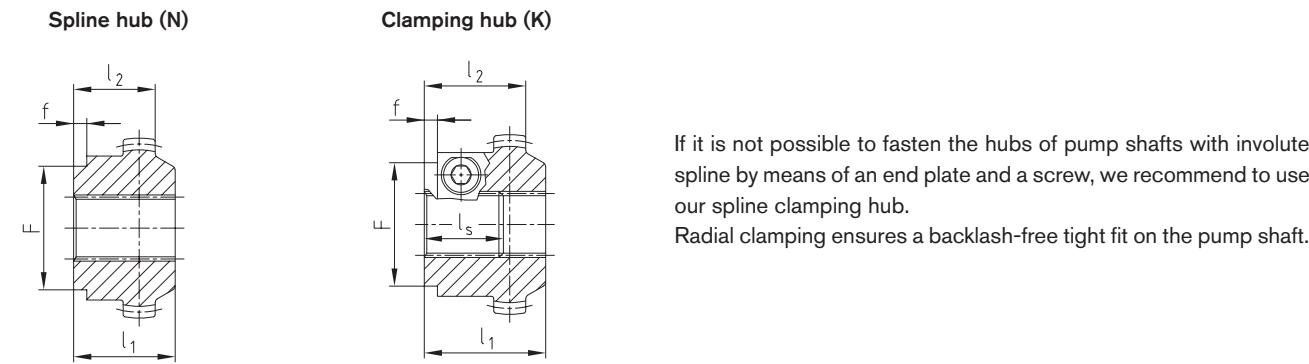

If it is not possible to fasten the hubs of pump shafts with involute spline by means of an end plate and a screw, we recommend to use our spline clamping hub.

Radial clamping ensures a backlash-free tight fit on the pump shaft.

Spline and clamping hubs acc. to DIN 5480								
Size	Dimensions [mm]						Order designation specify coupling size	
	Type	Spline size	l ₁	l ₂	l _S	F	f	
42	N	25x1.25x18	42	-	-	-	-	P000205
	K	25x1.25x18	42	-	-	-	-	P500202
48	K	30x2x14	42	-	-	60	6	P500203
	N	30x2x14	50	-	-	60	6	P000206
65	K	30x2x14	50	-	-	60	6	P500203
	N	35x2x16	55	-	-	60	6	P000303
65	K	35x2x16	60	-	-	60	6	P500301
	N	40x2x18	55	-	-	78	6	P000304
	K	40x2x18	60	-	-	78	6	P500302
	K	45x2x21	55	-	-	78	6	P500401

Spline and clamping hubs to ANSI B92.1								
Size	Dimensions [mm]						Order designation specify coupling size	
	Type	Spline size	l ₁	l ₂	l _S	F	f	
42	K	PH-S 5/8" 16/32DP, z=9	42	-	-	-	-	P558101
	K	PI-S 3/4" 16/32DP, z=11	-	35	-	-	-	P559101
48	K	PB-S 7/8" 16/32DP, z=13	42	-	-	60	3	P567101
	K	PB-BS 1" 16/32DP, z=15	42	-	27	50	6	P660201
65	K	PA-S 3/8" 16/32DP, z=21	50	-	45	52	7	P663301
	K	PA-S 5/8" 16/32DP, z=21	55	-	48	52	5	P663301
	K	PC-S 1 1/4" 12/24DP, z=14	55	-	44	52	5	P656201

Inch bores – see stock programme on page 86					
Bore and keyway acc. to ANSI/AGMA 9002-C14 Bore (clearance fit) Keyway (commercial class fit)			Bore and keyway acc. to ANSI/AGMA 9002-C14 Bore (clearance fit) Keyway (commercial class fit)		
KTR Code	Bore Ø [Inch]	Width of keyway [Inch]	Bore Ø [mm]	Width of keyway [mm]	Keyway depth/Tolerance +0.381 [mm]
Tb	3/8	1/8	9.525 ^{+0.0254}	3.175 ^{+0.05}	10.972
DNB	7/16	3/32	11.112 ^{+0.0254}	2.382 ^{+0.051}	12.293
T	1/2	3/16	12.7 ^{+0.0254}	4.762 ^{+0.051}	14.757
Ta	1/2	1/8	12.7 ^{+0.0254}	3.175 ^{+0.051}	14.224
DNC	17/32	1/8	13.495 ^{+0.0254}	3.175 ^{+0.051}	15.011
Do	9/16	1/8	14.287 ^{+0.0254}	3.175 ^{+0.051}	15.824
E	5/8	1/8	15.875 ^{+0.0254}	3.175 ^{+0.051}	17.424
Es	5/8	5/32	15.875 ^{+0.0254}	3.968 ^{+0.051}	17.729
Ed	5/8	3/16	15.875 ^{+0.0254}	4.762 ^{+0.051}	18.008
DNH	11/16	3/16	17.462 ^{+0.0254}	4.762 ^{+0.051}	19.634
Ad	3/4	1/8	19.05 ^{+0.0254}	3.175 ^{+0.051}	20.624
A	3/4	3/16	19.05 ^{+0.0254}	4.762 ^{+0.051}	21.259
G	7/8	3/16	22.225 ^{+0.0254}	4.762 ^{+0.051}	24.485
F	7/8	1/4	22.225 ^{+0.0254}	6.35 ^{+0.051}	25.069
Gf	15/16	1/4	23.812 ^{+0.0254}	6.35 ^{+0.051}	26.695
H	1	3/16	25.4 ^{+0.0254}	4.762 ^{+0.051}	27.686
Hs	1	1/4	25.4 ^{+0.0254}	6.35 ^{+0.051}	28.295
R	1 1/16	3/16	26.987 ^{+0.0254}	4.762 ^{+0.051}	29.286
Sb	1 1/8	1/4	28.575 ^{+0.0254}	6.35 ^{+0.051}	31.521

The splines and inch bores specified are only a part of KTR's options. Many other variants are available, too.

GEARex® FA, FB and FAB All-steel gear couplings

Coupling in accordance with AGMA 9008-B00, high power density



Dimensions																
Size	Pilot bore	Max. finish bore		Dimensions [mm]												
		d ₁ , d ₂	l ₁ , l ₂	Hub lengthened max. l ₁ , l ₂ ²⁾	EFA	EFB	EFAB	LFA	LFB	LFAB	l ₃	D	D _{A1}	D _{A2}	F ¹⁾	d ₃ ¹⁾
10	26	50	43	105	3	21	12	89	107	98	55	67	111	83	74	52
15	26	64	50	115	3	15	9	103	115	109	59	87	142	106	84	68
20	31	80	62	130	3	31	17	127	155	141	79	108	174	129	104	85
25	38	98	76	150	5	29	17	157	181	169	93	130	213	157	123	110
30	44.5	112	90	170	5	33	19	185	213	199	109	153	240	181	148	130
35	46	133	105	185	6	40	23	216	250	233	128	180	280	213	172	150
40	52	158	120	215	6	42	24	246	282	264	144	214	318	249	192	175
45	80	172	135	245	8	50	29	278	320	299	164	233	347	273	216	190
50	80	192	150	295	8	56	32	308	356	332	182	260	390	308	241	220
55	90	210	175	300	8	70	39	358	420	389	214	283	425.5	333	275	250
60	100	232	190	305	8	84	46	388	464	426	236	312	457	364.5	316	265
70	100	276	220	310	10	76	43	450	516	483	263	371	527	424	360	300

Technical data										Dowel screw (10.9)			
Size	Torque [Nm] ³⁾		Max. speed [rpm]	Weight with max. bore [kg]			Mass moment of inertia with max. bore [kgm ²]	Dowel screw (10.9)			z	M	T _A [Nm]
	T _{KN}	T _{KN} (42CrMo4)		Sleeve	Hub	Total		z	M	T _A [Nm]			
10	930	1580	8500	0.75	0.55	2.75	0.004	6	M6	15			
15	2000	3300	6400	1.50	1.10	5.60	0.015	8	M8	36			
20	3500	6300	5400	2.40	2.10	9.50	0.037	6	M10	72			
25	6500	11000	4500	4.30	3.60	16.60	0.096	6	M12	125			
30	10000	17400	4000	5.70	6.20	25.00	0.178	8	M12	125			
35	17000	28800	3500	9.50	9.90	40.90	0.410	8	M14	200			
40	28500	48500	3100	11.60	16.00	57.50	0.746	8	M14	200			
45	37000	62000	3000	15.40	21.40	76.40	1.163	10	M14	200			
50	51000	86000	2500	25.30	29.50	113.50	2.229	8	M18	430			
55	65000	110000	2300	31.00	40.20	149.00	3.415	14	M18	430			
60	85000	145000	2100	32.10	52.80	175.70	4.514	14	M18	430			
70	135000	240000	1850	42.50	85.50	265.50	9.212	16	M20	610			

= Standard




¹⁾ Space required to align the coupling and replace the gasket

²⁾ Lengthened hubs available as a standard for type FA only. For type FB and FAB lengthened hubs are available on request only.

³⁾ Maximum torque of the coupling T_{KN} max = rated torque of the coupling T_{KN} x 2. For selection see page 14 et seqq.


Ordering example:

GEARex® FA 10	d ₁ Ø50	d ₂ Ø50
Type and size of coupling	Finish bore with keyway to DIN 6885 sheet 1	Finish bore with keyway to DIN 6885 sheet 1

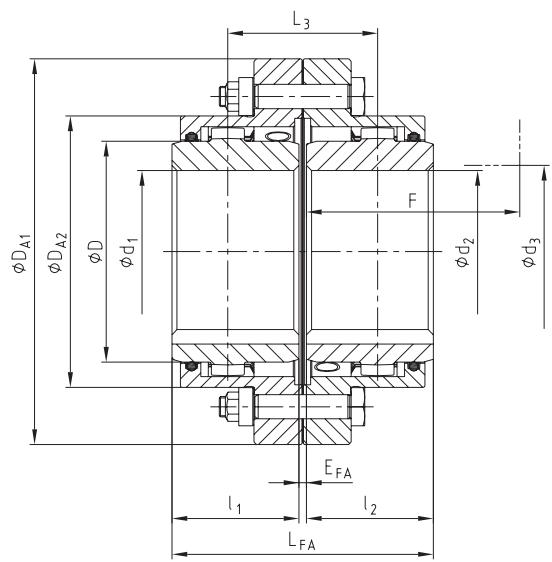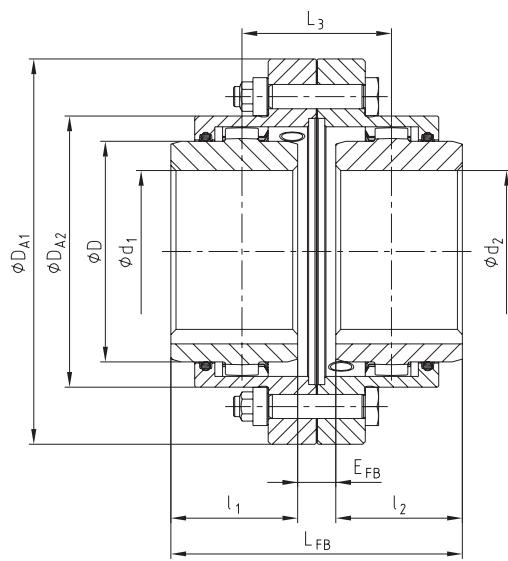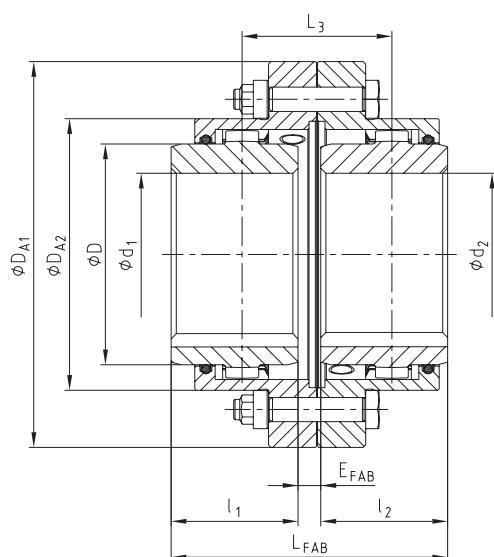Type FA**Type FB****Type FAB**

GEARex® DA, DB and DAB All-steel gear couplings

Easy to assemble, high power density



Size	Pilot bore	Max. finish bore	Dimensions													
			Dimensions [mm]													
			d ₁ , d ₂	l ₁ , l ₂	Hub lengthened max. l ₁ , l ₂ ²⁾	E _{DA}	E _{DB}	E _{DAB}	l _{DA}	l _{DB}	l _{DAB}	l ₃	D	D _{A1}	D _{A2}	F ¹⁾
20	31	80	62	130	3	31	17	133	155	144	79	108	187	146	105	85
25	38	98	76	150	5	29	17	157	181	169	93	130	220	172	115	105
30	44.5	112	90	170	5	33	19	185	213	199	109	153	248	194	140	120
35	46	133	105	185	6	40	23	216	250	233	128	180	285	228	165	145
40	52	158	120	215	6	42	24	246	282	264	144	214	335	270	180	160
45	80	172	135	245	8	50	29	278	320	299	164	233	358	294	195	185
50	80	192	150	295	8	56	32	388	356	332	182	260	390	332	215	205
55	90	210	175	300	8	70	39	358	420	389	214	283	425.5	354	240	220
60	100	232	190	305	8	84	46	388	464	426	236	312	457	380	260	245
70	100	276	220	310	10	76	43	450	516	483	263	371	527	445	300	290
80	140	300	280	-	10	50	30	570	610	590	310	394	545	475	340	310
85	160	325	292	-	13	53	33	597	637	617	325	430	585	515	352	330
90	180	350	305	-	13	83	48	623	693	658	353	464	640	560	365	360
100	220	390	330	-	13	93	53	673	753	713	383	512	690	612	390	400
110	220	420	350	-	20	296	158	720	996	858	508	560	765	665	410	420
120	260	450	420	-	25	421	223	864	1261	1063	643	608	825	720	480	470
130	300	500	440	-	25	415	220	905	1295	1100	660	684	980	805	520	520
140	380	550	460	-	20	430	225	940	1350	1145	685	750	1055	875	570	590
150	460	630	520	-	30	460	245	1070	1500	1285	765	850	1180	975	630	670

Size	Torque [Nm] ³⁾		Max. speed [rpm]	Weight with max. bore [kg]			Mass moment of inertia with max. bore [kgm ²]	Dowel screw (10.9)		
	T _{KN}	T _{KN} (42CrMo4)		Sleeve	Hub	Total		z	M	T _A [Nm]
	3500	6300	5400	3.6	2.1	12.8	0.056	6	M10	72
20	6500	11000	4500	5.5	3.6	20.3	0.125	6	M12	125
25	10000	17400	4000	6.9	6.2	28.9	0.219	8	M12	125
30	17000	28800	3500	11.2	9.8	46.6	0.488	8	M14	200
35	28500	48500	3100	16.3	15.9	70.9	1.011	8	M14	200
40	37000	62000	3000	20.2	21.4	90.7	1.482	10	M14	200
45	51000	86000	2500	27.0	29.5	123.5	2.474	8	M18	430
50	65000	110000	2300	32.6	40.2	159.1	3.714	14	M18	430
55	85000	145000	2100	32.0	52.8	184.4	4.810	14	M18	430
60	135000	240000	1850	43.8	85.5	280	9.907	16	M20	610
70	175000	300000	1750	64	117	362	14.214	18	M20	610
80	225000	380000	1650	75	148	446	20.320	20	M20	610
85	-	500000	1550	101	183	568	31.036	20	M24	1000
90	-	650000	1500	117	232	698	45.358	24	M24	1000
100	-	820000	1250	140	295	940	73.880	20	M30	1700
110	-	1050000	1150	188	430	1312	118.40	24	M30	1700
120	-	1450000	1000	330	595	1965	235.431	20	M36	2800
130	-	1950000	950	391	751	2411	343.432	24	M36	2800
140	-	2750000	850	488	1057	3242	575.453	30	M36	2800

■ = Standard




¹⁾ Space required to align the coupling and replace the gasket

²⁾ Lengthened hubs as a standard available for type DA only. For type DB and DAB lengthened hubs available on request only.

³⁾ Maximum torque of the coupling T_{KN} max = rated torque of the coupling T_{KN} x 2. For selection see page 14 et seqq.

Ordering example:



GEARex® DA 80	d ₁ Ø300	d ₂ Ø300
Type and size of coupling	Finish bore with keyway to DIN 6885 sheet 1	Finish bore with keyway to DIN 6885 sheet 1

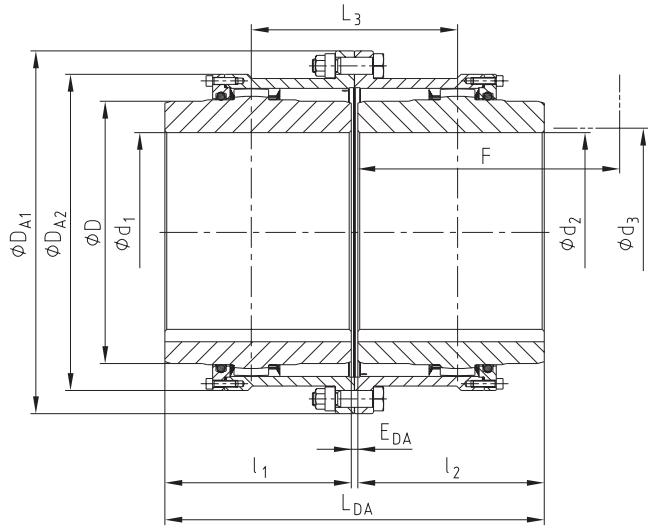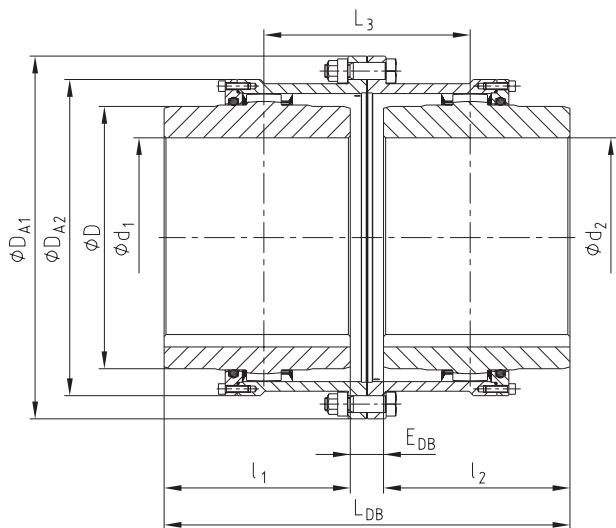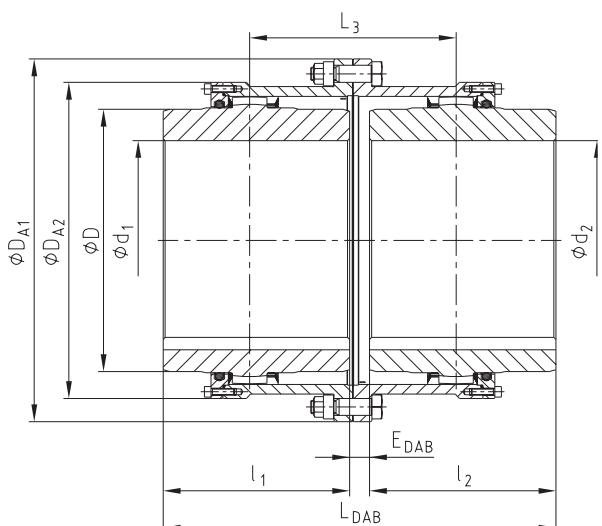Type DA**Type DB****Type DAB**

GEARex® FBR and DBR

All-steel gear coupling

All-steel gear coupling with brake disk

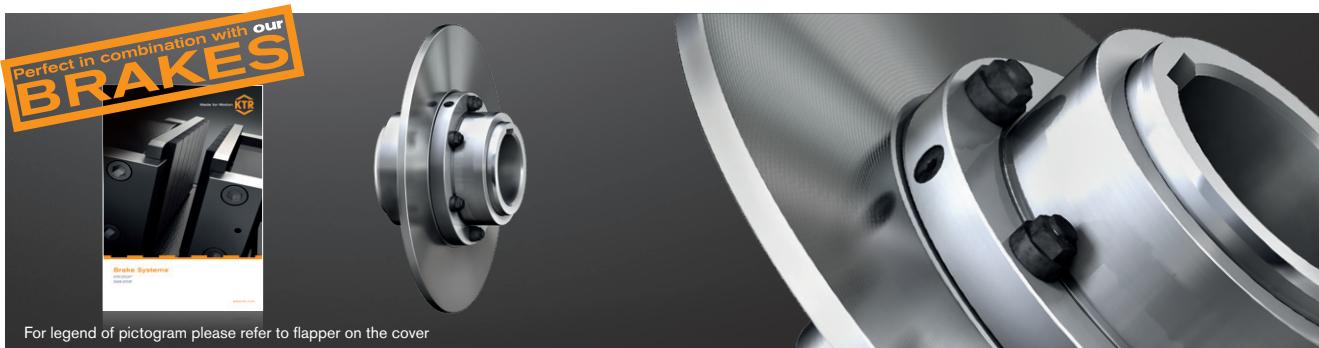

Dimensions																
Size	Pilot bore	Max. finish bore		Dimensions [mm]												
		d ₁ , d ₂	l ₁ , l ₂	Hub lengthened max. l ₁ , l ₂ ³⁾	E _A	E _B	l _A	l _B	l ₃	N	D	D _{A1} ⁴⁾	D _{A2} ⁴⁾	F ²⁾	d ₃ ²⁾	a
10 ¹⁾	26	50	43	105	16	34	102	120	55		67	111	83	74	52	1.8
15 ¹⁾	26	64	50	115	23	35	123	135	63		87	142	106	84	68	2.3
20	31	80	62	130	20	48	144	172	83		108	174	129	104	85	2.3
25	38	98	76	150	26	50	178	202	99		130	213	157	123	110	2.3
30	44.5	112	90	170	25	53	205	233	114		153	240	181	148	130	2.3
35	46	133	105	185	33	67	243	277	140		180	280	213	172	150	3.3
40	52	158	120	215	23	59	263	299	145		214	318	249	192	175	3.3
45	80	172	135	245	26	68	296	338	166		233	347	273	216	190	3.3
50	80	192	150	295	27	75	327	375	183		260	390	308	241	220	3.3
55	90	210	175	300	31	93	381	443	217		283	425.5	333	275	250	3.3
60	100	232	190	305	34	110	414	490	242		312	457	364.5	316	265	3.3
70	100	276	220	310	54	120	494	560	285		371	527	424	360	300	3.8

Technical data									
Size	Torque [Nm] ⁵⁾		Dowel screw (10.9)			Weight with max. bore excluding brake disk [kg]		Max. speed ⁶⁾	
	T _{KN}	T _{KN} (42CrMo4)	z	M	TA [Nm]	FBR	DBR	ØA x b [mm]	n [rpm]
10 ¹⁾	930	1580	6	M6	15	2.75	—	250 x 12.7	3900
15 ¹⁾	2000	3300	8	M8	36	5.60	—	300 x 12.7	3300
20	3500	6300	6	M10	72	9.50	12.8	315 x 12.7	3100
25	6500	11000	6	M12	125	16.60	20.3	350 x 12.7	2800
30	10000	17400	8	M12	125	25.00	28.9	400 x 12.7	2400
35	17000	28800	8	M14	200	40.90	46.6	460 x 12.7	2100
40	28500	48500	8	M14	200	57.50	70.9	515 x 12.7	1900
45	37000	62000	10	M14	200	76.40	90.7	610 x 12.7	1600
50	51000	86000	8	M18	430	113.50	123.5	710 x 12.7	1400
55	65000	110000	14	M18	430	149.00	159.1	810 x 12.7	1200
60	85000	145000	14	M18	430	175.70	184.4	915 x 12.7	1100
70	135000	240000	16	M20	610	265.50	280	915 x 12.7	1100

Recommended selection of coupling/brake disk									
Coupling size	Brake disk ØA x b ⁷⁾				Coupling size	Brake disk ØA x b ⁷⁾			
10 ¹⁾	250 x 12.7	300 x 12.7	315 x 12.7	—	40	610 x 12.7	710 x 12.7	810 x 12.7	
15 ¹⁾	300 x 12.7	315 x 12.7	350 x 12.7	—	45	610 x 12.7	710 x 12.7	810 x 12.7	
20	315 x 12.7	350 x 12.7	400 x 12.7	460 x 12.7	50	610 x 12.7	710 x 12.7	810 x 12.7	
25	400 x 12.7	460 x 12.7	515 x 12.7	610 x 12.7	55	710 x 12.7	810 x 12.7	915 x 12.7	
30	460 x 12.7	515 x 12.7	610 x 12.7	710 x 12.7	60	710 x 12.7	810 x 12.7	915 x 12.7	
35	515 x 12.7	610 x 12.7	710 x 12.7	—	70	810 x 12.7	915 x 12.7	—	

= Standard

¹⁾ Size 10 and 15 available as type F only.

²⁾ Space required to align the coupling and replace the gasket

³⁾ Hubs lengthened as a standard available in connection with hub configuration A only.

⁴⁾ Dimensions of type F For dimensions of type D see page 110.


⁵⁾ Maximum torque of the coupling T_K max. = rated torque of the coupling T_{KN} x 2. For selection see page 14 et seqq.

⁶⁾ The maximum speed depends on the size of brake disk and the maximum perm. circumferential speed. Please observe specifications of the brake manufacturer.

⁷⁾ Other sizes of brake disks on request. Cranked brake disks are available on request of the customer, too.


Ordering example:	GEARex® FBR 10	d ₁ Ø50	d ₂ Ø50	E _A = 16	Ø300 x 12.7
Type and size of coupling	Finish bore with keyway to DIN 6885 sheet 1	Finish bore with keyway to DIN 6885 sheet 1	Configuration of hubs with shaft distance E	Brake disk ØA x width b	

Type FBR
with hub configuration A

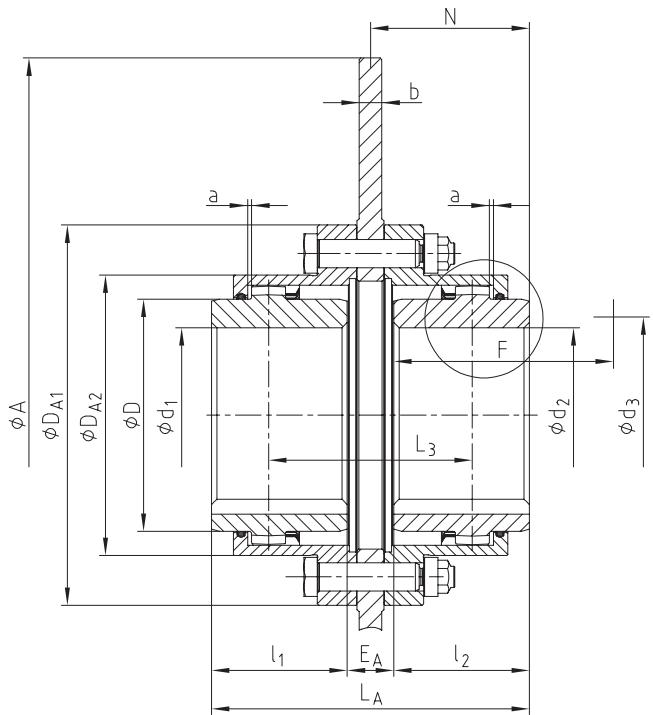


Types:


Type FBR

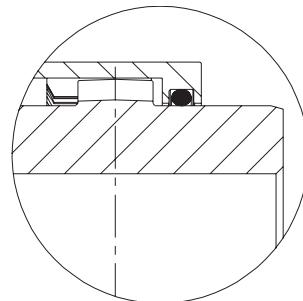

Type FBR
with hub arrangement B


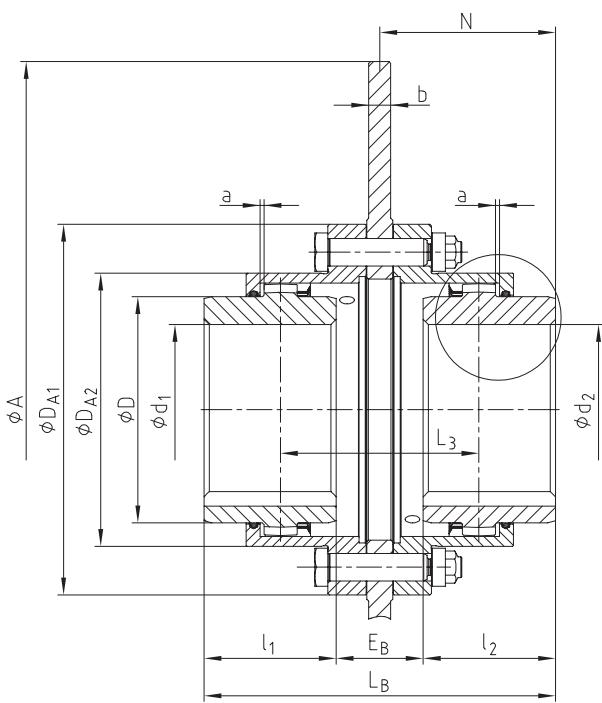


Type DBR

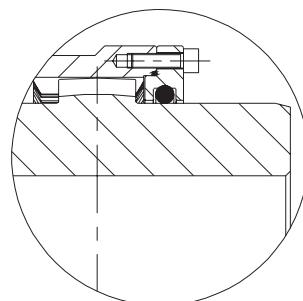

GEARex® FH and DH All-steel gear couplings

Large shaft distance dimension, high power density

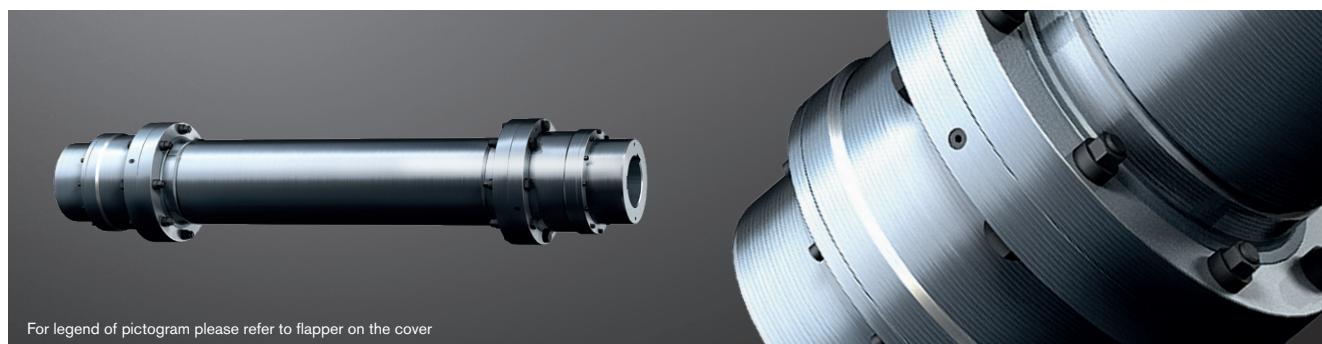

Size ³⁾	Dimensions													Dowel screw (10.9)				
	Torque [Nm] ⁴⁾		Pilot bore	Max. finish bore	Dimensions [mm]													
	T _{KN}	T _{KN} (42CrMo4)			d ₁ , d ₂	l ₁ , l ₂	Hub lengthened max. l ₁ , l ₂	D	D _{A1} ²⁾	D _{A2} ²⁾	L _H	E _H	F ¹⁾	d ₃ ¹⁾	z	M	T _A [Nm]	
10	930	1580	26	50	43	105	67	111	83					74	52	6	M6	15
15	2000	3300	26	64	50	115	87	142	106					84	68	8	M8	36
20	3500	6300	31	80	62	130	108	174	129					104	85	6	M10	72
25	6500	11000	38	98	76	150	130	213	157					123	110	6	M12	125
30	10000	17400	44.5	112	90	170	153	240	181					148	130	8	M12	125
35	17000	28800	46	133	105	185	180	280	213					172	150	8	M14	200
40	28500	48500	52	158	120	215	214	318	249					192	175	8	M14	200
45	37000	62000	80	172	135	245	233	347	273					216	190	10	M14	200
50	51000	86000	80	192	150	295	260	390	308					241	220	8	M18	430
55	65000	110000	90	210	175	300	283	425.5	333					275	250	14	M18	430
60	85000	145000	100	232	190	305	312	457	364.5					316	265	14	M18	430
70	135000	240000	100	276	220	310	371	527	424					360	300	16	M20	610
80	175000	300000	140	300	280	-	394	545	475					340	310	18	M20	610
85	225000	380000	160	325	292	-	430	585	515					352	330	20	M20	610
90	-	500000	180	350	305	-	464	640	560					365	360	20	M24	1000
100	-	650000	220	390	330	-	512	690	612					390	400	24	M24	1000
110	-	820000	220	420	350	-	560	765	665					410	420	20	M30	1700
120	-	1050000	260	450	420	-	608	825	720					480	470	24	M30	1700
130	-	1450000	300	500	440	-	684	980	805					520	520	20	M36	2800
140	-	1950000	380	550	460	-	750	1055	875					570	590	24	M36	2800
150	-	2750000	460	630	520	-	850	1180	975					630	670	30	M36	2800

■ = Standard

¹⁾ Space required to align the coupling and replace the gasket

²⁾ For dimensions of type F see page 108. For type D see page 110.

³⁾ Size 10 and 15 available as type F only. From size 80 available as type D only.


⁴⁾ Maximum torque of the coupling T_K max = rated torque of the coupling T_{KN} x 2. For selection see page 14 et seqq.

L_H = E_H + l₁ + l₂
According to customer specification

Ordering example:


GEARex® FH 10	d ₁ Ø50	d ₂ Ø50	250
Type and size of coupling	Finish bore with keyway to DIN 6885 sheet 1	Finish bore with keyway to DIN 6885 sheet 1	Shaft distance dimension E _H

Components

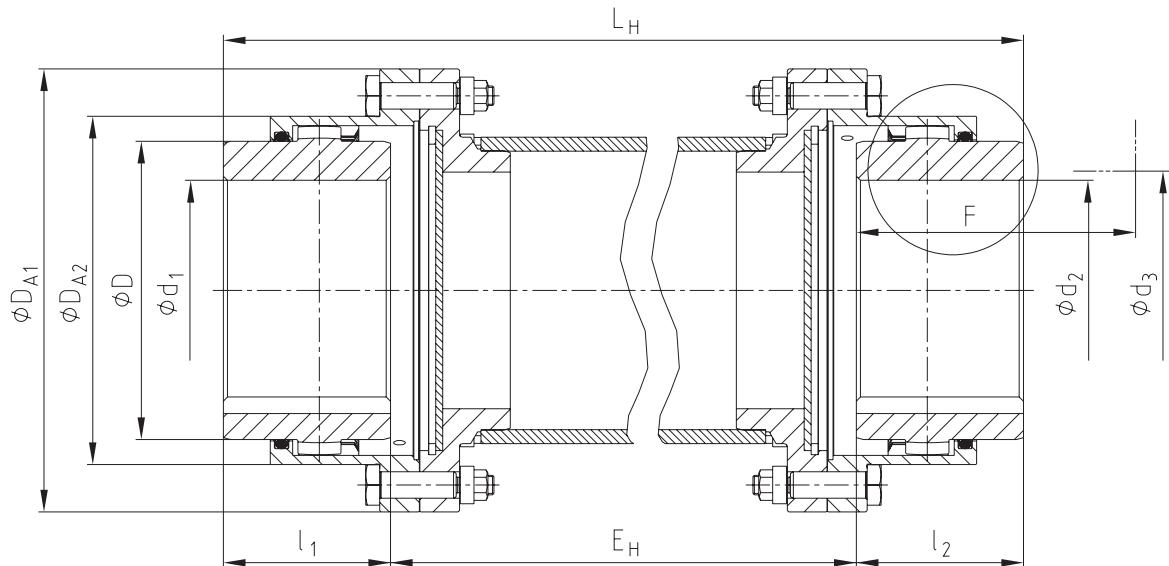


Types

Type FH

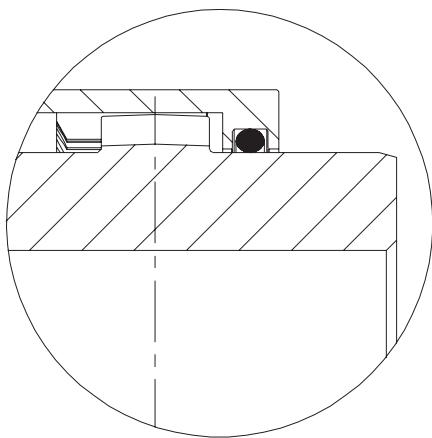


Type DH

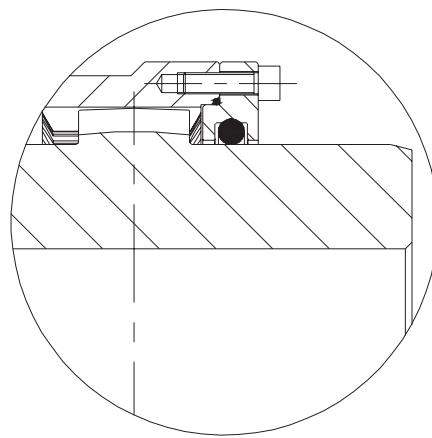

GEARex® SD

All-steel gear coupling

Shiftable coupling with shiftable linkage (at standstill)



Dimensions													
Size	Torque [Nm]	Max. finish bore		Dimensions [mm]									
		d ₁ , d ₂	E	l ₁	l ₂	l ₃	L	n	D	D _n	DA1	DA2	
10	1580	50	3	50	50	14	103	18	67	112.5	110	125	
15	3300	64	3	60	60	20	123	20	87	131	132	145	
20	6300	80	3	70	70	18	143	25	108	165	152	185	
25	11000	98	5	80	80	20.5	165	30	130	210.5	183	230	
30	17400	112	6	100	100	20	206	30	153	210.5	208	230	
35	28800	133	6	110	110	22.5	226	35	180	250.5	238	270	
40	48500	160	6	140	140	27.5	286	38	214	300.5	282	320	
45	62000	175	8	150	150	27.5	308	38	233	300.5	302	320	
50	86000	195	8	170	170	30	348	40	260	362	330	386	
55	110000	210	10	190	190	40	390	40	283	362	354	386	

Dimensions																				
Size	Shiftable linkage Size	Slip ring Size	Dimensions [mm]																	
			a	b	c	d ₃	d ₄	d ₅	e	F	g ₁	l ₂	l ₃	m	m ₁	m ₂	m ₃	m ₄	A	B
10	3	3.3	140	60	25	30	13.5	20	40	120	70	490	600	100	310	20	90	44	140	180
15	3	4.4	140	60	25	30	13.5	20	40	120	70	490	600	100	310	20	90	44	170	210
20	4	5.5	160	60	25	35	13.5	30	50	147.5	70	565	750	120	365	30	100	54	200	244
25	5	6.6	160	60	25	40	13.5	30	50	190	80	630	1025	120	410	30	110	62	250	300
30	5	6.6	160	60	25	40	13.5	30	50	190	80	630	1025	120	410	30	110	62	300	350
35	5	7.7	160	60	25	40	13.5	30	50	190	80	630	1085	120	410	30	110	62	300	350
40	6	8.8	160	60	25	40	13.5	30	50	265	80	760	1068	120	540	30	110	62	360	420
45	6	8.8	160	60	25	40	13.5	30	50	265	80	760	1068	120	540	30	110	62	360	420
50	6	9.9	160	60	25	40	13.5	30	50	265	80	760	1068	120	540	30	110	62	420	480
55	6	9.9	160	60	25	40	13.5	30	50	265	80	760	1068	120	540	30	110	62	420	480

Max. circumferential speed v = 20 m/s, referring to D_n.

Standard GEARex® SD couplings are not designed for continuous operation.

For displacement figures of the coupling refer to KTR standard 40311.

On request:


Other sizes or types for continuous operation available.

Shiftable linkage with locking pins, locking devices and retrieval of shift position available.

Ordering example:


GEARex® 30 SD	d ₁ Ø50	d ₂ Ø55	6.6	5
Size and type of coupling	Finish bore with keyway to DIN 6885 sheet 1		Slip ring Size	Shiftable linkage Size

Components

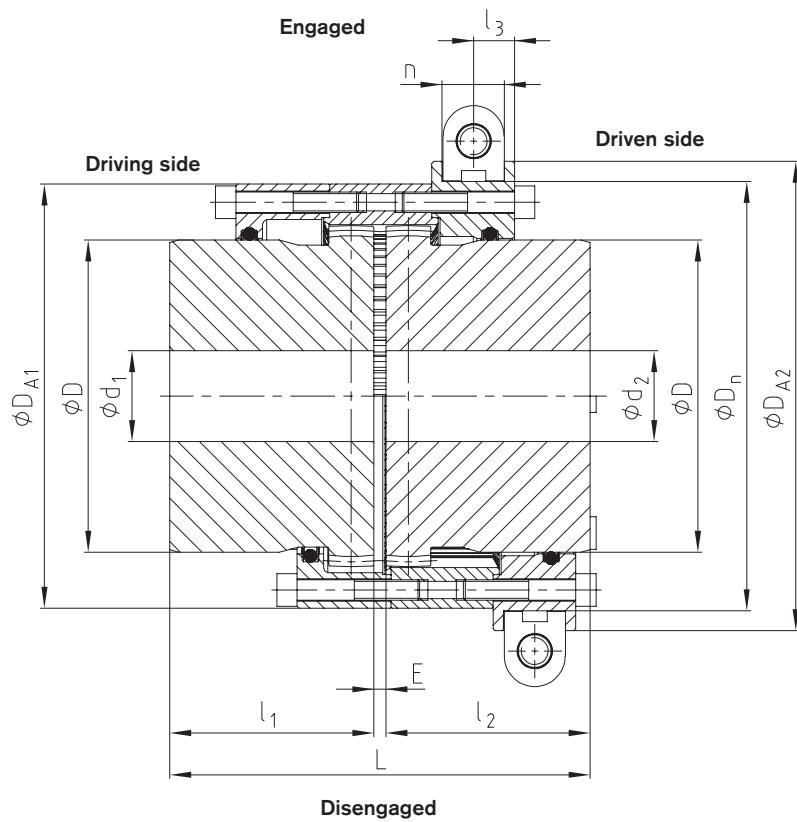

BoMlex®



Gear
couplings

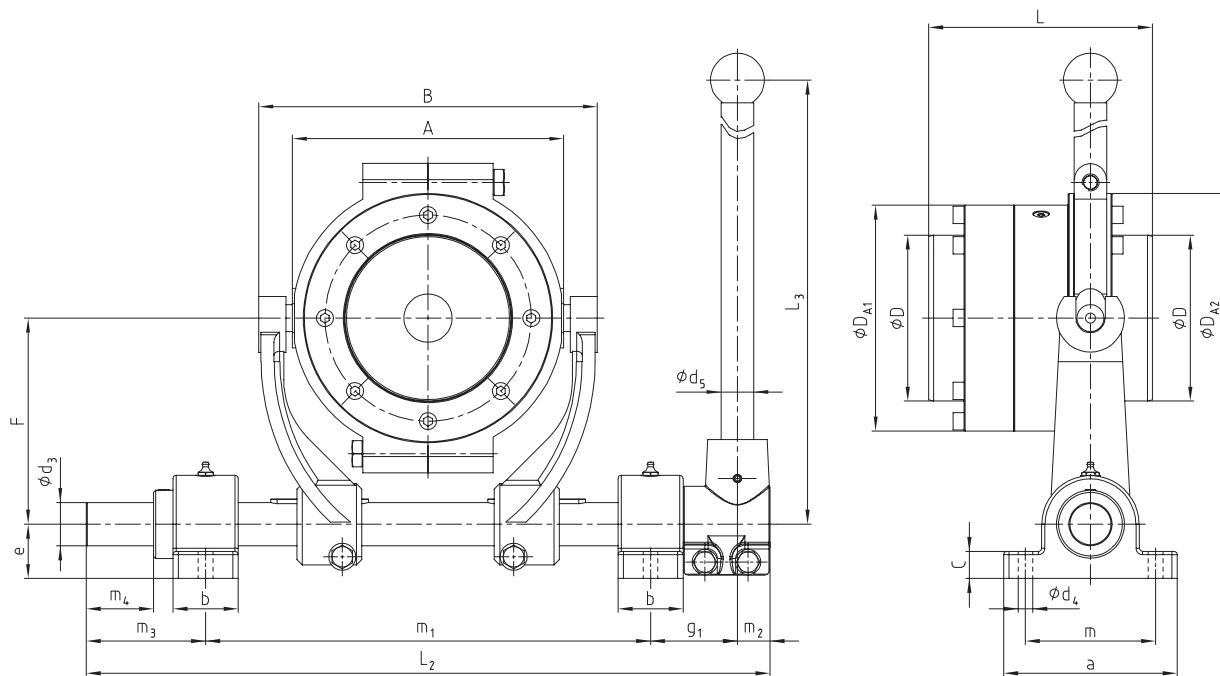

GEARex®

GEARex® FR and DR All-steel gear couplings

Single-cardanic, high power density

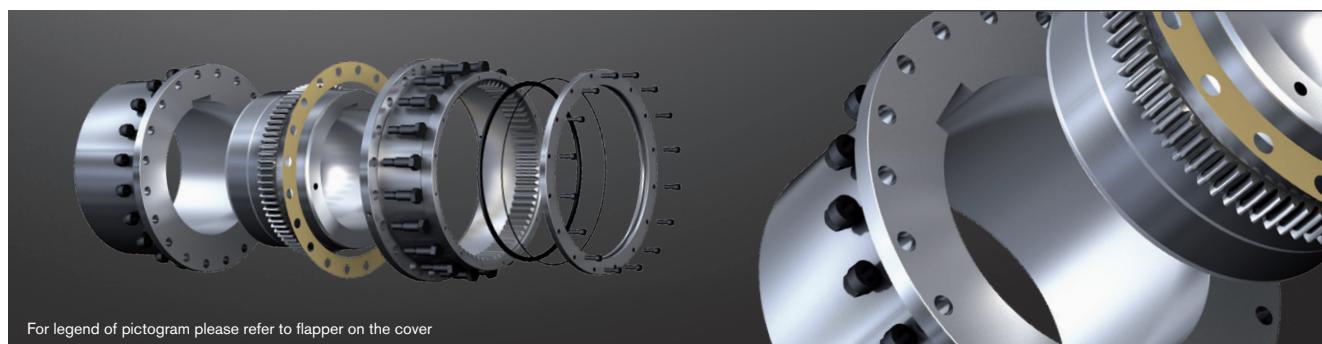

Size ³⁾	Dimensions														Dowel screw (10.9)		
	Torque [Nm] ⁴⁾		Max. finish bore		Dimensions [mm]												
	T _{KN}	T _{KN} (42CrMo4)	d ₁	d ₄	l ₁ , l ₂	Hub lengthened max. l ₁ , l ₂	D	D _{A1} ²⁾	D _{A2} ²⁾	D _F	L _R	F ¹⁾	d ₃ ¹⁾	z	M	T _A [Nm]	
10	930	1580	50	60	43	105	67	111	83	83	88	74	52	6	M6	15	
15	2000	3300	64	78	50	115	87	142	106	106	103	84	68	8	M8	36	
20	3500	6300	80	95	62	130	108	174	129	129	127	104	85	6	M10	72	
25	6500	11000	98	115	76	150	130	213	157	157	157	123	110	6	M12	125	
30	10000	17400	112	135	90	170	153	240	181	181	185	148	130	8	M12	125	
35	17000	28800	133	155	105	185	180	280	213	213	216	172	150	8	M14	200	
40	28500	48500	158	185	120	215	214	318	249	249	244	192	175	8	M14	200	
45	37000	62000	172	200	135	245	233	347	273	273	276	216	190	10	M14	200	
50	51000	86000	192	225	150	295	260	390	308	308	305	241	220	8	M18	430	
55	65000	110000	210	245	175	300	283	425.5	333	333	356	275	250	14	M18	430	
60	85000	145000	232	265	190	305	312	457	364.5	364.5	386	316	265	14	M18	430	
70	135000	240000	276	310	220	310	371	527	424	424	450	360	300	16	M20	610	
80	175000	300000	300	340	280	-	394	545	475	462	570	340	310	18	M20	610	
85	225000	380000	325	370	292	-	430	585	515	500	597	352	330	20	M20	610	
90	-	500000	350	400	305	-	464	640	560	546	623	365	360	20	M24	1000	
100	-	650000	390	440	330	-	512	690	612	594	673	390	400	24	M24	1000	
110	-	820000	420	480	350	-	560	765	665	647	710	410	420	20	M30	1700	
120	-	1050000	450	520	420	-	608	825	720	700	852	480	470	24	M30	1700	
130	-	1450000	500	560	440	-	684	980	805	760	890	520	520	20	M36	2800	
140	-	1950000	550	610	460	-	750	1055	875	835	930	570	590	24	M36	2800	
150	-	2750000	630	690	520	-	850	1180	975	935	1055	630	670	30	M36	2800	

= Standard

¹⁾ Space required to align the coupling and replace the gasket

²⁾ For dimensions of type F see page 108. For type D see page 110.


³⁾ Size 10 and 15 available as type F only. From size 80 available as type D only.

⁴⁾ Maximum torque of the coupling T_K max = rated torque of the coupling T_{KN} x 2. For selection see page 14 et seqq.

Ordering example:


GEARex® FR 10	d ₁ Ø50	d ₄ Ø60
Type and size of coupling	Finish bore with keyway to DIN 6885 sheet 1	Finish bore with keyway to DIN 6885 sheet 1

Components

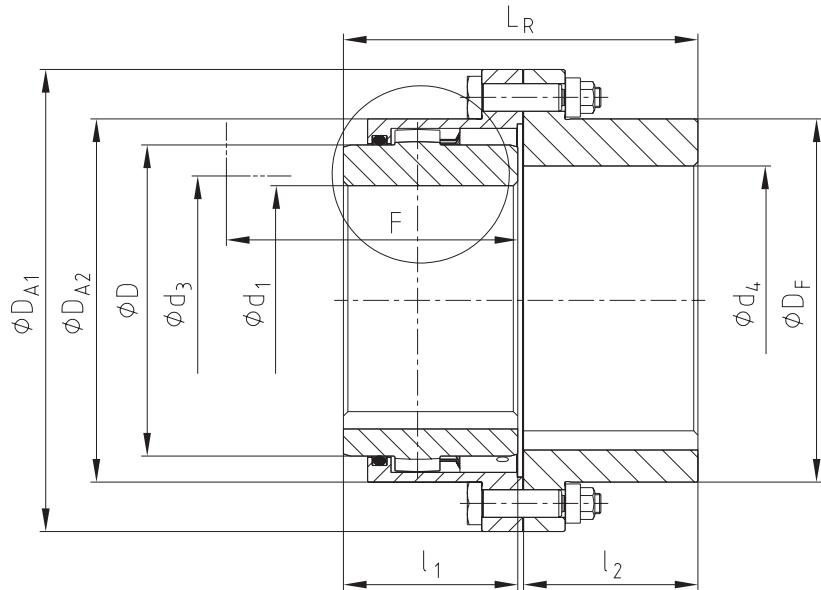


Types

Type FR

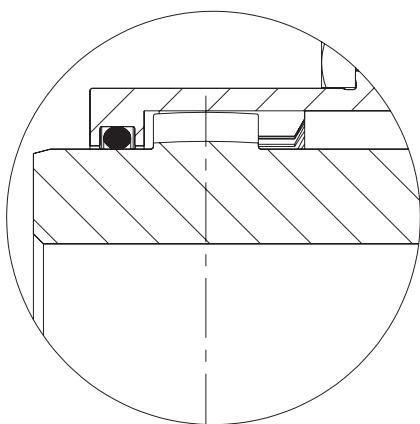


Type DR

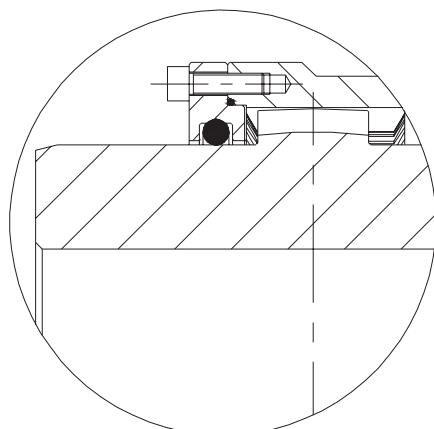


Displacements


Axial displacement

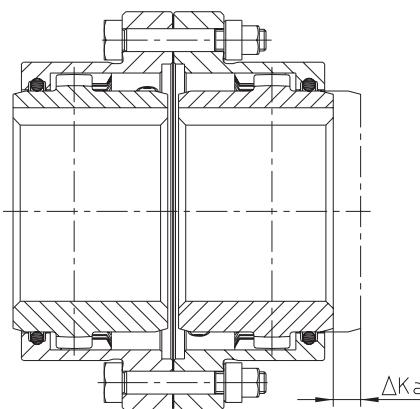

Radial displacement

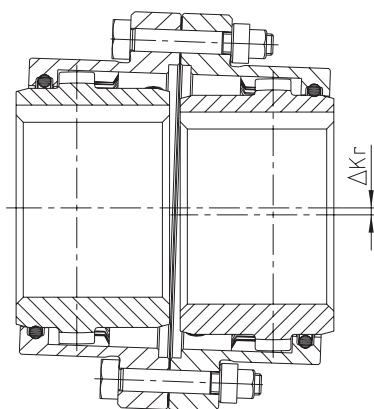

Angular displacement

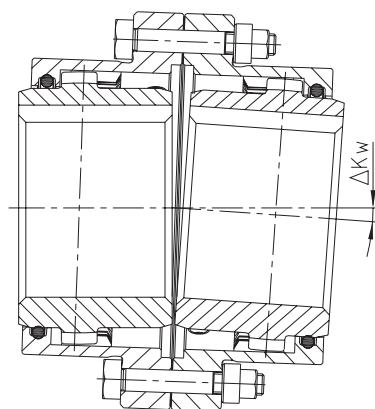

Displacements

Size	Max. axial displacement ΔK_a [mm]	Max. permissible displacements ¹⁾	
		ΔK_r [mm]	ΔK_w [$^{\circ}$]
10		± 0.4	
15		± 0.5	
20		± 0.6	
25	± 1.0	± 0.8	
30		± 1.0	
35		± 1.0	
40		± 1.2	
45		± 1.4	
50		± 1.6	
55	± 1.5	± 1.8	
60		± 2.0	0.5° each hub
70		± 2.2	
80		± 2.5	
85		± 2.8	
90	± 2.0	± 3.0	
100		± 3.2	
110		± 4.4	
120		± 5.5	
130		± 5.7	
140	± 2.5	± 6.0	
150		± 6.6	


¹⁾ The displacement figures are maximum figures which must not arise in parallel. If radial and angular displacements arise in parallel, the figures need to be reduced (see examples of calculation and diagramme).

Example 1:


$\Delta K_r = 30\%$
 $\Delta K_w = 70\%$

Example 2:

$\Delta K_r = 60\%$
 $\Delta K_w = 40\%$

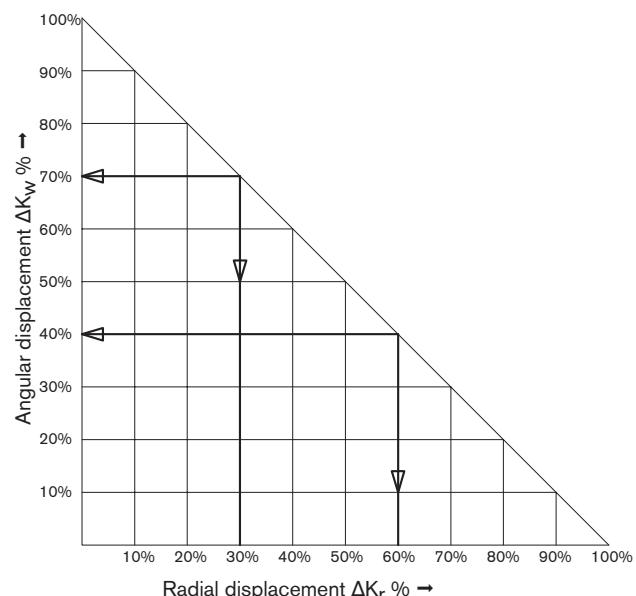


Flange dimensions in accordance with AGMA 9008-B00

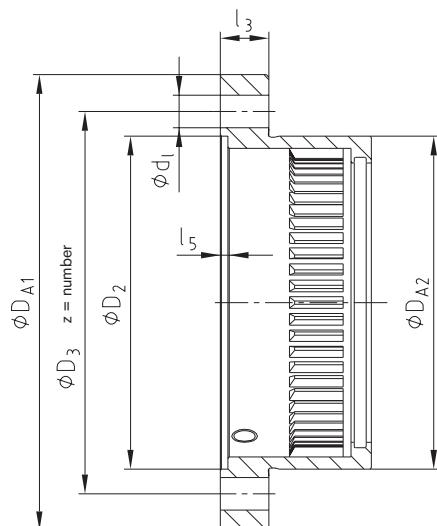


Size	Flange dimensions							
	Dimensions [mm]							
	D _{A1}	D _{A2}	D ₂	D ₃	d _l	z = number	l ₃	l ₅
10	111	83	82	95.25	6.35	6	14	3
15	142	106	105	122.24	9.52	8	19	3
20	174	129	130	149.23	12.70	6	19	3
25	213	157	153	180.97	15.87	6	22	4
30	240	181	178	206.38	15.87	8	22	4
35	280	213	205	241.30	19.05	8	28.5	5
40	318	249	243	279.40	19.05	8	28.5	4
45	347	273	265	304.80	19.05	10	28.5	5.5
50	390	308	302	342.90	22.22	8	38	6
55	425.5	333	320	368.30	22.22	14	38	6
60	457	364.5	353	400.05	22.22	14	26	6
70	527	424	412	463.55	25.40	16	28.5	8

Other types


Type I (with one-piece sleeve)

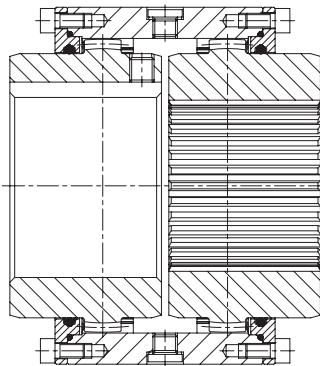

Type BK (with shear pins)

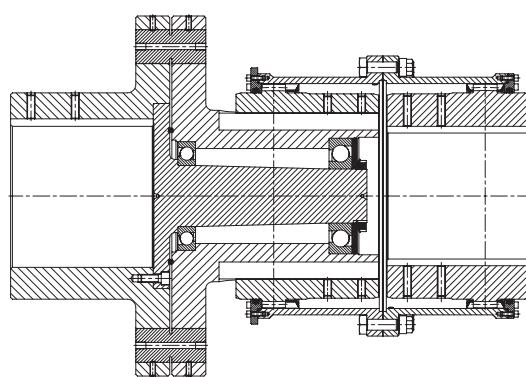

Type VD (for vertical assembly)

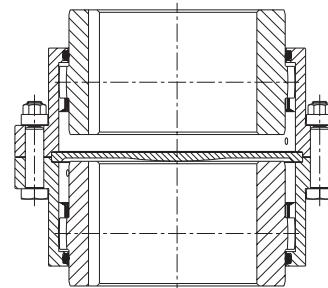



Backlash-free servo couplings

Types and operating description	120
---------------------------------	-----

ROTEX® GS

Design and operation	126
Technical data and displacements	128
Types of hubs	132
Basic programme	133
Standard types	134
Type Compact	136
Type clamping ring hubs light	138
Type clamping ring hubs steel	139
Type P according to DIN 69002	140
Type HP	142
Type P with ETP® clamping set	144
Type with expansion hub for hollow shaft connections	145
Type A-H drop-out center design couplings	146
Type DKM (double-cardanic)	148
Intermediate shaft couplings	150
Overview	154

TOOLFLEX®

Technical description	156
Types of hubs	157
Type S with setscrew	158
Type M with setscrew	159
Type S with clamping hubs	160
Type M with clamping hubs	162
Type KN	164
Type PI	166
Type CF	168
Type S-H / M-H	170
Type ZR	172

RADEX®-NC

Technical description	174
Laminae sets and hub types	175
Type DK and EK with clamping hub 2.5/2.6	176
Type DK and EK with clamping hub 3.5/3.6	177
Type DK and EK with clamping ring hub 6.5	178
Type ZR with clamping hub type DH 7.5	180

COUNTEX®

Standard types	182
----------------	-----

ROTEX® GS

ROTEX® GS HP

TOOLFLEX®

RADEX®-NC

COUNTEX®



BACKLASH-FREE SERVO COUPLINGS TYPES AND OPERATING DESCRIPTION

Properties of backlash-free couplings

				
Product	ROTEX® GS	TOOLFLEX®	RADEX®-NC	COUNTEX®
Type	Jaw coupling	Metal bellow-type coupling	Servo laminae coupling	Shaft encoder coupling
Properties				
Backlash-free	●	●	●	●
Torsionally stiff		●	●	●
Damping vibrations	●			
Maintenance-free	●	●	●	●
Axial plug-in	●	Optionally		●
Compensating for misalignment	●	●	●	●
Electrical insulation	●			●
Fail-safe	●			
Shear type		●		
Special features				
Applications	Backlash-free drives			
Core industries	Machine tools, automation technology, drive technology, medical technology, packaging technology	Drive technology, automation technology, medical technology, packaging technology, machine tools	Automation technology, drive technology, packaging technology, machine tools, medical technology	Automation technology, drive technology, medical technology
Applications	Main spindles Control & positioning technology (screw drives with incline $s < 40$, otherwise review by KTR) Gearboxes (for average to high transmission $i \geq 7$) Measuring and testing technology Miniature drives	Gearboxes (transmissions $i < 7$) Miniature drives Control & positioning technology (screw drives with incline $s \geq 40$)	Gearboxes (transmissions $i < 7$) Measuring & testing technology Miniature drives Control & positioning technology (screw drives with incline $s \geq 40$)	Measuring & control technology Miniature drives
Variation of components	very high	average	average	low
Torque range T_{KN} [Nm]				
Min.	0.2	0.1	2.5	0.3
Max.	5,850	600	3200	1.0
Max. circumferential speed v [m/s]				
Steel	depending on hub type up to 40 80 (type P) 175 (type HP)	depending on hub type up to 40	35	–
Aluminium	depending on hub type up to 50			
Torsion spring stiffness C_T [Nm/rad]				
Up to	1,308,850	322,740	1,050,000	235
Radial spring stiffness C_r [N/mm]				
Up to	20,290	1,365		70
Spiders / bellow / laminas / spacer				
Material	Polyurethane, Hytrel	Stainless steel	Stainless steel	PEEK
Elastomer hardness	flexible to torsionally stiff	–	–	torsionally stiff
Temperature range [°C] min./max.	-50/+120	-30/+100 (bonded)	-30/+200	-40/+160
		-30/+200 (flanged/welded)		
Geometries				
Design	compact	compact, short	compact, short	short
Mass moment of inertia	low	low	low	low
Shaft distance dimension	average	average	average	low
Shaft-hub-connection				
Positive-locking	●	Optionally	Optionally	Optionally
Non-positive (frictionally engaged)	●	●	●	●

● ≈ Standard

BACKLASH-FREE SERVO COUPLINGS TYPES AND OPERATING DESCRIPTION


Product finder of backlash-free couplings

Product	ROTEX® GS	TOOLFLEX®	RADEX®-NC	COUNTEX®
Type	Jaw coupling	Metal bellow-type coupling	Servo laminae coupling	Shaft encoder coupling
Types (extract)				
Elastomers can be radially disassembled » without displacing driving/driven side	A-H	-	-	-
Intermediate shaft type » bridging larger shaft distances	ZR1, ZR2, ZR3	ZR	ZR	-
Shaft-to-shaft connection	Standard	Standard	Standard	Standard
Flange-to-shaft connection	CFN, DFN, CF-DKM	CF	-	-
Flange-to-flange connection » particularly short mounting length	Optionally	Optionally	-	-
Single-cardanic	Standard	-	EK	-
Double-cardanic » compensating for big displacements » lower restoring forces	DKM	Standard	DK	Standard
Certifications				
ATEX		●		●

● ≈ Standard

Torsion angle

The diagramme alongside this text explains the influence of ROTEX®, ROTEX® GS, RADEX®-NC and TOOLFLEX® couplings on backlash and torsion angle. Due to the high torsion spring stiffness of RADEX®-NC and TOOLFLEX® the torsion angle is very low under torque. However, contrary to the flexible ROTEX® and the backlash-free ROTEX® GS damping of torsional vibrations etc. is not possible.

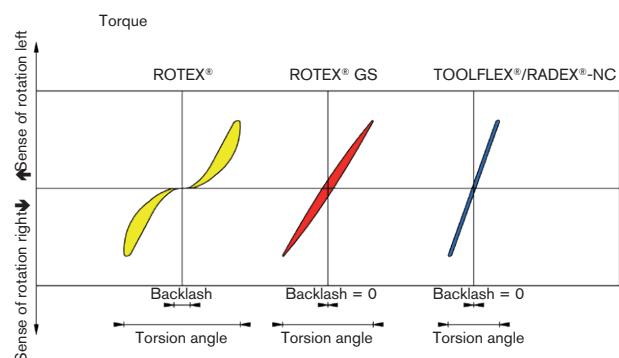

ROTEX® GS

Backlash-free jaw couplings

Technical description





ROTEX® GS is a three-part, axial plug-in coupling backlash-free under prestress. It impresses even with critical applications by its backlash-free power transmission, its stiffness which is each adapted to the application and its optimum damping of vibrations. Using this principle provides for significant options of assembly optimizing the assembly times in production.

The straight spline of the spider mounted under prestress results in a lower surface pressure and consequently higher stiffness of the coupling system. The flexible teeth compensating for misalignment are radially supported in the internal diameter by a web. This avoids too high internal or external deformation with high acceleration or high speeds. This is vital for a smooth operation and long service life of the coupling.

The pegs on the spider arranged reciprocally prevent a contact of the spider on the hubs over the full surface. Observing the distance dimension E ensures the ability of the coupling to compensate for displacements.

Observing the gap dimension „s“ ensures the electrical insulation as well as a long service life of the coupling. This mode is gaining more and more importance, due to the increasing precision of shaft encoders and the existing demand for electromagnetic compatibility (EMC).

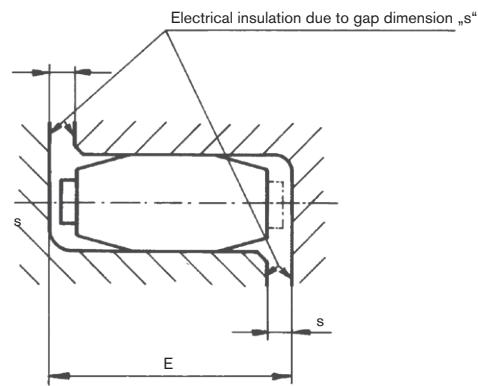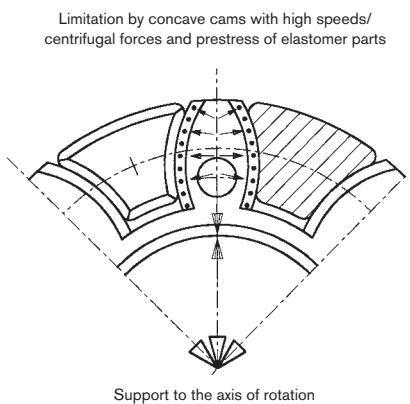

Advice

- Feather keyways available from a bore $\geq \text{Ø}6$. Feather keyways according to DIN 6885 sheet 1, tolerance JS9.
- Finish bore tolerance H7 (except for clamping hubs), from $\text{Ø}55$ G7 with clamping ring hubs
- Finish bore tolerance H6 for ROTEX® GS P and ROTEX® GS HP
- Recommended insertion dimension of shafts in the coupling hubs: l_1/l_2 ; for clamping ring hubs the minimum insertion dimension l_3 applies
- Spider with bore available on request. Please specify in the order as shown in the example on page 134.

Use in potentially explosive atmospheres

ROTEX® GS couplings are suitable for power transmission in drives in potentially explosive atmospheres. The couplings are assessed and approved as units of category 2G/2D according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 1, 2, 21 and 22. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.

Selection: If used in potentially explosive atmospheres the clamping ring hubs (clamping hubs without feather keyway only for use in category 3) must be selected in that there is a minimum safety factor of $s = 2$ between the peak torque of the machine including all operating parameters and the nominal torque and frictional locking torque of the coupling.

Technical description

ROTEX® GS HP is a backlash-free, axial plug-in, flexible jaw coupling developed for high-speed drives.

In contrast to the ROTEX® GS coupling this type has individual elastomers instead of a connected spider.

This allows to design the hubs as a completely enclosed shape so that both the cam section and the pocket part feature higher stiffness against loads in direction of rotation (torque shocks), but also in tangential direction (centrifugal force). The elastomers are embedded in the pocket part in a way that the high loads resulting from centrifugal forces do not have any negative influence on them and consequently on the overall drive system.



Instead of torques with circumferential speeds of a maximum of 100 m/s for ROTEX® GS P couplings, circumferential speeds up to 175 m/s can be reached with the new ROTEX® GS HP system.

ROTEX® GS

Backlash-free jaw couplings

Spiders

The flexible spiders for the GS series are available in five different kinds of Shore hardness, injected in different colours, either as a torsionally soft or hard material. These five spiders with different kinds of Shore hardness allow to easily adjust the ROTEX® GS to the individual conditions of an application considering the torsional spring stiffness and the vibration behaviour. The flexible prestress varies depending on the coupling size, the spiders/materials and the production tolerances. Resulting from it is the axial plug-in force starting from low as a close sliding fit or with torsionally soft spider to heavy with big prestress or torsionally rigid spider (see operating/assembly instruction KTR-N 45510 at www.ktr.com).


Along with an increasing hardness of the spider the torques to be transmitted and the stiffness of the spider increase, too. Along with reduced hardness of the spider the ability of compensating for displacements and damping the spider is increased.

Properties of ROTEX® GS spiders						
Description of spider hardness [Shore]	Marking of colour	Material	Perm. temperature range [°C]		Available for coupling size	Typical applications
			Permanent temperature ¹⁾	Max. temperature (short-time) ¹⁾		
80 ShA-GS		Polyurethane	-50 to +80	-60 to +120	Size 5 to 24	- drives of electric measuring systems
92 ShA-GS		Polyurethane	-40 to +90	-50 to +120	Size 5 to 55	- drives of electric measuring and control systems - Main spindle drives
98 ShA-GS		Polyurethane	-30 to +90	-40 to +120	Size 5 to 90	- Positioning drives - Main spindle drives - high load
52 ShD-GS ²⁾		Polyurethane	-40 to +120	-50 to +150	Size 24 to 42	- Positioning drives - backlash-free gears - Main spindle drives - High load with increased temperature
57 ShD-GS		Polyurethane	-30 to +90	-40 to +120	Size 19 to 48	- Positioning drives - Main spindle drives - high load
64 ShD-H-GS 64 ShD-GS		Hytral	-50 to +120	-60 to +150	Size 7 to 38	- Planetary gears/backlash-free gears - higher torsion spring stiffness
		Polyurethane	-20 to +110	-30 to +120	Size 42 to 90	- higher load - higher torsion spring stiffness
72 ShD-H-GS 72 ShD-GS		Hytral	-50 to +120	-60 to +150	Size 24 to 38	- very high torsion spring stiffness - very high load
		Polyurethane	-20 to +110	-30 to +120	Size 42 to 90	- very high torsion spring stiffness - very high load

Properties of ROTEX® GS HP tooth elements						
Description of spider hardness [Shore]	Marking of colour	Material	Perm. temperature range [°C]		Available for coupling size	Typical applications
			Permanent temperature	Max. temperature (short-time)		
98 ShA-GS 52 ShD-GS		Polyurethane	-30 to +90	-40 to +120	Size 24 to 65 (for ROTEX® GS HP only)	- HSC main spindle drives - Test benches with severely high speeds
64 ShD-GS		Polyurethane	-30 to +90	-40 to +120	Size 24 to 65 (for ROTEX® GS HP only)	- HSC main spindle drives - Test benches with severely high speeds - higher load - higher torsion spring stiffness

¹⁾ The temperature factors specified on page 23 must be considered.

²⁾ Torques and displacements same as with 98 ShA-GS spider

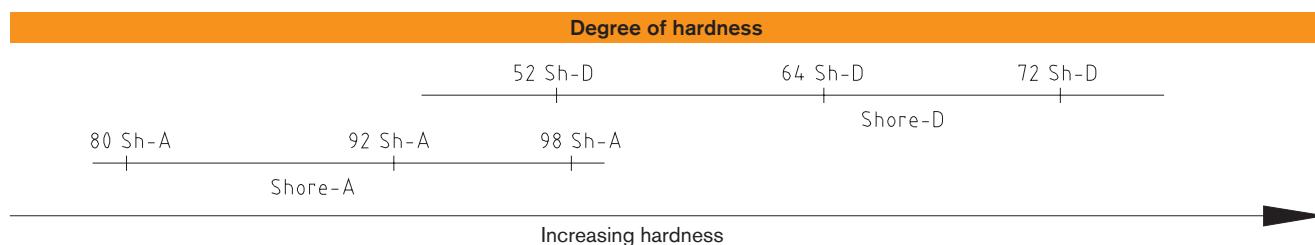

Spider material	Polyurethane			Hytral
Degree of hardness	92 Shore A	98 Shore A	64 Shore D	64 Shore D
Relative damping ψ [- ¹⁾	0.80	0.80	0.75	0.60
Resonance factor V_R [- ¹⁾	7.90	7.90	8.50	10.5

¹⁾ Special figures apply for ROTEX® GS HP, please contact us.

ROTEX® GS

Backlash-free jaw couplings

Technical data

Size	Spider GS Shore hardness	Shore scale	Max. speed [rpm] for type						Torque [Nm]		Static torsion spring stiffness ¹⁾ [Nm/rad]	Dynamic torsion spring stiffness ¹⁾ [Nm/rad]	Radial torsion spring stiffness C _r [N/mm]	Weight [kg]		Mass moment of inertia J [kgm ²]	
			2.0 / 2.1 2.5 / 2.6	2.8 2.9	1.0 1.1	6.0 light ²⁾	6.0 P ²⁾	DKM	T _{KN}	T _{K max}				Per hub ⁵⁾	Spider	Per hub ⁵⁾	Spider
5	80	A	38000	38000	47700			57300	0.3	0.6	3.15	10	82	0.001	0.2 $\times 10^{-3}$	0.015 $\times 10^{-6}$	0.002 $\times 10^{-6}$
	92	A							0.5	1.0	5.16	16	154				
	98	A							0.9	1.7	8.3	25	296				
7	80	A	27000					40900	0.7	1.4	8.6	26	114	0.003			
	92	A		27000	27000	34100			1.2	2.4	14.3	43	219		0.7 $\times 10^{-3}$	0.085	0.01
	98	A							2.0	4.0	22.9	69	421				
	64	D							2.4	4.8	34.3	103	630				
8	80	A	23800						0.7	1.4	8.8	27	117	0.003			
	98	A							2.0	4.0	23.5	71	433		0.5 $\times 10^{-3}$	0.117	0.0124
	64	D							2.4	4.8	35.3	106	648				
9	80	A	19000					28600	1.8	3.6	17.2	52	125	0.01			
	92	A		19000	19000	23800			3.0	6.0	31.5	95	262		1.7 $\times 10^{-3}$	0.48	0.085
	98	A							5.0	10.0	51.6	155	518				
	64	D							6.0	12.0	74.6	224	739				
12	80	A	15200					22900	3.0	6.0	84.3	252	274	0.02			
	92	A		15200	15200	19100			5.0	10.0	160.4	482	470		2.3 $\times 10^{-3}$	1.5	0.139
	98	A							9.0	18.0	240.7	718	846				
	64	D							12.0	24.0	327.9	982	1198				
13	80	A	12700						3.6	7.2	111	330	359	0.01	2.0 $\times 10^{-3}$	1.1	0.155
	98	A			38200				11.0	22.0	316	941	1109				
	64	D							14.5	29.0	430	1287	1570				
14	80	A	12700					19100	4.0	8.0	60.2	180	153	0.02			
	92	A		12700	12700	15900	32000		7.5	15.0	114.6	344	336		4.7 $\times 10^{-3}$	2.8	0.509
	98	A							12.5	25.0	171.9	513	654				
	64	D							16.0	32.0	234.2	702	856				
16	80	A	12000						5.0	10.0	157	471	400	0.02	3.6 $\times 10^{-3}$	2.8	0.435
	98	A							15.0	30.0	450	1341	1710				
	64	D							19.0	38.0	612	1835	2238				
19	80	A	9550					35800	6.0	12.0	618	1065	582	0.09			
	92	A							12.0	24.0	1090	1815	1120		7.6 $\times 10^{-3}$	19.5	1.35
	98	A		9550	9550	11900	24000 19000 ⁴⁾		21.0	42.0	1512	2540	2010				
	57	D							23.0	46.0	2036	3175	2470				
24	80	A	6950					10400	26.0	52.0	2560	3810	2930	0.2			
	92	A							35	70	2280	4010	1480				
	98	A							60	120	3640	5980	2560				
	57	D		6950	10400	8650	17000 14000 ⁴⁾		68	136	4335	8438	3128		0.02	81.9 $\times 10^{-6}$	6.7 $\times 10^{-6}$
28	72 ³⁾	D	5850					10400	75	150	5030	10896	3696	0.3			
	92	A							97	194	9944	17095	5799				
	98	A							95	190	4080	6745	1780				
	64	D							160	320	6410	9920	3200		184.2 $\times 10^{-6}$	14.85	
38	92	A	4750					17900	178	356	8335	15050	3775	0.6			
	98	A							200	400	10260	20177	4348				
	64	D							260	520	21526	36547	7876				
	72 ³⁾	D							190	380	6525	11050	2350				
42	92	A	4000					7150	325	650	11800	17160	4400	2.4			
	98	A							362	724	19050	28745	5437		0.05	542.7 $\times 10^{-6}$	39.4 $\times 10^{-6}$
	64	D							405	810	26300	40335	6474				
	72 ³⁾	D							525	1050	44584	71180	11425				
48	98	A	3600					5450	450	900	21594	37692	5570	3.3			
	57	D							587	1174	41695	72685	7102		0.09	4709	135
	64	D							655	1310	57630	99750	8274				
	72 ³⁾	D							852	1704	80000	136948	11359				
55	98	A	3150					4750	685	1370	42117	61550	6686	5.1			
	64	D							825	1650	105730	130200	9248		0.12	9460	229
	72 ³⁾	D							1072	2144	150000	209530	12762				
	98	A							940	1880	48520	71660	6418				
65	64	D	2800					11000	1175	2350	118510	189189	8870	6.7			
	72 ³⁾	D							1527	3054	160000	310000	11826		0.2	15143 $\times 10^{-6}$	437 $\times 10^{-6}$
	98	A						8950	1920	3840	79150	150450	8650				
	64	D							2400	4800	182320	316377	11923		0.3	32750	1179
75	98	A	2350						3120	6240	360540	586429	16454		0.105	87099	3362
	64	D							3600	7200	204500	302900	10700		0.6		
	72 ³⁾	D							4500	9000	429450	908700	14700		18.2		
	90	D		1900	2380	3800 ⁴⁾	7150		5850	11700	847440	1308852	20290				

¹⁾ Static and dynamic torsion spring stiffness with 0.5 x T_{KN}

²⁾ For higher speeds see ROTEX® GS HP

³⁾ When using the spider 72 ShD, we recommend to use hubs made of steel

⁴⁾ Clamping ring hubs 6.0 made of steel


⁵⁾ Hubs with an average bore type 1.0

The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition (see coupling selection on page 22 et seqq.). The specified torques T_{KN}/T_{K max} refer to the spider. The shaft-hub-connection needs to be inspected by the customer.

ROTEX® GS

Backlash-free jaw couplings

Notes for displacements

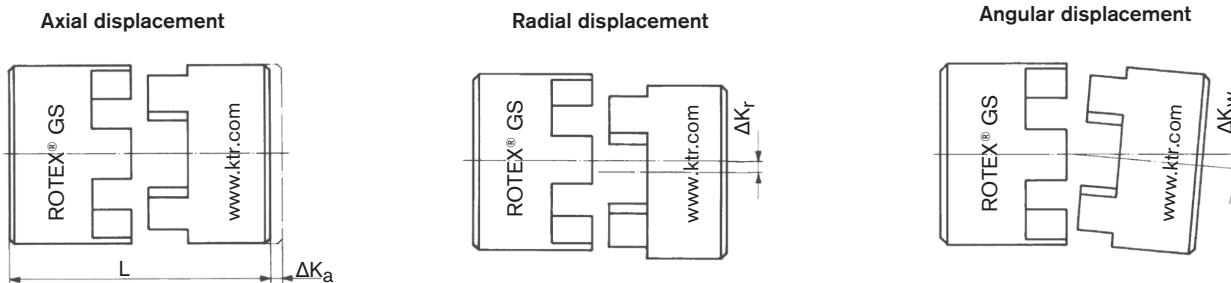

Due to its design the ROTEX® GS is able to absorb axial, angular and radial displacement, without causing any wear or premature failure of the coupling. As the spider is only stressed under pressure it is ensured that the coupling will remain backlash-free even after a longer operation period.

As an example, axial displacement may be generated by different tolerances of the connecting elements with assembly or by alteration of the shaft lengths if temperature fluctuations occur. As the shaft bearings usually cannot be axially stressed to a big extent, it is the task of the coupling to compensate for this axial displacement and keep the reaction forces low.

In case of pure angular displacement the imaginary bisecting lines of the shafts intersect in the center of the coupling. Within a permissible range this displacement can be absorbed by the coupling without extensive restoring forces being generated.

Radial displacement results from parallel displacement of the shafts towards each other, caused by different tolerances on the centerings or by mounting the power packs on different levels. Due to the kind of displacement the largest restoring forces are generated here, consequently causing the highest stresses on adjacent components.

In case of larger displacements (especially radial displacements) the ROTEX® GS type DKM double-cardanic system should be used in order to avoid excessive restoring forces.

The permissible displacement figures of the flexible ROTEX® GS couplings specified are general standard values taking into account the load of the coupling up to the rated torque TKN of the coupling and an ambient temperature of +30 °C. The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. The ROTEX® GS couplings are able to compensate for axial, radial and angular displacements. Careful and accurate alignment of the shafts increases the service life of the coupling.

ROTEX® GS


Backlash-free
servo couplings

TOOLFLEX®


RADEX®-NC

COUNTEX®


Axial displacement

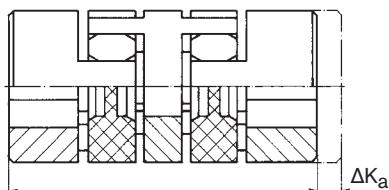

Radial displacement

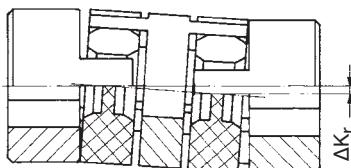

Angular displacement

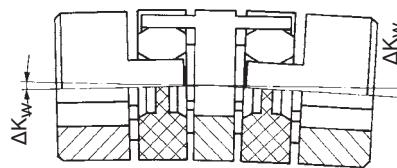

Shaft misalignment of ROTEX® GS type DKM

This design reduces the restoring forces arising with radial displacement to a minimum, due to the double-jointed operation, additionally the coupling is able to compensate for higher axial and angular misalignment.

ROTEX® GS

Backlash-free jaw couplings

Displacements

		Displacements					
Size	Spider GS	Standard displacements			DKM displacements		
		Axial ΔK_a ¹⁾ [mm]	Radial ΔK_r [mm]	Angular ΔK_w [degree]	Axial ΔK_a ¹⁾ [mm]	Radial ΔK_r [mm]	Angular ΔK_w [degree]
5	80 ShA	-0.2	0.12	1.1°	-0.4	0.15	1.1°
	92 ShA		0.06	1.0°		0.14	1.0°
	98 ShA		0.04	0.9°		0.13	0.9°
7	80 ShA	+0.6	0.15	1.1°	+0.6	0.23	1.1°
	92 ShA		0.10	1.0°		0.21	1.0°
	98 ShA		0.06	0.9°		0.19	0.9°
	64 ShD		0.04	0.8°		0.17	0.8°
8	80 ShA	+0.6	0.15	1.1°	—	—	—
	98 ShA		0.08	0.9°		—	—
	64 ShD		0.06	0.8°		—	—
9	80 ShA	+0.8	0.19	1.1°	+0.8	0.29	1.1°
	92 ShA		0.13	1.0°		0.26	1.0°
	98 ShA		0.08	0.9°		0.24	0.9°
	64 ShD		0.05	0.8°		0.21	0.8°
12	80 ShA	+0.9	0.20	1.1°	+0.9	0.35	1.1°
	92 ShA		0.14	1.0°		0.32	1.0°
	98 ShA		0.08	0.9°		0.29	0.9°
	64 ShD		0.05	0.8°		0.25	0.8°
13	80 ShA	+0.9	0.20	1.1°	—	—	—
	98 ShA		0.08	0.9°		—	—
	64 ShD		0.05	0.8°		—	—
14	80 ShA	+1.0	0.21	1.1°	+1.0	0.40	1.1°
	92 ShA		0.15	1.0°		0.37	1.0°
	98 ShA		0.09	0.9°		0.33	0.9°
	64 ShD		0.06	0.8°		0.29	0.8°
16	80 ShA	+1.0	0.21	1.1°	—	—	—
	98 ShA		0.10	0.9°		—	—
	64 ShD		0.08	0.8°		—	—
19	80 ShA	+1.2	0.15	1.1°	+1.2	0.49	1.1°
	92 ShA		0.10	1.0°		0.45	1.0°
	98 ShA		0.06	0.9°		0.41	0.9°
	57 ShD		0.05	0.85°		0.38	0.85°
	64 ShD		0.04	0.8°		0.36	0.8°
24	92 ShA	+1.4	0.14	1.0°	+1.4	0.59	1.0°
	98 ShA		0.10	0.9°		0.53	0.9°
	57 ShD		0.08	0.85		0.50	0.85
	64 ShD		0.07	0.8°		0.47	0.8°
28	72 ShD	-0.7	0.04	0.7°	-1.4	0.42	0.7°
	92 ShA		0.15	1.0°		0.66	1.0°
	98 ShA		0.11	0.9°		0.60	0.9°
	57 ShD		0.09	0.85		0.56	0.85
38	64 ShD	-0.7	0.08	0.8°	-1.4	0.53	0.8°
	72 ShD		0.05	0.7°		0.46	0.7°
	92 ShA	+1.8	0.17	1.0°	+1.8	0.77	1.0°
	98 ShA		0.12	0.9°		0.69	0.9°
42	57 ShD		0.10	0.85		-1.4	0.65
	64 ShD		0.08	0.85		-2.0	0.61
	72 ShD		0.07	0.7°		-2.0	0.54
	98 ShA		0.16	0.9°		-2.0	0.75
48	57 ShD	-1.0	0.13	0.85	-2.0	0.71	0.85
	64 ShD		0.11	0.8°		0.67	0.8°
	72 ShD		0.08	0.7°		0.59	0.7°
	98 ShA		0.17	0.9°		0.82	0.9°
55	64 ShD	-1.0	0.12	0.8°	-2.0	0.77	0.85
	72 ShD		0.09	0.7°		0.73	0.8°
	98 ShA		0.17	0.9°		0.64	0.7°
65	64 ShD	-1.0	0.12	0.8°	-2.0	0.91	0.9°
	72 ShD		0.09	0.7°		0.81	0.8°
	98 ShA		0.18	0.9°		0.71	0.7°
75	64 ShD	+2.6	0.13	0.8°	—	—	—
	72 ShD		0.10	0.7°		—	—
	98 ShA		0.21	0.9°		—	—
90	64 ShD	+3.0	0.15	0.8°	—	—	—
	72 ShD		0.11	0.7°		—	—
	98 ShA		0.23	0.9°		—	—
	64 ShD	+3.4	0.17	0.8°	—	—	—
	72 ShD		0.13	0.7°		—	—

¹⁾ The K_a figures specified have to be added to the length of the respective coupling type.

The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. Detailed mounting instructions are shown on our homepage www.ktr.com. For technical data of type HP see page 142.

ROTEX® GS

Backlash-free jaw couplings

Displacements of intermediate shaft coupling

Displacements of intermediate shaft couplings			
ROTEX® GS size (with 98 Sha-GS)	Axial ΔK_a [mm]	Radial ΔK_r ¹⁾ [mm]	Angular ΔK_w [degree]
14	+1.0	15	0.9°
	-1.0		
19	+1.2	14	0.9°
	-1.0		
24	+1.4	14	0.9°
	-1.0		
28	+1.5	14	0.9°
	-1.4		
38	+1.8	14	0.9°
	-1.4		
42	+2.0	14	0.9°
	-2.0		
48	+2.1	13	0.9°
	-2.0		
55	+2.2	13	0.9°
	-2.0		
65	+2.6	13	0.9°
	-2.0		

¹⁾ Radial displacements based on a coupling length $L_{ZR} = 1000$ mm

Calculation of overall torsion spring stiffness:


$$C_{\text{tot.}} = \frac{1}{2 \cdot \frac{1}{C_1} + \frac{L_{\text{pipe}}}{C_2}} \quad [\text{Nm/rad}]$$

$$\text{with } L_{\text{pipe}} = \frac{L_{ZR} - 2 \cdot L}{1000} \quad [\text{m}]$$


C_1 = torsion spring stiffness for spider see page 128

C_2 = from table on page 150 - 152

Axial displacement

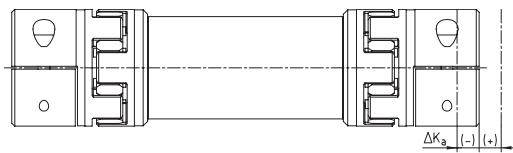

Radial displacement

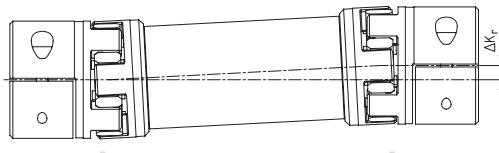

$$\Delta K_r = (L_{ZR} - 2 \cdot l_1 - E) \cdot \tan \Delta K_w$$

Angular displacement


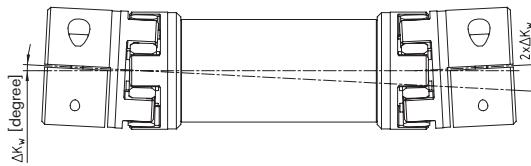


Chart of critical bending speeds for type ZR3

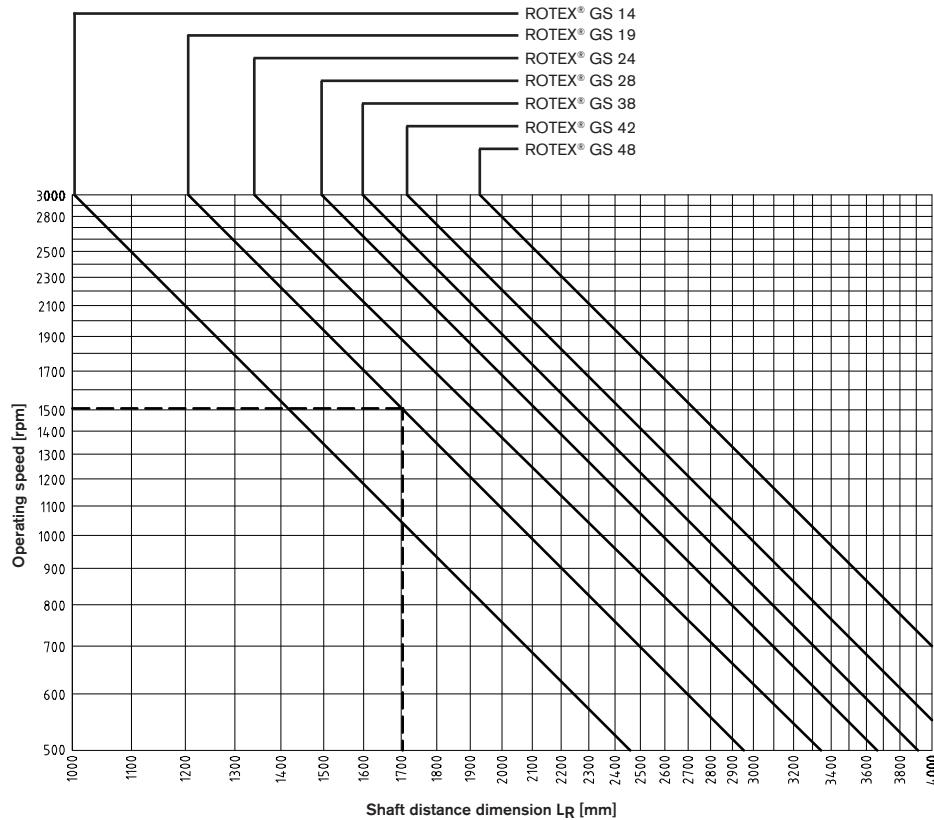

Example:

ROTEX® GS 19
Operating speed: 1500 rpm
Max. perm. shaft distance dimension: 1700 mm
Operating speed = $n_{\text{crit}}/1.4$

ROTEX® GS

Backlash-free jaw couplings

Types of hubs

Due to the numerous applications of ROTEX® GS for many different mounting situations, this coupling system is available with various hub types. The different hub types can be combined optionally within one size.



Type 1.0
with feather keyway and setscrew

Positive-locking power transmission, permissible torque depending on the permissible surface pressure. Not suitable for backlash-free power transmission with heavily reversing operation.



Type 1.5
with hydraulic clamping system

Integrated frictionally engaged shaft-hub-connection for transmitting high torques with easy assembly by means of a screw.



Type 2.0 clamping hub
single slot without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection. Transmittable torques depending on bore diameter. Type 2.0 up to size 14 as standard. (For ATEX category 3 only)



Type 2.5 clamping hub
double slotted, without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection. Transmittable torques depending on bore diameter. Type 2.5 from size 19 as standard. (For ATEX category 3 only)



Type 2.8 short-type clamping hub C
with axial slot, without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection, good properties of concentric running. Transmittable torques depending on bore diameter. Type 2.8 from size 24 as standard; size 7 - 19 type 2.8 single slotted. (For ATEX category 3 only)



Type 6.0 clamping ring hub

Integrated frictionally engaged shaft-hub-connection for the transmission of higher torques. Screwing on elastomer side. For details about torque and dimensions see page 138/139 and HP page 142. Suitable for high speeds.



Type 7.5 clamping hub type DH
without feather keyway for double-cardanic connections

Frictionally engaged, backlash-free shaft-hub-connection for radial assembly of coupling. Transmittable torques depending on bore diameter. For torques see page 150.



Type 7.8 clamping hub type H
without feather keyway for single-cardanic connection



Type 4.2 with CLAMPEX KTR 250

Frictionally engaged shaft-hub-connection to transmit high torques with clamping screws externally.



Type 1.1
without feather keyway, with setscrew

Non-positive torque transmission. Suitable for backlash-free transmission of very low torques. (For ATEX category 3 only)



Type 2.1 clamping hub
single slot with feather keyway

Positive-locking power transmission with additional friction fit. The friction fit avoids resp. reduces reverse backlash. Surface pressure of the keyway connection is reduced. Type 2.1 up to size 14 as standard.



Type 2.6 clamping hub
double slotted, with feather keyway

Positive-locking power transmission with additional friction fit. The friction fit avoids resp. reduces reverse backlash. Surface pressure of the keyway connection is reduced. Type 2.6 from size 19 as standard.



Type 2.9 short-type clamping hub C
with axial slot, with feather keyway

Positive-locking power transmission with additional friction fit. Surface pressure of the keyway connection is reduced. Type 2.9 from size 24 as standard; size 7 - 19 type 2.9 single slotted.



Type 6.0 precision clamping ring hub
Type 6.0 high-precision clamping ring hub

Operating principle equal to type 6.0, but highly accurate machining with slight modifications of design. See page 140/141.



Type 7.6 clamping hub type DH
with feather keyway for double-cardanic connections

Positive shaft-hub-connection with additional friction fit for radial assembly of coupling. The friction fit avoids resp. reduces reverse backlash. Surface pressure of the keyway connection is reduced.



Type 7.9 clamping hub type H
with feather keyway for single-cardanic connection



Type 9.0 expansion hub

Frictionally engaged connection for hollow shaft. Transmittable torques depend on bore diameter and hollow shaft.

Special designs on request of customers

Type 6.5 clamping ring hub



Design equal to 6.0, but only clamping screws externally. As an example for radial disassembly of intermediate pipe (special design).

Stock programme

		Finish bore [mm] according to ISO fit H7 / feather keyway with thread according to DIN 6885 sheet 1 - JS9																															
Size	Hub type	un/pilot bored	Ø2	Ø3	Ø4	Ø5	Ø6	Ø6.35	Ø7	Ø8	Ø9	Ø9.5	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	
7	1.1	●				●	●	●																									
	2.0	●		●	●	●	●		●	●																							
	2.8	●																															
8	2.8	●		●	●	●	●		●	●																							
	1.0	●																															
	1.1	●			●	●	●		●	●																							
9	2.0	●		●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	2.1	●																															
	2.8	●			●	●																											
12	1.0	●																		●													
	1.1	●																															
	2.0	●		●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
13	2.1	●																															
	2.8	●																															
	1.0	●																															
14	1.1	●																															
	2.0	●		●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	2.8	●																															
16	2.0	●																															
	2.1	●																															
	2.8	●																															
19	2.5	●						■																									
	2.6	●							●																								
	2.8	●							●																								
24	2.8	●																															
	6.0 light									●																							
	6.0 steel																																
28	6.0 P37.5																																
	6.0 P																																
	1.0	●																															
38	2.5	●							■																								
	2.6	●								●																							
	2.8	●									●																						

Taper bores for Fanuc motors:

GS 19 1:10 Ø11

GS 24 1:10 Ø16

¹⁾ Type 2.0/2.1



Finish bores [mm]																
Size	Hub type	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø80
42	6.0 light	●			●	●	●	●	●	●	●					
	6.0 steel	●	●	●	●	●	●	●	●	●	●					
48	6.0 light		●				●		●	●	●					
	6.0 steel		●	●	●	●	●	●	●	●	●					
55	6.0 steel			●	●	●	●	●	●	●	●					
	6.0 P															
75	6.0 steel															
	6.0 P															
90	6.0 steel															

Bores on request


ROTEX® GS

Backlash-free jaw couplings


Standard types

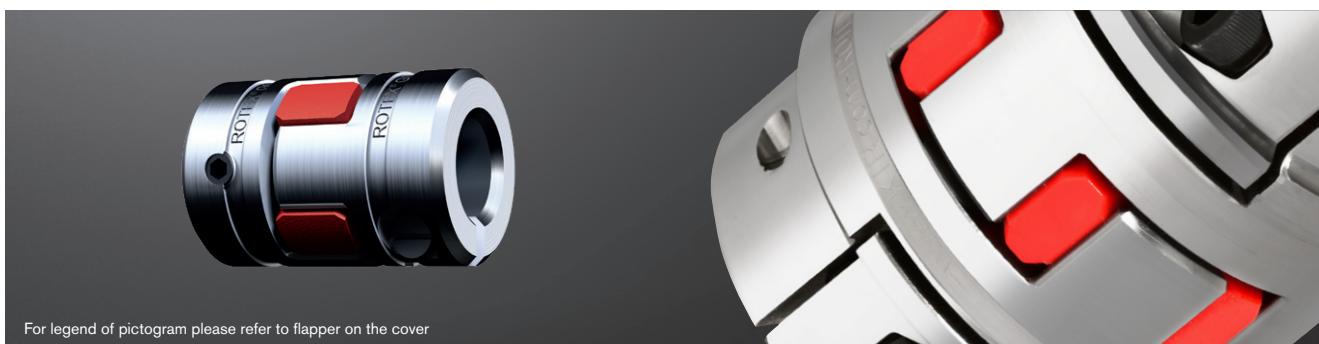

ROTEX® GS 5 - 38

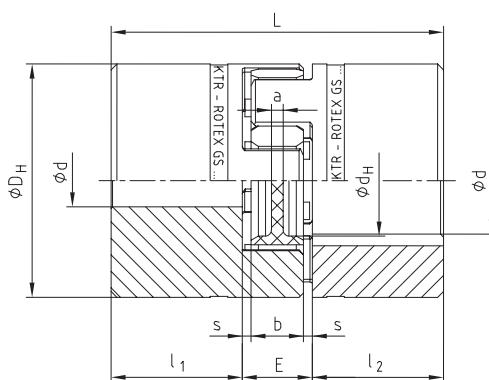


ROTEX® GS 42 - 90

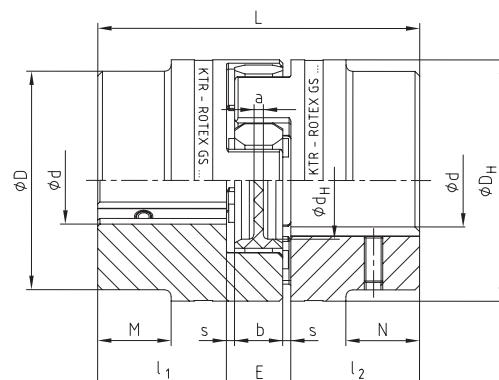


Types of hubs:

Type 1.0




with feather keyway
and setscrew

Type 1.1



without feather keyway,
with setscrew

Type 1.2



without feather keyway
and without setscrew

ROTEX® GS standard types - For size 5 to 38 hub material aluminium/for size 42 to 90 hub material steel



Size	Spider GS ¹⁾ torque T _K [Nm] for 98 ShA	d _{max.} for hub type				Dimensions [mm]								Setscrew DIN EN ISO 4029				
		1.0	1.1	1.2	D	D _H	d _H	L	l ₁ , l ₂	M, N	E	b	s	a	G	t	T _A [Nm]	
5	0.9	-	6	5	-	10	-	15	5	-	5	4	0.5	4.0	M2	2.5	0.35	
7	2.0	7	7	7	-	14	-	22	7	-	8	6	1.0	6.0	M3	3.5	0.6	
9	5.0	10	11	11	-	20	7.2	30	10	-	10	8	1.0	1.5	M4	5.0	1.5	
12	9.0	12	12	12	-	25	8.5	34	11	-	12	10	1.0	3.5	M4	5.0	1.5	
14	12.5	16	16	16	-	30	10.5	35	11	-	13	10	1.5	2.0	M4	5.0	1.5	
19	21	24	-	-	-	40	18	66	25	-	16	12	2.0	3.0	M5	10	2.0	
24	60	32	-	-	-	55	27	78	30	-	18	14	2.0	3.0	M5	10	2.0	
28	160	38	-	-	-	65	30	90	35	-	20	15	2.5	4.0	M8	15	10	
38	325	45	-	-	-	80	38	114	45	-	24	18	3.0	4.0	M8	15	10	
42	450	55	-	-	-	85	95	46	126	50	28	20	3.0	4.0	M8	20	10	
48	525	62	-	-	-	95	105	51	140	56	32	28	21	3.5	4.0	M8	20	10
55	685	74	-	-	-	110	120	60	160	65	37	30	22	4.0	4.5	M10	20	17
65	940	80	-	-	-	115	135	68	185	75	47	35	26	4.5	4.5	M10	20	17
75	1920	95	-	-	-	135	160	80	210	85	53	40	30	5.0	5.0	M10	25	17
90	3600	110	-	-	-	160	200	104	245	100	62	45	34	5.5	6.5	M12	30	40

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

Ordering example:	ROTEX® GS 24	98 ShA-GS	d 20	2.5 - Ø24		1.0 - Ø20	
	Coupling size	Spider hardness	Optional: Bore in spider	Hub type	Finish bore	Hub type	Finish bore

Types of hubs:



Type 2.0
Type 2.1



Size 5 to 14

Type 2.0: single slotted clamping hub **without** feather keyway
(only for ATEX cat. 3), torque depending on bore Ø
Type 2.1: single slotted clamping hub **with** feather keyway

Type 2.5
Type 2.6



from size 19

Type 2.5: double slotted clamping hub **without** feather keyway
(only for ATEX cat. 3), torque depending on bore Ø
Type 2.6: double slotted clamping hub **with** feather keyway

Size		Spider GS ¹⁾ torque T _{KN} [Nm] for 98 ShA		d _{max.} for hub type				Dimensions [mm]										Clamping screws DIN EN ISO 4762 (ROTEX® GS 5 - DIN EN ISO 1207)					
				2.0	2.1	2.5	2.6	D	D _H	d _H	L	I ₁ , I ₂	M, N	E	b	s	a	M ₁	t ₁	e	D _K	T _A [Nm]	
5	0.9	5	-	-	-	-	-	10	-	-	15	5	-	5	4	0.5	4.0	M1.2	2.5	3.5	11.4	- ²⁾	
7	2.0	7	7	-	-	-	-	14	-	-	22	7	-	8	6	1.0	6.0	M2	3.5	5.0	16.5	0.37	
9	5.0	11	11	-	-	-	-	20	7.2	30	10	-	10	8	1.0	1.5	M2.5	5.0	7.5	23.4	0.76		
12	9.0	12	12	-	-	-	-	25	8.5	34	11	-	12	10	1.0	3.5	M3	5.0	9.0	27.5	1.34		
14	12.5	16	16	-	-	-	-	30	10.5	35	11	-	13	10	1.5	2.0	M3	5.0	11.5	32.2	1.34		
19	21	-	-	24	24	-	-	40	18	66	25	-	16	12	2.0	3.0	M6	11.0	14.5	46	10.5		
24	60	-	-	28	28	-	-	55	27	78	30	-	18	14	2.0	3.0	M6	10.5	20.0	57.5	10.5		
28	160	-	-	38	38	-	-	65	30	90	35	-	20	15	2.5	4.0	M8	11.5	25.0	73	25		
38	325	-	-	45	45	-	-	80	38	114	45	-	24	18	3.0	4.0	M8	15.5	30.0	83.5	25		
42	450	-	-	50	45	85	95	46	126	50	28	26	20	3.0	4.0	M10	18	32.0	93.5	69			
48	525	-	-	55	55	95	105	51	140	56	32	28	21	3.5	4.0	M12	21	36.0	105	120			
55	685	-	-	68	68 ³⁾	110	120	60	160	65	37	30	22	4.0	4.5	M12	26	42.5	119.5	120			
65	940	-	-	70	70 ³⁾	115	135	68	185	75	47	35	26	4.5	4.5	M12	33	45.0	124	120			
75	1920	-	-	80	80	135	160	80	210	85	53	40	30	5.0	5.0	M16	36	51.0	147.5	295			
90	3600	-	-	90	90	160	200	104	245	100	62	45	34	5.5	6.5	M20	40	60.0	176	580			

¹⁾ For selections see page 22 et seqq./other spiders see page 127.²⁾ No T_A defined (slotted screw)³⁾ From Ø60 keyway opposite the clamping screw

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 2.0														
Size	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16
7	0.7	0.9	1.1	1.2	1.4									
9		1.6	1.9	2.2	2.6	2.9	3.2	3.5	3.8					
12		2.4	2.9	3.4	3.9	4.4	4.9	5.4	5.8	6.3				
14			3.1	3.6	4.2	4.7	5.2	5.7	6.2	6.7	7.1	7.6	8.0	8.5


Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 2.5																		
Size	Ø8	Ø10	Ø11	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40
19	23	25	31	33	35	39	41	42	46 ⁴⁾	49 ⁴⁾								
24	26	33	35	37	41	43	45	48	52	54	59							
28		63	67	71	79	82	86	94	101	105	115	122	129	139	148			
38		67	71	79	83	87	95	102	106	117	124	131	142	152	158	165	175	
42					188	197	214	231	240	264	281	297	320	343	358	373	395	417
48								356	394	418	442	478	513	536	558	592	624	646
55										456	493	529	553	577	611	646	668	724
65											499	536	560	584	620	655	677	734
75												1107	1175	1242	1287	1396	1503	1607
90												1764	1876	1985	2057	2235	2409	2579

⁴⁾ Clamping hub single slotted with 2-off clamping screws M4 and dimension e = 15, T_A = 2.9 Nm

ROTEX® GS Compact

Backlash-free jaw couplings

Compact design



Size	Spider GS ¹⁾ torque T _{KN} [Nm]				Dimensions [mm]										Clamping screws DIN EN ISO 4762			
	80 ShA	92 ShA	98 ShA	64 ShD	d _{max.}	D _H	D _K	L	I ₁ , I ₂	E	b	s	d _H	t	e	M	T _A [Nm]	
Single slotted hub type 2.8/2.9																		
7	0.7	1.2	2.0	2.4	7	14	16.6	18	5	8	6	1	—	2.5	5	M2	0.37	
8	0.5	—	2.0	2.4	8	15	17.3	20	7	6	5	0.5	6.2	4	5.4	M2	0.52	
9	1.8	3.0	5.0	6	9	20	21.3	24	7	10	8	1	—	3.5	6.7	M2.5	0.76	
12	3.0	5.0	9.0	12	12	25	26.2	26	7	12	10	1	—	3.5	8.3	M3	1.34	
13	3.6	—	11	14.5	12.7	25	25.7	26	8	10	8	1	10	4	8	M3	1.9	
14	4.0	7.5	12.5	16	16	30	31.6	32	9.5	13	10	1.5	—	4.5	10	M4	2.9	
16	5.0	—	15	19	16	30	32.5	32	10.3	11.4	9.4	1	14	5.3	10.5	M4	4.1	
19	6.0	12.0	21.0	26.0	24 ²⁾	40	45.5	50	17	16	12	2	—	9	14.0	M6	10	
Axially slotted hub type 2.8/2.9																		
24	—	35	60	75	32	55	57.5	54	18	18	14	2	—	11	20.0	M6	10	
28	—	95	160	200	35	65	69.0	62	21	20	15	2.5	—	12	23.8	M8	25	
38	—	190	325	405	45	80	86.0	76	26	24	18	3	—	15	29.5	M10	49	

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 2.8																										
Size	03	04	05	06	07	08	09	010	011	012	014	015	016	018	019	020	024	025	028	030	032	035	038	040	042	045
Single slotted hub type 2.8																										
7	0.7	0.9	1.1	1.2	1.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
8	1.0	1.2	1.5	1.8	2.0	2.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
9	—	1.5	1.8	2.1	2.4	2.7	3.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
12	—	2.3	2.8	3.3	3.8	4.3	4.7	5.2	5.6	6.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
13	—	3.1	3.9	4.6	5.2	5.9	6.5	7.1	7.8	8.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
14	—	—	5.0	5.9	6.8	7.7	8.5	9.4	10.2	11.0	7.2 ²⁾	7.7 ²⁾	8.1 ²⁾	—	—	—	—	—	—	—	—	—	—	—		
16	—	—	7.2	8.5	9.8	11.0	12.2	13.4	14.6	15.7	17.9	19.0	20.0	—	—	—	—	—	—	—	—	—	—	—		
19	—	—	—	—	—	18.7	20.8	22.9	24.9	26.9	30.8	32.7	34.6	38.2	40.0	41.8	36.0 ²⁾	—	—	—	—	—	—	—		
Axially slotted hub type 2.8																										
24	—	—	—	—	—	—	34	37	41	48	51	54	61	64	68	81	85	95	102	109	—	—	—	—		
28	—	—	—	—	—	—	—	—	—	87	93	100	112	118	124	149	156	174	187	199	218	—	—	—		
38	—	—	—	—	—	—	—	—	—	148	158	178	188	198	237	247	277	296	316	346	375	395	415	444		


¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ Size 14 with screw M3 and dimension e = 10.4/D_K = 30.5/T_A = 1.34 Nm; size 19 with screw M5 and dimension e = 15.5/D_K = 47mm/T_A = 6 Nm


Ordering example:
ROTEX® GS 38

ROTEX® GS 38	Compact	98 ShA-GS	d 28	2.8 - Ø28	2.8 - Ø45
Coupling size	Type	Spider hardness	Optional: Bore in spider	Hub type	Finish bore


ROTEX® GS 8, 13, 16
Compact
single slotted type 2.8

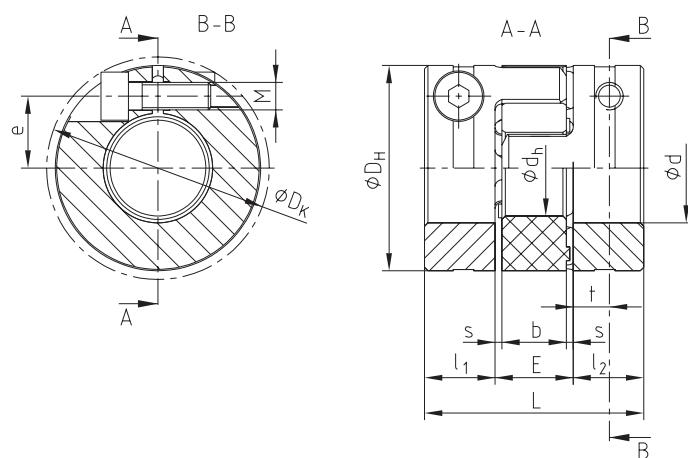

ROTEX® GS 7, 9, 12, 14, 19
Compact
single slotted type 2.8

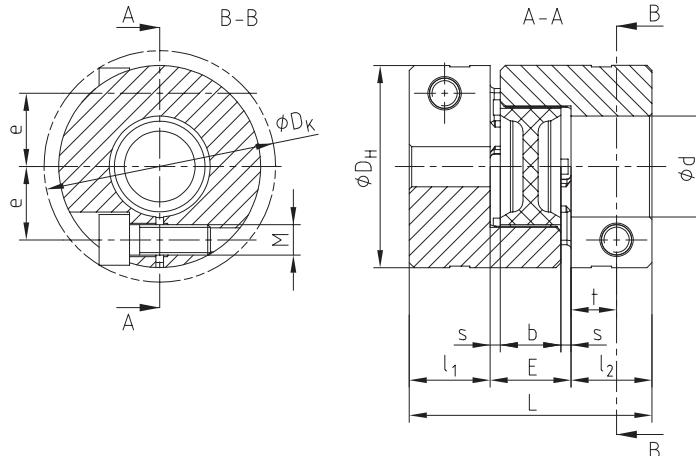


ROTEX® GS 24 - 38
Compact
axially slotted type 2.8

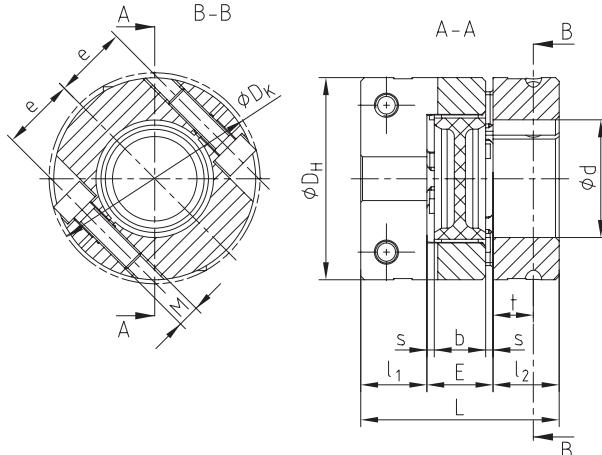


Types of hubs

Type 2.8



Short-type clamping hub C with axial slot, without feather keyway
Type 2.8 from size 24 as standard, size 7 - 19 type 2.8 single slotted

Type 2.9





Short-type clamping hub C with axial slot, with feather keyway
Type 2.9 from size 24 as standard, size 7 - 19 type 2.9 single slotted

ROTEX® GS Clamping ring hubs light


Backlash-free jaw couplings

Integrated clamping system made of aluminium

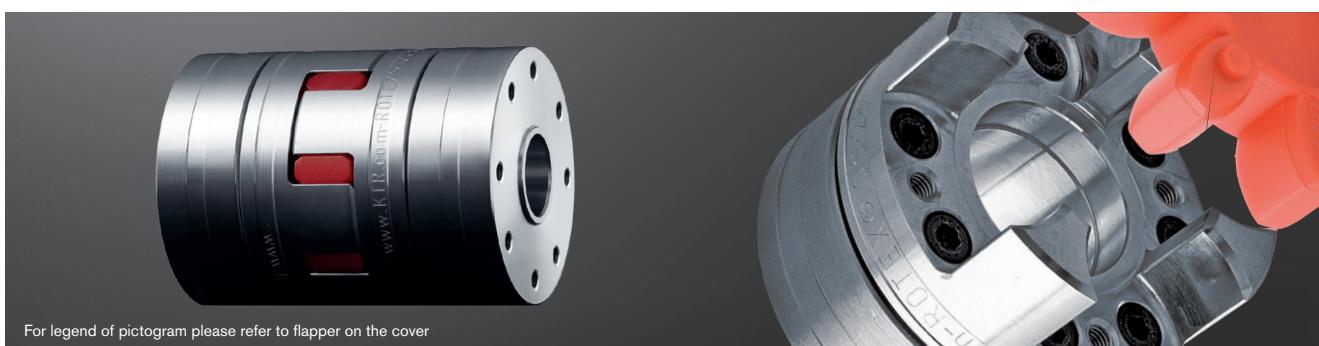

Extraction thread M₁ between clamping screws

Clamping ring hub light with block mounting
(hub and clamping ring mounted as a block)

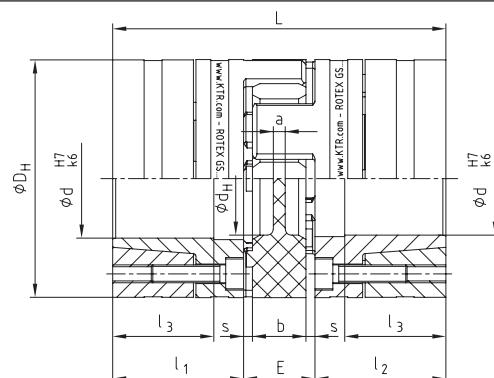

ROTEX® GS clamping ring hubs light

Size	Spider GS ¹⁾ torque TKN [Nm]			Dimensions [mm]										Clamping screws DIN EN ISO 4762				Weight per hub with max. bore [kg]	Mass moment of inertia per hub with max. bore [kgm ²]
	92 ShA	98 ShA	64 ShD	d _{max.}	D _H ²⁾	d _H	L	l ₁ , l ₂	l ₃	E	b	s	a	M	z = number	T _A [Nm]	M ₁		
13	-	11	14.5	13	25	10	34	12	9	10	8	1	-	M2	6	0.37	M2	0.014	1.39 x 10 ⁻⁶
14	7.5	12.5	16.0	14	30	10.5	50	18.5	13.5	13	10	1.5	2.0	M3	4	1.34	M3	0.032	0.04 x 10 ⁻⁴
19	12	21	26	20	40	18	66	25	18	16	12	2.0	3.0	M4	6	3	M4	0.077	0.19 x 10 ⁻⁴
24	35	60	75	32	55	27	78	30	22	18	14	2.0	3.0	M5	4	6	M5	0.162	0.78 x 10 ⁻⁴
28	95	160	200	38	65	30	90	35	27	20	15	2.5	4.0	M5	8	6	M5	0.240	1.70 x 10 ⁻⁴
38	190	325	405	48	80	38	114	45	35	24	18	3.0	4.0	M6	8	10	M6	0.490	5.17 x 10 ⁻⁴
42	265	450	560	51	95	46	126	50	35	26	20	3.0	4.0	M8	4	25	M8	0.772	11.17 x 10 ⁻⁴
48	310	525	655	55	105	51	140	56	41	28	21	3.5	4.0	M10	4	49	M10	1.066	18.81 x 10 ⁻⁴

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ ØD_H + 2 mm with high speeds for expansion of spider

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 6.0 light

Size	Ø3	Ø4	Ø5	Ø6	Ø8	Ø9	Ø10	Ø11	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55*	
13	H7/k6 H7/h6	1.3 ³⁾ 2.3 ³⁾ 4.3 ³⁾ 5.4 ³⁾ 10 ³⁾		6.3 2.4	8.9 4.8	10.6 5.4																					
14	H7/k6 H7/h6			8.2 5.8	13.1 9.5	18.7 15.7	20.5 16.6	25.9 21.6	36.2 24.7																		
19	H7/k6 H7/h6					33 27	41 35	59 52	71 65	51 39	80 68	92 81															
24	H7/k6 H7/h6						84 75	99 92	93 125	139 145	157 119	160 136	177 190	232 147 ⁴⁾													
28	H7/k6 H7/h6								140 121	207 187	188 157	289 263	316 293	355 318	414 381	324 245	404 324	422 343									
38	H7/k6 H7/h6									290 247	439 403	480 447	567 530	656 626	617 499	759 636	733 606	825 696	922 792	808 678	937 809						
42	H7/k6 H7/h6													651 574	752 681	747 613	916 774	1001 881	1115 1001	1044 888	1218 1058	1404 1241	1432 1295				
48	H7/k6 H7/h6													765 678	822 760	927 837	1121 1047	1220 1085	1357 1231	1318 1128	1536 1339	1768 1566	1535 1331	1823 1475			

* Standard bore tolerance H7, special tolerances on request * From Ø55 tolerance G7/m6

The friction torque is reduced with bigger fitting tolerances. Steel or nodular iron with a yield strength of approx. 250 N/mm² or more can be used as shaft material. For strength calculation of shaft/hollow shaft see KTR standard 45510 on our homepage www.ktr.com.

³⁾ Taper of hub with slot



⁴⁾ Clamping ring hub with screws M3, z = 8 and T_A = 2.9 Nm

Ordering example:	ROTEX® GS 24	98 ShA-GS	d 20	6.0 light - Ø24		6.0 light - Ø20	
	Coupling size	Spider hardness	Optional: Bore in spider	Hub type	Finish bore	Hub type	Finish bore


ROTEX® GS Clamping ring hubs made of steel

Backlash-free jaw couplings

Integrated clamping system made of steel

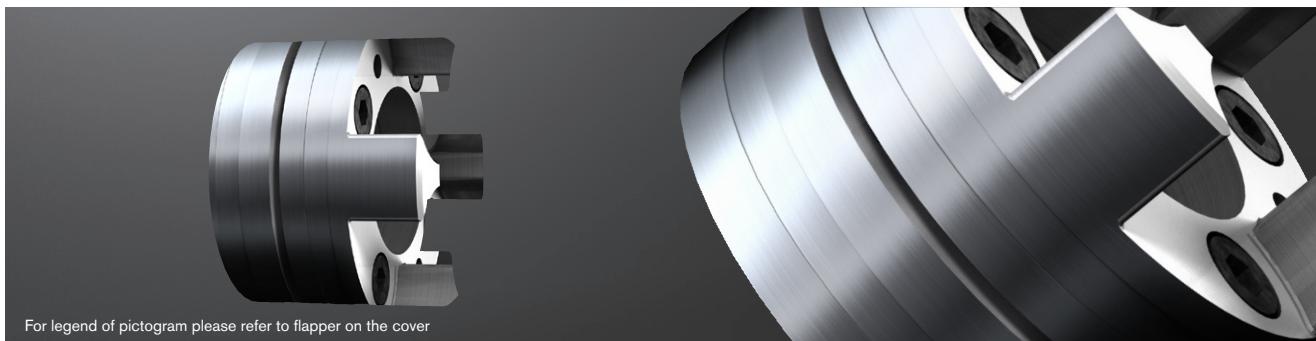

Extraction thread M₁
between clamping screws

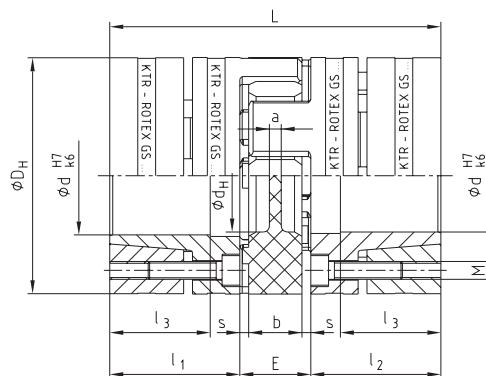

ROTEX® GS clamping ring hubs steel

Size	Spider GS ¹⁾ torque T _{KN} [Nm]			Dimensions [mm]									Clamping screws DIN EN ISO 4762				Weight per hub with max. bore [kg]	Mass moment of inertia per hub with max. bore [kgm ²]	
	98 ShA	64 ShD	72 ShD	d _{max.}	D _H ²⁾	d _H	L	l ₁ , l ₂	l ₃	E	b	s	a	M	z = number	T _A [Nm]	M ₁		
19	21	26	—	20	40	18	66	25	18	16	12	2.0	3.0	M4	6	4.1	M4	0.179	0.44 x 10 ⁻⁴
24	60	75	97	28	55	27	78	30	22	18	14	2.0	3.0	M5	4	8.5	M5	0.399	1.91 x 10 ⁻⁴
28	160	200	260	38	65	30	90	35	27	20	15	2.5	4.0	M5	8	8.5	M5	0.592	4.18 x 10 ⁻⁴
38	325	405	525	48	80	38	114	45	35	24	18	3.0	4.0	M6	8	14	M6	1.225	12.9 x 10 ⁻⁴
42	450	560	728	51	95	46	126	50	35	26	20	3.0	4.0	M8	4	41	M8	2.30	31.7 x 10 ⁻⁴
48	525	655	852	55	105	51	140	56	41	28	21	3.5	4.0	M10	4	69	M10	3.08	52.0 x 10 ⁻⁴
55	685	825	1072	70	120	60	160	65	45	30	22	4.0	4.5	M10	4	69	M10	4.67	103.0 x 10 ⁻⁴
65	940	1175	1527	70	135	68	185	75	55	35	26	4.5	4.5	M12	4	120	M12	6.70	191.0 x 10 ⁻⁴
75	1920	2400	3120	80	160	80	210	85	63	40	30	5.0	5.0	M12	5	120	M12	9.90	396.8 x 10 ⁻⁴
90	3600	4500	5850	105	200	104	245	100	75	45	34	5.5	6.5	M16	5	295	M16	17.7	1136 x 10 ⁻⁴

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ ØD_H + 2 mm with high speeds for expansion of spider

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 6.0 steel

Size	Ø10	Ø11	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55*	Ø60*	Ø65*	Ø70*	Ø80*	Ø90*	Ø95*	Ø100*	Ø105*	
19	H7/k6	27	32	69	84	57	94	110																					
	H7/h6	15	18	57	74	38	76	94																					
24	H7/k6			70	87	56	97	114	116	133	192																		
	H7/h6			55	74	32	72	93	84	103	173																		
28	H7/k6				108	131	207	148	253	285	315	382	330	433	503														
	H7/h6				74	97	172	94	207	242	267	343	260	377	453														
38	H7/k6						208	353	395	439	531	463	603	593	689	793	776												
	H7/h6						136	290	337	373	476	367	525	491	601	721	677												
42	H7/k6								445	495	595	526	677	671	775	718	872	1043	1061										
	H7/h6								387	429	540	429	600	569	687	599	773	970	978										
48	H7/k6									616	704	899	896	1030	962	1160	1379	1222	1543										
	H7/h6									513	590	806	775	924	822	1042	1290	1073	—										
55	H7/k6										863	856	991	918	1119	1110	1247	1277	1665	1605	2008								
	H7/h6										750	710	863	750	976	934	1089	—	—	—	—								
65	H7/k6											1446	1355	1637	1635	1827	1887	2429	2368	2930									
	H7/h6											1275	1135	1447	1404	1619	—	—	—	—	—								
75	H7/k6											1710	2053	2059	2294	2384	3040	2983	3664	4293									
	H7/h6											1460	1836	1797	2056	—	—	—	—	—									
90	H7/k6												3845	4249	4795	5859	5906	7036	8047	9247	9575	10845							
	H7/h6												3445	—	—	—	—	—	—	—	—	—							

* From Ø55 tolerance G7/m6


The friction torque is reduced with bigger fitting tolerances. For the strength calculation of shaft/hollow shaft see KTR standard 45510 on our homepage www.ktr.com.

Ordering example:	ROTEX® GS 24	98 ShA-GS d 20	6.0 steel - Ø24	6.0 steel - Ø20			
Coupling size	Coupling size	Spider hardness	Optional: Bore in spider	Hub type	Finish bore	Hub type	Finish bore

ROTEX® GS P

Backlash-free jaw couplings

Highly accurate type P according to DIN 69002



Size	Spider GS ¹⁾ torque T_{KN} [Nm]		Dimensions [mm]										Clamping screws DIN EN ISO 4762				Weight per hub d _{standard} ³⁾ [kg]	Mass moment of inertia per hub with bore d _{standard} ³⁾ [kgm ²]	
	98 ShA	64 ShD	d _{max.}	DH ²⁾	d _H	L	I ₁ , I ₂	I ₃	E	b	s	a	d ₃	M	z = number	T _A [Nm]	M1		
14 P	12.5	16	15	32	10.5	50	18.5	15.5	13	10	1.5	2	—	M3	4	1.89	M3	0.08	0.011 x 10 ⁻³
19 P	21	26	20	40	18	66	25	21	16	12	2	3	—	M4	6	3.05	M4	0.19	0.046 x 10 ⁻³
24 P	60	75	28	55	27	78	30	25	18	14	2	3	—	M5	4	8.5	M5	0.44	0.201 x 10 ⁻³
28 P	160	200	38	65	30	90	35	30	20	15	2.5	4	—	M5	8	8.5	M5	0.64	0.438 x 10 ⁻³
38 P	325	405	48	80	38	114	45	40	24	18	3	4	—	M6	8	14	M6	1.32	1.325 x 10 ⁻³
42 P	450	560	51	95	46	126	50	45	26	20	3	4	18.5	M8	4	35	M8	2.23	3.003 x 10 ⁻³
48 P	525	655	55	105	51	140	56	50	28	21	3.5	4	20.5	M10	4	69	M10	3.09	5.043 x 10 ⁻³
55 P	685	825	70	120	60	160	65	58	30	22	4	4.5	22.5	M10	4	69	M10	4.74	10.02 x 10 ⁻³
65 P	940	1175	70	135	68	185	75	55	35	26	4.5	4.5	30	M12	4	120	M12	6.70	191.0 x 10 ⁻⁴
75 P	1920	2400	80	160	80	210	85	63	40	30	5.0	5.0	40	M12	5	120	M12	9.90	396.8 x 10 ⁻⁴
90 P	3600	4500	105	200	104	245	100	75	45	34	5.5	6.5	50	M16	5	295	M16	17.7	1136 x 10 ⁻⁴

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ Ø DH + 2 mm with high speeds for expansion of spider

For the strength calculation of shaft/hollow shaft see KTR standard 45610 on our homepage www.ktr.com.

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 6.0 steel																																						
Size	Ø10	Ø11	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60*	Ø65*	Ø70*	Ø80*	Ø90*	Ø95*	Ø100*	Ø105*										
14	H6/k6	11	13	29																																		
	H6/h6	3	4	23																																		
19	H6/k6	34	41	75	90	68	104	119																														
	H6/h6	22	26	64	80	49	85	103																														
24	H6/k6	79	95	70	110	126	134	149	201																													
	H6/h6	64	82	46	85	104	101	119	183																													
28	H6/k6	128	150	225	177	278	307	341	403	366	461	528																										
	H6/h6	94	117	191	123	232	265	293	364	295	405	478																										
38	H6/k6				247	386	426	475	560	511	641	644	733	828	825	970																						
	H6/h6				174	323	368	408	505	415	564	542	645	757	726	897																						
42	H6/k6					389	433	512	464	585	586	669	631	753	888	906																						
	H6/h6					330	367	457	368	508	485	581	512	654	815	823																						
48	H6/k6						672	762	945	957	1082	1033	1219	1423	1296	1606																						
	H6/h6						568	647	852	836	977	892	1101	1334	1148	-																						
55	H6/k6								920	929	1055	1002	1190	1198	1325	1388	1743	1722	2088																			
	H6/h6								807	783	927	834	1047	1022	1168	-	-	-	-																			
65	H6/k6										1532	1465	1731	1750	1931	2034	2534	2521	3038																			
	H6/h6										1361	1245	1542	1520	1723	-	-	-	-																			
75	H6/k6										1835	2161	2190	2413	2551	3161	3158	3789	4421																			
	H6/h6										1585	1944	1928	2175	-	-	-	-		4046	4503	5057	6079	6181	7324	8398	9530	9892	11084									
90	H6/k6											3645	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
	H6/h6																																					

* From Ø55 tolerance G6/m6.

The friction torque is reduced with bigger fitting tolerances. For the strength calculation of shaft/hollow shaft see KTR standard 45610 on our homepage www.ktr.com.


Assignment for stub spindles according to DIN 69002																		
Spindle drive	ROTEX® GS P size	Dimensions according to DIN 69002																
		Standard spindle shaft diameter d	d ₁	d ₂	d ₃	DH	I ₁ , I ₂	L	E	Transmittable torque T_R with d [Nm] ³⁾	Weight per hub with bore d _{standard} ³⁾ [kg]	Mass moment of inertia with bore d _{standard} ³⁾ [kgm ²]						
25 x 20	14 P	14	17	17	8.5	32	18.5	50	13	25	0.08	0.011 x 10 ⁻³						
32k x 25	19 P37.5	16	20	19	9.5	37.5	25	66	16	60	0.16	0.037 x 10 ⁻³						
32g x 30	19 P	19	23	22	9.5	40	25	66	16	71	0.19	0.046 x 10 ⁻³						
40 x 35	24 P50	24	28	29	12.5	50	30	78	18	108	0.331	0.136 x 10 ⁻³						
50 x 45	24 P	25	30	30	12.5	55	30	78	18	170	0.44	0.201 x 10 ⁻³						
63 x 55	28 P	35	40	40	14.5	65	35	90	20	506	0.64	0.438 x 10 ⁻³						
80 x 75	38 P	40	46	46	16.5	80	45	114	24	821	1.32	1.325 x 10 ⁻³						

³⁾ Standard spindle shaft diameter


Ordering example:	ROTEX® GS P 24	98 ShA-GS	6.0 - Ø25	6.0 - Ø25
Coupling size	Spider hardness	Hub type	Finish bore	Hub type

Components

Extraction thread M₁
between clamping screws

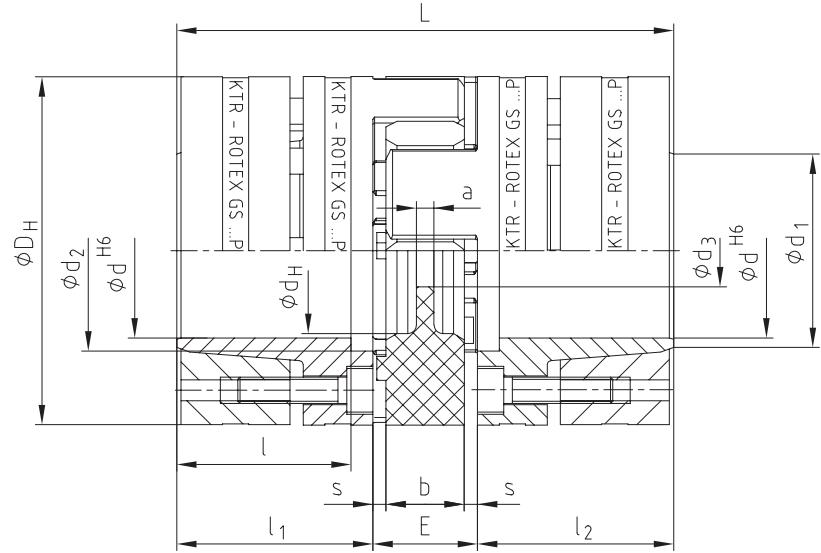



ROTEX® GS P with central coolant supply for stub spindles and multiple spindle heads

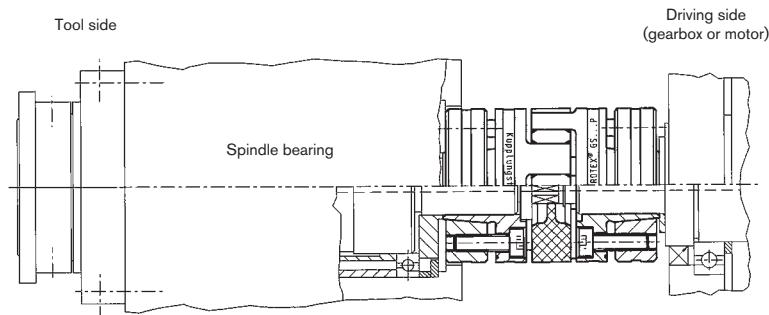

ROTEX® GS HP

Backlash-free shaft coupling

Highly accurate closed coupling system

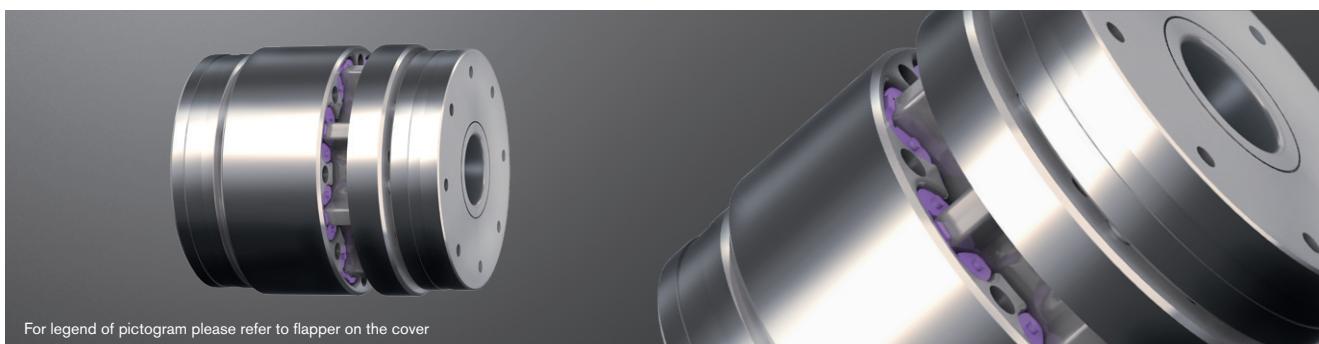

ROTEX® GS HP - clamping ring hubs/clamping ring material steel																		
Size	Tooth element ROTEX® GS HP ⁱ⁾		Max. speed [rpm]	Dimensions [mm]											Clamping screws DIN EN ISO 4762		Weight of coupling with max. bore [kg]	Mass moment of inertia of coupling with max. bore [kgm ²]
	52 ShD	64 ShD		Max. d ₁ , d ₂	DH	D	L	l ₁ , l ₂	l ₃ , l ₄	N	E	b	s	M	z = number	T _A [Nm]		
24	100	125	59,000	25	55	48	73	24.5	18	15	24	20	2	5	5	7.7	0.74	0.000317
28	160	200	47,000	35	66	58	78	27	17	17	24	20	2	5	6	7.7	1.02	0.000653
38	400	500	39,000	45	80	76	82	29	18	18	24	20	2	5	8	7.7	1.54	0.001534
42	475	590	35,000	51	95	82	99	36	24	24	27	22	2.5	6	8	13	2.59	0.003441
48	550	685	30,000	55	105	92	101	37	25	25	27	22	2.5	6	9	13	3.39	0.005481
55	725	905	26,000	60	120	105	103	38	26	26	27	22	2.5	6	10	13	6.84	0.009172
65	1075	1340	22,500	70	139	125	107	40	27	25.3	27	22	2.5	6	12	14	7.00	0.019633

ⁱ⁾ For selections see page 22 et seqq./other spiders see page 127.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 6.0 steel																				
Size		Ø12	Ø15	Ø18	Ø19	Ø20	Ø22	Ø25	Ø28	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55 *	Ø60 *	Ø65 *
24	H6/k6	55	102	165	115	133	172	241												
	H6/h6	34	82	150	81	100	143	222												
28	H6/k6		125	199	226	158	202	280	246	340	432									
	H6/h6		99	177	201	111	157	240	195	292	398									
38	H6/k6					216	274	376	374	508	635	586	666	752	649					
	H6/h6					170	231	339	318	452	592	509	589	674	524					
42	H6/k6								665	830	1015	770	871	1035	1215	1153				
	H6/h6								570	749	953	656	766	948	1150	1076				
48	H6/k6													1128	1321	1530	1211	1477		
	H6/h6													914	1102	1306	985	—		
55	H6/k6													1314	1543	1562	1711	1562	1915	
	H6/h6													1217	1463	1329	1474	—	—	
65	H6/k6													1606	1852	2026	1891	2306	2134	
	H6/h6													1349	1584	1751	—	—	—	

* From Ø55 G6/m6.

The friction torque depends on the speed.


The friction torque is reduced with bigger fitting tolerances. For the strength calculation of shaft/hollow shaft see KTR standard 45710 on our homepage www.ktr.com.

Technical data										
Size	Tooth element ROTEX® GS HP	Displacements			Torsional stiffness [Nm/rad]			Radial spring stiffness [N/mm]		Axial stiffness [N/mm]
		Axial ΔKa [mm]	Radial ΔKr [mm]	Angular ΔKw [degree]	C _T stat.	C _T dyn.	Cr	C _a		
24	52 ShD			0.10	0.9	5,740	10,950	7,210	3,440	
	64 ShD			0.07	0.8	8,040	17,520	10,100	4,820	
28	52 ShD		+1.0/-0.8	0.10	0.9	13,190	23,980	8,380	4,360	
	64 ShD			0.07	0.8	18,470	38,370	11,740	6,110	
38	52 ShD			0.10	0.9	47,260	69,000	11,190	6,280	
	64 ShD			0.07	0.8	66,160	110,400	15,670	8,790	
42	52 ShD			0.14	0.9	90,000	101,750	12,490	7,410	
	64 ShD			0.10	0.8	126,000	162,800	17,490	10,380	
48	52 ShD			0.14	0.9	109,030	128,530	11,480	8,230	
	64 ShD		+1.4/-1.0	0.10	0.8	152,640	205,640	16,070	11,520	
55	52 ShD			0.14	0.9	148,750	198,940	12,240	9,830	
	64 ShD			0.10	0.8	208,250	318,300	17,140	13,770	
65	52 ShD			0.14	0.9	110,350	295,200	14,000	14,820	
	64 ShD			0.10	0.8	154,490	472,300	19,600	20,750	

The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. Detailed mounting instructions are shown on our homepage www.ktr.com.

Ordering example:	ROTEX® GS 24 HP	98 ShA-GS	d1 6.0 - Ø25		d2 6.0 - Ø25	
	Coupling size	Hardness of tooth element	Hub type	Finish bore	Hub type	Finish bore

Components

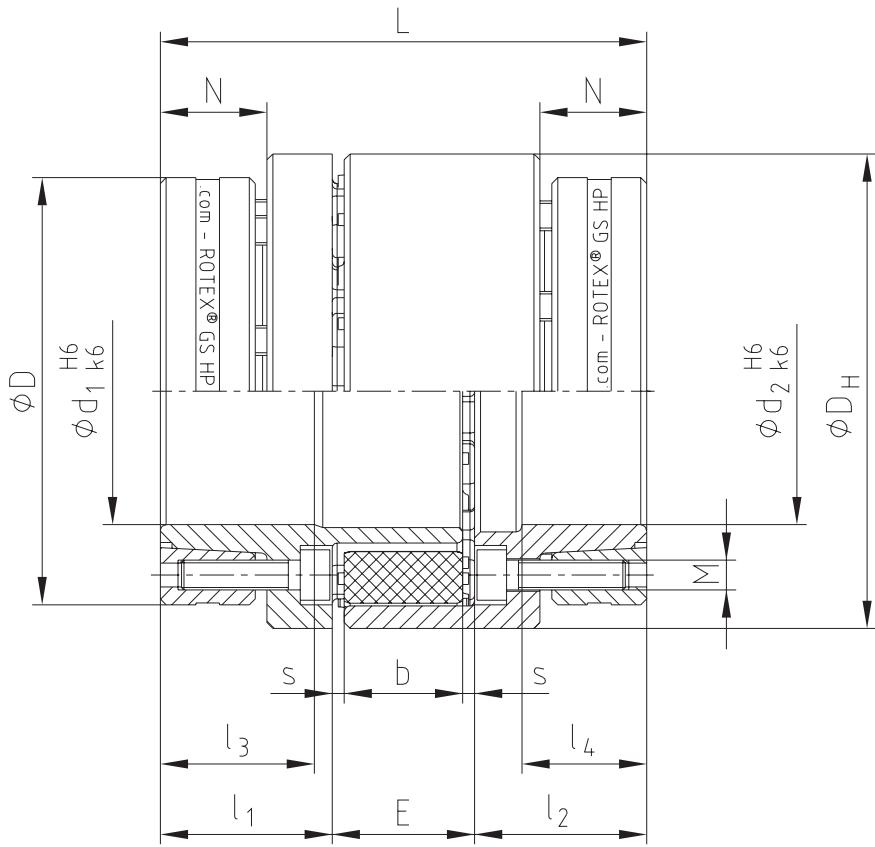

COUNTEX®

RADEX®-NC

TOOLFLEX®




Backlash-free
servo couplings

ROTEX® GS

ROTEX® GS P ETP®

Backlash-free jaw couplings

Integrated hydraulic clamping system

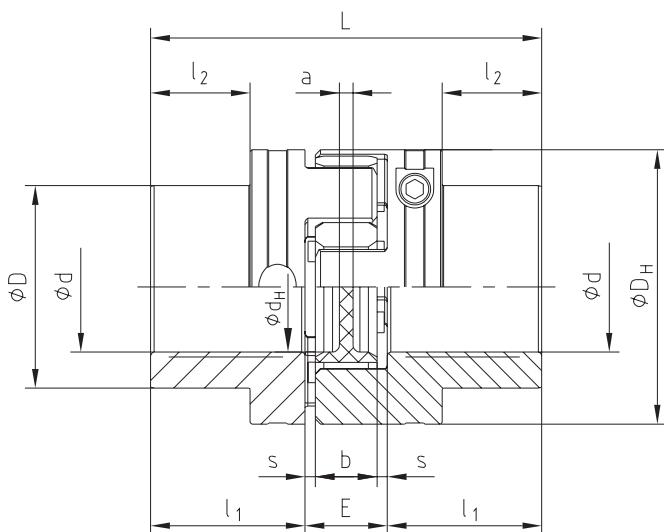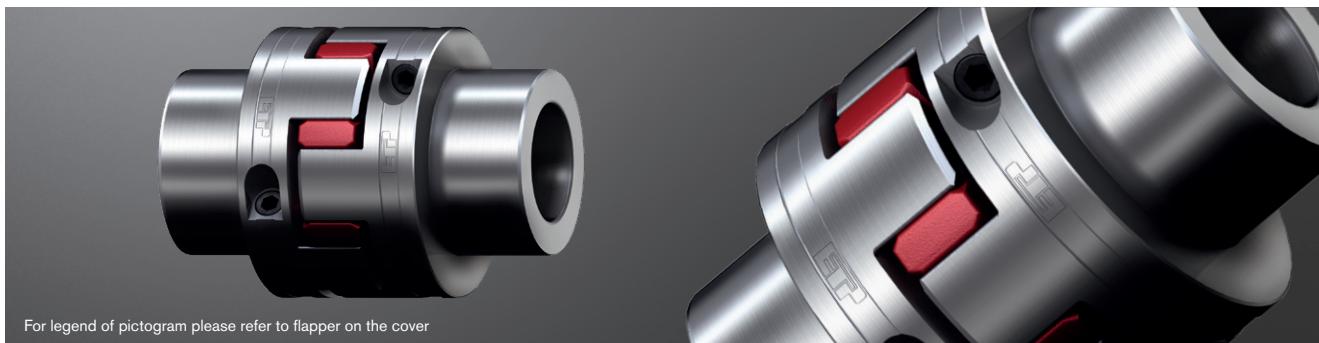

Size	Spider GS ¹⁾ torque T_{KN} [Nm]			Dimensions [mm]										Screw		Weight per hub with max. bore [kg]
	92 ShA	98 ShA	64 ShD	$d_{max.}$	D_H ²⁾	d_H	L	l_1	l_2	E	b	s	a	M	T_A [Nm]	
24	35	60	75	24	55	27	78	30	16	18	14	2	3	M6	5	0.33
28	95	160	200	32	65	30	90	35	20	20	15	2.5	4	M6	5	0.53
38	190	325	405	40	80	38	114	45	29	24	18	3	4	M6	5	0.98
42	265	450	560	48	95	46	126	50	34	26	20	3.5	4	M6	5	1.51

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ $\bar{D}_H + 2$ mm with high speeds for expansion of spider

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type ROTEX® GS P ETP®															
Size	Tolerance fit	Bore diameter d /collar diameter D													
		$\bar{D}_{15}/\bar{D}_{24}$	$\bar{D}_{16}/\bar{D}_{26}$	$\bar{D}_{19}/\bar{D}_{30}$	$\bar{D}_{20}/\bar{D}_{32}$	$\bar{D}_{24}/\bar{D}_{39}$	$\bar{D}_{25}/\bar{D}_{40}$	$\bar{D}_{28}/\bar{D}_{44}$	$\bar{D}_{30}/\bar{D}_{47}$	$\bar{D}_{32}/\bar{D}_{50}$	$\bar{D}_{35}/\bar{D}_{55}$	$\bar{D}_{38}/\bar{D}_{59}$	$\bar{D}_{40}/\bar{D}_{62}$	$\bar{D}_{42}/\bar{D}_{65}$	$\bar{D}_{45}/\bar{D}_{70}$
24		42	50	70	80	125									
28		50	60	80	95	150	160	210	230	250					
38	F6/h6					220	230	310	350	380	450	570	610		
42						270	360	410	440	540	660	730	820	940	1100




ETP® is a registered trademark by ETP® Transmission AB.

Ordering example:	ROTEX® GS P ETP® 24	98 ShA-GS	d 20	Ø24	Ø20
	Coupling size	Spider hardness	Optional: Bore in spider	Finish bore	Finish bore

ROTEX® GS expansion hubs

Backlash-free jaw couplings

Clamping system for hollow shaft connection

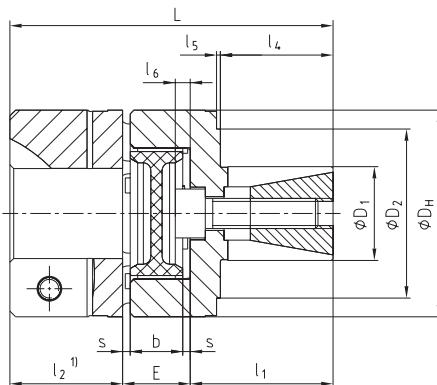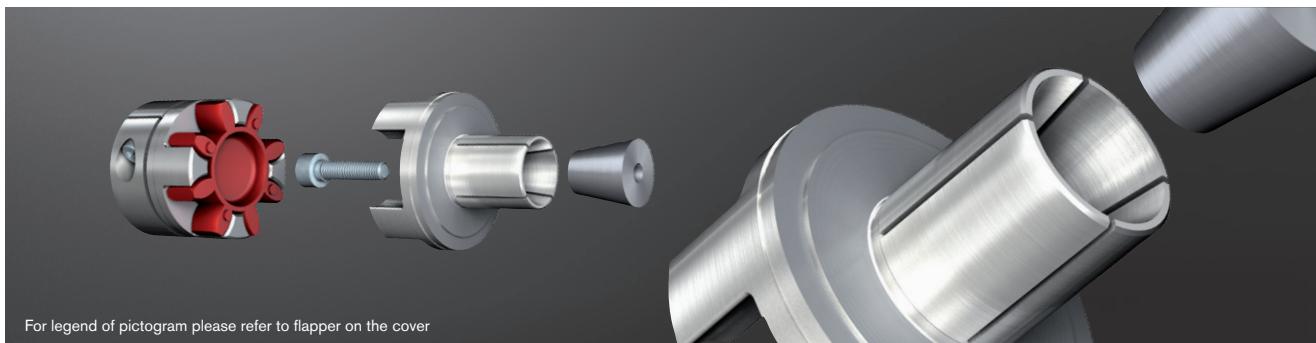


Size	Spider GS ²⁾ torque T _{KN} [Nm]					Dimensions [mm]										Friction torque ³⁾ [Nm]		
	80 ShA	92 ShA	98 ShA	64 ShD	72 ShD	D ₁ ²⁾	D ₂	D _H	l ₁ ²⁾	l ₂	l ₄ ²⁾	l ₅ ²⁾	l ₆	L	E	b	s	
9	1.8	3.0	5.0	6.0	—	10	—	20	20	10	11	—	0	40	10	8	1.0	6.4
12	3.0	5.0	9.0	12.0	—	10	20	25	19	11	14	1.5	2	42	12	10	1.0	7.7
14	4.0	7.5	12.5	16.0	—	12	24	30	18.5	11	12.5	3	2	42.5	13	10	1.5	7.7
19	6.0	12.0	21.0	26.0	—	20	35	40	28	25	20	1	0	69	16	12	2.0	35.7
24	—	35	60	75	97	25	45	55	38	30	30	1	4	86	18	14	2.0	82.0
28	—	95	160	200	260	35	55	65	44	35	36	1	5	99	20	15	2.5	182.0

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ Example: Other dimensions on customers' request.


³⁾ The friction torque applies for the figures D₁, l₁, l₄ and l₅ specified and a hollow shaft material steel.

ROTEX® GS expansion hub for axis of belt

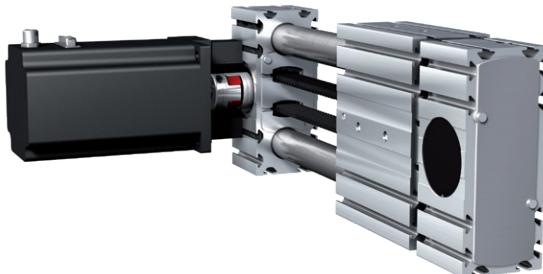


Special types for hollow shaft connections

Shaft extension

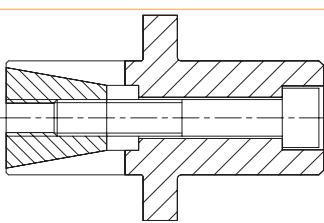

ROTEX® GS hub
with CLAMPEX®
KTR 150





Ordering example:

ROTEX® GS 24	98 ShA-GS	d 20	9.0 – Ø24	2.5 – Ø20
Coupling size	Spider hardness	Optional: Bore in spider	Hub type	Finish bore

ROTEX® GS A-H

Backlash-free jaw couplings

Drop-out center design coupling

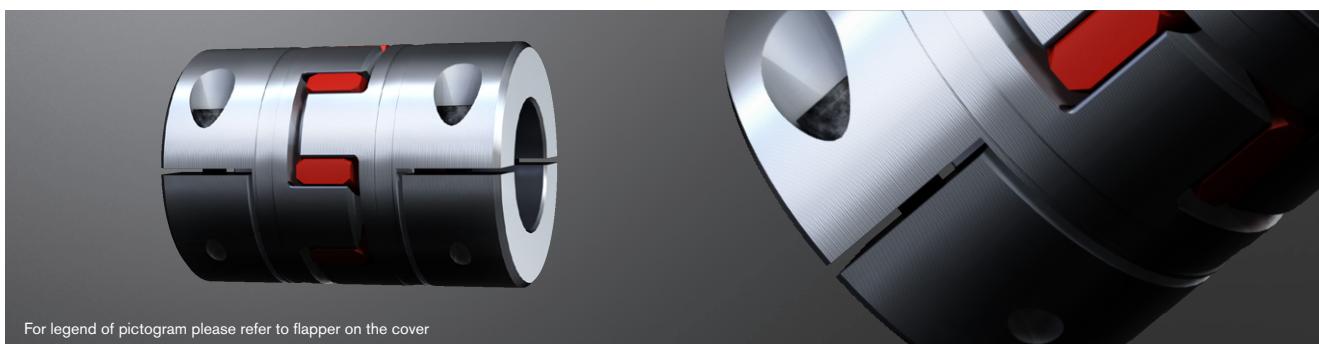

ROTEX® GS type A-H - Hub material aluminium												
Size	Dimensions [mm]										Cap screws DIN EN ISO 4762	
	d _{max.}	L	I ₁ , I ₂	E	b	s	D _H	D _K	x ₁ , x ₂	E ₁	M	T _A [Nm]
19	20	66	25	16	12	2.0	40	46	17.5	31	M6	10
24	30	78	30	18	14	2.0	55	57.5	22.0	34	M6	10
28	38	90	35	20	15	2.5	65	73	25.0	40	M8	25
38	45	114	45	24	18	3.0	80	83.5	33.0	48	M8	25
42	50	126	50	26	20	3.0	95	93.5	39	48	M10	49

Technical data											
Size	Spider Shore-GS ¹⁾	Shore scale	Max. speed [rpm]	Torque [Nm]		Static torsion spring stiffness [Nm/rad]	Weight per hub with max. bore [kg]	Mass moment of inertia J per hub with max. bore [kgm ²]			
				T _{KN}	T _{K max}						
19	80	A	9550	6.0	12.0	618	77 x 10 ⁻³	19.6 x 10 ⁻⁶			
	92	A		12.0	24.0	1090					
	98	A		21.0	42.0	1512					
	64	D		26.0	52.0	2560					
24	92	A	6950	35	70	2280	161 x 10 ⁻³	77.3 x 10 ⁻⁶			
	98	A		60	120	3640					
	64	D		75	150	5030					
28	92	A	5850	95	190	4080	240 x 10 ⁻³	173 x 10 ⁻⁶			
	98	A		160	320	6410					
	64	D		200	400	10260					
38	92	A	4750	190	380	6525	470 x 10 ⁻³	496 x 10 ⁻⁶			
	98	A		325	650	11800					
	64	D		405	810	26300					
42	92	A	4000	265	530	10870	1770 x 10 ⁻³	2409 x 10 ⁻⁶			
	98	A		450	900	21594					
	64	D		560	1120	36860					

¹⁾ For selections see page 22 et seqq./other spiders see page 127.


²⁾ Static torsion spring stiffness with 0.5 x T_{KN}

To make sure that the coupling can be assembled/disassembled radially, please observe the insertion dimension x₁/x₂ of the shafts.


Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 7.8																							
Size	Ø8	Ø10	Ø11	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø46	Ø48	Ø50
19	17	21	23	30	32	34	38	40	42														
24		21	23	30	32	34	38	40	42	47	51	53	59	63									
28				54	58	62	70	74	78	86	93	97	109	117	124	136	148						
38							70	74	78	86	93	97	109	117	124	136	148	156	163	175			
42										136	149	155	174	186	198	217	235	248	260	279	285	297	310

Ordering example:


ROTEX® GS 38	A-H	98 ShA-GS	7.8 – Ø38	7.9 – Ø30
Coupling size	Type	Spider hardness	Hub type	Finish bore

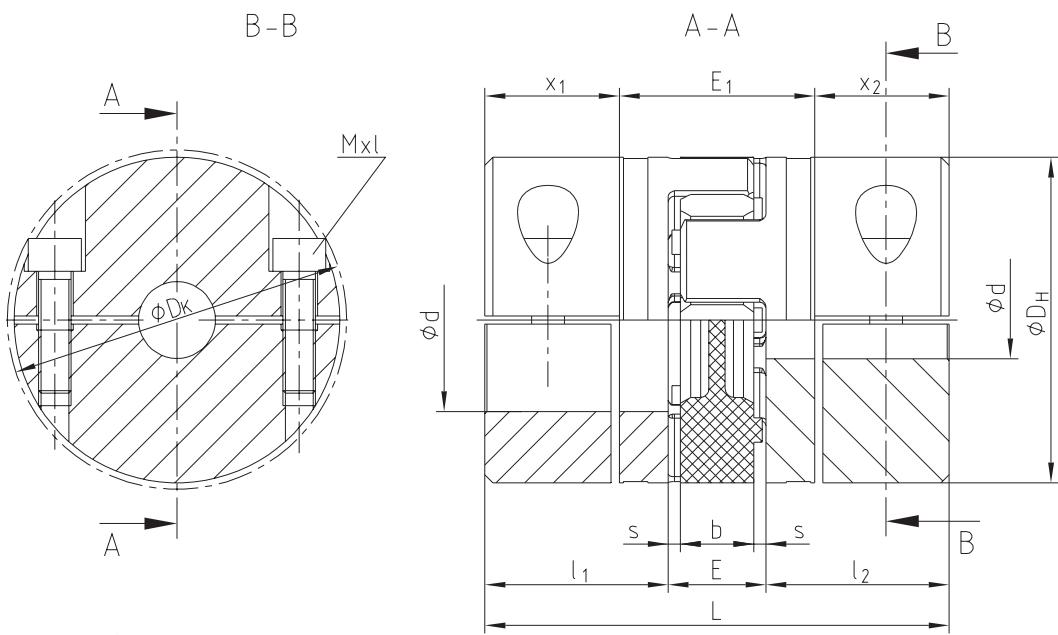Type A-H

Caution:
Feather keyways are offset to each other by approx. 5°!
Hub material: Al-H

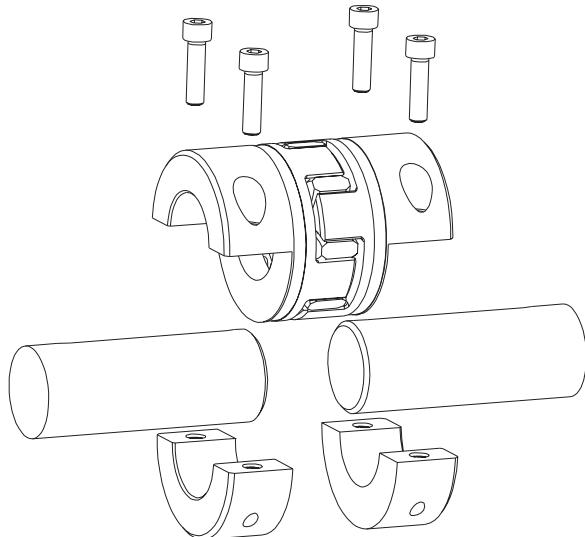
**Types of hubs**

Type 7.8



clamping hub type H without feather keyway for single-cardanic connection

Type 7.9





clamping hub type H with feather keyway for single-cardanic connection

ROTEX® GS DKM

Backlash-free jaw couplings

Double-cardanic jaw coupling

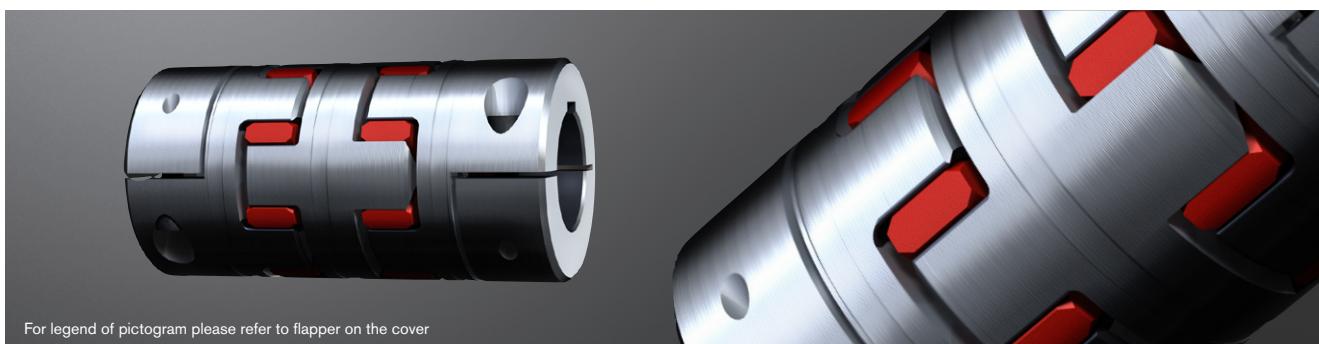


ROTEX® GS DKM - Spacer material aluminium/hub material depends on hub type																	
Size	Spider GS ¹⁾ torque T _{KN} [Nm]		Dimensions [mm]														
	98 ShA	64 ShD	d _{max.} ²⁾	D	D _H	d _H	d _{H1}	l ₁ , l ₂	M, N	l ₁₁	l ₁₂	L _{DKM}	E	b	s	a	
5	0.9	—	5	—	10	—	—	5	—	3	13	23	5	4	0.5	4.0	
7	2.0	2.4	7	—	14	—	—	7	—	4	20	34	8	6	1.0	6.0	
9	5.0	6.0	11	—	20	7.2	—	10	—	5	25	45	10	8	1.0	1.5	
12	9.0	12.0	12	—	25	8.5	—	11	—	6	30	52	12	10	1.0	3.5	
14	12.5	16.0	16	—	30	10.5	—	11	—	8	34	56	13	10	1.5	2.0	
19	21.0	26.0	24	—	40	18.0	18	25	—	10	42	92	16	12	2.0	3.0	
24	60	75	30	—	55	27.0	27	30	—	16	52	112	18	14	2.0	3.0	
28	160	200	38	—	65	30.0	30	35	—	18	58	128	20	15	2.5	4.0	
38	325	405	45	—	80	38.0	38	45	—	20	68	158	24	18	3.0	4.0	
42	450	560	55	85	95	46	46	50	28	22	74	174	26	20	3.0	4.0	
48	525	655	62	95	105	51	51	56	32	24	80	192	28	21	3.5	4.0	
55	685	825	74	110	120	60	60	65	37	28	88	218	30	22	4.0	4.5	

¹⁾ For selections see page 22 et seqq./other spiders see page 127.


²⁾ Dependent on hub type. Hub types can be freely selected, for summary see page 132.

Ordering example:


ROTEX® GS 24	DKM	98 ShA-GS	d 25	1.0 - Ø25		2.5 - Ø25	
Coupling size	Type	Spider hardness	Optional: Bore in spider	Hub type	Finish bore	Hub type	Finish bore

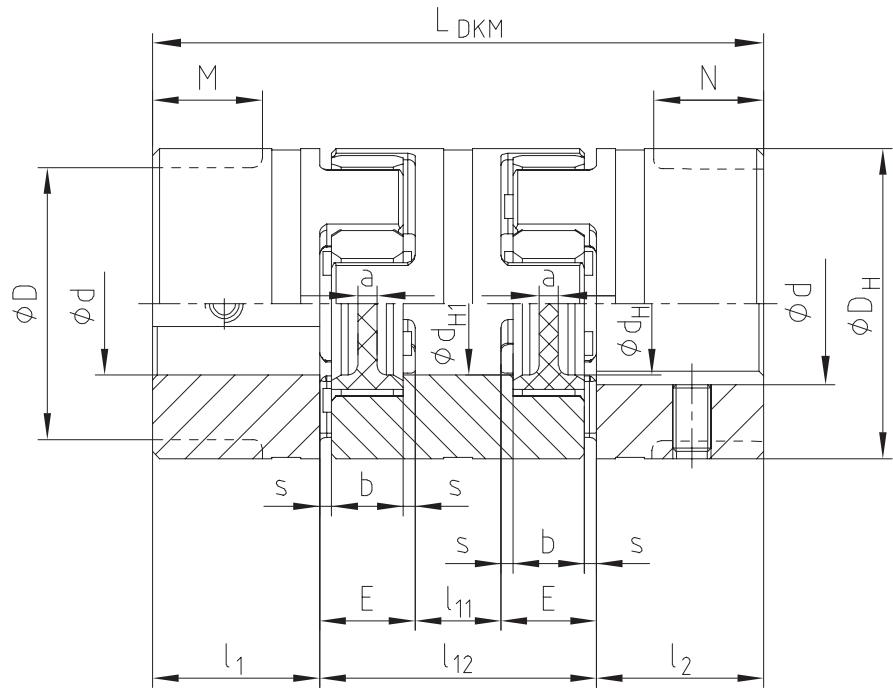**Other types:**

ROTEX® GS - CF - DKM

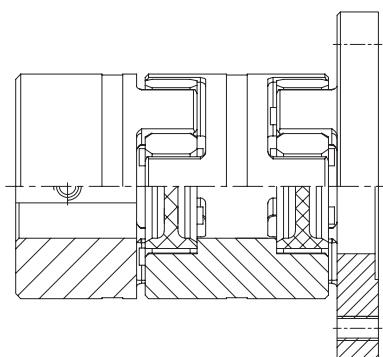



ROTEX® GS - DKM-H

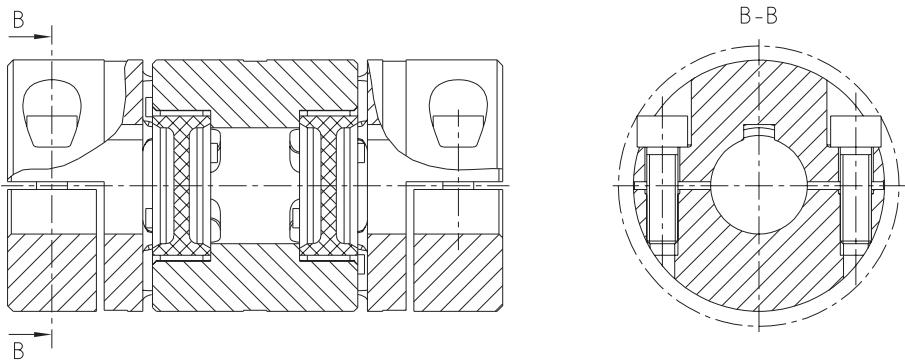

ROTEX® GS ZR3

Backlash-free intermediate shaft couplings

Intermediate shaft coupling with aluminium pipe bonded

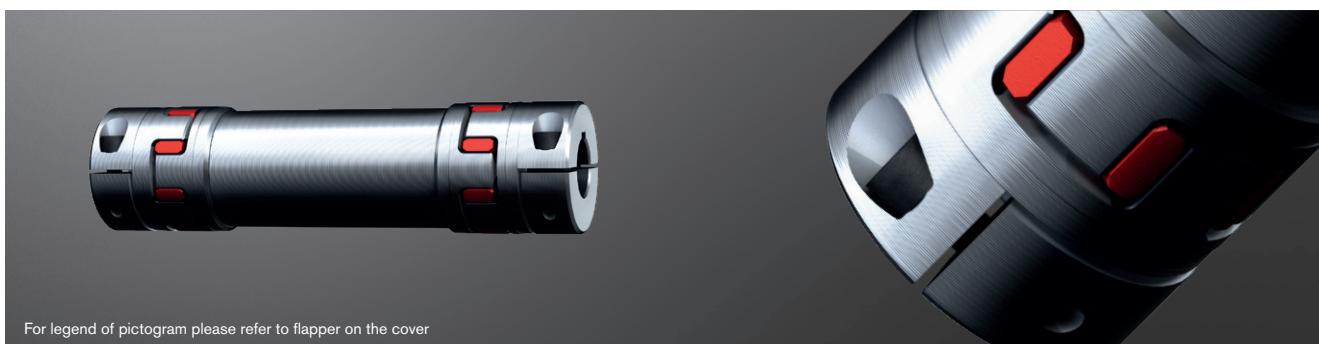

ROTEX® GS Type ZR3 - Hub material aluminium/intermediate pipe material aluminium																
Size	Dimensions [mm]															
	d _{max.}	D _H	l ₁	L	l ₃	E	L _R		L _{ZR} = L _R + 2 • l ₃		d _R	D _K	t ₁	e	Cap screws DIN EN ISO 4762	
							Min.	Max.	Min.	Max.					M	T _A [Nm]
14	15	30	18.5	36.0	14.5	13	72	2971	101	3000	28	33.3	7.5	10.5	M4	2.9
19	20	40	25	49.0	17.5	16	98	2965	133	3000	40	46	8.0	14.5	M6	10
24	30	55	30	59.0	22.0	18	121	3456	165	3500	50	57.5	10.5	20	M6	10
28	38	65	35	67.0	25.0	20	137	3950	187	4000	60	73	11.5	25	M8	25
38	45	80	45	83.5	33.0	24	169	3934	235	4000	70	83.5	15.5	30	M8	25
42	50	95	50	93.0	36.5	26	180	3927	253	4000	80	93.5	18.0	32	M10	49
48	55	105	56	100.0	39.5	28	202	3921	281	4000	100	105	18.5	36	M12	86

Technical data of type ZR3																
Size	Spider GS ¹⁾ torque T _{KN} [Nm]						Moment of inertia [10 ⁻³ kgm ²]								Static torsion spring stiffness [Nm/rad]	
	98 ShA	64 ShD	Hub ²⁾	ZR hub	Pipe/meter	ZW C ₂										
14	12.5	16.0	0.00362	0.00238	0.088	858										
19	21.0	26.0	0.02002	0.01304	0.329	3243.6										
24	60.0	75.0	0.07625	0.04481	0.673	6631.8										
28	160	200	0.17629	0.10950	1.199	11814.1										
38	325	405	0.50385	0.2572	2.972	29290.4										
42	450	560	1.12166	0.5523	4.560	44929.7										
48	525	655	1.87044	1.1834	9.251	91158.2										

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ With d_{max}.

³⁾ Torsion spring stiffness with a length of 1 m of intermediate pipe with L-pipe = L_{ZR} - 2 • L

For inquiries and orders please specify the shaft distance dimension L_R along with the maximum speed to review the critical bending speed. See diagramme on page 131.

The intermediate pipe can be combined with other hub types, but in that case it can no longer be disassembled radially. Please specify the shaft distance dimension required in your order.

With vertical application a support washer has to be used (please specify in your order).



Insertion dimension of shaft l₃, to make sure that the coupling can be assembled/disassembled radially.

Straightness/concentricity of pipes according to DIN EN 755-1.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 7.5																	
Size	Ø6	Ø8	Ø10	Ø11	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35
14	5.5	7.4	9.2	10.1	12.9	13.8											
19		17	21	23	30	32	34	38	40	42							
24			21	23	30	32	34	38	40	42	47	51	53	59	63		
28					54	58	62	70	74	78	86	93	97	109	117	124	136
38								70	74	78	86	93	97	109	117	124	136
42											136	149	155	174	186	198	217
48											199	217	226	253	271	290	317


Ordering example:

ROTEX® GS 24	ZR3	1200 mm	98 ShA-GS	7.5 - Ø24	7.5 - Ø24
Coupling size	Type	Shaft distance dimension (L _R)	Spider hardness	Hub type	Finish bore

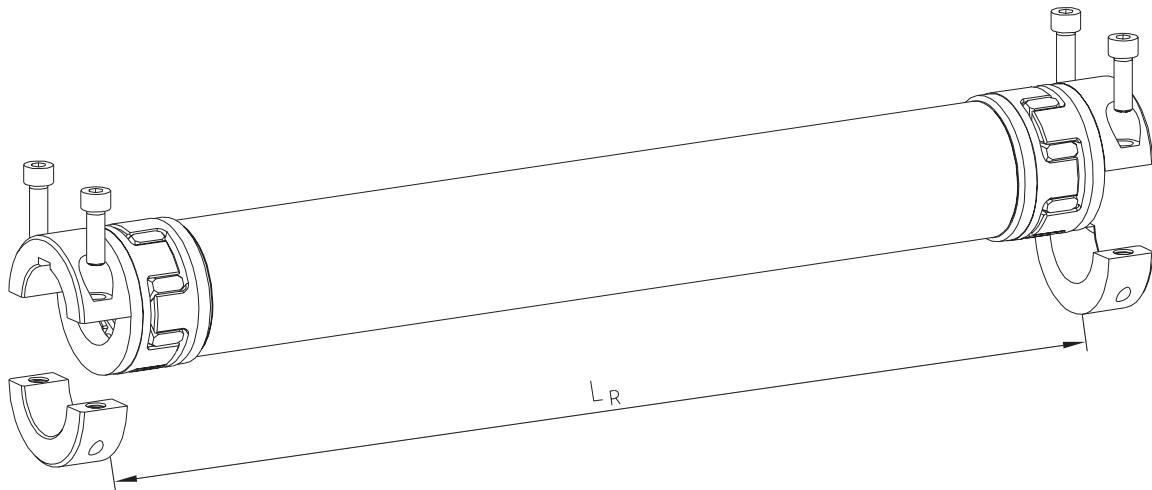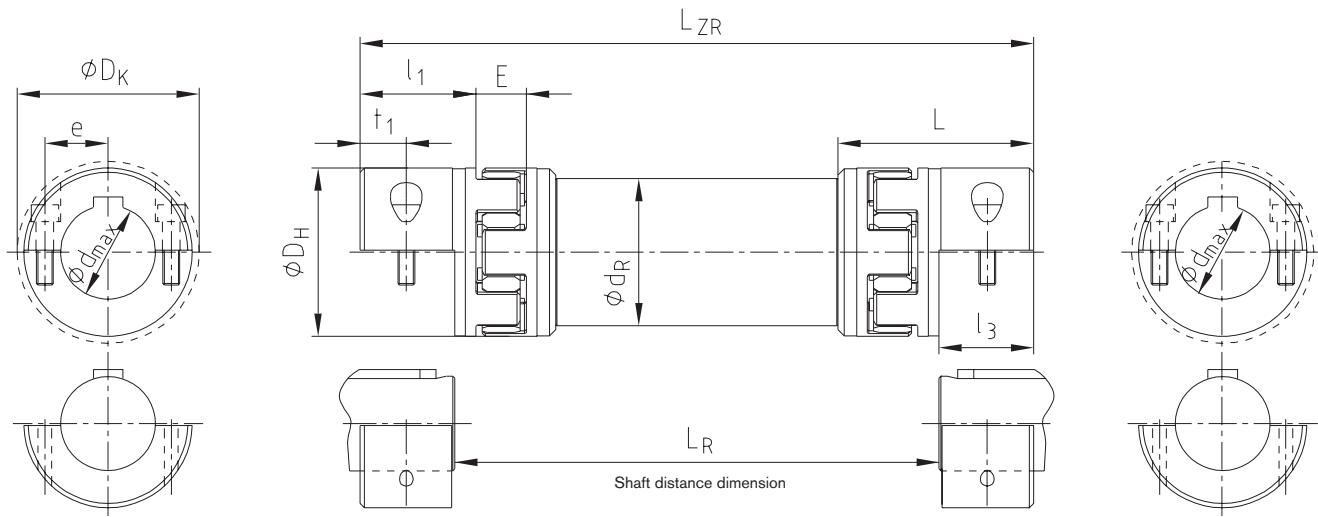


Types of hubs

Type 7.5



Clamping hub type DH without feather keyway for double-cardanic connections

Type 7.6



Clamping hub type DH with feather keyway for double-cardanic connections

ROTEX® GS ZR1 and ZR2

Backlash-free intermediate shaft couplings

Intermediate shaft couplings with steel pipe/steel shaft



ROTEX® GS Type ZR1																	
Size	Spider GS ¹⁾ torque TKN [Nm]		Dimensions [mm]												Cap screws DIN EN ISO 4762		Friction torque TR [Nm]
	98 ShA	64 ShD	dmax. ²⁾	DH	I ₁ , I ₂	L	E	b	s	B	LR1	Minimum dimension for LR1	LZR1	dR ³⁾	M	T _A [Nm]	
14 ZR1	12.5	16.0	16	30	11	35	13	10	1.5	11.5	Please specify with inquiries and orders.	71	L _{R1+22}	14x2.5	M3	1.34	6.1
19 ZR1	21.0	26.0	24	40	25	66	16	12	2.0	14.0		110	L _{R1+50}	20x3.0	M6	10.5	34
24 ZR1	60	75	28	55	30	78	18	14	2.0	16.0		128	L _{R1+60}	25x2.5	M6	10.5	45
28 ZR1	160	200	38	65	35	90	20	15	2.5	17.5		145	L _{R1+70}	35x4.0	M8	25	105
38 ZR1	325	405	45	80	45	114	24	18	3.0	21.0		180	L _{R1+90}	40x4.0	M8	25	123

ROTEX® GS Type ZR2																			
Size	Spider GS ¹⁾ torque TKN [Nm]		Dimensions [mm]												Precision tube		Clamping screws DIN EN ISO 4762		
	98 ShA	64 ShD	dmax. ²⁾	DH	I ₁ , I ₂	I ₃	L	E	b	s	B	LR2	Minimum dimension for LR2	LZR2	dR ³⁾ [mm]	C ₂ ⁴⁾ [Nm/rad]	xD	M	
14 ZR2	12.5	16.0	16	30	11	26	50	13	10	1.5	11.5	Please specify with inquiries and orders.	109	L _{R2+22}	10x2.0	68.36	10x16	M4	5.6
19 ZR2	21.0	26.0	24	40	25	26	67	16	12	2.0	14.0		120	L _{R2+50}	12x2.0	130	12x18	M4	5.6
24 ZR2	60	75	28	55	30	38	86	18	14	2.0	16.0		156	L _{R2+60}	20x3.0	954.9	20x28	M6	17.0
28 ZR2	160	200	38	65	35	45	100	20	15	2.5	17.5		177	L _{R2+70}	25x2.5	1811	25x34	M6	17.0
38 ZR2	325	405	45	80	45	45	114	24	18	3.0	21.0		192	L _{R2+90}	32x3.5	5167	32x43	M6	17.0
42 ZR2	450	560	55	95	50	52	128	26	20	3.0	23.0		214	L _{R2+100}	40x4.0	11870	40x53	M6	17.0
48 ZR2	525	655	62	105	56	70	154	28	21	3.5	24.5		261	L _{R2+112}	45x4.0	17486	45x59	M8	41.0
55 ZR2	685	825	74	120	65	80	175	30	22	4.0	26.0		288	L _{R2+130}	55x4.0	33543	55x71	M8	41.0
65 ZR2	940	1175	80	135	75	80	185	35	26	4.5	30.5		387	L _{R2+150}	60x4.0	44362	60x77	M8	41.0

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

²⁾ Dependent on hub type. Hub types can be freely selected, for summary see page 132.

³⁾ Has to be remachined, if necessary.

⁴⁾ Torsion spring stiffness with a length of 1 m of intermediate pipe.



For inquiries and orders please specify the shaft distance dimension LR1/LR2 along with the maximum speed to review the critical bending speed.

With vertical application a support washer has to be used (please specify in your order).

Straightness/concentricity of pipes according to DIN 10305-1.

Ordering example:

ROTEX® GS 24	ZR1	1000 mm	98 ShA-GS	1.0 - Ø24	2.5 - Ø24
Coupling size	Type	Shaft distance dimension (LR1/LR2)	Spider hardness	Hub type	Finish bore

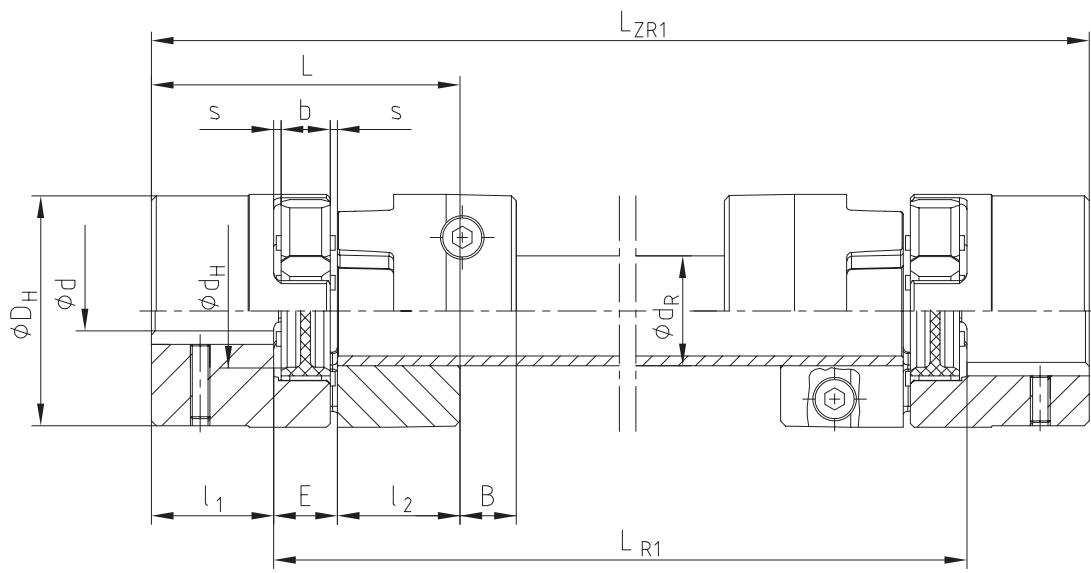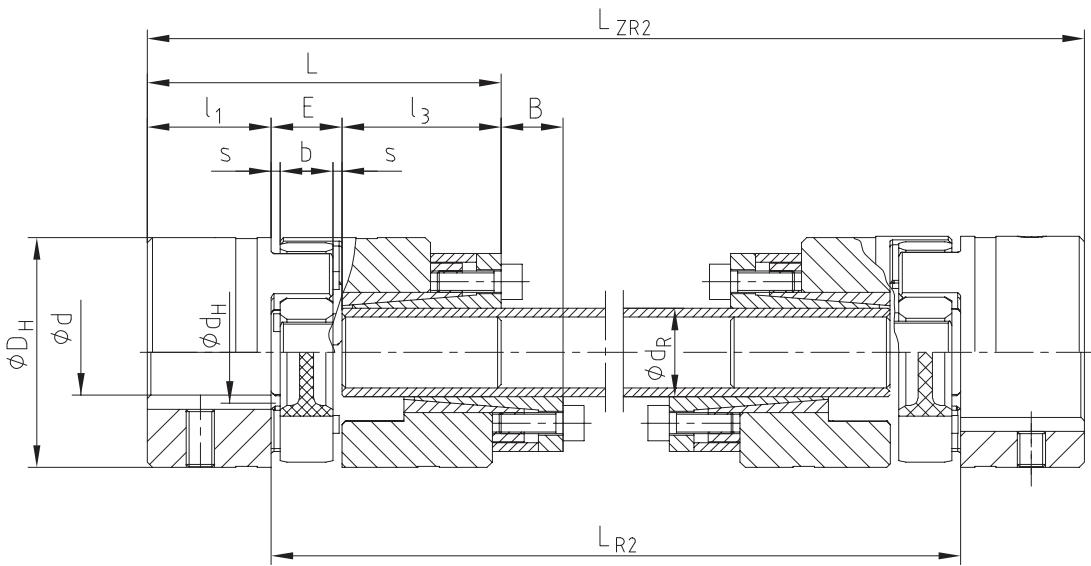Type ZR1**Type ZR2**

Large selection for your application



ROTEX® GS



ROTEX® GS HP



ROTEX® GS miniature coupling



ROTEX® GS Compact



ROTEX® GS clamping ring hubs light



ROTEX® GS clamping ring hubs steel



ROTEX® GS P acc. to DIN 69002



ROTEX® GS P ETP



ROTEX® GS expansion hub



ROTEX® GS A-H



ROTEX® GS DKM



ROTEX® GS ZR1



ROTEX® GS ZR2



ROTEX® GS ZR3

Low-priced, backlash-free servo couplings – easy and quick assembly

ROTEX GS is a three-part servo coupling (elastomer coupling) backlash-free under prestress. The different hub types and various kinds of Shore hardness provide the optimum coupling for every application in automation technology.

It is used wherever drives have to position accurately. In spite of their vibration-damping properties the coupling is torsionally stiff so that you do not have to cut back on precision even with highly dynamic servo drives. The ROTEX GS backlash-free elastomer couplings allow for simultaneous compensation of radial, axial and angular displacements.

The backlash-free servo coupling ROTEX GS uses the construction kit system, it is available in a high variance of different hub types which can be combined within one coupling size.

The choice of the hub material depends on the size and the hub is either made of aluminium or steel. Both frictionally engaged connections without feather keyway and positive-locking connections with feather keyway are available.

Areas of application of the ROTEX GS servo coupling

Couplings for machine tools, automation technology, drive technology, medical technology, packaging technology.




TOOLFLEX®

Metal bellow-type couplings

Technical description


TOOLFLEX® is a metal bellow-type coupling, a coupling system which has proven in the field with numerous applications. The metal bellow compensates perfectly for axial, radial and angular displacements. At the same time its geometric shape allows for high torsional stiffness and a low mass moment of inertia. TOOLFLEX® is manufactured in twelve sizes for maximum torques up to 600 Nm. Its main application ranges are both positioning drives, e. g. ball spindles with a high incline, and indexing tables or planetary and worm gears with small gear ratios.

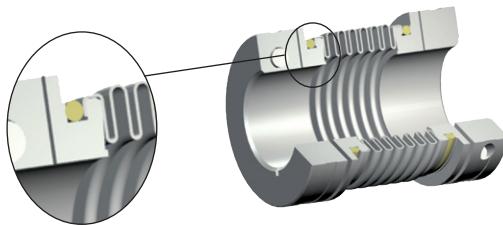

Subject to its proven bonding technique a non-positive, backlash-free connection of the aluminium hubs with the multi-layer bellows made of stainless steel is generated. The flanged insert connection for sizes 16 to 55 ensures torque transmission of every single bellow layer. Since TOOLFLEX® is a metal coupling, it remains fatigue-endurable in the high-temperature range up to a maximum of 200 °C. Apart from that it is resistant to the effect of media respectively critical operating conditions.

The renowned shaft-hub-connection by means of clamping hubs ensures an easy assembly by a radial clamping screw. Subject to two slots in the hub there is no deformation of the bellow when tightening the clamping screw. For higher friction torques type KN with taper hubs can be used.

Double slotted clamping hub

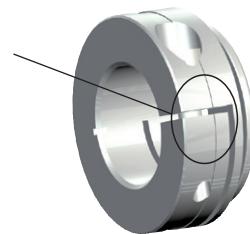

Types



Size	Type	Bel-low-hub-con-nection	Summary												
			Setscrew (hub type 1.0/1.1)			Clamping hubs (hub type 2.5/2.6)			KN			PI			
5	S	Bonded Maximum ambient temperature 100 °C	0.1	0.15	47700										
	M														
7	S	Flanged Maximum ambient temperature 200 °C	1	1.5	31800	1	1.5	31800							
	M		1.5	2.25	23800	1.5	2.25	23800							
9	S	Flanged Maximum ambient temperature 200 °C	2	3	19000	2	3	19100							
	M		5	7.5	14900	5	7.5	14900							
12	S	Flanged Maximum ambient temperature 200 °C	15	22.5	11900	15	22.5	11950				15	22.5	11950	
	M														
16	S	Flanged Maximum ambient temperature 200 °C				35	52.5	8700	35	52.5	15280	35	52.5	8700	35
	M					65	97.5	7350	65	97.5	12600	65	97.5	7350	65
20	S	Flanged Maximum ambient temperature 200 °C				95	142.5	6820	95	142.5	11580	95	142.5	6820	95
	M					170	255	5750	170	255	9300	170	255	5750	170
30	S	Flanged Maximum ambient temperature 200 °C				340	510	4800							
	M					340	510	4800	340	510	7870	340	510	4800	
38	S	Weided Maximum ambient temperature 200 °C				600	900	3850							
	M														
42	S	Weided Maximum ambient temperature 200 °C													
	M														
45	S	Weided Maximum ambient temperature 200 °C													
	M														
55 Al	S	Weided Maximum ambient temperature 200 °C													
	M														
55	S	Weided Maximum ambient temperature 200 °C													
	M														
65	S	Weided Maximum ambient temperature 200 °C													
	M														

Types of hubs

Due to the use of TOOLFLEX® for many different applications and mounting situations, this coupling system is available with various hub types and two different lengths of bellows. A combination of the components forms a type.

TOOLFLEX® is supplied as a complete unit; a supply of individual components is not possible.



Type 1.0
with feather keyway and setscrew

Positive-locking power transmission. Permissible torque depending on the permissible surface pressure.
Not suitable for backlash-free power transmission with heavily reversing operation.



Type 1.1
without feather keyway, with setscrew

Non-positive torque transmission. Suitable for backlash-free transmission of very low torques.



Type 1.3
with spline bore

Positive-locking power transmission. Spline on request of customers (e. g. for shaft with flattening).



Type 1.2
without feather keyway, without setscrew

For low torques. Suitable for bonding or pressing on the shaft.




Type 2.5 clamping hub
double slotted, without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection.
Transmittable torques depending on bore diameter.




Type 2.6 clamping hub
double slotted, with feather keyway

Positive-locking power transmission with additional friction fit. The friction fit avoids resp. reduces reverse backlash.
Surface pressure of the keyway connection is reduced.



Type 6.5 taper hub KN

Integrated frictionally engaged shaft-hub-connection
for the transmission of higher torques in the area of the
shaft-hub-connection.



Flange

Flange to connect to customer's component. Special dimensions on request.



Type 7.5 clamping hub type DH
without feather keyway for double-cardanic connection

Frictionally engaged, backlash-free shaft-hub-connection
for radial assembly of coupling. Transmittable torques
depending on bore diameter.



Type 7.6 clamping hub type DH
with feather keyway for double-cardanic connection

Positive-locking power transmission with additional friction fit for radial assembly of coupling. The friction fit avoids resp. reduces reverse backlash. Surface pressure of the keyway connection is reduced.




Type 7.8 clamping hub type H
without feather keyway for single-cardanic connection

Frictionally engaged, backlash-free shaft-hub-connection for
radial assembly of coupling. Transmittable torques depending
on bore diameter.




Type 7.9 clamping hub type H
with feather keyway for single-cardanic connection

Positive-locking power transmission with additional friction fit for radial assembly of coupling. The friction fit avoids resp. reduces reverse backlash. Surface pressure of the keyway connection is reduced.



Bellow type S

Bellow with 4 layers made of stainless steel; compact design with high torsion spring stiffness.




Bellow type M

Bellow with 6 layers made of stainless steel; realizing large shaft distance dimensions and displacements.

Special designs on request of customers

Special bellows





Bellows with 1, 2 or 3 layers available on request.


TOOLFLEX® S

Metal bellow-type couplings

Type S: Hubs with setscrews

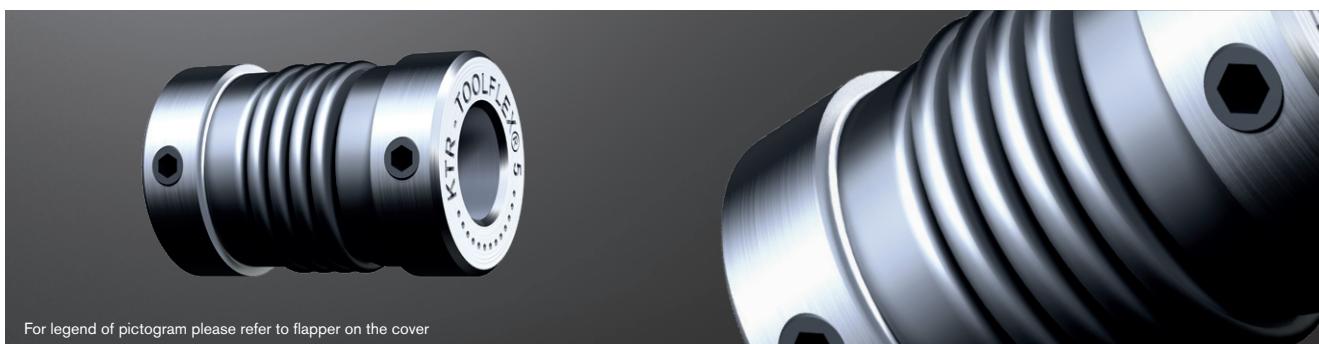

TOOLFLEX® S type 1.1

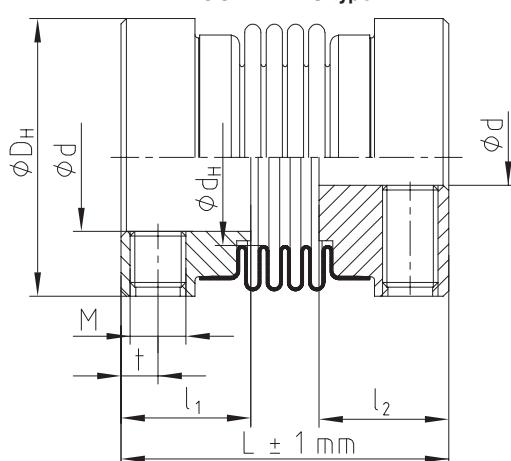

TOOLFLEX® S with setscrew (type 1.1) - Hub material aluminium/bellow material stainless steel																	
Size	Bellow-hub-connection	Torque of bellow T_{KN} ¹⁾ [Nm]	Max. speed [rpm]	Dimensions [mm]							Perm. displacements			Torsion spring stiffness C_T [Nm/rad]	Weight ³⁾ [kg]		
				Finish bore d		General			Setscrew		Axial [mm]	Radial [mm]	Angular [degree]				
Min.	Max.	D_H	d_H	L	l_1, l_2	M	t	$z = \text{number } ^2)$	Axial [mm]	Radial [mm]	Angular [degree]						
5		0.1	47700	2	5	10	6	15	6	M2	1.8	1	±0.30	0.10	0.7	97	0.0027
7	4)	1.0	31800	3	8	15	9	18	7	M3	2.0	1	±0.30	0.10	0.7	390	0.005
9		1.5	23800	3	10	20	12	21	8	M3	2.2	2	±0.35	0.15	1.0	750	0.010
12		2.0	19000	4	14	25	16	27.5	11	M4	2.8	2	±0.40	0.15	1.0	1270	0.017
16	5)	5.0	14900	5	18	32	20	37	13	M5	4	2	±0.30	0.15	1.0	4500	0.046
20		15	11900	6	25	40	27	42	15	M5	5	2	±0.40	0.15	1.0	9600	0.076

¹⁾ For selection see page 22 et seqq.

²⁾ Number per hub; from size 9: 2 x 120° offset.

³⁾ Figures refer to the complete coupling with max. bore.

4) Bonded

5) Flanged

Types of hubs

Type 1.0




Hub with feather keyway and setscrew

Type 1.1



Hub without feather keyway, with setscrew

Type 1.2



Hub without feather keyway, without setscrew

Type 1.3



Hub with spline bore



Ordering example:

TOOLFLEX® 7 S	1.1 - Ø4		1.1 - Ø6	
Size and type of coupling	Hub type	Finish bore	Hub type	Finish bore


TOOLFLEX® M

Metal bellow-type couplings

Type M: Hubs with setscrews

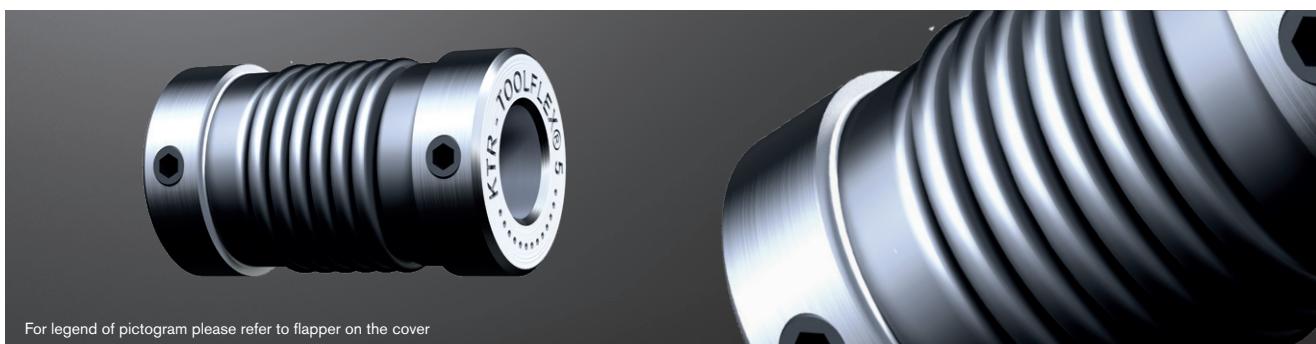

TOOLFLEX® M type 1.1

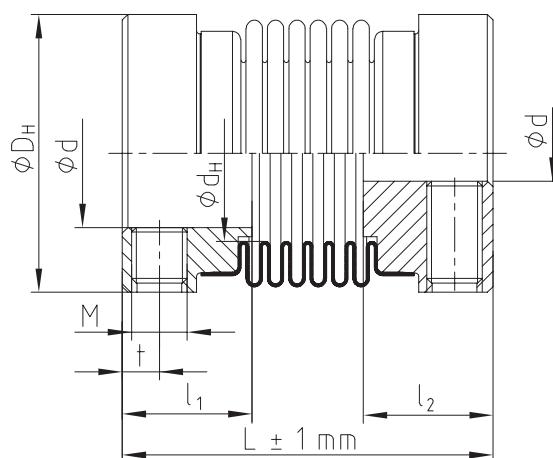

TOOLFLEX® M with setscrew (type 1.1) - Hub material aluminium/bellow material stainless steel

Size	Bellow-hub-connection	Torque of bellow T_{KN} ¹) [Nm]	Max. speed [rpm]	Dimensions [mm]								Perm. displacements			Torsion spring stiffness C_T [Nm/rad]	Weight ³) [kg]	
				General				Setscrew									
				Min.	Max.	D_H	d_H	L	l_1, l_2	M	t	$z = \text{number}^2)$	Axial [mm]	Radial [mm]	Angular [degree]		
5		0.1	47700	2	5	10	6	17	6	M2	1.8	1	±0.40	0.15	1.0	75	0.003
7	⁴)	1.0	31800	3	8	15	9	20	7	M3	2.0	1	±0.40	0.15	1.0	300	0.006
9		1.5	23800	3	10	20	12	24	8	M3	2.2	2	±0.50	0.20	1.5	580	0.011
12		2.0	19000	4	14	25	16	31	11	M4	2.8	2	±0.60	0.20	1.5	980	0.019
16	⁵)	5.0	14900	5	18	32	20	41	13	M5	4	2	±0.50	0.20	1.5	3050	0.049
20		15	11900	6	25	40	27	49	15	M5	5	2	±0.60	0.20	1.5	6600	0.082

¹) For selection see page 22 et seqq.

²) Number per hub; from size 9: 2 x 120° offset.

³) Figures refer to the complete coupling with max. bore.

⁴) Bonded

⁵) Flanged

Types of hubs

Type 1.0




Hub with feather keyway and setscrew

Type 1.1



Hub without feather keyway, with setscrew

Type 1.2



Hub without feather keyway, without setscrew

Type 1.3



Hub with spline bore



Ordering example:

TOOLFLEX® 7 M	1.1 - Ø4	1.1 - Ø6		
Size and type of coupling	Hub type	Finish bore	Hub type	Finish bore

TOOLFLEX® S

Metal bellow-type couplings

Type S: with clamping hubs

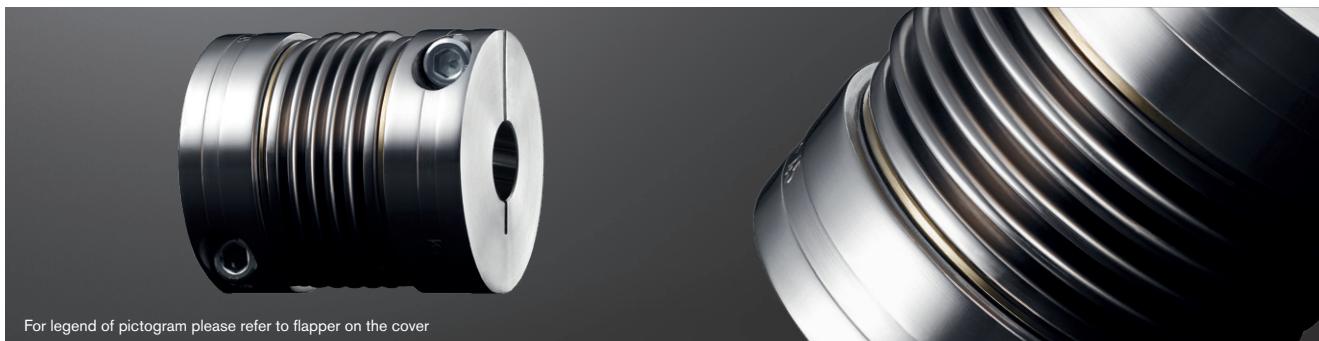

TOOLFLEX® Type S with clamping hubs - Hub material aluminium (size 55/65 steel)/bellow material stainless steel												
Size	Dimensions [mm]											
	Finish bore d		General					Clamping screws DIN EN ISO 4762				
	Min.	Max.	L	l_1, l_2	E	D_H	d_H	M1	D_K	t1	e1	T_A [Nm]
7	3	7	24	9	6	15	9	M2	16.5	3.2	5	0.37
9	3	9	29	11	7	20	12	M2.5	21.5	3.5	7.1	0.76
12	4	12	34.5	13	8.5	25	16	M3	26.5	4	8.5	1.34
16	5	16	45	17.0	11	32	20	M4	35.0	5	12.0	2.9
20	8	20	55	21.5	12	40	27	M5	43.5	6	14.5	6
30	10	30	63	23.0	17	55	33	M6	58.0	7	19	10
38	12	38	69	25.5	18	65	42	M8	72.6	9	25	25
42	14	42	84	30.0	24	70	46	M8	76.1	9	27	25
45	14	45	86.5	32.0	22.5	83	58	M10	89.0	11	30	49
55 Al	20	55	111	40.0	31	100	73	M12	106.0	14	37	86
55 ³⁾	20	55	111	40.0	31	100	73	M12	106.0	14	37	120
65 ³⁾	30	65	126	45.0	36	125	95	M14	127.2	15	45	185

Technical data												
Size	Bellow-hub-connection	Torque of bellow TK_N ¹⁾ [Nm]	Max. speed [rpm]	Hub material	Moment of inertia ²⁾ [$\times 10^{-4} \text{kgm}^2$]	Torsion spring stiffness C_T [Nm/rad]	Axial stiffness C_a [N/mm]	Radial stiffness C_r [N/mm]	Perm. displacements			Weight ²⁾ [kg]
									Axial [mm]	Radial [mm]	Angular [degree]	
7	Bonded	1	31800	Aluminium	0.26	390	—	—	±0.3	0.10	0.7	0.007
		1.5	23800	Aluminium	0.97	750	—	—	±0.35	0.15	1.0	0.014
		2	19100	Aluminium	2.6	1270	—	—	±0.4	0.15	1.0	0.025
		5	14900	Aluminium	9	4500	43	138	±0.3	0.15	1.0	0.06
		15	11950	Aluminium	30	9600	63	189	±0.4	0.15	1.0	0.12
		35	8700	Aluminium	114	17800	97	233	±0.5	0.20	1.5	0.24
38	Flanged	65	7350	Aluminium	245	37400	108	318	±0.6	0.20	1.5	0.35
		95	6820	Aluminium	396	54700	120	499	±0.6	0.20	1.5	0.49
		170	5750	Aluminium	931	95800	132	738	±0.9	0.20	1.5	0.82
		340	4800	Aluminium	1665	144100	160	894	±1.1	0.25	1.5	1.50
		340	4800	Steel	4996	144100	160	894	±1.0	0.25	1.5	3.20
		600	3850	Steel	13318	322740	212	1365	±1.0	0.30	1.5	5.50

¹⁾ For selection see page 22 et seqq.



²⁾ Figures refer to the complete coupling with max. bore.

³⁾ Hub made of steel welded with bellow.

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 2.5																														
Size	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø50	Ø55	Ø60	Ø65
7	0.84	0.91	0.97	1.04	1.10																									
9	1.87	1.98	2.09	2.20	2.31	2.41	2.52																							
12		3.48	3.65	3.81	3.98	4.14	4.31	4.48	4.64	4.81																				
16			8.5	8.8	9.1	9.4	9.7	9.9	10.2	10.5	11.1	11.4	11.7																	
20						17.6	18.1	18.6	19.1	19.5	20.5	21.0	21.4	22.4	22.9	23.3														
30								33.1	33.8	35.1	35.8	36.5	37.8	38.5	39.2	41.9	42.5	44.6	45.9											
38										79.2	80.4	81.7	84.2	85.4	86.6	91.6	92.8	96.5	99.0	102	105	109								
42										84.2	85.4	86.6	89.1	90.3	91.6	96.5	97.8	102	104	106	110	114	116	119						
45															157	165	167	173	177	181	187	193	197	200	206					
55 Al															270	281	284	293	298	304	313	321	327	333	341	356	371			
55 ³⁾															397	401	413	421	429	442	454	462	470	482	502	523				
65 ³⁾															720	732	750	768	780	792	810	840	870	900	930					


Ordering example:

TOOLFLEX® 30 S	2.5	Ø25	2.5	Ø30
Size and type of coupling	Hub type	Finish bore	Hub type	Finish bore

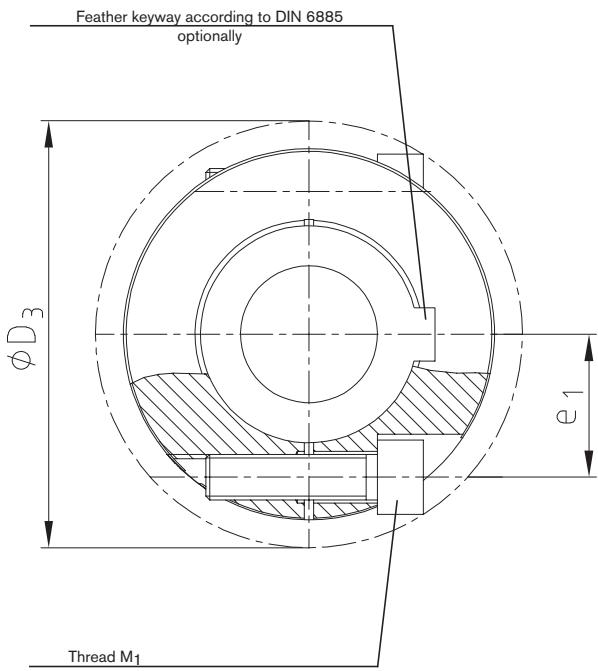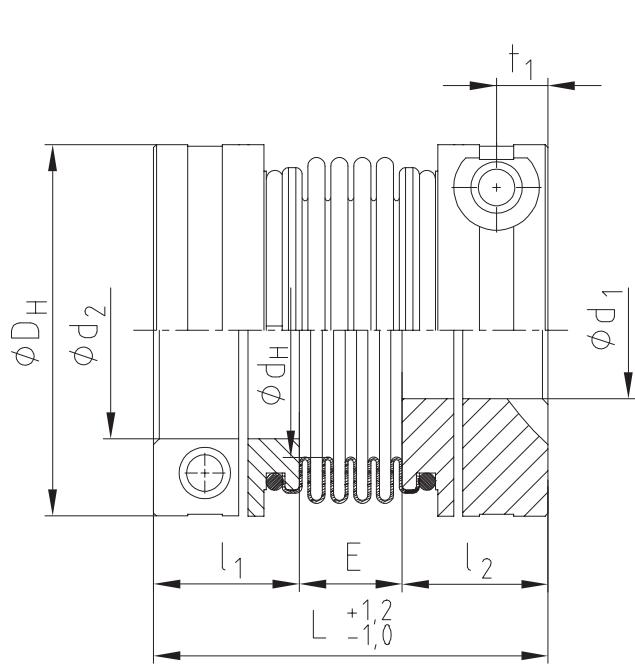

Other types:

Type for FANUC motors

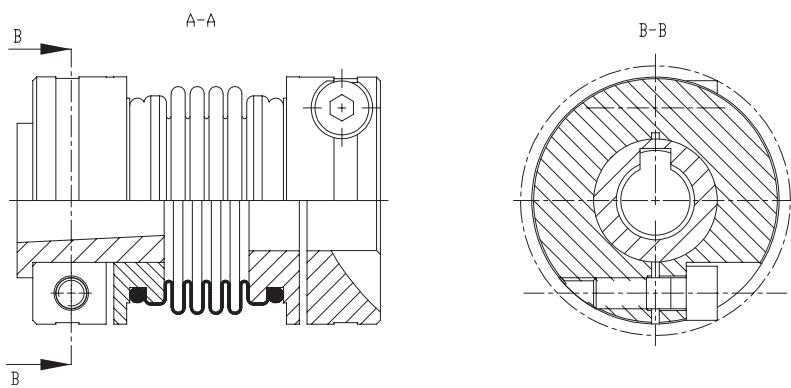

Types of hubs

Type 2.5



Clamping hub double slot without feather keyway

Type 2.6





Clamping hub double slot with feather keyway

TOOLFLEX® M

Metal bellow-type couplings

Type M: with clamping hubs

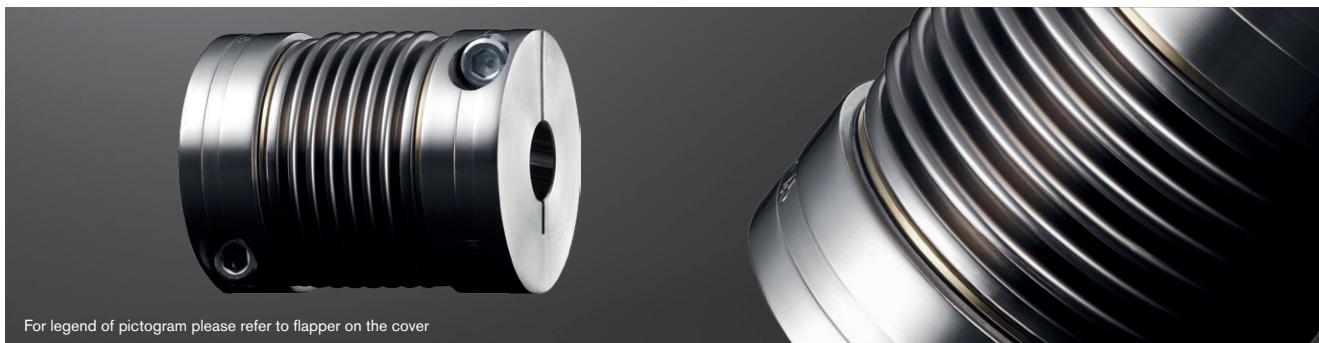

TOOLFLEX® Type M with clamping hubs - Hub material aluminium (size 55/65 steel)/bellow material stainless steel												
Size	Dimensions [mm]											
	Finish bore d		General					Clamping screws DIN EN ISO 4762				
	Min.	Max.	L	l ₁ , l ₂	E	D _H	d _H	M ₁	D _K	t ₁	e ₁	T _A [Nm]
7	3	7	26	9	8	15	9	M2	16.5	3.2	5	0.37
9	3	9	32	11	10	20	12	M2.5	21.5	3.5	7.1	0.76
12	4	12	38	13	12	25	16	M3	26.5	4	8.5	1.34
16	5	16	49	17.0	15	32	20	M4	35.0	5	12	2.9
20	8	20	62	21.5	19	40	27	M5	43.5	6	14.5	6
30	10	30	72	23.0	26	55	33	M6	58.0	7	19	10
38	12	38	81	25.5	30	65	42	M8	72.6	9	25	25
42	14	42	95	30.0	35	70	46	M8	76.1	9	27	25
45	14	45	103	32.0	39	83	58	M10	89.0	11	30	49
55 Al	20	55	125	40.0	45	100	73	M11	106.0	14	37	86
55 ³⁾	20	55	125	40.0	45	100	73	M12	106.0	14	37	120
65 ³⁾	30	65	142	45.0	52	125	95	M14	127.2	15	45	185

Technical data												
Size	Bellow-hub-connection	Torque of bellow T _{KN} ¹⁾ [Nm]	Max. speed [rpm]	Hub material	Moment of inertia ²⁾ [x10 ⁻⁶ kgm ²]	Torsion spring stiffness C _T [Nm/rad]	Axial stiffness C _a [N/mm]	Radial stiffness C _r [N/mm]	Perm. displacements			Weight ²⁾ [kg]
									Axial [mm]	Radial [mm]	Angular [degree]	
7	Bonded	1	31800	Aluminium	0.3	300	—	—	±0.4	0.15	1.0	0.008
9		1.5	23800	Aluminium	1.0	580	—	—	±0.5	0.20	1.5	0.015
12	Flanged	2	19100	Aluminium	2.7	980	—	—	±0.6	0.20	1.5	0.03
16		5	14900	Aluminium	10	3050	29	92	±0.5	0.20	1.5	0.06
20	Flanged	15	11950	Aluminium	32	6600	126	126	±0.6	0.20	1.5	0.14
30		35	8700	Aluminium	123	14800	65	155	±0.8	0.25	2.0	0.31
38	Flanged	65	7350	Aluminium	262	24900	72	212	±0.8	0.25	2.0	0.45
42		95	6820	Aluminium	427	36500	80	333	±0.8	0.25	2.0	0.52
45	Flanged	170	5750	Aluminium	1020	64000	88	492	±1.0	0.25	2.0	1.13
55 Al		340	4800	Aluminium	1706	96100	107	598	±1.1	0.30	20	2.0
55 ³⁾	3)	340	4800	Steel	5118	96100	107	598	±1.0	0.30	2.0	3.3
65 ³⁾		600	3850	Steel	13727	226550	135	910	±2.0	0.35	2.0	5.6

¹⁾ For selection see page 22 et seqq.


²⁾ Figures refer to the complete coupling with max. bore.

³⁾ Hub made of steel welded with bellow.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 2.5																	
Size	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24
7	0.84	0.91	0.97	1.04	1.10												
9	1.87	1.98	2.09	2.20	2.31	2.41	2.52										
12		3.48	3.65	3.81	3.98	4.14	4.31	4.48	4.64	4.81							
16			8.5	8.8	9.1	9.4	9.7	9.9	10.2	10.5	11.1	11.4	11.7				
20					17.6	18.1	18.6	19.1	19.5	20.5	21.0	21.4	22.4	22.9	23.3		
30						33.1	33.8	35.1	35.8	36.5	37.8	38.5	39.2	41.9	42.5	44.6	45.9
38								79.2	80.4	81.7	84.2	85.4	86.6	91.6	92.8	96.5	99.0
42									84.2	85.4	86.6	89.1	90.3	91.6	96.5	97.8	102
45												157	165	167	173	177	181
55 Al												270	281	284	293	298	304
55 ³⁾												397	401	413	421	429	442
65 ³⁾												720	732	750	768	780	792


Ordering example:

TOOLFLEX® 30 M	2.5 - Ø25				2.5 - Ø30			
Size and type of coupling	Hub type	Finish bore	Hub type	Finish bore	Hub type	Finish bore	Hub type	Finish bore

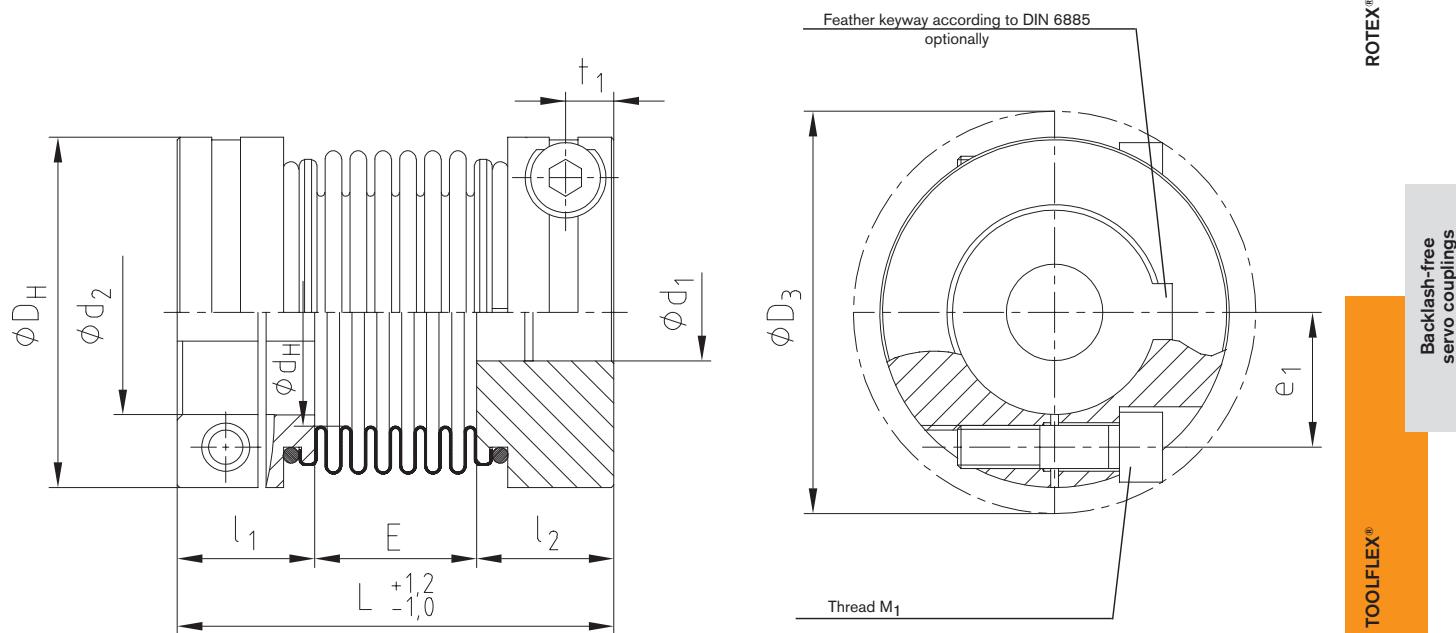

Other types:

Type for FANUC motors

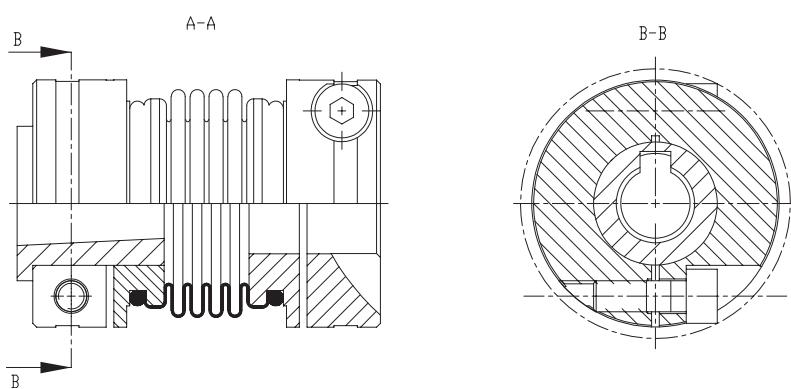

RADEX®-NC

Types of hubs

Type 2.5



Clamping hub double slot without feather keyway

Type 2.6




Clamping hub double slot with feather keyway

COUNTEX®

TOOLFLEX® KN

Metal bellow-type couplings

Taper hubs for high friction torques



TOOLFLEX® Type S-KN - Hub material steel/bellow material stainless steel																		
Size	Torque of bellow TKN ¹⁾ [Nm]	Max. speed [rpm]	Dimensions [mm]														Weight ⁴⁾ [kg]	
			Finish bore d		L	L _{total}	l ₁ , l ₂	D _H	D ₁	D ₂	Clamping screws DIN EN ISO 4017			Extraction thread				
			Min.	Max.	4 layers	4 layers					M	T _A [Nm]	z = number	M1	z = number	T _{A1} ³⁾ [Nm]		
30	35	15280	12	22	48	54	22	50	43	47	M4	2.9	12	M4	6	1.2	0.4	
38	65	12600	12	28	56	63	26	60.5	52	56	M5	6	12	M5	6	1.4	0.7	
42	95	11580	14	35	64	71	29	66	60	63	M5	6	12	M5	6	1.4	0.8	
45	170	9300	15	40	74.5	82.5	34	82	68	77	M6	14	12	M6	6	3	1.5	
55 ²⁾	340	7870	15	56	95.5	106	40	97	95	95	M8	35	12	M8	6	6	2.5	

TOOLFLEX® Type M-KN - Hub material steel/bellow material stainless steel																		
Size	Torque of bellow TKN ¹⁾ [Nm]	Max. speed [rpm]	Dimensions [mm]														Weight ⁴⁾ [kg]	
			Finish bore d		L	L _{total}	l ₁ , l ₂	D _H	D ₁	D ₂	Clamping screws DIN EN ISO 4017			Extraction thread				
			Min.	Max.	6 layers	6 layers					M	T _A [Nm]	z = number	M1	z = number	T _{A1} ³⁾ [Nm]		
30	35	15280	12	22	57	63	22	50	43	47	M4	2.9	12	M4	6	1.2	0.4	
38	65	12600	12	28	68	75	26	60.5	52	56	M5	6	12	M5	6	1.4	0.7	
42	95	11580	14	35	75	82	29	66	60	63	M5	6	12	M5	6	1.4	0.8	
45	170	9300	15	40	91	99	34	82	68	77	M6	14	12	M6	6	3	1.5	
55 ²⁾	340	7870	15	56	109	120	40	97	95	95	M8	35	12	M8	6	6	2.5	

¹⁾ For selection see page 22 et seqq.

²⁾ Hub made of steel welded with bellow.

³⁾ After assembly of the clamping screws (M) tighten the extraction thread (M₁) at the tightening torque T_{A1} specified.



⁴⁾ Figures refer to the complete coupling with max. bore.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 6.5																		
Size	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55
30	50	58	66	71	79													
38		81	92	130	103	149	161	202										
42				105	117	168	131	164	189	215	257							
45					230	332	230	288	331	376	451	531	589					
55 ⁴⁾						483	606	696	792	585	690	764	843	967	1101	1194	1445	



Ordering example:

TOOLFLEX® 38 S-KN	6.5 - Ø15	6.5 - Ø22
Size and type of coupling	Finish bore	Finish bore

TOOLFLEX® S-KN

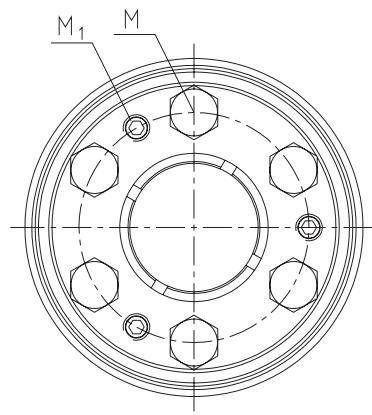
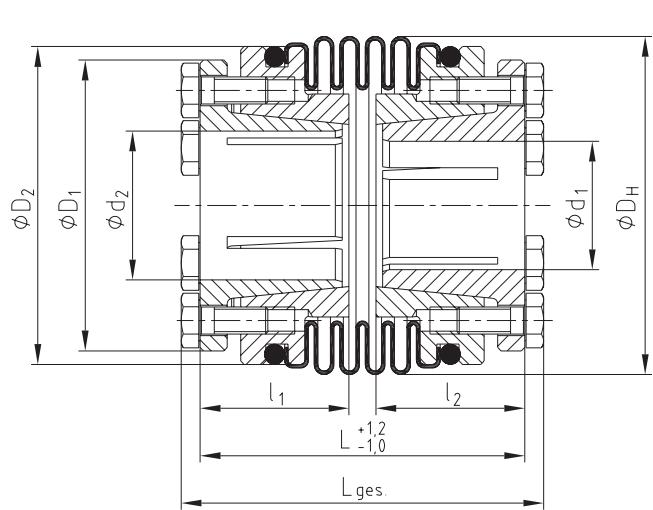


TOOLFLEX® M-KN

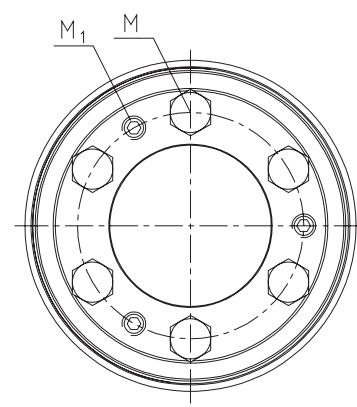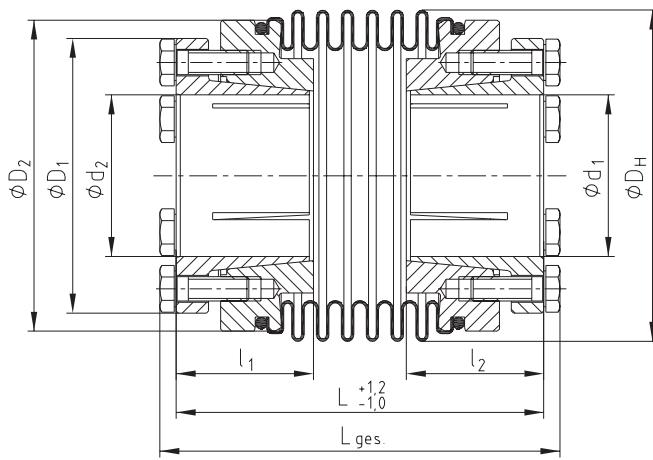


Other types:

TOOLFLEX® KN for FANUC motors

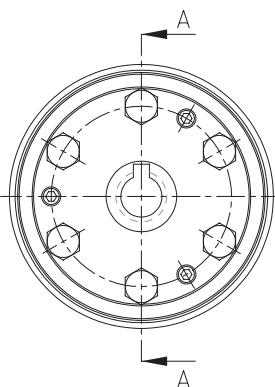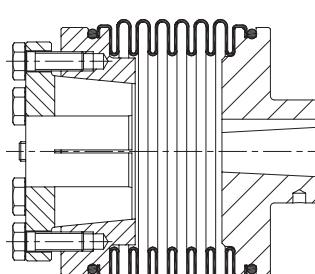

Types of hubs

Type 6.5



Taper hub KN

COUNTEX®



ROTEX® GS

Backlash-free
servo couplings

TOOLFLEX® PI

Metal bellow-type couplings

Axial plug-in

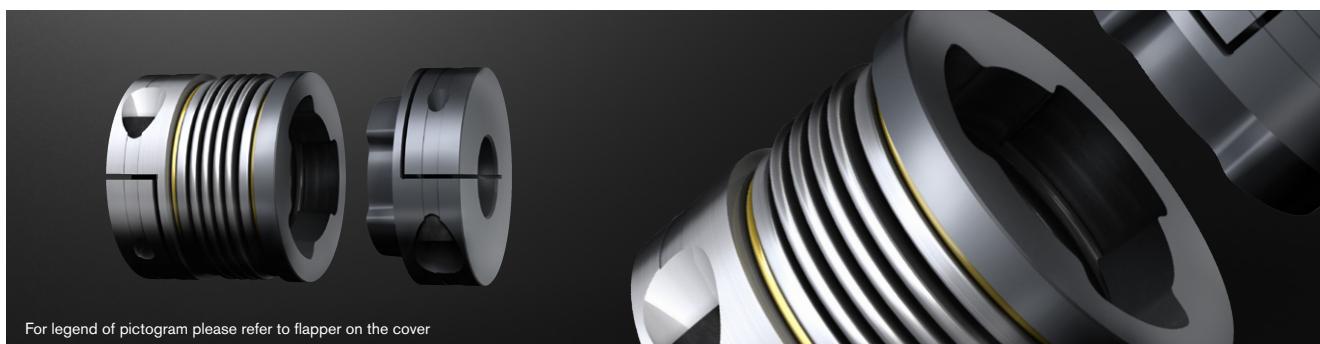

TOOLFLEX® Type S-PI - Hub material aluminium/bellow material stainless steel															
Size	Type	Dimensions [mm]													
		Min. d ₁ , d ₂	Max. d ₁	Max. d ₂	L ¹⁾	I ₁	I ₂	E	D _H	H	M ₁ , M ₂	D _K	e	t ₁ , t ₂	T _A [Nm]
20	S	8	20	20	67.0	21.5	33.5	12.0	40	0.5 - 1	M5	43.5	14.5	6	6
30	S	10	30	28	73.5	23.0	33.5	17.0	55	0.5 - 1	M6	58.0	19.0	7	10
38	S	12	38	32	87.5	25.5	44.0	18.0	65	0.5 - 1.5	M8	72.6	25.0	9	25
42	S	14	42	35	93.0	30	39.0	21.0	70	0.5 - 1.5	M8	76.1	25.0	9	25
45	S	14	45	42	96.0	32.0	41.5	22.5	83	0.5 - 1.5	M10	89.0	30.0	11	49
55 ⁴⁾	S	20	55	55	130.1	40	58.5	31.5	100	0.5 - 1.5	M12	106.0	37	14	120

Technical data of TOOLFLEX® S-PI															
Size	Type	Torque of bellow T _{KN} ²⁾ [Nm]	Max. speed [rpm]	Moment of inertia ³⁾ [x10 ⁻⁶ kgm ²]	Torsion spring stiffness C _T [Nm/rad]	Axial stiffness C _A [N/mm]	Radial stiffness C _r [N/mm]	Perm. displacements				Weight ³⁾ [kg]			
								Radial [mm]	Angular [degree]	t ₁ , t ₂	T _A [Nm]				
20	S	15	11950	37	6600	63	189	0.15	1.0	1.0	0.15				
30	S	35	8700	140	11500	97	233	0.20	1.5	1.5	0.29				
38	S	65	7350	329	21500	108	318	0.20	1.5	1.5	0.50				
42	S	95	6820	396	31500	120	499	0.20	1.5	1.5	0.49				
45	S	170	5750	1031	55000	132	738	0.25	1.5	1.5	0.93				
55 ⁴⁾	S	340	4800	6150	144100	160	894	0.25	1.5	1.5	3.80				

TOOLFLEX® Type M-PI - Hub material aluminium/bellow material stainless steel															
Size	Type	Dimensions [mm]													
		Min. d ₁ , d ₂	Max. d ₁	Max. d ₂	L ¹⁾	I ₁	I ₂	E	D _H	H	M ₁ , M ₂	D _K	e	t ₁ , t ₂	T _A [Nm]
20	M	8	20	20	74.0	21.5	33.5	19.0	40	0.5 - 1	M5	43.5	14.5	6	6
30	M	10	30	28	82.5	23.0	33.5	26.0	55	0.5 - 1	M6	58.0	19.0	7	10
38	M	12	38	32	99.5	25.5	44.0	30.0	65	0.5 - 1.5	M8	72.6	25.0	9	25
42	M	14	42	35	104.0	30	39.0	32.0	70	0.5 - 1.5	M8	76.1	25.0	9	25
45	M	14	45	42	112.5	32.0	41.5	39.0	83	0.5 - 1.5	M10	89.0	30.0	11	49
55 ⁴⁾	M	20	55	55	143.6	40	58.5	45	100	0.5 - 1.5	M12	106.0	37	14	120

Technical data of TOOLFLEX® M-PI															
Size	Type	Torque of bellow T _{KN} ²⁾ [Nm]	Max. speed [rpm]	Moment of inertia ³⁾ [x10 ⁻⁶ kgm ²]	Torsion spring stiffness C _T [Nm/rad]	Axial stiffness C _A [N/mm]	Radial stiffness C _r [N/mm]	Perm. displacements				Weight ³⁾ [kg]			
								Radial [mm]	Angular [degree]	t ₁ , t ₂	T _A [Nm]				
20	M	15	11950	38	4900	42	126	0.20	1.5	1.5	0.16				
30	M	35	8700	145	10200	65	155	0.25	2.0	2.0	0.31				
38	M	65	7350	346	15100	72	212	0.25	2.0	2.0	0.52				
42	M	95	6820	427	22000	80	333	0.25	2.0	2.0	0.52				
45	M	170	5750	1127	41000	88	492	0.30	2.0	2.0	1.00				
55 ⁴⁾	M	340	4800	6270	96100	107	598	0.30	2.0	2.0	3.90				

¹⁾ When plugged in

²⁾ For selection see page 22 et seqq.

³⁾ Figures refer to the complete coupling with max. bore.


⁴⁾ Hub made of steel welded with bellow.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 2.5 for Ød ₁ /Ød ₂																				
Size	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42
20	17.6	18.1	18.6	19.1	19.5	20.5	21.0	21.4	22.4	22.9	23.3									
30				33.1	33.8	35.1	35.8	36.5	37.8	38.5	39.2	41.9	42.5	44.6	45.9					
38						79.2	80.4	81.7	84.2	85.4	86.6	91.6	92.8	96.5	99.0	102				
42						79.2	80.4	81.7	84.2	85.4	86.6	91.6	92.8	96.5	99.0	102	105			
45											157	165	167	173	177	181	187	193	197	200
55											397	401	413	421	429	442	454	462	470	

Ordering example:

TOOLFLEX® 30 S-PI		d ₁ - Ø22		d ₂ - Ø18	
Size and type of coupling		Finish bore		Finish bore	

TOOLFLEX® S-PI

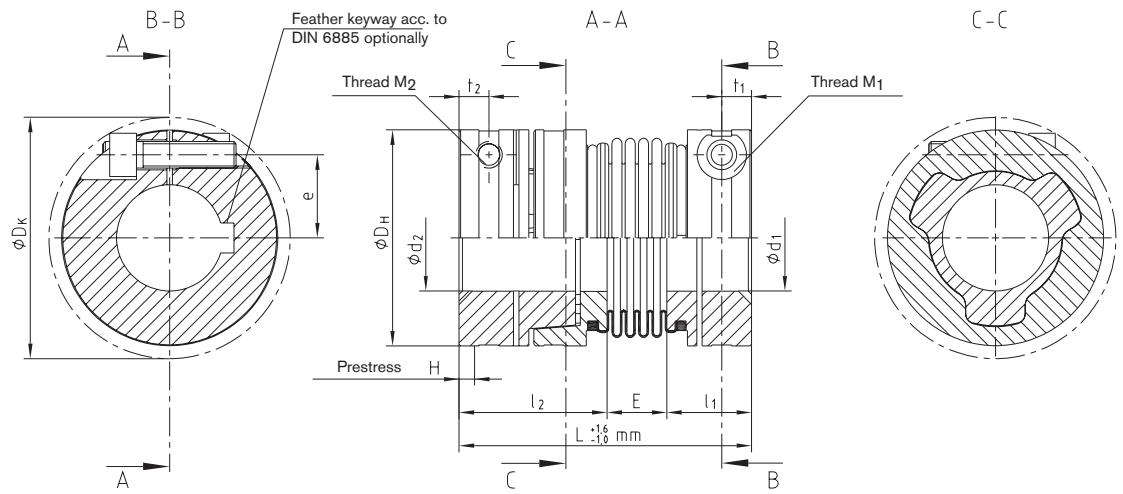


ROTEX® GS

Backlash-free
servo couplings

TOOLFLEX®

TOOLFLEX® M-PI

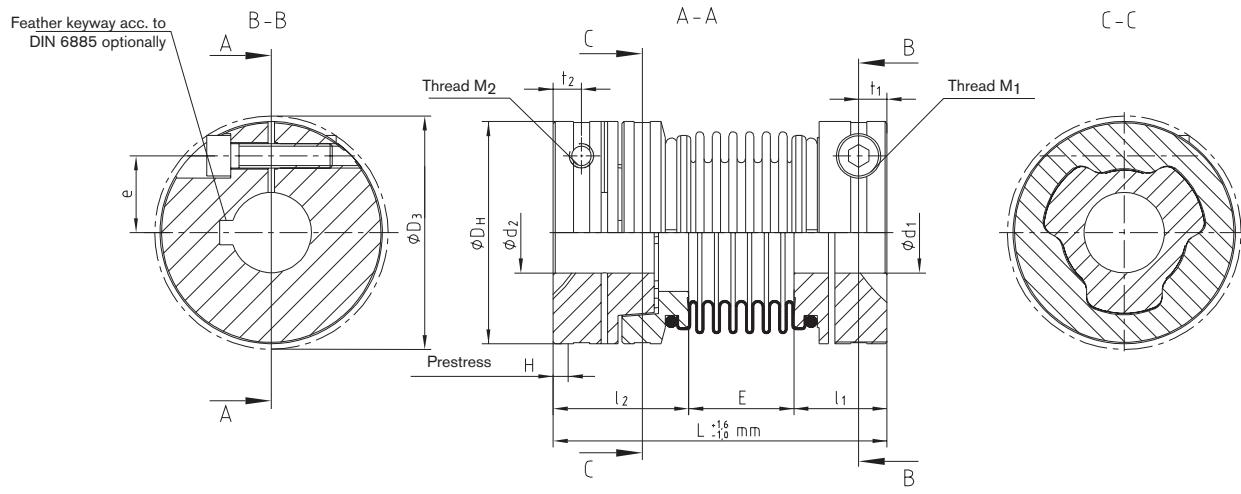


RADEX®-NC

COUNTEX®

TOOLFLEX® CF

Metal bellow-type couplings

Flange programme

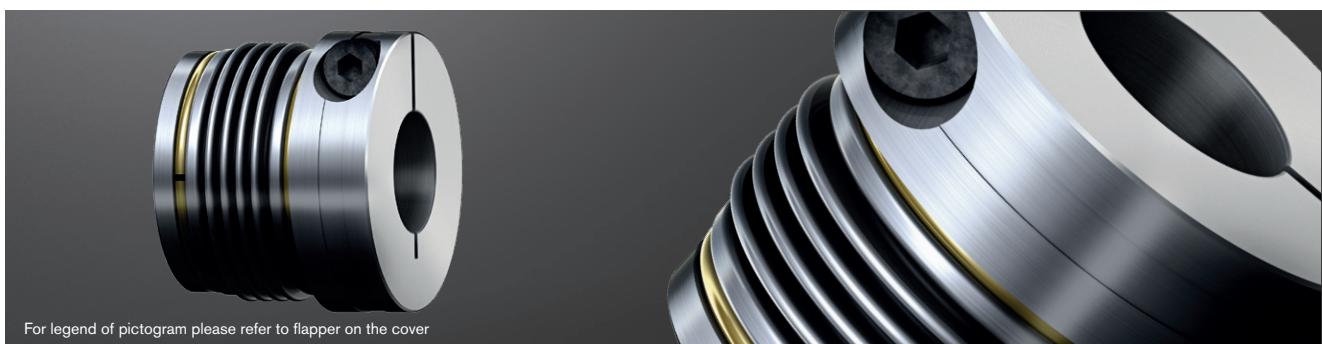

For legend of pictogram please refer to flapper on the cover



TOOLFLEX® Type S-CF - Hub material aluminium (size 55 steel)/bellow material stainless steel																		
Size	Finish bore d		Dimensions [mm]								Clamping screws DIN EN ISO 4762						Flange	
	Min.	Max.	D _H	D _B	D _F	d ₂ H7	l ₃	l ₁	l ₂	E	L	D _K	e ₁	t ₁	M	T _A [Nm]	D _T	M ₁
30	10	30	55	50	47	25	1.5	16	23.0	10.5	49.5	58.0	19	7	M6	10	30	M4
						29											34	
38	12	38	65	60.5	55.75	29	1.5	18	25.5	11.0	54.5	72.6	25	9	M8	25	35	M5
						36											42	
42	14	42	70	66	62.95	36	1.5	21	30.0	15.0	66.0	76.1	27	9	M8	25	42	M5
						43											49	
45	14	45	83	82	77	38	1.5	23	32.0	14.5	69.5	89.0	30	11	M10	49	45	M6
						49											56	
55 ²⁾	20	55	100	97	95	51	1.5	28	40.0	23.5	91.5	106.0	37	14	M12	120	60	M8
						68											78	

Technical data									
Size	Type	Torque of bellow T_{kN} ¹⁾ [Nm]	Max. speed [rpm]	Torsion spring stiffness C_T [Nm/rad]	Axial stiffness C_A [N/mm]	Radial stiffness C_r [N/mm]	Perm. displacements		
							Axial [mm]	Radial [mm]	Angular [degree]
30	S	35	8700	14800	97	233	±0.5	0.20	1.5
38	S	65	7350	24900	108	318	±0.6	0.20	1.5
42	S	95	6820	36500	120	499	±0.6	0.20	1.5
45	S	170	5750	64000	132	738	±0.9	0.25	1.5
55 ²⁾	S	340	4800	96100	160	894	±1.0	0.25	1.5

TOOLFLEX® Type M-CF - Hub material aluminium (size 55 steel)/bellow material stainless steel																		
Size	Finish bore		Dimensions [mm]								Clamping screws DIN EN ISO 4762					Flange		
	d1 min.	d1 max.	DH	DB	DF	d2 H7	l3	l1	l2	E	L	DK	e1	t1	M	T _A [Nm]	D _T	M ₁
30	10	30	55	50	47	25	1.5	16	23.0	19.5	58.5	58.0	19	7	M6	10	30	M4
						29											34	
38	12	38	65	60.5	55.75	29	1.5	18	25.5	23.0	66.5	72.6	25	9	M8	25	35	M5
						36											42	
42	14	42	70	66	62.95	36	1.5	21	30.0	26.0	77.0	76.1	27	9	M8	25	42	M5
						43											49	
45	14	45	83	82	77	38	1.5	23	32.0	31.0	86.0	89.0	30	11	M10	49	45	M6
						49											56	
55 ²⁾	20	55	100	97	95	51	1.5	28	40.0	37.0	105.0	106.0	37	14	M12	120	60	M8
						68											78	

Technical data									
Size	Type	Torque of bellow TKN ¹⁾ [Nm]	Max. speed [rpm]	Torsion spring stiff- ness C _T [Nm/rad]	Axial stiffness C _A [N/mm]	Radial stiffness C _R [N/mm]	Perm. displacements		
							Axial [mm]	Radial [mm]	Angular [degree]
30	M	35	8700	14800	65	155	±0.8	0.25	2.0
38	M	65	7350	24900	72	212	±0.8	0.25	2.0
42	M	95	6820	36500	80	333	±0.8	0.25	2.0
45	M	170	5750	64000	88	492	±1.0	0.30	2.0
55 ²⁾	M	340	4800	96100	107	598	±1.0	0.30	2.0

¹⁾ For selection see page 22 et seqq.

²⁾ Hub made of steel welded with bellow.


Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 2.5																					
Size	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø50	
30		33.1	33.8	35.1	35.8	36.5	37.8	38.5	39.2	41.9	42.5	44.6	45.9								
38							84.2	85.4	86.6	91.6	92.8	96.5	99.0	102	105	109					
42					84.2	85.4	86.6	89.1	90.3	91.6	96.5	97.8	102	104	106	110	114	116	119		
45										157	165	167	173	177	181	187	193	197	200	206	
55 ⁴⁾										397	401	413	421	429	442	454	462	470	482	502	523

Ordering example:	TOOLFLEX® 38 M-CF	Ø15	Ø29 - Ø35 - 6xM5
	Size and type of coupling	Finish bore	Dimensions flange (d_2 - D_T - M1)

168

For continuously updated data please refer to our online catalogue at www.ktr.com

TOOLFLEX® S-CF

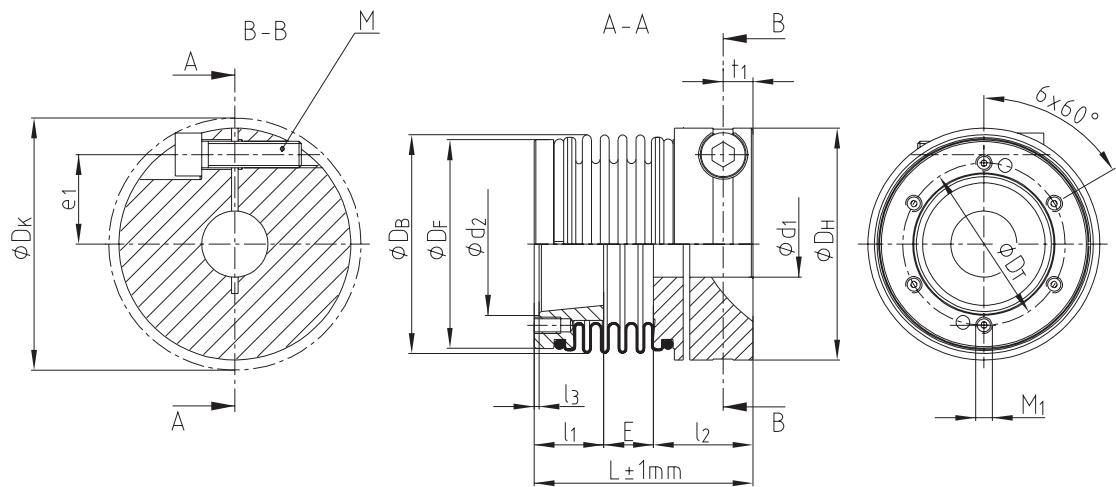


ROTEX® GS

Backlash-free
servo couplings

TOOLFLEX®

TOOLFLEX® M-CF

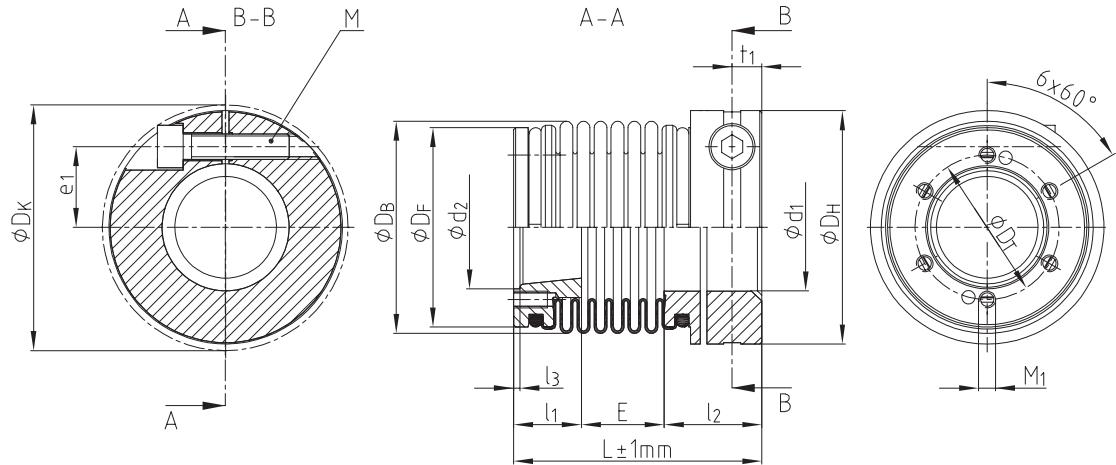



RADEX®-NC

COUNTEX®

TOOLFLEX® S-H / M-H

Metal bellow-type couplings

Half shell clamping hubs

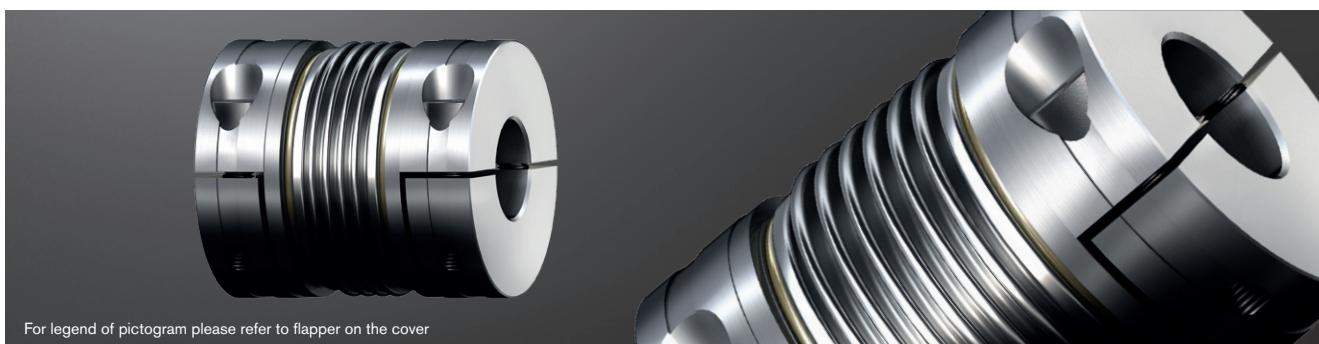

TOOLFLEX® type S-H / shell clamping hubs - Hub material aluminium/bellow material stainless steel													
Size	Finish bore d		Dimensions [mm]										
	Min.	Max.	General							Clamping screws DIN EN ISO 4762			
			L	I ₁ , I ₂	E	D _H	D _K	E ₁	t ₁	x ₁ , x ₂	e	M	T _A [Nm]
20	8	20	51	19.5	12.0	40	41.2	26.0	5.5	12.5	14.5	M4	5.0
30	10	30	68	25.5	17.0	55	57.7	34.0	7.5	17.0	19.0	M6	15.0
38	12	38	78	30.0	18.0	65	72.6	36.0	9.5	21.0	25.0	M8	40.0
45	14	45	94.5	36.0	22.5	83	88.8	46.5	11.0	24.0	30.0	M10	70.0

Technical data of TOOLFLEX® S-H											
Size	Bel-low-hub-connection	Torque of bellow TKN ¹⁾ [Nm]	Max. speed [rpm]	Moment of inertia ²⁾ [x10 ⁻⁶ kgm ²]	Torsion spring stiffness C _T [Nm/rad]	Axial stiffness C _A [N/mm]	Radial stiffness C _R [N/mm]	Perm. displacements			Weight ²⁾ [kg]
								Axial [mm]	Radial [mm]	Angular [degree]	
20	Flanged	15	9550	28	9600	63	189	±0.4	0.15	1.0	0.110
30		35	6950	132	17800	97	233	±0.5	0.20	1.5	0.285
38		65	5850	292	37400	108	318	±0.6	0.20	1.5	0.422
45		170	4750	1003	95800	132	738	±0.9	0.20	1.5	0.897

TOOLFLEX® type M-H / shell clamping hubs - Hub material aluminium/bellow material stainless steel													
Size	Finish bore d		Dimensions [mm]										
	Min.	Max.	General							Clamping screws DIN EN ISO 4762			
			L	I ₁ , I ₂	E	D _H	D _K	E ₁	t ₁	x ₁ , x ₂	e	M	T _A [Nm]
20	8	20	58	19.5	19.0	40	41.2	33.0	5.5	12.5	14.5	M4	5.0
30	10	30	77	25.5	26.0	55	57.7	43.0	7.5	17.0	19.0	M6	15.0
38	12	38	90	30.0	30.0	65	72.6	48.0	9.5	21.0	25.0	M8	40.0
45	14	45	111	36.0	39.0	83	88.8	63.0	11.0	24.0	30.0	M10	70.0

Technical data of TOOLFLEX® M-H											
Size	Bel-low-hub-connection	Torque of bellow TKN ¹⁾ [Nm]	Max. speed [rpm]	Moment of inertia ²⁾ [x10 ⁻⁶ kgm ²]	Torsion spring stiffness C _T [Nm/rad]	Axial stiffness C _A [N/mm]	Radial stiffness C _R [N/mm]	Perm. displacements			Weight ²⁾ [kg]
								Axial [mm]	Radial [mm]	Angular [degree]	
20	Flanged	15	9550	29	6600	42	126	±0.6	0.20	1.5	0.115
30		35	6950	138	14800	65	155	±0.8	0.25	2.0	0.304
38		65	5850	310	24900	72	212	±0.8	0.25	2.0	0.445
45		170	4750	1069	64000	88	492	±1.0	0.25	2.0	0.947

¹⁾ For selection see page 22 et seqq.

²⁾ Figures refer to the complete coupling with max. bore.



To make sure that the coupling can be assembled/disassembled radially, please observe the insertion dimension x1/x2 of the shafts.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 7.8 for Ød ₁ /Ød ₂																					
Size	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45
20	20	23	25	28	30	35	38	40	45	48	50										
30			51	56	61	71	76	81	92	97	102	122	127	143							
38					120	140	150	160	180	190	200	240	250	280	300	320	350	380			
45						197	211	226	254	268	282	338	352	395	423	451	493	536	564	592	634



Ordering example:

TOOLFLEX® 30 S-H	7.8 - Ø25	7.9 - Ø30
Size and type of coupling	Hub type	Hub type

TOOLFLEX® S-H

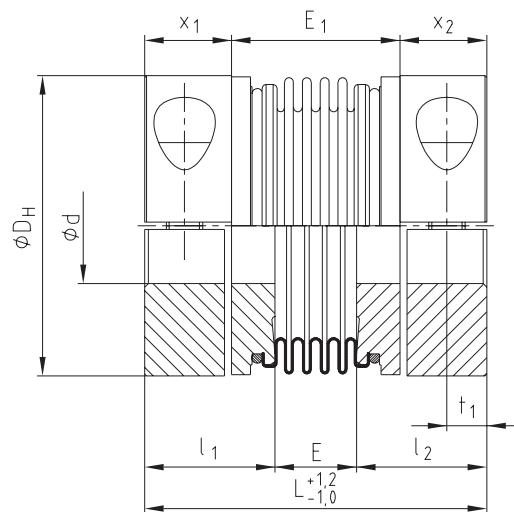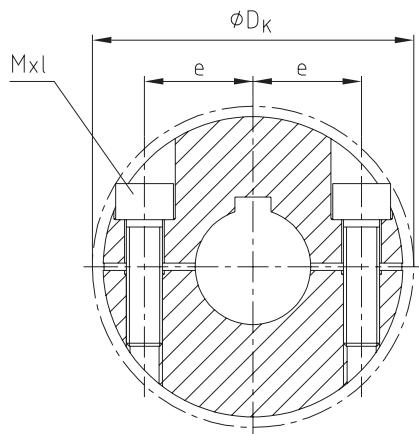

TOOLFLEX® M-H

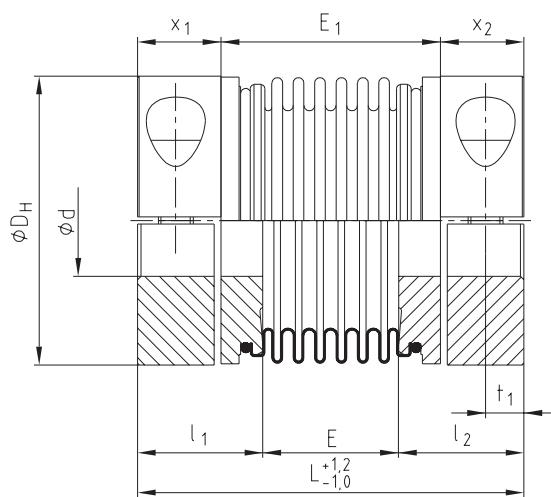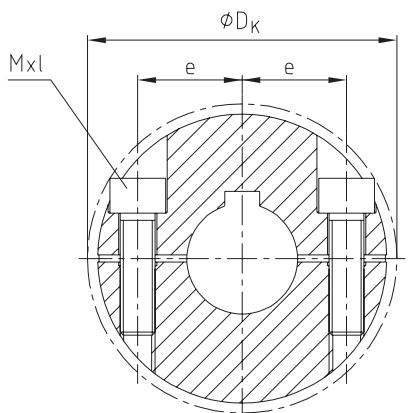

Types of hubs

Type 7.8



clamping hub type H without feather keyway for single-cardanic connection

Type 7.9



clamping hub type H with feather keyway for single-cardanic connection (on request)

COUNTEX®

RADEX®-NC

ROTEX® GS



Backlash-free
servo couplings

TOOLFLEX®

TOOLFLEX® ZR

Metal bellow-type couplings

Intermediate shaft coupling with aluminium pipe bonded

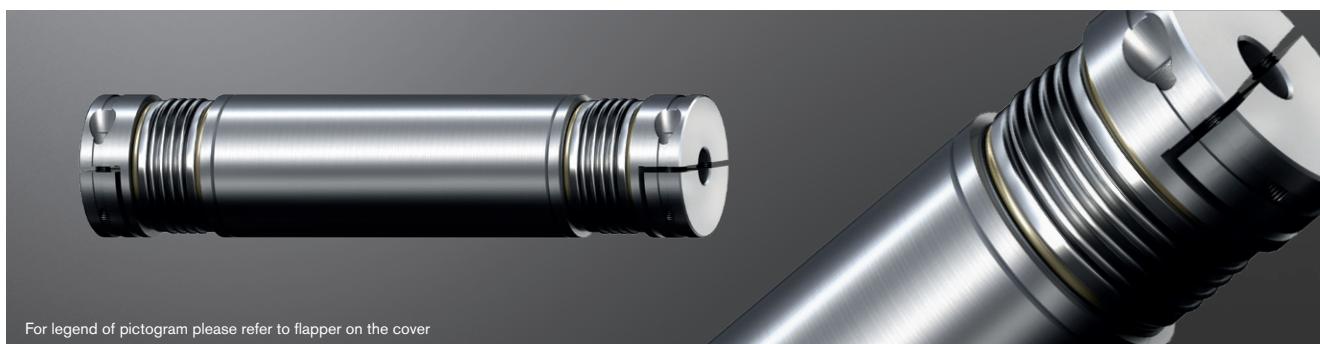

TOOLFLEX® type ZR / shell clamping hubs - Hub material aluminium/bellow material stainless steel															
Size	Finish bore d		Dimensions [mm]												
			General						Clamping screws DIN EN ISO 4762						
	Min.	Max.	D _H	L	l ₃	L _R	L _{ZR} = L _R + 2 • l ₃		d _R	d _K	t ₁	e	M	T _A [Nm]	
20	8	20	40	40	12.5	80	2975	105	3000	40	41.2	5.5	14.5	M4	5
30	10	28	55	58.5	17.0	114	3466	148	3500	50	58.0	7.5	19	M6	15
38	12	38	65	61	21.0	129	3958	171	4000	60	72.6	9.5	25	M8	40
45	14	45	83	78.5	25.0	149	3950	199	4000	80	89.0	11.0	30	M10	70

Technical data of TOOLFLEX® ZR														
Size	Torque of bellow T _{KN} ¹⁾ [Nm]	Moment of inertia [10 ⁻³ kgm ²]										Static torsion spring stiffness [Nm/rad]		
		ZR hub ²⁾					Pipe/meter					Z _W C ₂ ³⁾		
20	15	0.024378					0.329					1935		
30	35	0.121256					0.673					3800		
38	65	0.253162					1.199					7240		
45	170	0.961451					4.560					23183		

¹⁾ For selection see page 22 et seqq.

²⁾ Figures refer to the complete coupling with max. bore.

³⁾ Torsion spring stiffness with a length of 1 m of intermediate pipe with L_{pipe} = L_{ZR} - 2 • L

For inquiries and orders please specify the shaft distance dimension L_R along with the maximum speed to review the critical bending speed.


Straightness/concentricity of pipes according to DIN EN 755-1.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 7.5 for Ød ₁ /Ød ₂																					
Size	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45
20	20	23	25	28	30	35	38	40	45	48	50										
30			51	56	61	71	76	81	92	97	102	122	127	143							
38					120	140	150	160	180	190	200	240	250	280	300	320	350	380			
45						197	211	226	254	268	282	338	352	395	423	451	493	536	564	592	634

Ordering example:

TOOLFLEX® 30	ZR	1200 mm	7.5 - Ø24	7.6 - Ø24
Size and type of coupling	Type	Shaft distance dimension (L _R)	Hub type	Finish bore


TOOLFLEX® ZR

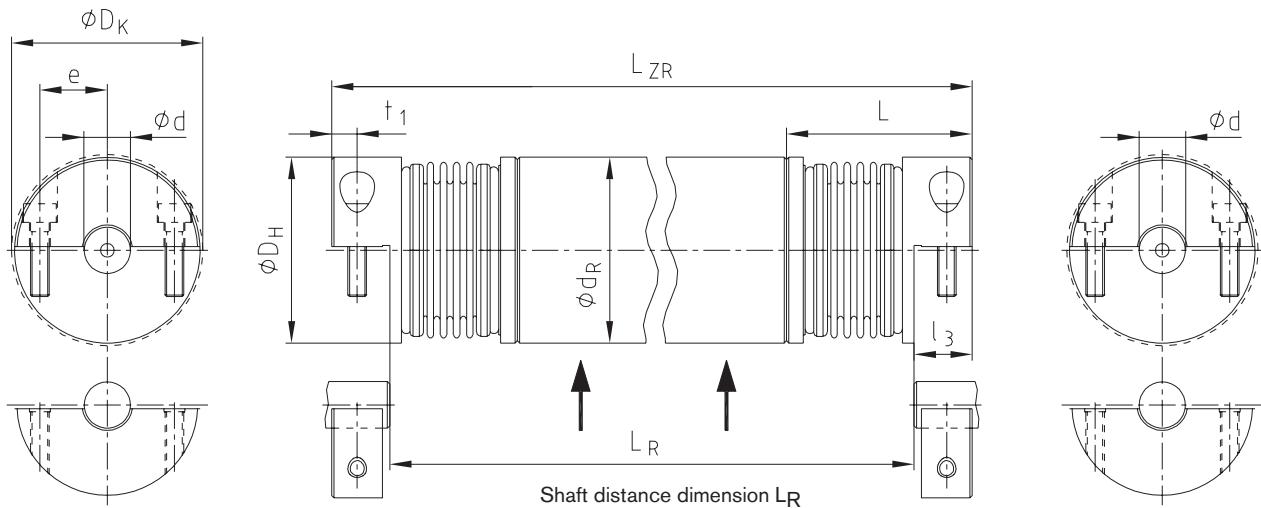

ROTEX® GS

Backlash-free
servo couplings

TOOLFLEX®

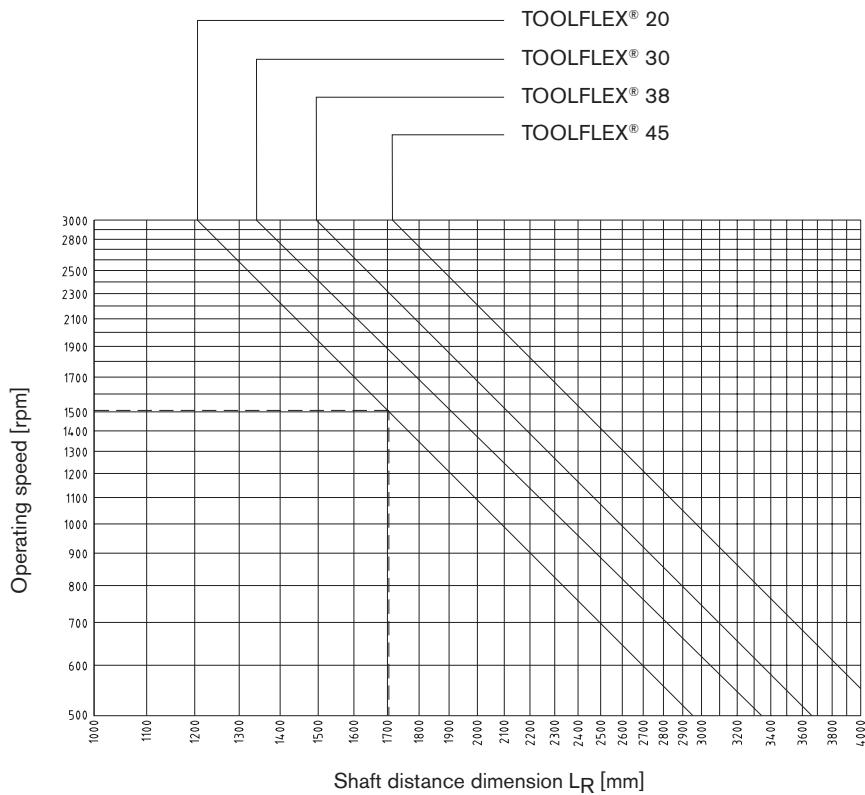

RADEX®-NC

Types of hubs

Type 7.5



Clamping hub type DH without feather keyway for double-cardanic connection

Type 7.6



Clamping hub type DH with feather keyway for double-cardanic connection (on request)

COUNTEX®

RADEX®-NC


Servo laminae couplings

Technical description

RADEX®-NC is a line specifically developed for servo technology. With this coupling a set of torsionally rigid steel laminas that are soft in bending ensure a reliable compensation for axial, angular and radial shaft displacements. As an all-metal coupling - the laminas are made of stainless steel - RADEX®-NC can even be used with high temperatures (up to 200 °C) and under aggressive ambient conditions. RADEX®-NC is manufactured in 10 sizes from size 5 to 75 for max. torques up to 4800 Nm. In addition to the two different types (EK = single-cardanic and DK = double-cardanic) it is available in five different hub types.



A typical application of RADEX®-NC are backlash-free worm gear pairs with low gear ratios. For reason of the gear ratio of the gearbox the rigidity of the coupling must be converted from the drive side into the driven side. Here the gear ratio itself has a decisive influence because it is included in the calculation by square. This converted rigidity is added in line with the gearbox stiffness in order to obtain the total rigidity. In case of gear ratios that are smaller than $i = 8$ we recommend to use RADEX®-NC due to the loss of rigidity of the total system arising with the use of flexible couplings.

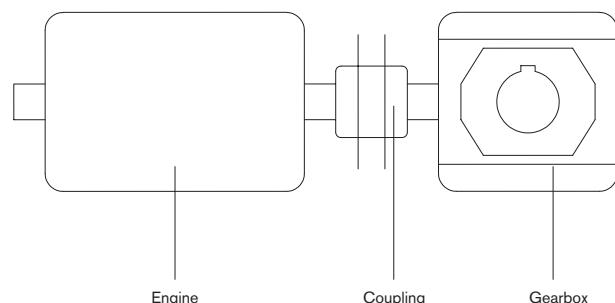

Use in potentially explosive atmospheres

RADEX®-NC couplings are suitable for power transmission in drives in potentially explosive atmospheres. The couplings are assessed and approved as units of category 2G/2D according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 1, 2, 21 and 22. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.


Selection:

If used in potentially explosive atmospheres, the clamping hubs without feather keyway only for use in category 3 (with feather keyway for cat. 2) must be selected in that there is a minimum safety factor of $s = 2$ between the peak torque (including all operating parameters) and the nominal torque and frictional torque of engagement of the coupling.




RADEX®-NC DK and EK Servo laminae couplings


Laminae sets

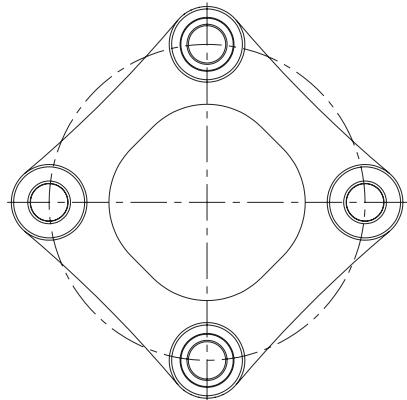


Size 5 to 26
(laminae with 4 holes)

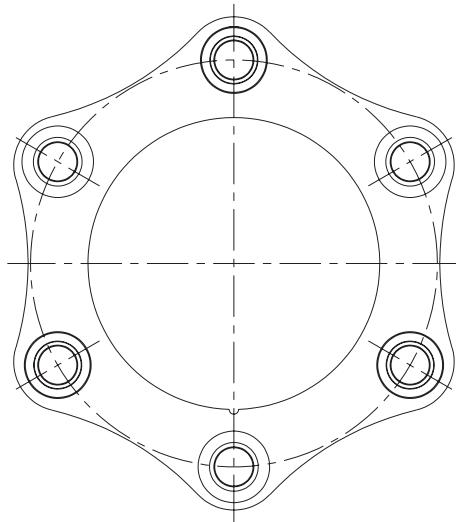

Size 36 to 75
(laminae with 6 holes)

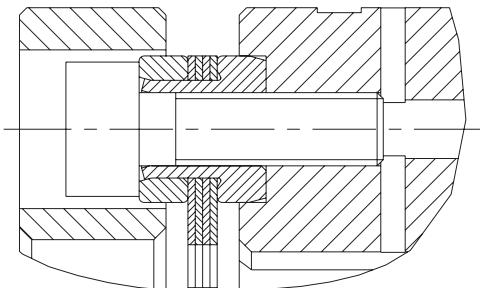

Size 5 to 10
(cylindrical sleeve)

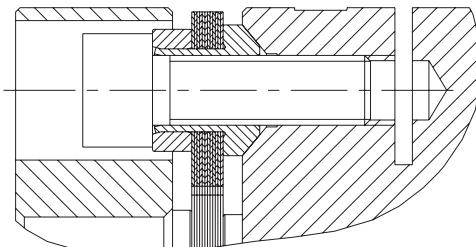

Size 16 to 75
(taper sleeve)

ROTEX® GS

Backlash-free
servo couplings

TOOLFLEX®

RADEX®-NC

Types of hubs



Type 2.5 clamping hub
double slotted, without feather keyway
Frictionally engaged, backlash-free shaft-hub-connection.
Transmittable torques depending on bore diameter.



Type 3.5 clamping hub
triple slotted, without feather keyway
Frictionally engaged, backlash-free shaft-hub-connection,
good properties of concentric running and reduced im-
balance. Transmittable torques depending on bore diameter.
Type 3.5 standard from size 43




Type 2.6 clamping hub
double slotted, with feather keyway
Positive-locking power transmission with additional friction
fit. The friction fit avoids resp. reduces reverse backlash.
Surface pressure of the keyway connection is reduced.




Type 3.6 clamping hub
triple slotted, with feather keyway
Positive-locking power transmission with additional friction
fit. The friction fit avoids resp. reduces reverse backlash.
Surface pressure of the keyway connection is reduced.
Type 3.6 standard from size 43



Type 6.5 clamping ring hub
Integrated frictionally engaged shaft-hub-connection for the
transmission of higher torques. Suitable for high speeds.



Type 7.5 clamping hub type DH
without feather keyway for double-cardanic connection
Frictionally engaged, backlash-free shaft-hub-connection
for radial assembly of coupling. Transmittable torques
depending on bore diameter.




Type 7.6 clamping hub type DH
with feather keyway for double-cardanic connection
Positive-locking, backlash-free power transmission with
additional friction fit for radial assembly of coupling. The
friction fit avoids resp. reduces reverse backlash. Surface
pressure of the keyway connection is reduced.

COUNTEX®


RADEX®-NC DK and EK Servo laminae couplings

Double- and single-cardanic types




Hub type 2.5/2.6

Type DK

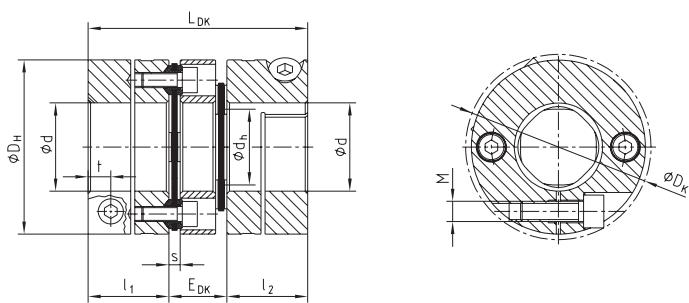

Type EK

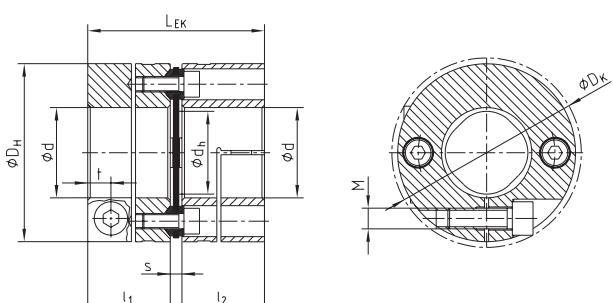

RADEX®-NC Types DK and EK - Hub and spacer material aluminium/laminae made of stainless steel

Size	Dimensions [mm]									Clamping screws DIN EN ISO 4762		Mass moment of inertia [kgm ²]		
	d _{max.}	D _H	D _K	l ₁ , l ₂	L _{DK}	E _{DK}	L _{EK}	d _h	s	t	M	T _A [Nm]	DK	EK
5	12	26	26	12	34	10	26.5	12	2.5	3.5	M2.5	0.8	0.00004	0.00003
10	15	35	35	16	44	12	35	14.5	3	5	M4	3	0.000016	0.000012
16	20	46	49	22	58	14	47	19.5	3	6.8	M6	10	0.000063	0.00005
21	30	58	59	25	69	19	53.5	24	3.5	6.8	M6	10	0.00018	0.00014
26	38	69	73	32	88	24	69	30	5	9	M8	25	0.00046	0.00036
36	45	84	87	35	93.6	23.6	74.8	48	4.8	10.5	M10	49	0.0011	0.00091

Technical data

Size	T _{KN} ¹⁾ [Nm]	T _K max ¹⁾ [Nm]	Max. speed [rpm]	Torsion spring stiffness [Nm/rad]		Laminae type	Displacements of type DK			Displacements of type EK		
				EK	DK		Radial [mm]	Axial [mm]	Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]
5	2.5	5	18,300	2,400	1,200	4 holes	0.13	± 0.4	1	-	± 0.2	1
10	7.5	15	13,600	5,600	2,800	4 holes	0.16	± 0.8	1	-	± 0.4	1
16	35	53	10,500	20,000	10,000	4 holes	0.19	± 1.0	1	-	± 0.5	1
21	70	105	8,500	40,000	20,000	4 holes	0.27	± 1.2	1	-	± 0.6	1
26	120	180	7,000	84,000	42,000	4 holes	0.33	± 1.6	1	-	± 0.8	1
36	340	510	5,700	280,000	140,000	6 holes	0.32	± 2.0	1	-	± 1.0	1

¹⁾ For selection see page 22 et seqq.

Review of shaft-hub-connection: Friction torques T_R [Nm] for hub type 2.5


Size	Pilot bored	Ø3	Ø5	Ø8	Ø10	Ø12	Ø14	Ø15	Ø16	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45
5	2.5		1.1	1.8	2.8	3.4	4															
10	4.5		5	7.7	9.5	11.1	12.7	13.5														
16	5.5				23	27	31	33	35	41	43											
21	7.5						28	32	34	36	42	44	48	52	54	59	63					
26	9.5								66	70	81	85	92	100	103	114	121	127	137	147		
36	11.5										129	135	147	159	165	182	194	199	221	237	247	258

Ordering example:

RADEX®-NC 21	DK	2.5 - Ø20		2.5 - Ø25	
Coupling size	Type	Hub type	Finish bore	Hub type	Finish bore


RADEX®-NC DK and EK Servo laminae couplings

Double- and single-cardanic types

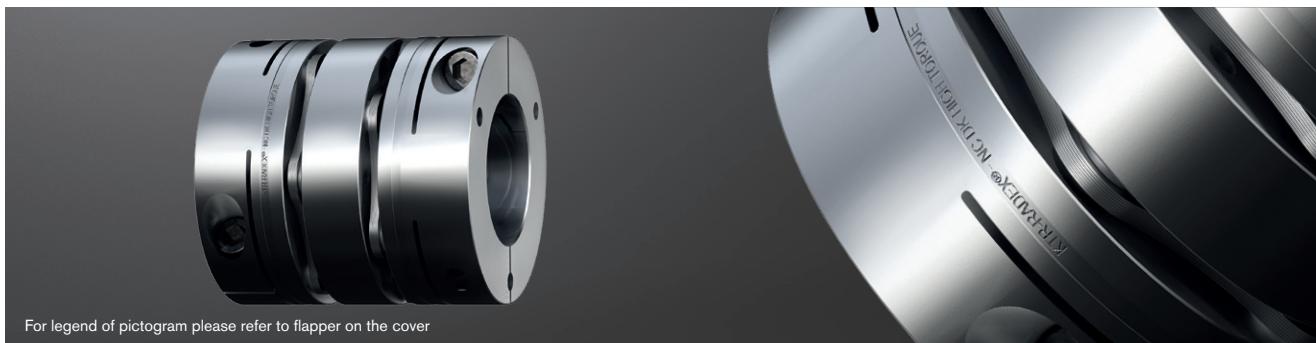


Hub type 3.5/3.6

Type DK

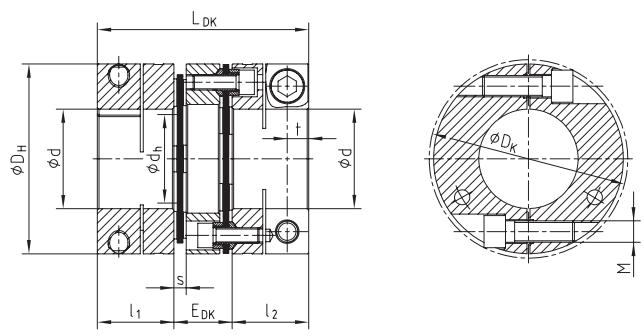

Type EK

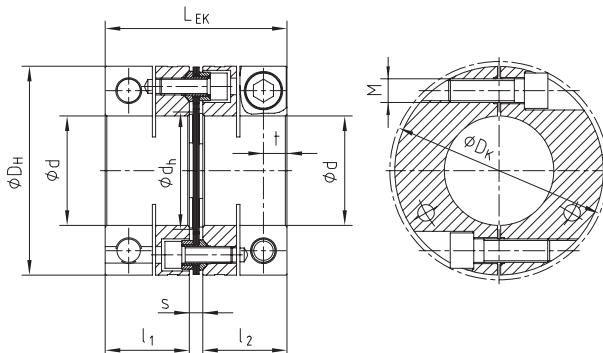

Size	Dimensions [mm]									Clamping screws DIN EN ISO 4762		Mass moment of inertia [kgm²]		
	d _{max.}	D _H	D _K	l ₁ , l ₂	L _{DK}	E _{DK}	L _{EK}	d _h	s	t	M	T _A [Nm]	DK	EK
	43	55	104	104	40.5	115	34	89	61	8	10.5	M10	49	0.0033 0.0025
51	70	124	130	50	138	38	108	73	8	14	M14	135	0.0082 0.006	
61	80	144	148.5	54	150	42	118	88	10	16	M16	210	0.016 0.012	
75	90	170	181.1	70	189	49	152	104	12	21.5	M20	610	0.099 0.077	

Size	Technical data												
	T _{KN} ¹⁾ [Nm]	T _{K max} ¹⁾ [Nm]	Max. speed [rpm]	Torsion spring stiffness [Nm/rad]		Laminae type	Displacements of type DK			Displacements of type EK			
				Type EK	Type DK		Radial [mm]	Axial [mm]	Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]	
43	600	900	8,100	510,000	255,000	6 holes	0.45	± 2.20	1	—	± 1.10	1	
51	1,300	1,950	6,700	920,000	460,000	6 holes	0.52	± 2.50	1	—	± 1.25	1	
61	2,000	3,000	6,100	1,500,000	750,000	6 holes	0.56	± 2.60	1	—	± 1.30	1	
75	3,200	4,800	5,100	2,100,000	1,050,000	6 holes	0.64	± 2.90	1	—	± 1.45	1	

¹⁾ For selection see page 22 et seqq.

Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 3.5																						
Size	Pilot bored	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø58	Ø60	Ø65	Ø70	Ø75	Ø80	Ø85	Ø90
43	15.0	238	248	258	297	317	347	377	397	416	446	476	496	545								
51	28.0				594	633	693	752	792	831	891	950	990	1089	1148	1188	1286	1385				
61	30.0							1039	1093	1148	1230	1312	1367	1503	1585	1640	1777	1913	2050	2187		
75	35												3129	3192	3630	3755	4068	4381	4694	5006	5319	5632

Ordering example:

RADEX®-NC 43	DK	3.5 - Ø25		3.5 - Ø35	
Coupling size	Type	Hub type	Finish bore	Hub type	Finish bore

RADEX®-NC DK and EK with clamping ring hubs Servo laminae couplings

Double- and single-cardanic types



Size	Dimensions [mm]											Clamping screws DIN EN ISO 4017			Mass moment of inertia [kgm²]	
	d _{max.}	D _H	l ₁ , l ₂	l ₃	l _{DK}	l _{DK1}	E _{DK}	l _{EK1}	l _{EK}	d _h	s	M x l	z = number	T _A [Nm]	DK	EK
	16	20	46	24	18	62	68	14	51	57	19.5	3	M5 x 20	4	6	0.000075
21	28	58	28	22	75	81.2	19	59.5	65.7	24	3.5	M6 x 25	4	10	0.000218	0.000177
26	35	69	36	28	96	100.8	24	77	81.8	30	5	M5 x 30	8	6	0.000565	0.000467
36	42	84	43	35	109.6	118.3	23.6	90.8	99.5	48	4.8	M8 x 40	6	25	0.001581	0.001294
43	60	104	46	35	126	135.9	34	100	109.9	61	8	M8 x 40	6	25	0.004051	0.003250
51	70	124	50	38	138	150.5	38	108	120.5	73	8	M10 x 45	6	49	0.008981	0.007096
61	80	144	55	43	152	165.5	42	120	133.5	88	10	M12 x 50	6	85	0.024188	0.020678

Size	Technical data													Displacements of type DK				Displacements of type EK				
	T _{KN} ¹⁾ [Nm]	T _K max ¹⁾ [Nm]	Max. speed [rpm]	Torsion spring stiffness [Nm/rad]				Laminae type	Radial [mm]			Axial [mm]		Angular per lamina [degree]		Radial [mm]			Axial [mm]		Angular per lamina [degree]	
				Type EK	Type DK	Radial [mm]	Axial [mm]		Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]	Radial [mm]	Axial [mm]	Angular per lamina [degree]	
16	35	53	31,150	20,000	10,000	4 holes	0.19	± 1.00	1.00	—	± 0.50	1	—	—	—	—	—	—	—	—	—	
21	70	105	24,700	40,000	20,000	4 holes	0.27	± 1.20	1.00	—	± 0.60	1	—	—	—	—	—	—	—	—	—	
26	120	180	20,800	84,000	42,000	4 holes	0.33	± 1.60	1.00	—	± 0.80	1	—	—	—	—	—	—	—	—	—	
36	340	510	17,100	280,000	140,000	6 holes	0.32	± 2.00	1.00	—	± 1.00	1	—	—	—	—	—	—	—	—	—	
43	600	900	13,800	510,000	255,000	6 holes	0.45	± 2.20	1.00	—	± 1.10	1	—	—	—	—	—	—	—	—	—	
51	1300	1950	11,600	920,000	460,000	6 holes	0.52	± 2.50	1.00	—	± 1.25	1	—	—	—	—	—	—	—	—	—	
61	2000	3000	10,000	1,500,000	750,000	6 holes	0.56	± 2.60	1.00	—	± 1.30	1	—	—	—	—	—	—	—	—	—	

¹⁾ For selection see page 22 et seqq.



Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 6.5																										
Size	Tolerance fit	Ø10	Ø12	Ø14	Ø15	Ø16	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55*	Ø60*	Ø65*	Ø70*	Ø75*	Ø80*
16	H7/h6	29	33	57	70	50	83	97	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	H7/k6	34	42	64	76	62	96	109	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
21	H7/h6	27	45	75	91	79	125	145	127	144	201	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	H7/k6	36	56	83	99	93	139	157	169	187	245	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
26	H7/h6	—	—	—	104	126	194	169	279	311	338	404	273	357	—	—	—	—	—	—	—	—	—	—	—	
	H7/k6	—	—	—	124	145	214	200	305	334	382	444	355	441	—	—	—	—	—	—	—	—	—	—	—	
36	H7/h6	—	—	—	—	—	241	395	438	521	616	523	664	647	741	841	—	—	—	—	—	—	—	—	—	
	H7/k6	—	—	—	—	—	284	430	471	558	646	640	779	778	875	974	—	—	—	—	—	—	—	—	—	
43	H7/h6	—	—	—	—	—	—	595	705	647	814	946	1073	980	1163	1360	1200	1072	1372	—	—	—	—	—	—	
	H7/k6	—	—	—	—	—	—	684	789	784	916	1096	1219	1144	1332	1534	1376	1370	1669	—	—	—	—	—	—	
51	H7/h6	—	—	—	—	—	—	—	750	818	1020	1085	1228	1166	1377	1605	1450	1607	2283	2255	2704	—	—	—		
	H7/k6	—	—	—	—	—	—	—	822	927	1117	1254	1392	1348	1568	1803	1652	1960	2387	2447	2842	—	—	—		
61	H7/h6	—	—	—	—	—	—	—	—	880	1074	1211	1264	1480	1597	1750	1911	2097	2542	2669	2718	3168	—	—	—	
	H7/k6	—	—	—	—	—	—	—	—	951	1131	1258	1333	1534	1668	1810	2032	2239	2635	2785	2855	3252	—	—	—	

* From Ø55 tolerance G7/m6



Ordering example:	RADEX®-NC 26	DK	6.5 - Ø24				6.5 - Ø35			
	Coupling size	Type	Hub type	Finish bore	Hub type	Finish bore	Hub type	Finish bore	Hub type	Finish bore

Hub type 6.5

Type DK

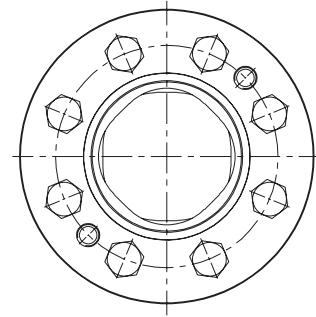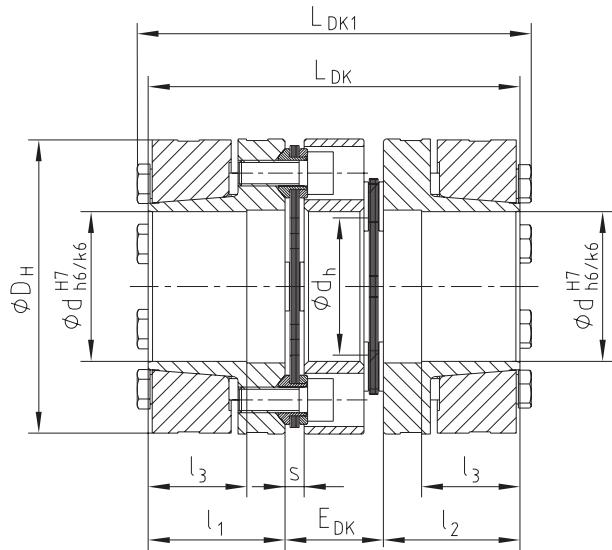

Type EK

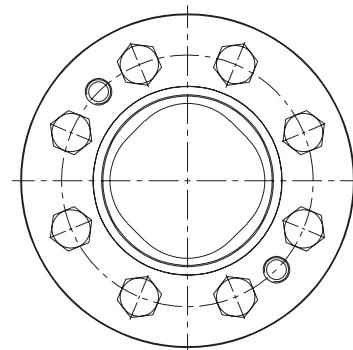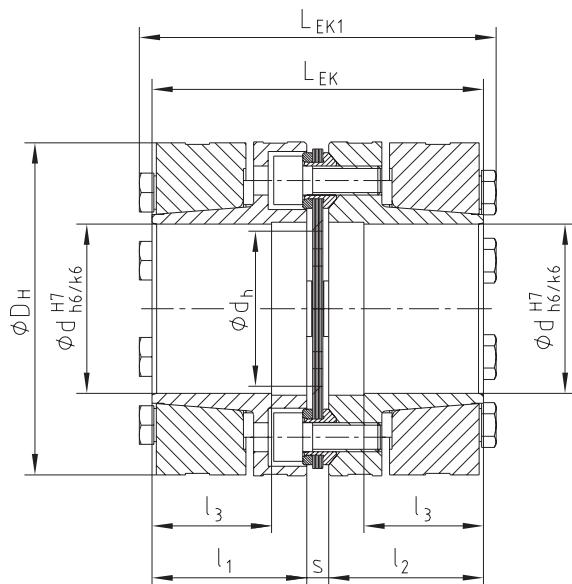

Types of hubs




Type 6.5
Clamping ring hub

RADEX®-NC ZR

Servo laminae couplings

Double-cardanic type

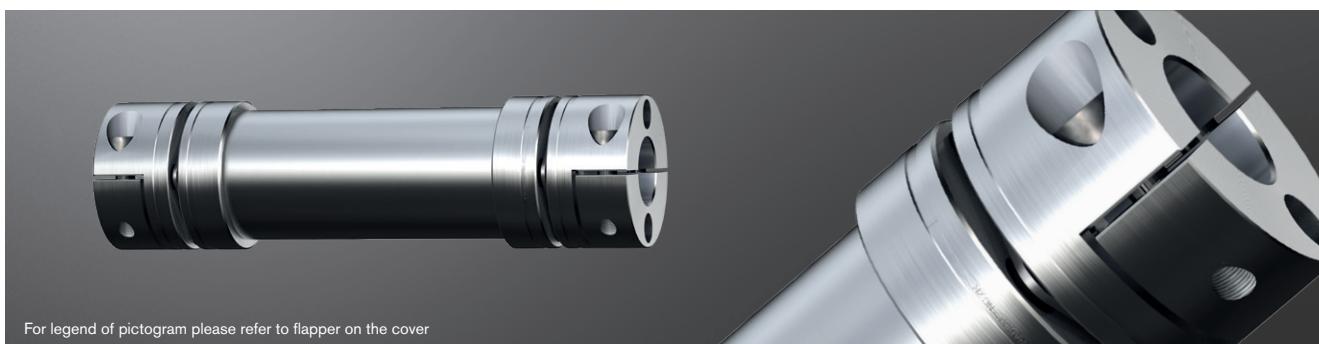

RADEX®-NC type ZR / half shell clamping hubs - Hub material aluminium/bellow material stainless steel															
Size	Finish bore d		Dimensions [mm]												
			General						Clamping screws DIN EN ISO 4762						
	Min.	Max.	D _H	L	l ₃	L _R	L _{ZR} = L _R + 2 • l ₃		d _R	D _K	t ₁	e	M	T _A [Nm]	
16	6	20	46	42	17.0	75	2966	109	3000	40	48.9	8	16	M6	15.0
21	8	30	58	47.5	17.0	92	3466	126	3500	50	59.2	8	20.5	M6	15.0
26	10	35	69	59	21.5	124	3957	167	4000	60	72.6	9.5	25	M8	40.0
36	12	45	84	62.3	26.5	114	3947	167	4000	80	86.8	12	30	M10	70.0

Technical data of RADEX®-NC ZR														
Size	T _{KN} ¹⁾ [Nm]		Moment of inertia [10 ⁻³ kgm ²]								Static torsion spring stiffness [Nm/rad]			
			Z _R hub ²⁾				Pipe/meter				Z _W C ₂ ³⁾			
16	35		0.049596				0.329				2449			
21	70		0.138744				0.673				4980			
26	120		0.348421				1.199				9220			
36	340		0.869569				4.560				34014			

¹⁾ For selection see page 22 et seqq.

²⁾ Figures refer to the complete coupling with max. bore.

³⁾ Torsion spring stiffness with a length of 1 m of intermediate pipe with L_{pipe} = L_{ZR} - 2 • L



For inquiries and orders please specify the shaft distance dimension L_R along with the maximum speed to review the critical bending speed.

Straightness/concentricity of pipes according to DIN EN 755-1.


Review of shaft-hub-connection: Friction torques T _R [Nm] for hub type 7.5 for Ød ₁ /Ød ₂																					
Size	Ø8	Ø9	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45
16			51	56	61	71	76	81	92	97	102										
21					61	71	76	81	92	97	102	122	127	143	153						
26							150	160	180	190	200	240	250	280	300						
36									268	282	338	352	395	423	451	493	536	564	592	634	

Ordering example:

RADEX®-NC 26	ZR	1200 mm	7.5 - Ø24	7.6 - Ø24
Coupling size	Type	Shaft distance dimension (L _R)	Hub type	Finish bore

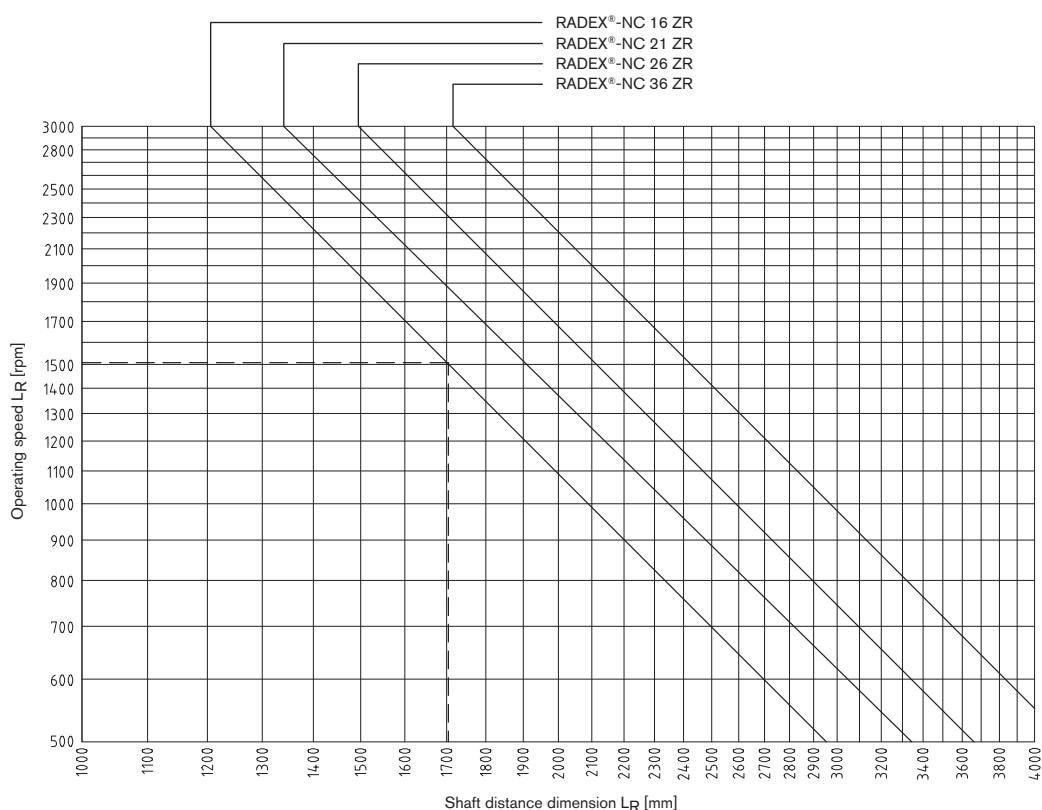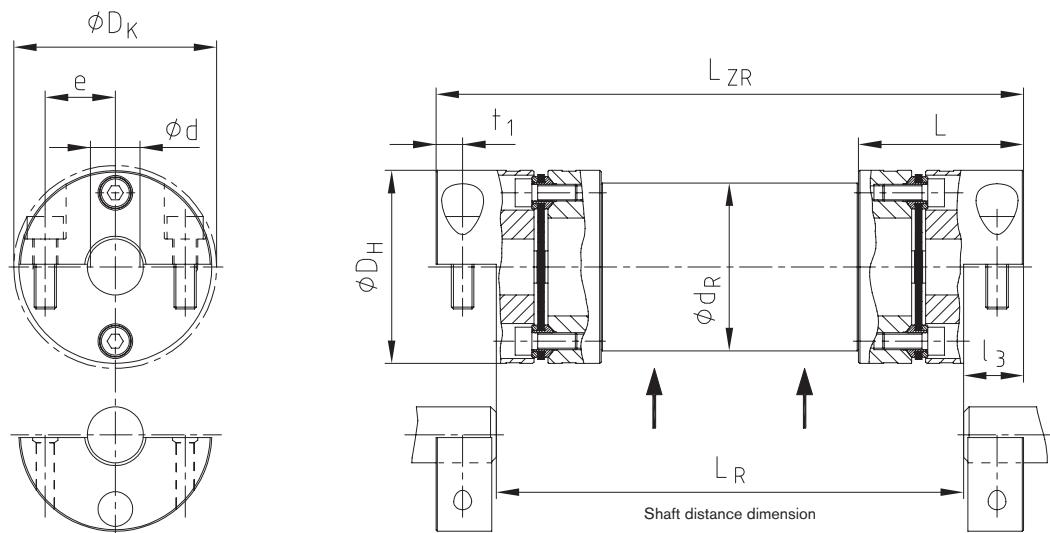
Components**Types of hubs**

Type 7.5




Clamping hub type DH without feather keyway for double-cardanic connection

Type 7.6



Clamping hub type DH with feather keyway for double-cardanic connection (on request)

Double-cardanic for measuring drives



COUNTEX® - Hub material aluminium/spacer PEEK														
Size	Torque [Nm]		Finish bore d		Dimensions [mm]				Displacements			Torsion spring stiffness CT [Nm/rad]	Radial stiffness Cr [N/mm]	Axial restoring force FA [N]
	T _{KN}	T _{K max}	Min.	Max.	D	I ₁ , I ₂	E	L	Radial ΔK _r [mm]	Axial ΔK _a [mm]	Angular ΔK _w [degree]			
6	0.3	0.6	2	6	15	4	4	12	0.05	-0.3/+0.6	0.36	48	26	10
12	0.5	1.0	2	12	22	6	3.5	15.5	0.10	-0.5/+1.0	0.45	120	65	25
14	1.0	2.0	5	14	31	8	4	20	0.12	-0.5/+1.0	0.57	235	70	27


General description

COUNTEX® is a three-part, backlash-free and torsionally stiff coupling specifically developed for the demands in measuring and control technology. Its axial plug-in ability combined with the geometry of hubs results in a coupling system with short dimensions, easy to assemble. The material of the spacer is resistant to high temperatures ensuring almost continuous properties of the coupling system even with temperatures up to 160 °C.

Applications

The measuring and control technology demands for high torsion spring stiffness of the coupling in order to implement reproducible positioning. At the same time the coupling has to compensate for displacements without any big forces causing stresses on the adjacent filigree components.

With its spacer made of high-temperature resistant nylon our COUNTEX® ensures almost constant torsion spring stiffness even with high temperatures. The double-cardanic principle of COUNTEX® reduces the restoring forces to a minimum. Nevertheless it has very compact dimensions which make it excellently suitable for tight mounting spaces.

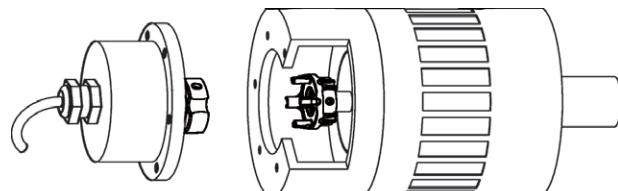



Use in potentially explosive atmospheres

COUNTEX® couplings are suitable for positioning transmission in drives used in potentially explosive atmospheres. The couplings are assessed and approved as units of category 2G/2D according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 1, 2, 21 and 22. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.



Ordering example:

COUNTEX® 14	1.1 - Ø6.35		1.1 - Ø10	
Coupling size	Hub type	Finish bore d ₁	Hub type	Finish bore d ₂

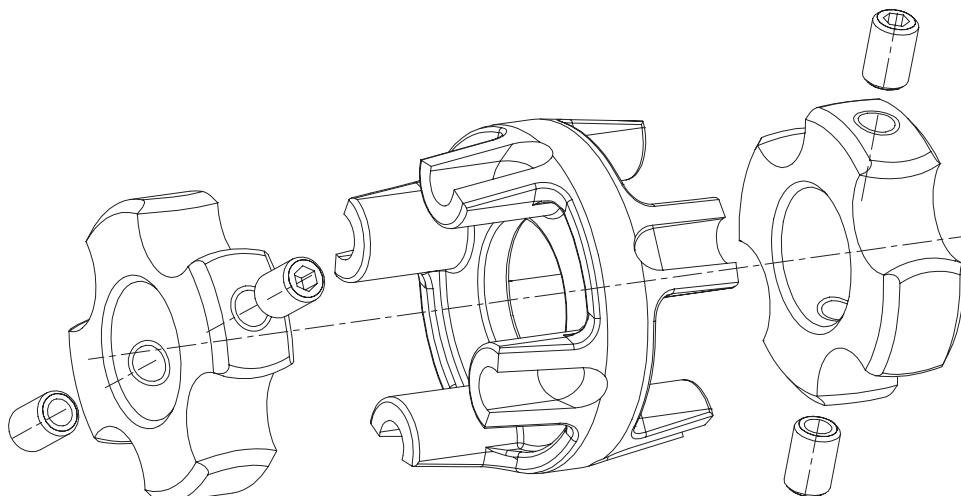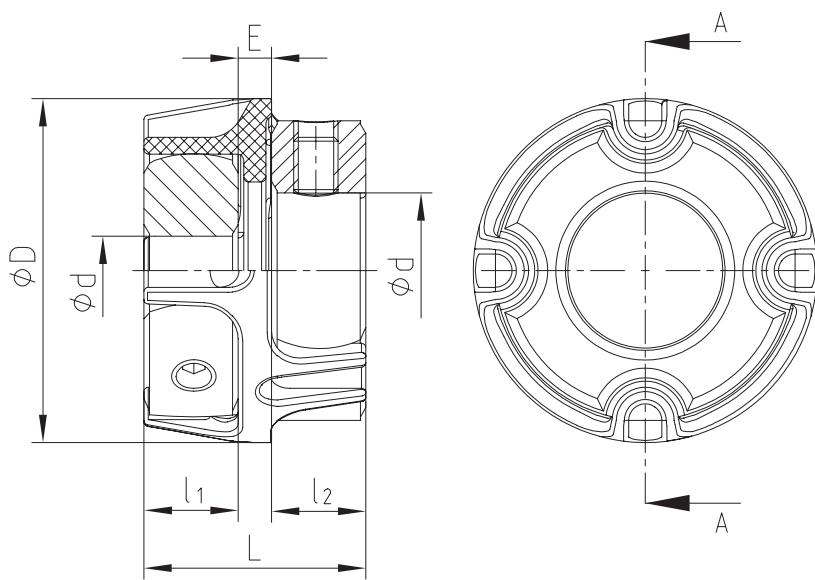

Types of hubs



Type 1.0
with feather keyway and setscrew

Positive-locking power transmission. Permissible torque depending on the permissible surface pressure. Not suitable for backlash-free power transmission with heavily reversing operation.



Type 1.1
without feather keyway, with setscrew

Non-positive torque transmission. Suitable for backlash-free transmission of very low torques.
Standard



Type 1.3
with spline bore

Positive-locking power transmission. Spline on request of customers (e. g. for shaft with flattening).



Type 1.2
without feather keyway, without setscrew

For low torques. Suitable for bonding or pressing on the shaft.



Steel laminae couplings

Types and operating description 186

RADEX®-N

General information and hub types	188
Types and applications	189
Technical data	190
Standard types	192
Customised types	194
Corrosion-resistant type for large shaft distances	195
Standard series NANA 3 for Pump drives in accordance with API 610	196



RIGIFLEX®-N

General information and hub types	198
Technical data	199
Type A	201
Type A-J	202
Type A-H	203

RIGIFLEX®-HP

Type C	204
Type L	205

Please note: torque increase



Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of rated and maximum torques with some sizes of this series:

RADEX®-N



RIGIFLEX®-N



RIGIFLEX®-HP



STEEL LAMINAE COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of laminae couplings

			
Product	RADEX®-N	RIGIFLEX®-N	RIGIFLEX®-HP
Type	Steel laminae coupling	High-performance steel laminae coupling	
Properties			
Torsionally rigid	●	●	●
Backlash-free	●	●	●
Maintenance-free	●	●	●
Compensating for misalignment	●	●	●
Special features			
Stock programme	Basic programme available from stock, customised solutions available	Basic programme available from stock, customised solutions available	For customised solutions, applications in high performance ranges and on high-speed drives
Applications / core industries	Pumps, compressors, fans	Pumps, compressors, fans	Pumps, turbo compressors, turbines
API	610	610 & 671	610 & 671
Performance data			
Max. rated torque T _{KN} [Nm]	280,000	280,000	330,000
Max. speed n [rpm]	20,000	23,000	17,300
Max. operating temperature T [°C]	280	280	280
Standard materials			
Hubs			
Steel (S355J2)	●	●	
Q & T steel (C45N)	●	●	
Q & T steel (42CrMo4V)			●
Q & T steel (30CrNiMo8)			●
Spacers			
Steel (S355J2)	●	●	
Q & T steel (C45N)	●	●	
Q & T steel (42CrMo4V)	with torsion shafts		●
Q & T steel (30CrNiMo8)	with torsion shafts		●
Special materials (corrosion-resistant)			
Hubs			
Steel (1.4305)	●	○	○
Steel (1.4404)	●		
Spacers			
Steel (1.4305)	●		
Steel (1.4404)	●	○	○
Spacer made of Composite GRP (fibre glass)	●		
Spacer made of Composite CFRP (carbon fibre)	●		
Surface coating	Painting, phosphating, zinc-coating and passivating, Geomet, Tenifer Q	Painting, phosphating, zinc-coating and passivating, Geomet, Tenifer Q	Painting, phosphating, zinc-coating and passivating, Geomet, Tenifer Q

● ≈ Standard
○ ≈ On request

STEEL LAMINAE COUPLINGS

TYPES AND OPERATING DESCRIPTION




Product finder of laminae couplings



Product	RADEX®-N	RIGIFLEX®-N	RIGIFLEX®-HP
Type	Steel laminae coupling	High-performance steel laminae coupling	
Geometries			
Design	Single- and double-cardanic	Double-cardanic	Double-cardanic
Max. shaft diameter [mm]	330	400	380
Radial assembly	●	●	●
Certifications/type examinations			
ATEX 	●	●	-
GOST R / GOST TR 	●	●	●
DNV GL 	●	●	●
ABS 	●	●	-

● ≈ Standard

Details on laminae couplings

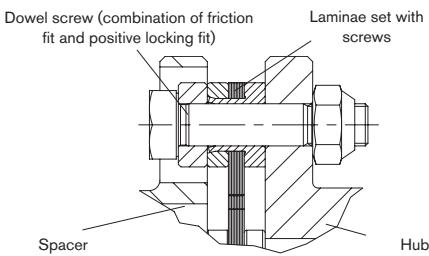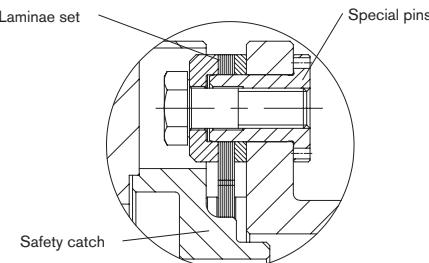Laminas - laminae shape optimized by FEM	
The steel laminae sets made of high-strength, stainless spring steel were developed based on FEM calculations. Considering the necessary options of displacement of the coupling, the optimum shape with regard to torque transmission and torsional stiffness was aimed at. The waisted shape of the steel laminas on the outside diameter resulted from this optimization calculation.	
RADEX®-N - laminae sets with dowel screws	
The heart of the steel laminae coupling are the laminae sets and their connection to hubs and spacers. High-strength special dowel screws that are alternately screwed to hubs and spacer allow for a combination of friction fit and positive locking fit. Thus a high power density with simultaneous ease of displacement and low restoring forces is ensured.	
RIGIFLEX®-N - protecting the spacer	
Since our main idea with the development of RIGIFLEX®-N was to comply with the standards of API 610 and API 671, the spacer is secured by a safety catch, too. In case if the laminae break the spacer remains inside the coupling. In general the spacer is supplied along with laminae sets pre-assembled by the manufacturer. These are connected with the spacers resp. flanges fully free from backlash via positive-locking special pins.	


RADEX®-N

Steel laminae couplings

General advice


Advice on assembly and operation

See our mounting instructions KTR standard 47110 at www.ktr.com. With the assembly it is important to make sure that the laminae sets are assembled free from distortion in axial direction. If the finish bore is machined by the customer, the concentricity and axial running tolerances have to be adhered to (see sketch).



Installation

RADEX®-N couplings are designed for horizontal installation. With vertical installation the spacer might have to be supported (see sketch). Please consult with us.



Delivery condition

RADEX®-N couplings are delivered as individual components (can be delivered assembled on request). The hubs can be supplied unbored or with finish bore and feather keyway or with a frictionally engaged shaft-hub-connection. The shaft-hub-connection needs to be inspected by the customer (consult with KTR, if necessary).




Balancing

On request of the customer the RADEX®-N couplings can be balanced. For standard applications this is not necessary due to accurate machining of the coupling. Please consult with us, if necessary.

Safety regulations

The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling. The customer has to protect rotating parts from accidental contact (Safety of Machinery DIN EN 292 part 2). Take precautions to make sure there is sufficient coupling protection in case of fracture of the coupling caused by overload.

Types of hubs



Type 1.0 hub
with feather keyway and setscrew

Positive locking torque transmission, permissible torque depending on the permissible surface pressure. Not suitable for backlash-free torque transmission with heavily reversing operation.

Type 1.1 hub
without feather keyway, with setscrew

Non-positive torque transmission for crimp connections and adhesive bonds. (No ATEX approval)

Type 1.2 hub
without feather keyway, without setscrew

Non-positive torque transmission for crimp connections and adhesive bonds. (No ATEX approval)



Type 2.5 clamping hub
double slotted, without feather keyway

Frictionally engaged, backlash-free shaft-hub-connection. Transmittable torques depending on bore diameter. For ATEX category 3 only.

Type 2.6 clamping hub
double slotted, with feather keyway

Positive shaft-hub connection with additional friction fit. The friction fit prevents respectively reduces reverse backlash.



Type 6.0 clamping ring hub


Integrated frictionally engaged shaft-hub-connection for the transmission of higher torques. Clamping screws on laminae side. Transmittable torques depending on bore diameter. Suitable for high speeds.

Type 6.5 clamping ring hub

Integrated frictionally engaged shaft-hub-connection for the transmission of higher torques. Clamping screws from outside. Transmittable torques depending on bore diameter. Suitable for high speeds.

Types and applications

Type NN (see page 192)




Properties

- Single-cardanic type
- Only angular and axial displacement permissible
- High torsional rigidity
- Compact dimensions

Applications

- Mixers
- Agitators
- Immersion pumps
- Fans
- Applications with high radial load


Type NANA 1/NANA 2 (see page 192)

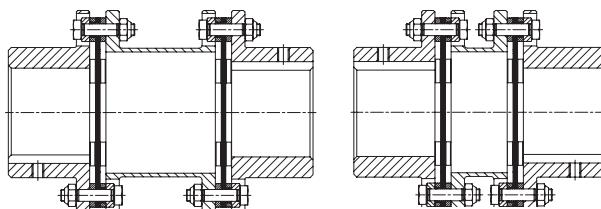

- Double-cardanic type
- Compensating for high misalignment with low restoring forces
- Standard spacers available from stock

- Paper machines
- Printing and processing machines
- Materials handling
- Steel mills
- Generators
- Mill drives


Type NANA 3 (see page 196)

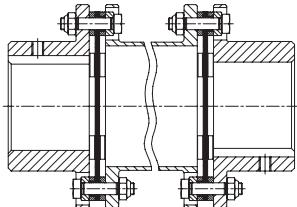

- Double-cardanic type
- Spacers adapted to standard dimensions of pumps
- Radial assembly, no shifting of the machine required
- Available according to API 610

- Process pumps
- Water pumps
- Pumps according to API standard
- Turbines
- Compressors


Type NANA 4 (see page 194)

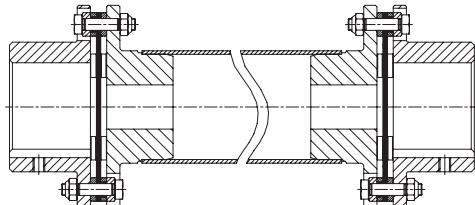

- Customised spacers
- Max. shaft distance dimension up to approx. 6 m
- Welded intermediate pipes for high torsional rigidity

- Foil and paper machines
- Pallet and conveyor systems
- Robotic palletizers
- Test benches
- Cooling towers/blowers


Type NNW (see page 194)

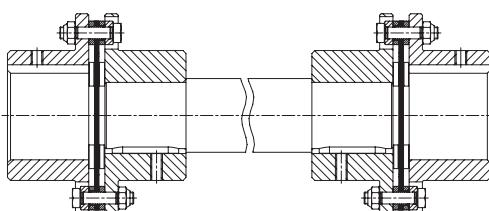

- Customised spacers
- Coupling consisting of 2-off type NN with intermediate shaft
- For drives with relatively low speeds

- Low-speed drives with large shaft distance dimensions
- Agitators
- Crushers
- Presses
- Packaging machinery


Type NNZ (see page 193)

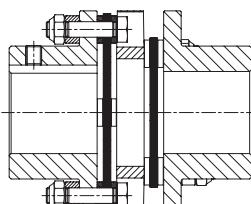

- Compact double-cardanic coupling
- Cannot be radially assembled
- With intermediate disk
- Ideal for replacing curved-tooth gear couplings made of steel
- Standard type up to size 70

- Robotics
- Paper machines and inserters
- Machine tools
- Packaging machinery
- Test benches

Type NENE (see page 193)



- With reduced hubs
- Compact double-cardanic design
- Spacer cannot be radially assembled
- Variable spacer length

- Applications with short shaft distance dimensions
- Replacement of curved-tooth gear couplings made of steel


RADEX®-N

Steel laminae couplings


Technical data

The following laminae types are to be distinguished with RADEX®-N:


Size 20 – 50
(laminae with 4 holes)




Size 60 – 135
(laminae with 6 holes)

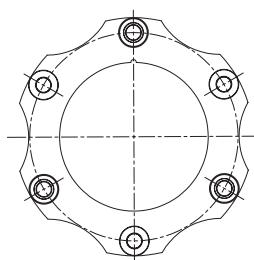

Size 136 – 336
(laminae with 6 holes)

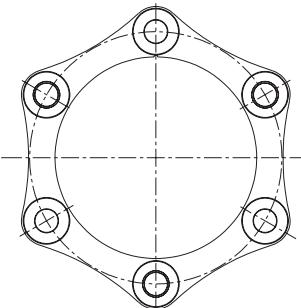

Size 138 – 338
(laminae with 8 holes)

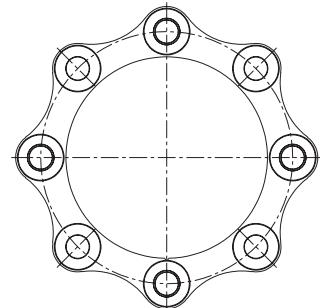

Size	Laminae type	Torques and displacements					
		Torques [Nm] ¹⁾			Angular [°] each laminae	Perm. displacements ²⁾	
		T _{KN}	T _{K max}	T _{KW}		Axial [mm]	Radial [mm]
20	laminae with 4 holes	30	60	15	1.0	0.60	1.2
		60	120	30	1.0	0.80	1.6
		120	240	60	1.0	1.00	2.0
		240	480	120	1.0	1.20	2.4
		320	640	160	1.0	1.40	2.8
		470	940	235	1.0	1.60	3.2
		900	1800	450	1.0	1.00	2.0
		1300	2600	650	1.0	1.10	2.2
		1800	3600	900	1.0	1.30	2.6
		2600	5200	1300	1.0	1.30	2.6
		4600	9200	2300	1.0	1.00	2.0
		5600	11200	2800	1.0	1.20	2.4
136	laminae with 6 holes	9900	19800	4950	1.0	1.40	2.8
		13500	27000	6750	1.0	1.75	3.5
		17500	35000	8750	0.7	1.85	3.7
		25000	50000	12500	0.7	2.10	4.2
		35000	70000	17500	0.7	2.25	4.5
		42000	84000	21000	0.7	2.40	4.8
		52500	105000	26250	0.7	2.60	5.2
		90000	180000	45000	0.7	3.00	6.0
		150000	300000	75000	0.7	3.35	6.7
		210000	420000	105000	0.7	3.75	7.5
		23000	46000	11500	0.5	1.30	2.6
		33000	66000	16500	0.5	1.40	2.8
138	laminae with 8 holes	45000	90000	22500	0.5	1.50	3.0
		56000	112000	28000	0.5	1.60	3.2
		70000	140000	35000	0.5	1.75	3.5
		120000	240000	60000	0.5	2.00	4.0
		200000	400000	100000	0.5	2.40	4.5
		280000	560000	140000	0.5	2.50	5.0

¹⁾ Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

Permissible speeds and torsional stiffness figures

Size	Max. speed [rpm] (higher speeds on request)	Torsion spring stiffness x 10 ⁶ [Nm/ rad] per laminae set	Size	Max. speed [rpm] (higher speeds on request)	Torsion spring stiffness x 10 ⁶ [Nm/ rad] per laminae set
20	20400	0.02	156	3500	17.00
25	16800	0.03	166	3300	19.00
35	13900	0.11	186	3000	25.00
38	12000	0.20	206	2800	31.00
42	11000	0.28	246	2300	55.00
50	9000	0.50	286	2000	79.00
60	8200	0.56	336	1800	125.00
70	7300	0.90	138	3800	20.00
80	6300	1.10	158	3500	26.00
85	5900	1.50	168	3300	30.00
90	5400	2.00	188	3000	39.00
105	5000	2.50	208	2800	49.00
115	4300	3.50	248	2300	83.00
135	3700	6.90	288	2000	125.00
136	3800	13.00	338	1800	200.00

¹⁾ For selection of coupling see page 18 et seqq.


²⁾ The permissible displacement figures specified are maximum figures which must not arise simultaneously. If axial, radial and angular displacement arises at the same time, these values must be reduced.

Technical data

Weights and mass moments of inertia						
Size	Hub ¹⁾ [kg] / [kgm ²]	Laminae set [kg] / [kgm ²]	NN ¹⁾ complete [kg] / [kgm ²]	NANA 1 ¹⁾ complete [kg] / [kgm ²]	NANA 2 ¹⁾ complete [kg] / [kgm ²]	NNZ ¹⁾ complete [kg] / [kgm ²]
20	0.13 / 0.00043	0.04 / 0.00002	0.3 / 0.00011	0.6 / 0.000204	—	0.4 / 0.000166
25	0.2 / 0.000116	0.08 / 0.00005	0.56 / 0.00028	0.9 / 0.000522	—	0.8 / 0.000414
35	0.6 / 0.00042	0.10 / 0.00010	1.2 / 0.00094	1.9 / 0.00158	—	1.6 / 0.00129
38	0.8 / 0.00073	0.20 / 0.00026	1.8 / 0.0017	2.8 / 0.00303	—	2.4 / 0.00247
42	1.1 / 0.00123	0.25 / 0.00040	2.4 / 0.0029	3.6 / 0.00482	—	3.1 / 0.00409
50	1.7 / 0.00291	0.46 / 0.0010	4.0 / 0.0068	6.2 / 0.0118	—	5.1 / 0.00932
60	1.9 / 0.00378	0.40 / 0.0012	4.2 / 0.0087	6.0 / 0.0141	5.8 / 0.0138	5.3 / 0.0120
70	2.8 / 0.00714	0.42 / 0.0016	6.0 / 0.016	8.6 / 0.0253	8.2 / 0.0242	7.5 / 0.0214
80	4.1 / 0.0134	0.72 / 0.0037	9.0 / 0.031	12.6 / 0.0476	12.0 / 0.0458	11.1 / 0.0410
85	5.1 / 0.0195	1.0 / 0.0065	11.2 / 0.046	16.2 / 0.0734	15.5 / 0.0711	14.8 / 0.0650
90	6.2 / 0.0282	2.3 / 0.0162	14.7 / 0.073	22.0 / 0.121	21.3 / 0.119	20.1 / 0.108
105	7.6 / 0.0414	2.2 / 0.0180	17.4 / 0.101	25.8 / 0.165	24.6 / 0.159	23.1 / 0.145
115	12.0 / 0.0899	4.0 / 0.0433	27.9 / 0.223	42.8 / 0.381	41.2 / 0.372	38.3 / 0.333
135	19.0 / 0.187	7.3 / 0.105	45.1 / 0.478	71.3 / 0.835	—	—
136	16.8 / 0.153	7.9 / 0.113	41.4 / 0.419			—
156	20.2 / 0.217	11.9 / 0.200	52.2 / 0.634			—
166	30.0 / 0.373	12.3 / 0.255	72.3 / 1.001			—
186	42.0 / 0.629	12.7 / 0.318	96.7 / 1.576			—
206	55.1 / 1.004	18.2 / 0.548	128.3 / 2.556			—
246	85.9 / 2.229	31.2 / 1.304	203.1 / 5.762			—
286	145.1 / 4.977	44.4 / 2.495	334.4 / 12.449			—
336	223.9 / 10.486	64.2 / 4.74	512.0 / 25.712	Depending on drop-out center dimension E	Depending on drop-out center dimension E	—
138	16.2 / 0.145	9.9 / 0.143	42.3 / 0.433			—
158	19.5 / 0.205	14.9 / 0.252	54.0 / 0.662			—
168	29.4 / 0.360	15.2 / 0.318	74.0 / 1.038			—
188	41.7 / 0.611	15.6 / 0.396	99.0 / 1.618			—
208	54.1 / 0.971	22.4 / 0.680	130.5 / 2.622			—
248	84.0 / 2.144	38.2 / 1.605	206.2 / 5.893			—
288	142.5 / 4.823	53.8 / 3.056	338.8 / 12.702			—
338	220.1 / 10.18	78.0 / 5.817	518.2 / 26.177			—

¹⁾ Hubs with max. bore

Cylindrical bores

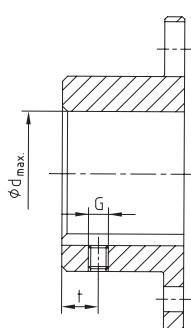



Standard hub 1.0 with feather keyway according to DIN 6885 sheet 1

Size	d _{max.}	G	t	T _A [Nm]	Size	d _{max.}	G	t	T _A [Nm]
20	20	M5	6	2.0	105	110	M12	30	40.0
25	25	M5	8	2.0	115	120	M12	30	40.0
35	38	M6	15	4.8	135	135			
38	42	M6	15	4.8	136 / 138	135			
42	50	M8	20	10.0	156 / 158	150			
50	55	M8	20	10.0	166 / 168	170			
60	65	M8	20	10.0	186 / 188	190			
70	75	M10	20	17.0	206 / 208	210			
80	85	M10	20	17.0	246 / 248	245			
85	90	M10	25	17.0	286 / 288	290			
90	100	M12	25	40.0	336 / 338	340			


According to customer specification

Backlash-free shaft-hub connections without feather key

Selection: If used in potentially explosive atmospheres the clamping ring hubs must be selected in that there is a minimum safety factor of s = 2 between the peak torque of the machine including all operating parameters and the nominal torque and frictional locking torque of the coupling.

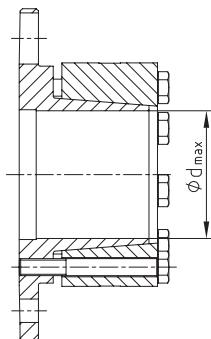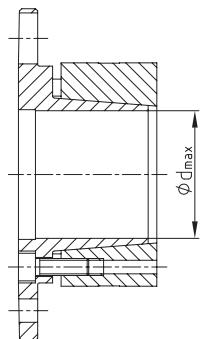Clamping ring hub type 6.5
(clamping screws from outside)Clamping ring hub type 6.0
(clamping screws from inside)


Type with CLAMPEX® element type 603

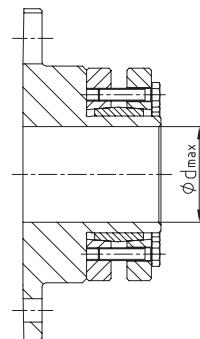


RADEX®-N NN, NANA 1 and NANA 2

Steel laminae couplings

Standard types



Components

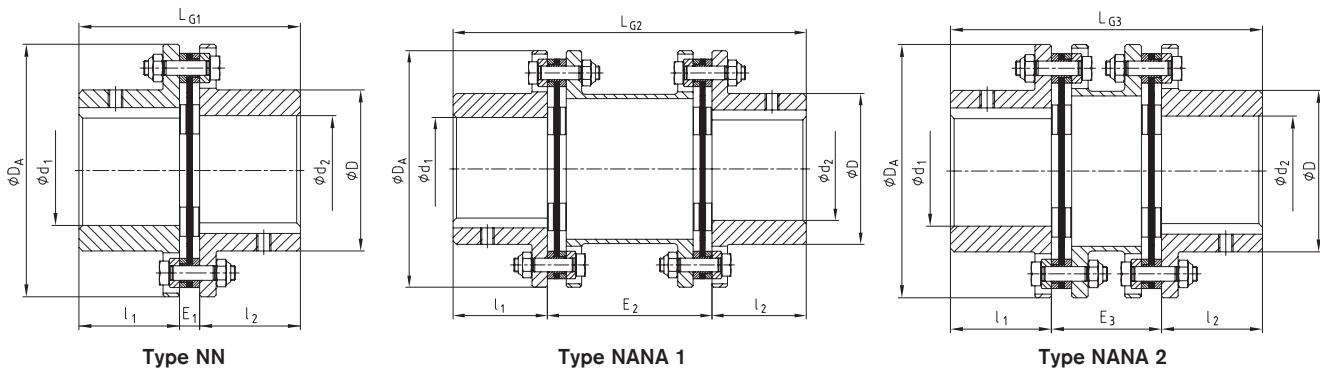


Size	Max. finish bore		Dimensions [mm]								
	d ₁ , d ₂	D	D _A	l ₁ , l ₂	L _{G1}	E ₁	L _{G2}	E ₂	L _{G3}	E ₃	
20	20	32	56	20	45	5	100	60	—	—	
25	25	40	68	25	56	6	110	60	—	—	
35	38	54	82	40	86	6	150	70	—	—	
38	42	58	94	45	98	8	170	80	—	—	
42	50	68	104	45	100	10	170	80	—	—	
50	55	78	126	55	121	11	206	96	—	—	
60	65	88	138	55	121	11	206	96	170	60	
70	75	102	156	65	141	11	246	116	200	70	
80	85	117	179	75	164	14	286	136	233	83	
85	90	123	191	80	175	15	300	140	246	86	
90	100	132	210	80	175	15	300	140	251	91	
105	110	147	225	90	200	20	340	160	281	101	
115	120	163	265	100	223	23	370	170	309	109	
135	135	184	305	135	297	27	520	250	—	—	
136	135	180	300	135	293	23					
156	150	195	325	150	327	27					
166	170	225	350	165	361	31					
186	190	250	380	185	401	31					
206	210	275	420	200	437	37					
246	245	320	500	240	524	44					
286	290	383	567	280	612	52					
336	340	445	660	330	718	58					
138	135	180	300	135	293	23	According to customer specification				
158	150	195	325	150	327	27					
168	170	225	350	165	361	31					
188	190	250	380	185	401	31					
208	210	275	420	200	437	37					
248	245	320	500	240	524	44					
288	290	383	567	280	612	52					
338	340	445	660	330	718	58					

Ordering example:


RADEX®-N 60	NANA 1	Ø50	Ø60
Coupling size	Type	Finish bore d ₁	Finish bore d ₂

RADEX®-N NENA 1, NENA 2, NENE and NNZ Steel laminae couplings


Standard types




Components

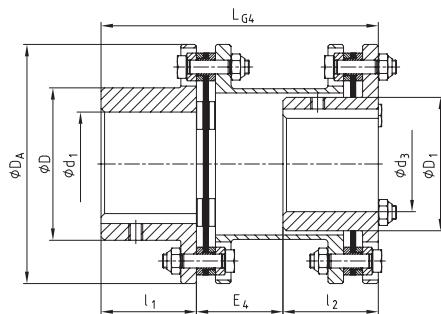


Type NENA 1

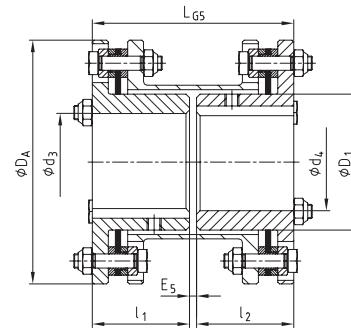

Type NENE

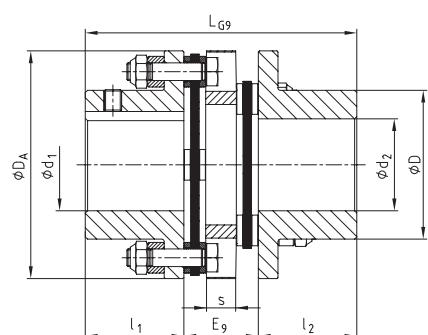

Type NNZ

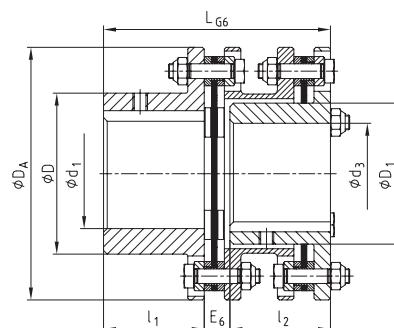



Type NENA 2

Size	Max. finish bore		Dimensions [mm]											
	d ₁ , d ₂	d ₃ , d ₄	D	D ₁	D _A	l ₁ , l ₂	L _{G4}	E ₄	L _{G5}	E ₅	L _{G6}	E ₆	L _{G9}	E ₉
20	20	—	32	—	56	20	—	—	—	—	—	—	58	18
25	25	—	40	—	68	25	—	—	—	—	—	—	70	20
35	38	—	54	—	82	40	—	—	—	—	—	—	102	22
38	42	—	58	—	94	45	—	—	—	—	—	—	118	28
42	50	—	68	—	104	45	—	—	—	—	—	—	124	34
50	55	—	78	—	126	55	—	—	—	—	—	—	144	34
60	65	55	88	77	138	55	160	50	114	4	124	14	144	34
70	75	65	102	90	156	65	190	60	134	4	144	14	166	36
80	85	75	117	104	179	75	220	70	154	4	167	17	—	—
85	90	80	123	112	191	80	232	72	164	4	178	18	—	—
90	100	85	132	119	210	80	233	73	166	6	184	24	—	—
105	110	90	147	128	225	90	263	83	186	6	204	24	—	—
115	120	100	163	145	265	100	288	88	206	6	227	27	—	—


Ordering example:	RADEX®-N 60	NENA 1	Ø50	Ø60
	Coupling size	Type	Finish bore d ₁	Finish bore d ₂

RADEX®-N NANA 4 and NNW Steel laminae couplings

Customised types

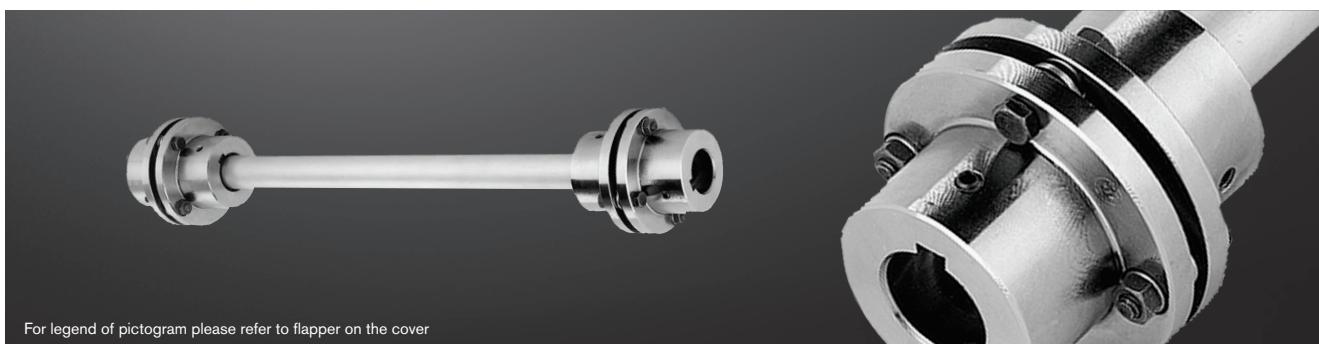

Components

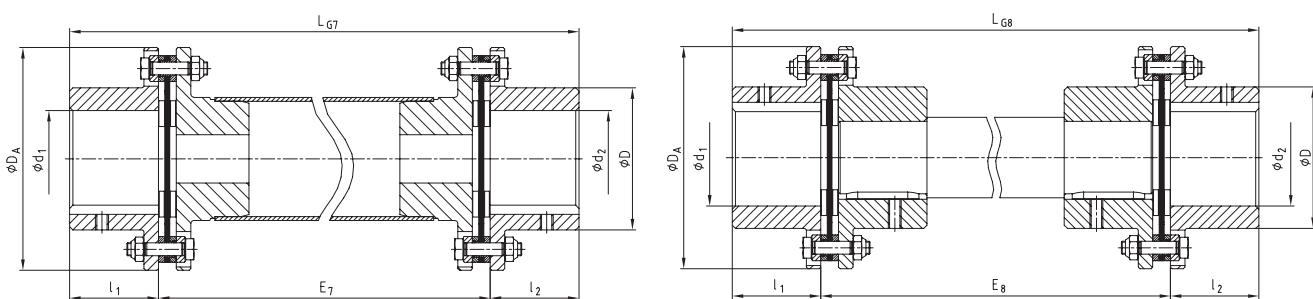

Type NANA 4


Type NNW

Size	Max. finish bore	RADEX®-N Types NANA 4, NNZ and NNW									
		D	D _A	l ₁ , l ₂	L _{G7}	E ₇	L _{G8}	E ₈			
20	20	32	56	20							
25	25	40	68	25							
35	38	54	82	40							
38	42	58	94	45							
42	50	68	104	45							
50	55	78	126	55							
60	65	88	138	55							
70	75	102	156	65							
80	85	117	179	75							
85	90	123	191	80							
90	100	132	210	80							
105	110	147	225	90							
115	120	163	265	100							
135	135	184	305	135							
136	135	180	300	135							
156	150	195	325	150							
166	170	225	350	165							
186	190	250	380	185							
206	210	275	420	200							
246	245	320	500	240							
286	290	383	567	280							
336	340	445	660	300							
138	135	180	300	135	$L_{G7} = E_7 + l_1 + l_2$						
158	150	195	325	150	$L_{G8} = E_8 + l_1 + l_2$						
168	170	225	350	165	Intermediate shaft dimension according to customer specification						
188	190	250	380	185	Intermediate shaft dimension according to customer specification						
208	210	275	420	200	Intermediate shaft dimension according to customer specification						
248	245	320	500	240	Intermediate shaft dimension according to customer specification						
288	290	383	567	280	Intermediate shaft dimension according to customer specification						
338	340	445	660	300	Intermediate shaft dimension according to customer specification						


Ordering example:	RADEX®-N 60	NANA 4	Ø50	Ø60	2500
Coupling size	Type	Finish bore d ₁	Finish bore d ₂	Shaft distance dimension	

RADEX®-N Composite Steel laminae couplings

Corrosion-resistant type for large shaft distances



Components

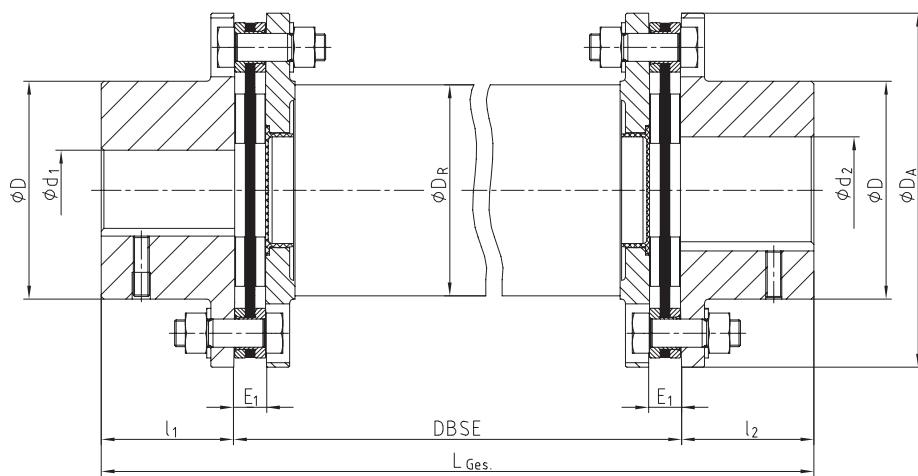

Size	Torque [Nm] ¹⁾		Dimensions [mm]									
	T _{KN}	T _{K max}	D _A	d ₁ , d ₂ max.	D	l ₁ , l ₂	E ₁	DBSE	L _{total}	Composite tube D _R	Max. DBSE ²⁾ with 1500 rpm	
70	800	1600	149	75	102	65	11			95	3500	
85	1800	3600	184	90	123	80	15			117	3900	
90	2500	5000	200	100	135	80	15			128	4100	
115	4500	9000	253	120	163	100	23			160	4600	

¹⁾ For selection of coupling see page 18 et seqq.

²⁾ For higher speeds or bigger shaft distance dimensions please consult with KTR (+49 5971 798-484). The above-mentioned characteristic figures (e. g. max. DBSE) can be varied by composite tubes optimized for the application, if necessary.

Particularly the steel laminae couplings are well suited for applications with especially large distance dimensions between the drive and the driven side (e. g. cooling towers, fans etc.) due to their design. In order to generate high speeds with large distance dimensions, RADEX®-N couplings with intermediate shafts made of glass fibre or carbon fibre reinforced nylon (GRP or CFRP) are used, if necessary.


Ordering example:

RADEX®-N 85	NANA 4 CFK	Ø60	Ø70	3000
Coupling size	Type	Finish bore d ₁	Finish bore d ₂	Shaft distance dimension

RADEX®-N NANA 3

Steel laminae couplings

Pump drives in accordance with API 610



RADEX®-N type NANA 3						
Size	Max. finish bore	Dimensions [mm]				Perm. displacements
		d	D	D _A	E _{standard} ¹⁾	
42	50	68	104	100	45	1.0 2.8
50	55	78	126	140/180	55	1.0 3.2
60	65	88	138	100/140/180/250	55	1.0 2.0
70	75	102	156	100/140/180	65	1.0 2.2
80	85	117	179	100/140/180/250	75	1.0 2.6
85	90	123	191	100/140/180/250	80	1.0 2.3
90	100	132	210	140/180/250	80	1.0 2.0
105	110	147	225	250	90	1.0 2.4
115	120	163	265	250	100	1.0 2.8
135	135	184	305	250	135	1.0 3.5
136	135	180	300		135	0.7 3.7
156	150	195	325		150	0.7 4.2
166	170	225	350		165	0.7 4.5
186	190	250	380		185	0.7 4.8
206	210	275	420		200	0.7 5.2
246	245	320	500		240	0.7 6.0
286	290	383	567		280	0.7 6.7
336	340	445	660		330	0.7 7.5
138	135	180	300		135	0.5 2.6
158	150	195	325		150	0.5 2.8
168	170	225	350	As specified by the customer	165	0.5 3.0
188	190	250	380		185	0.5 3.2
208	210	275	420		200	0.5 3.5
248	245	320	500		240	0.5 4.0
288	290	383	567		280	0.5 4.5
338	340	445	660		330	0.5 5.0


¹⁾ Other distance dimensions E available on request.

Ordering example:	RADEX®-N 60	NANA 3	Ø50	Ø60	140
Coupling size	Type	Finish bore d ₁	Finish bore d ₂	Shaft distance dimension	


Components

RADEX®-N

Laminae
couplings

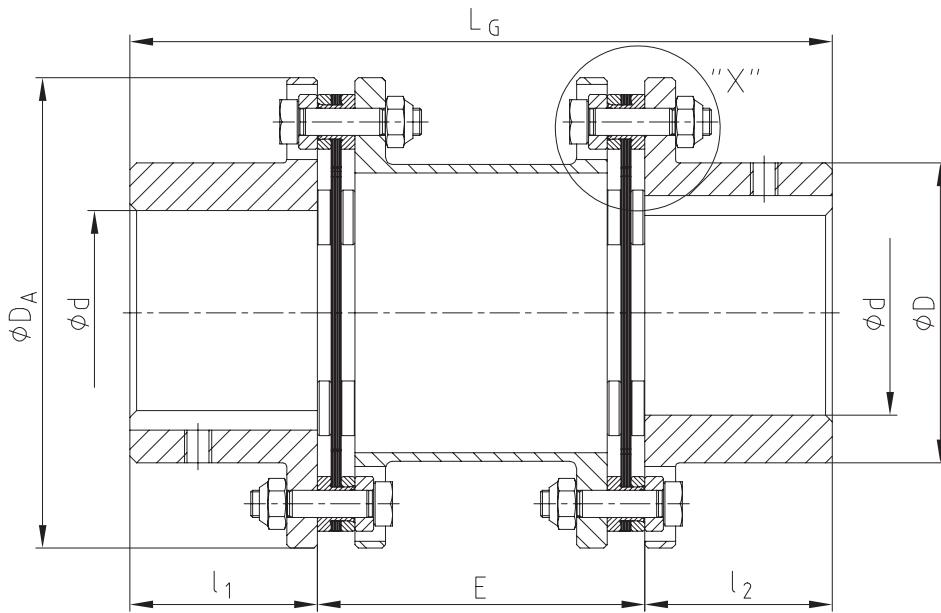

Detail "X"

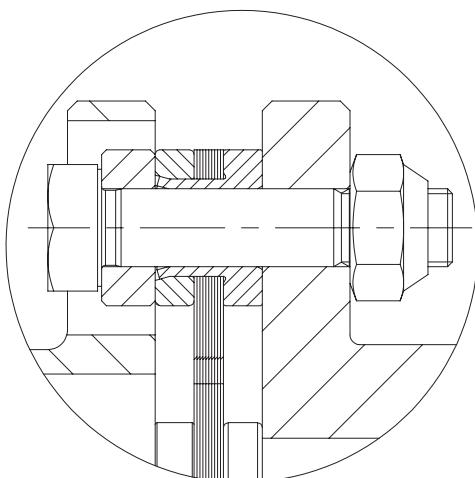

Safety catch of the spacer:

The laminae sets are provided with a sleeve in order to fasten the spacer if the laminae break.

RIGIFLEX®-HP

RIGIFLEX®-N


Steel laminae couplings

General advice

Advice on assembly and operation

See our mounting instructions KTR standard 47410 at www.ktr.com. With the assembly it is important to make sure that the laminae sets are assembled free from distortion in axial direction.

If the finish bore is machined by the customer, the tolerances for concentricity and axial run-out have to be observed (see illustrations below).

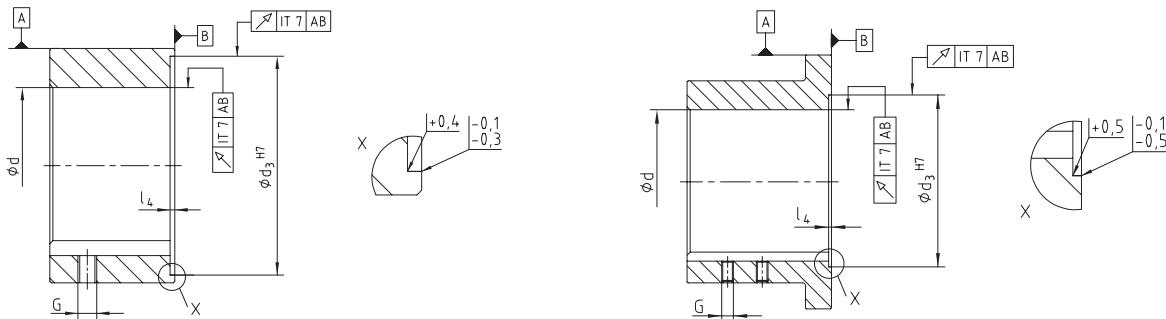

Installation

RIGIFLEX®-N couplings are designed for horizontal installation. With vertical installation the spacer has to be supported, if necessary. Please consult with us.

Delivery condition

RIGIFLEX®-N-couplings are supplied as individual components (assembled on request), with the subassembly of spacers (flanges, laminae sets and spacer) being fully assembled. The hubs can be supplied unbored or with finish bore and feather keyway or with a frictionally engaged shaft-hub-connection. The shaft-hub-connection needs to be inspected by the customer (consult with KTR, if necessary).


Balancing

On request of the customer the RIGIFLEX®-N couplings can be balanced. Please consult with us, if necessary.

Safety regulations


The coupling has to be dimensioned in that the permissible coupling load is not exceeded during any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling. The customer has to protect rotating parts from accidental contact (Safety of Machinery DIN EN 292 part 2). Take precautions to make sure there is sufficient coupling protection in case of fracture of the coupling caused by overload.

Types of hubs




Type 1.0 hub with feather keyway and setscrew

Positive locking torque transmission, permissible torque depending on the permissible surface pressure.



Type with KTR 620 or 603 clamping set

Frictionally engaged torque transmission with external clamping set KTR 620 or KTR 603. Transmittable torques depending on bore diameter.



Type 6.0 and 6.5 hub


Integrated frictionally engaged shaft-hub-connection. Transmittable torques depending on bore diameter. Suitable for high speeds.

RIGIFLEX®-N

Steel laminae couplings

Technical data

The following laminae types are to be distinguished with RIGIFLEX®-N:

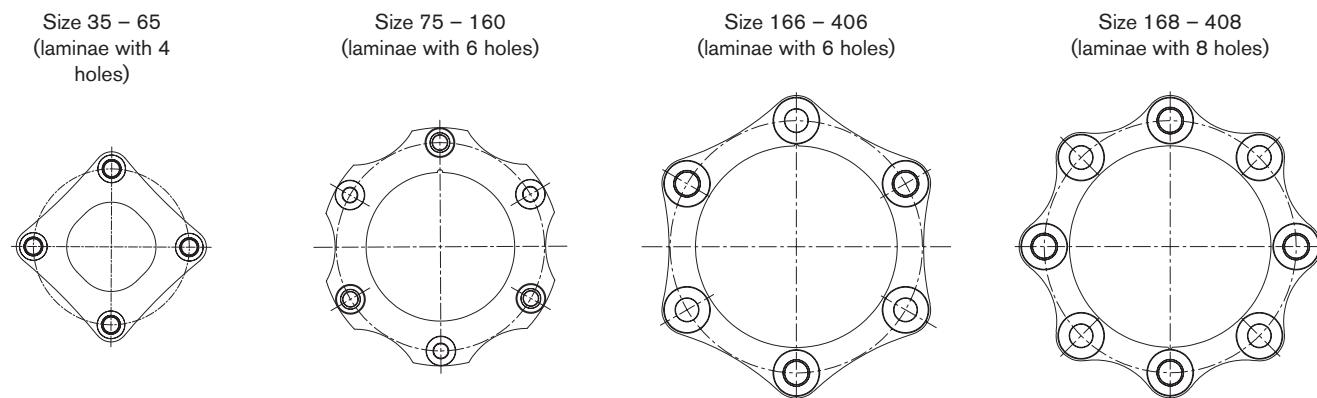

RADEX®-N

Size	Laminae type	Torques [Nm]			Angular displacement $\pm K_w^{(1)} [\text{°}]$	Axial displacement $\pm K_a [\text{mm}]$	Perm. displacements				
		T _{KN}	T _{K max}	T _{KW}			E=100	E=140	E=180	E=200	E=250
35		130	260	65	0.7	1.2	0.90	1.40	—	—	—
50	laminae with 4 holes	270	540	135	0.7	1.4	0.77	1.26	—	—	—
65		550	1100	275	0.7	1.5	0.75	1.23	1.72	—	—
75		1100	2200	550	0.7	1.8	0.73	1.22	1.71	—	—
85		1900	3800	950	0.7	2.1	—	1.14	1.62	1.87	2.48
110		3500	7000	1750	0.7	2.4	—	1.05	1.54	1.78	2.39
120		5750	11500	2875	0.7	2.6	—	1.00	1.49	1.73	2.35
140		10500	21000	5250	0.7	3.3	—	—	—	1.55	2.16
160		16000	32000	8000	0.7	3.8	—	—	—	—	1.99
166	laminae with 6 holes	19000	38000	9500	0.7	3.7	Depending on shaft distance dimension E				
196		22500	45000	11250	0.7	4.2					
216		32000	64000	16000	0.7	4.5					
256		52500	105000	26250	0.7	5.2					
306		86000	172000	43000	0.7	6.0					
346		135000	270000	67500	0.7	6.7					
406		210000	420000	105000	0.7	7.5					
168		25000	50000	12500	0.5	2.6					
198		30000	60000	15000	0.5	2.8					
218		42500	85000	21500	0.5	3.0					
258	laminae with 8 holes	70000	140000	35000	0.5	3.5					
308		115000	230000	57500	0.5	4.0					
348		180000	360000	90000	0.5	4.5					
408		280000	560000	140000	0.5	5.0					

⁽¹⁾ Angular displacement each laminae set

If axial, angular and radial shaft displacement arises in parallel please note the following table:

Size	Permissible angular displacement							
	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7
Permissible axial displacement								
35	1.20	1.00	0.85	0.74	0.60	0.40	0.20	0.00
50	1.40	1.20	1.00	0.80	0.60	0.40	0.20	0.00
65	1.50	1.29	1.07	0.86	0.64	0.43	0.22	0.00
75	1.80	1.54	1.29	1.03	0.77	0.52	0.26	0.00
85	2.10	1.80	1.50	1.20	0.90	0.60	0.30	0.00
110	2.40	2.06	1.71	1.37	1.03	0.69	0.34	0.00
120	2.60	2.23	1.86	1.48	1.11	0.74	0.37	0.00
140	3.30	2.83	2.36	1.88	1.41	0.94	0.47	0.00
160	3.80	3.26	2.71	2.17	1.63	1.09	0.54	0.00
166	3.70	3.17	2.64	2.12	1.59	1.06	0.53	0.00
196	4.20	3.60	3.00	2.40	1.80	1.20	0.60	0.00
216	4.50	3.86	3.21	2.57	1.93	1.29	0.64	0.00
256	5.20	4.46	3.71	2.97	2.23	1.49	0.74	0.00
306	6.00	5.14	4.29	3.43	2.57	1.72	0.86	0.00
346	6.75	5.79	4.82	3.86	2.89	1.93	0.96	0.00
406	7.50	6.43	5.36	4.28	3.21	2.14	1.07	0.00
168	2.60	2.08	1.56	1.04	0.52	0.00	—	—
198	2.80	2.24	1.68	1.12	0.56	0.00	—	—
218	3.00	2.40	1.80	1.20	0.60	0.00	—	—
258	3.50	2.80	2.10	1.40	0.70	0.00	—	—
308	4.00	3.20	2.40	1.60	0.80	0.00	—	—
348	4.50	3.60	2.70	1.80	0.90	0.00	—	—
408	5.00	4.00	3.00	2.00	1.00	0.00	—	—

RIGIFLEX®-N

Steel laminae couplings

Technical data

Size	Max. speed [rpm]	per laminae set		ct [Nm/rad] for complete coupling with mounting length E				
		cw [Nm/rad]	ct x 10 ⁶ [Nm/rad]	E=100	E=140	E=180	E=200	E=250
35	23000	170	0.056	65020	56700	—	—	—
50	18000	490	0.27	73953	63990	—	—	—
65	13600	260	0.5	146022	129938	117046	—	—
75	12400	1000	0.67	306145	278381	255234	—	—
85	11000	1500	0.9	—	406641	369429	353265	318433
110	9000	1500	1.5	—	664284	637587	625028	595693
120	8000	3000	2.0	—	1798018	1637553	1567602	1416348
140	6400	10000	3.5	—	—	—	2363340	2226630
160	5600	10350	6.9	—	—	—	—	2654894
166	5600	26800	13.0					
196	5200	35800	17.0					
216	4600	41500	19.0					
256	3900	65000	31.0					
306	3300	112000	55.0					
346	2900	205000	79.0					
406	2500	276000	125.0					
168	5600	44300	20.0	Mounting dimension E as specified by the customer				
198	5200	82200	26.0					
218	4600	90000	30.0					
258	3900	138000	49.0					
308	3300	234000	83.0					
348	2900	416000	125.0					
408	2500	562000	200.0					

cw = angular stiffness

ct = torsion spring stiffness


Size	Hub (max. bore)		Spacer complete [kg]					Spacer complete [kgm ²]				
	[kg]	[kgm ²]	E=100	E=140	E=180	E=200	E=250	E=100	E=140	E=180	E=200	E=250
35	0.60	0.0007	1.030	1.120	—	—	—	0.00040	0.00050	—	—	—
50	0.92	0.001019	2.262	2.442	—	—	—	0.00256	0.00263	—	—	—
65	2.7	0.00541	3.922	4.183	4.445	—	—	0.00810	0.00830	0.00828	—	—
75	2.4	0.00566	4.482	4.842	5.202	—	—	0.01143	0.01191	0.01239	—	—
85	3.7	0.01135	—	7.154	7.548	7.746	8.239	—	0.02364	0.02427	0.02459	0.02538
110	6.7	0.03222	—	12.492	13.478	13.972	15.205	—	0.06291	0.06540	0.06665	0.06976
120	9.2	0.05238	—	—	17.324	17.842	19.137	—	—	0.10314	0.10458	0.10818
140	18.2	0.15175	—	—	—	32.530	34.325	—	—	—	0.31901	0.32845
160	29.9	0.33890	—	—	—	—	52.458	—	—	—	—	0.68640
166	28.0	0.32										
196	37.0	0.554										
216	50.0	0.85										
256	95.0	2.35										
306	138.0	4.55										
346	215.0	9.75										
406	310.0	18.95										
168	30.0	0.33										
198	40.0	0.56										
218	52.0	0.88										
258	99.0	2.43										
308	142.0	4.78										
348	222.0	9.83										
408	325.0	19.22										

Mounting dimension E as specified by the customer


RIGIFLEX®-N

Steel laminae couplings

Standard type A

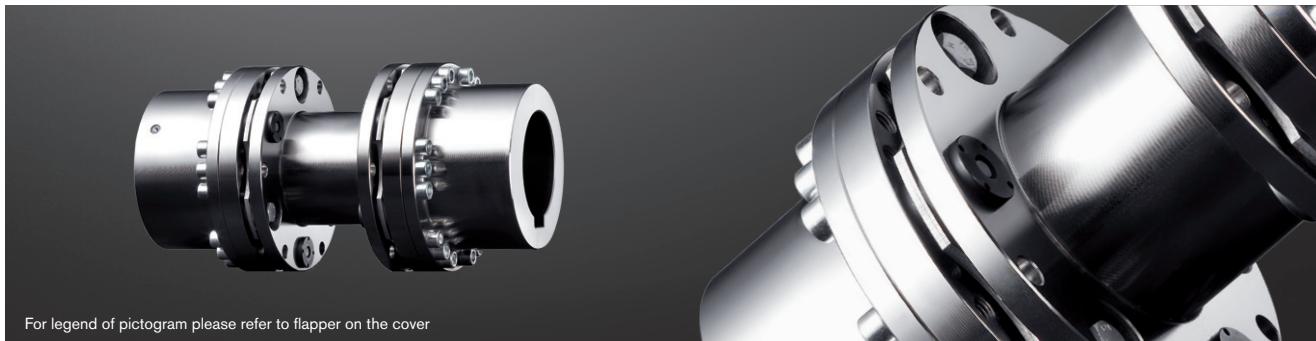


For legend of pictogram please refer to flapper on the cover




Components

Size 35

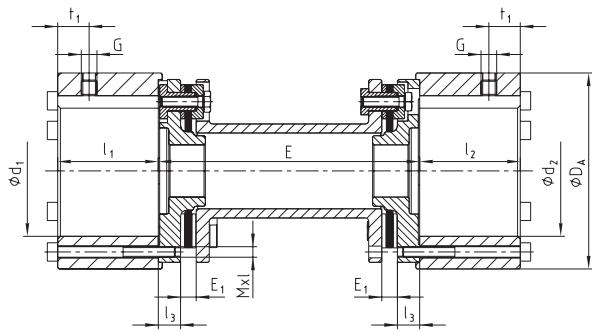

Size 50 - 408

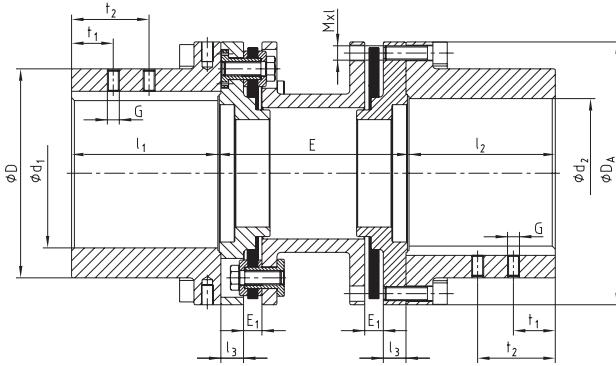

RIGIFLEX®-N type A

RIGIFLEX®-N type A																				
Size	Torques [Nm]			Max. finish bore		Dimensions [mm]											Screws DIN EN ISO 4762			
	T _{KN}	T _{K max}	T _{KW}	d _{1, d₂}	D	D _A	I _{1, I₂}	I ₃	G	t ₁	t ₂	E ₁	E ¹⁾				M _{xL}	T _A [Nm]		
35	130	260	65	50	—	75	38.5	8.5	M6	15	—	6	100	140	—	—	M4x45	4.1		
50	270	540	135	50	70	95	50	12	M6	10	—	9	100	140	—	—	M6x22	14		
65	550	1100	275	70	100	126	63	12	M8	20	—	11	100	140	180	—	M6x25	14		
75	1100	2200	550	75	105	138	62.5	12	M8	20	—	11	100	140	180	—	M8x30	35		
85	1900	3800	950	90	120	156	72.5	15	M10	20	—	12	—	140	180	200	250	M8x30	35	
110	3500	7000	1750	110	152	191	87	18	M10	25	—	12	—	140	180	200	250	M10x35	69	
120	5750	11500	2875	120	165	213	102	20	M12	25	—	12	—	—	180	200	250	M12x40	120	
140	10500	21000	5250	150	200	265	126	25	M12	30	—	15	—	—	—	200	250	M16x50	295	
160	16000	32000	8000	165	230	305	145	31	M12	30	—	15	—	—	—	—	250	M16x55	295	
166	19000	38000	9500	165	230	305	155	31	M16	30	70	17							M20x50	560
196	22500	45000	11250	195	260	330	185	32	M16	40	90	24							M20x50	560
216	32000	64000	16000	210	285	370	205	32	M20	50	110	26							M20x65	560
256	52500	105000	26250	260	350	440	245	38	M20	70	130	31							M24x80	970
306	86000	172000	43000	305	400	515	295	43	M24	70	130	36							M27x100	1450
346	135000	270000	67500	350	460	590	335	55	M24	95	175	45							M30x110	1950
406	210000	420000	105000	405	530	675	395	58.5	M24	95	175	50	According to customer specification						M36x130	3300
168	25000	50000	12500	165	230	305	155	31	M16	30	70	17							M20x50	560
198	30000	60000	15000	195	260	330	185	32	M16	40	90	24							M20x50	560
218	42500	85000	21500	210	285	370	205	32	M20	50	110	26							M20x65	560
258	70000	140000	35000	260	350	440	245	38	M20	70	130	31							M24x80	970
308	115000	230000	57500	305	400	515	295	43	M24	70	130	36							M27x100	1450
348	180000	360000	90000	350	460	590	335	55	M24	95	175	45							M30x110	1950
408	280000	560000	140000	405	530	675	395	58.5	M24	95	175	50							M36x130	3300

According to customer specification

¹⁾ Other shaft distance dimensions available on request.


For selection of coupling see page 18 et seqq. Assembly instruction KTR standard 47410 available at www.ktr.com.

Ordering example:	RIGIFLEX®-N 120	A	Ø 100	Ø 120	200
	Coupling size	Type	Bore d ₁	Bore d ₂	Shaft distance dimension E

RIGIFLEX®-N


Steel laminae couplings

Standard type A-J

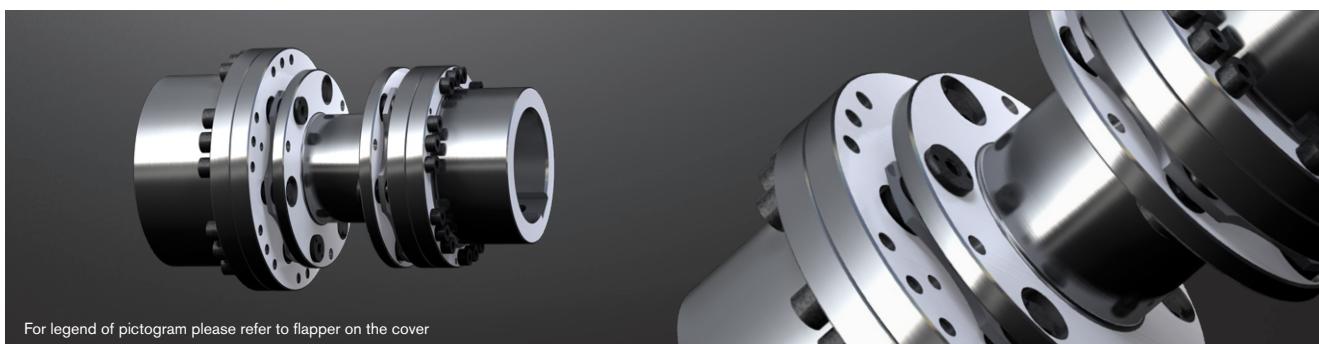

Components

Size 50 - 140

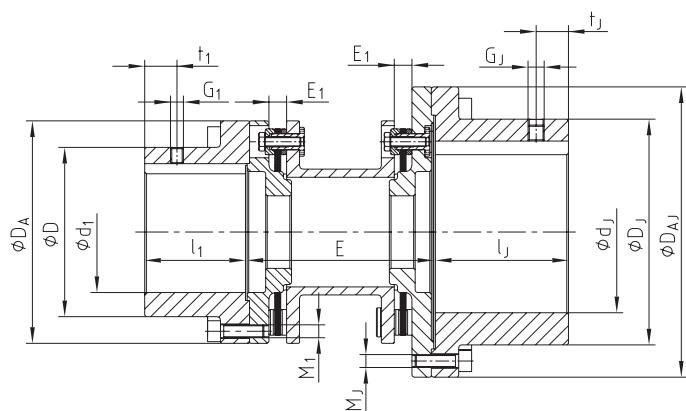


RIGIFLEX®-N type A-J

Size	Torques [Nm]			Max. finish bore		Dimensions [mm]												Screws DIN EN ISO 4762								
	T _{KN}	T _{K max}	T _{KW}	d ₁	d _j	D	D _A	l ₁	D _J	D _{AJ}	l _J	G ₁	t ₁	G _J	t _J	E ₁	E ¹⁾			M ₁	T _A [Nm]	M _J	T _{AJ} [Nm]			
50	270	540	135	50	70	70	95	50	100	126	63	M6	10	M8	20	9	100	140	—	—	—	M6	14	M6	14	
65	550	1100	275	70	90	100	126	63	120	156	72.5	M8	20	M10	20	11	100	140	180	—	—	—	M6	14	M8	35
75	1100	2200	550	75	100	105	138	62.5	140	180	83	M8	20	M10	20	11	100	140	180	—	—	—	M8	35	M8	35
85	1900	3800	950	90	110	120	156	72.5	152	191	87.5	M10	20	M10	25	12	—	140	180	200	250	M8	35	M10	69	
110	3500	7000	1750	110	150	152	191	87	200	265	127	M10	25	M12	30	12	—	140	180	200	250	M10	69	M16	295	
120	5750	11500	2875	120	165	165	213	102	230	305	147	M12	25	M12	30	12	—	—	180	200	250	M12	120	M16	295	
140	10500	21000	5250	150	195	200	265	126	260	330	186	M12	30	M16	40/90	15	—	—	—	200	250	M16	295	M20	560	
160	16000	32000	8000	165	210	230	305	145	285	370	205	M12	30	M20	50/60	15	—	—	—	200	250	M16	295	M20	560	


¹⁾ Other shaft distance dimensions available on request.

For selection of coupling see page 18 et seqq. Assembly instruction KTR standard 47410 available at www.ktr.com.

Other types:

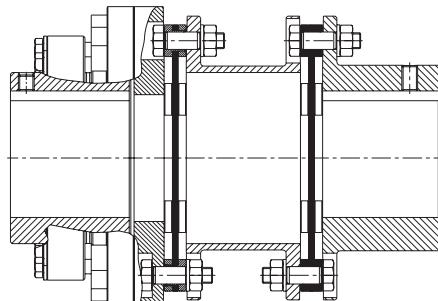

For RADEX®-N with integrated slipping unit
see dimension sheet 699206

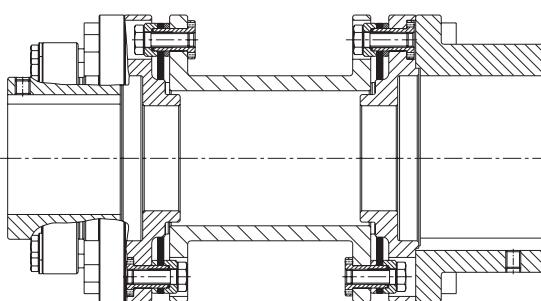

For RIGIFLEX®-N with integrated slipping unit
see dimension sheet 698869



Ordering example:

RIGIFLEX®-N 85	A-J	Ø 80	Ø 120	200
Coupling size	Type	Bore d ₁	Bore d _j	Shaft distance dimension E


RIGIFLEX®-N

Steel laminae couplings

Standard type A-H

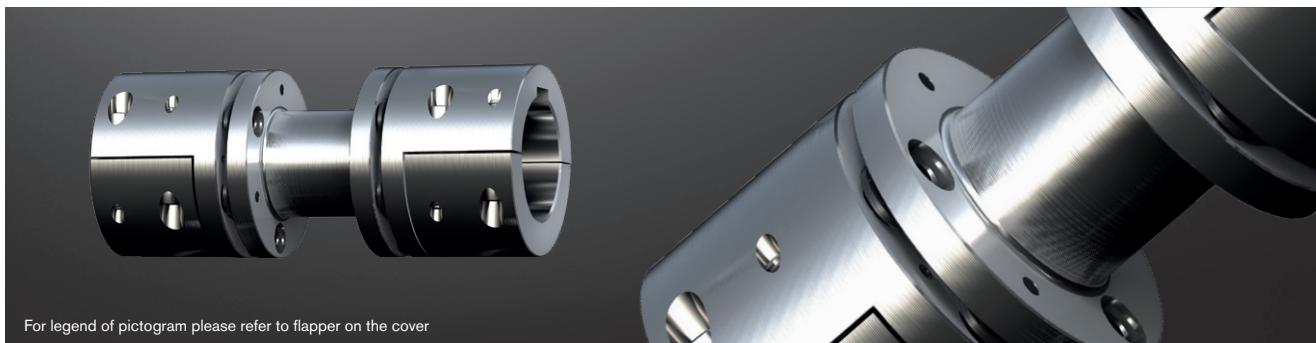

Components

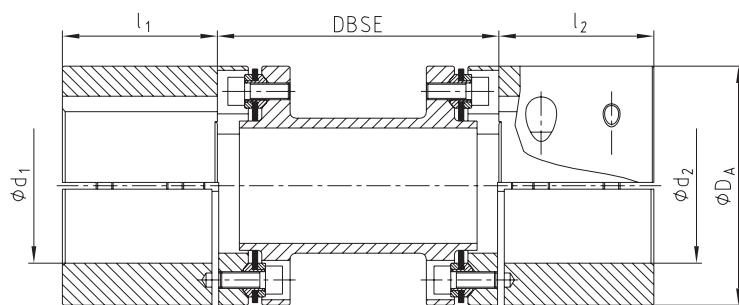

RIGIFLEX®-N type A-H									
Size	Torques [Nm]		Max. finish bore [mm]		Dimensions [mm]				
	TKN	TK max	d1, d2	DA	l1, l2	Standard shaft distance dimension DBSE ¹⁾			Perm. axial displacement
46	90	180	42	69	45	100			+/- 1.4
56	255	510	55	85	55	140			+/- 1.2
66	450	900	65	105	65	180	250		+/- 1.6
76	975	1950	75	124	75	-			+/- 1.8
86	1500	3000	85	145	85	-			+/- 2.2
106	2400	4800	105	168	105	-			+/- 2.4

¹⁾ Other shaft distance dimensions (DBSE) available on request

Benefits of type A-H:

- Hub type 7.6 - half shell hub
- Easy and quick radial assembly and disassembly
- Type according to API 610 and 671
(please observe exceptions)
- Drop-out protection of spacer with fracture of laminas following API 671




Ordering example:

RIGIFLEX®-N 66	A-H	Ø 42	Ø 48	140
Coupling size	Type	Bore d ₁	Bore d ₂	Shaft distance dimension DBSE


RIGIFLEX®-HP C

High-performance steel laminae couplings

Flange connection



Components

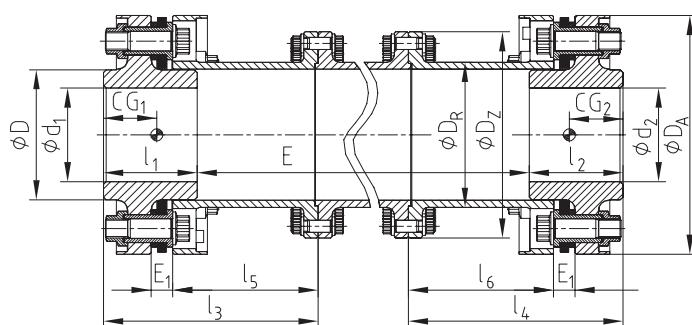

RIGIFLEX®-HP type C

Size	Torques [Nm]		Max. finish bore d ₁ , d ₂	Dimensions [mm]										
	T _{KN}	T _{K max}		D	D _A	D _Z	D _R	E ₁	E	E _{min.}	CG ₁ , CG ₂ ²⁾	I ₁ , I ₂	I ₃ , I ₄	I ₅ , I ₆
158	20000	26000	85	119	220	195	135	17		335	46	85	189	130
168	30000	39000	100	139	255	220	155	23		395	55	100	229	155
188	38000	49400	105	147	265	235	165	23		375	55	105	229	155
208	50000	65000	120	168	298	245	186	23		350	57	120	229	155
228	59000	76700	125	178	315	270	199	33		425	65	125	265	175
248	72000	93600	140	196	335	300	217	33		395	67	140	265	175
278	115000	149500	160	225	380	335	248	33		355	70	160	265	175
318	180000	234000	180	252	445	370	280	48		495	88	180	348	225
358	253000	328900	210	295	500	415	326	48		435	93	210	348	225
388	330000	429000	235	330	545	464	362	48		400	97	235	348	225

Technical data

Size	Max. speed [rpm]	Perm. displacements			Stiffness figures			
		Angular ¹⁾		Axial	Radial ²⁾	per laminae set	Spacer	Coupling complete ²⁾
		± K _W [°]	± K _a [mm]	± K _r [mm]	c _t [Nm/rad]	c _{tR} [Nm · mm/rad]	c _{tE} = 457.2 [Nm/rad]	
158	17300	0.25	3.0	2.30	13.0 · 10 ⁶	839 · 10 ⁶	1.04 · 10 ⁶	
168	14900	0.25	3.0	2.32	18.0 · 10 ⁶	1535 · 10 ⁶	1.79 · 10 ⁶	
188	14400	0.25	3.3	2.37	28.0 · 10 ⁶	1974 · 10 ⁶	2.23 · 10 ⁶	
208	12800	0.25	3.8	2.50	35.0 · 10 ⁶	2876 · 10 ⁶	3.15 · 10 ⁶	
228	12100	0.25	4.0	2.44	39.5 · 10 ⁶	4123 · 10 ⁶	5.06 · 10 ⁶	
248	11400	0.25	4.2	2.58	60.0 · 10 ⁶	5410 · 10 ⁶	5.51 · 10 ⁶	
278	10000	0.25	4.5	2.75	80.0 · 10 ⁶	8592 · 10 ⁶	7.94 · 10 ⁶	
318	8500	0.25	5.2	2.70	105.0 · 10 ⁶	14724 · 10 ⁶	13.00 · 10 ⁶	
358	7600	0.25	6.0	2.96	155.0 · 10 ⁶	26258 · 10 ⁶	20.30 · 10 ⁶	
388	7000	0.25	6.5	3.18	225.0 · 10 ⁶	37596 · 10 ⁶	27.70 · 10 ⁶	

¹⁾ Per laminae set ²⁾ with E=457.2 mm and cylindrical maximum finish bore

Size	Coupling ²⁾			Spacer	
	m [kg]	J [kgm ²]		m _R [kg/mm]	J _R [kgm ² /mm]
158	45	0.274		20.28 · 10 ⁻³	81 · 10 ⁻⁶
168	69	0.577		27.282 · 10 ⁻³	149 · 10 ⁻⁶
188	78	0.711		30.975 · 10 ⁻³	191 · 10 ⁻⁶
208	97	1.081		35.118 · 10 ⁻³	279 · 10 ⁻⁶
228	123	1.561		44.397 · 10 ⁻³	400 · 10 ⁻⁶
248	144	2.109		48.614 · 10 ⁻³	524 · 10 ⁻⁶
278	190	3.542		58.694 · 10 ⁻³	833 · 10 ⁻⁶
318	306	7.792		79.311 · 10 ⁻³	1427 · 10 ⁻⁶
358	405	12.869		104.041 · 10 ⁻³	2545 · 10 ⁻⁶
388	525	19.257		120.151 · 10 ⁻³	3644 · 10 ⁻⁶

c_t total = 1 / ((1/c_{tE} = 457.2) + ((E - 457.2 mm) / c_{tR}))


m_{total} = m + m_R · (E - 457.2 mm)

J_{total} = J + J_R · (E - 457.2 mm)


RIGIFLEX®-HP L

High-performance steel laminae couplings

Type with flange hubs



Components

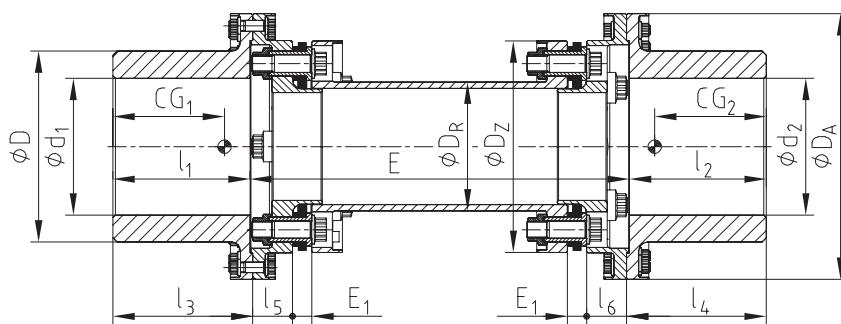

RIGIFLEX®-HP type L

Size	Torques [Nm]		Max. finish bore d ₁ , d ₂	Dimensions [mm]									
	T _{KN}	T _{K max}		D	D _A	D _Z	D _R	E ₁	E	E _{min.}	CG ₁ , CG ₂ ²⁾	I ₁ , I ₂	I ₃ , I ₄
158	20000	26000	150	210	310	220	135	17	265	140	150	163.5	37.5
168	30000	39000	165	230	320	255	155	23	340	148	165	168.5	48.0
188	38000	49400	180	250	335	265	165	23	340	156	180	183.5	48.0
208	50000	65000	200	280	362	298	186	23	340	165	200	203.5	48.0
228	59000	76700	220	310	390	315	199	33	390	179	220	223.5	54.5
248	72000	93600	240	340	420	334	217	33	390	185	235	238.5	54.5
278	115000	149500	270	380	455	380	248	33	390	202	270	273.5	54.5
318	180000	234000	315	445	550	445	280	48	510	246	315	318.5	71.5
358	253000	328900	350	490	600	500	326	48	510	263	350	353.5	71.5
388	330000	429000	380	535	650	545	362	48	510	277	380	383.5	71.5


Technical data

Size	Max. speed [rpm]	Perm. displacements			Stiffness figures		
		Angular ¹⁾ ± K _W [°]	Axial ± K _A [mm]	Radial ²⁾ ± K _R [mm]	per laminae set	Spacer	Coupling complete ²⁾ c _{1E} = 457.2 [Nm/rad]
		c ₁ [Nm/rad]	c _{1R} [Nm · mm/rad]				
158	13800	0.25	3.0	1.56	13.0 · 10 ⁶	839 · 10 ⁶	1.70 · 10 ⁶
168	12300	0.25	3.0	1.45	18.0 · 10 ⁶	1535 · 10 ⁶	3.00 · 10 ⁶
188	11400	0.25	3.3	1.45	28.0 · 10 ⁶	1974 · 10 ⁶	4.08 · 10 ⁶
208	10500	0.25	3.8	1.45	35.0 · 10 ⁶	2876 · 10 ⁶	5.61 · 10 ⁶
228	9700	0.25	4.0	1.34	39.5 · 10 ⁶	4123 · 10 ⁶	7.77 · 10 ⁶
248	9000	0.25	4.2	1.34	60.0 · 10 ⁶	5410 · 10 ⁶	10.70 · 10 ⁶
278	8300	0.25	4.5	1.34	80.0 · 10 ⁶	8592 · 10 ⁶	15.60 · 10 ⁶
318	6900	0.25	5.2	1.13	105.0 · 10 ⁶	14724 · 10 ⁶	26.90 · 10 ⁶
358	6300	0.25	6.0	1.13	155.0 · 10 ⁶	26258 · 10 ⁶	41.20 · 10 ⁶
388	5800	0.25	6.5	1.13	225.0 · 10 ⁶	37596 · 10 ⁶	61.30 · 10 ⁶

¹⁾ Per laminae set ²⁾ with E=457.2 mm and cylindrical maximum finish bore

Size	Coupling ²⁾		Spacer	
	m [kg]	J [kgm ²]	m _R [kg/mm]	J _R [kgm ² /mm]
158	80	0.717	20.28 · 10 ⁻³	81 · 10 ⁻⁶
168	115	1.327	27.282 · 10 ⁻³	149 · 10 ⁻⁶
188	135	1.759	30.975 · 10 ⁻³	191 · 10 ⁻⁶
208	175	2.771	35.118 · 10 ⁻³	279 · 10 ⁻⁶
228	235	4.525	44.397 · 10 ⁻³	400 · 10 ⁻⁶
248	285	6.417	48.614 · 10 ⁻³	524 · 10 ⁻⁶
278	375	10.381	58.694 · 10 ⁻³	833 · 10 ⁻⁶
318	642	24.810	79.311 · 10 ⁻³	1427 · 10 ⁻⁶
358	812	38.404	104.041 · 10 ⁻³	2545 · 10 ⁻⁶
388	1016	57.062	120.151 · 10 ⁻³	3644 · 10 ⁻⁶

Ordering example:	RIGIFLEX®-HP 188	L	Ø 160	Ø 180	457.2
	Coupling size	Type	Bore d ₁	Bore d ₂	Shaft distance dimension E

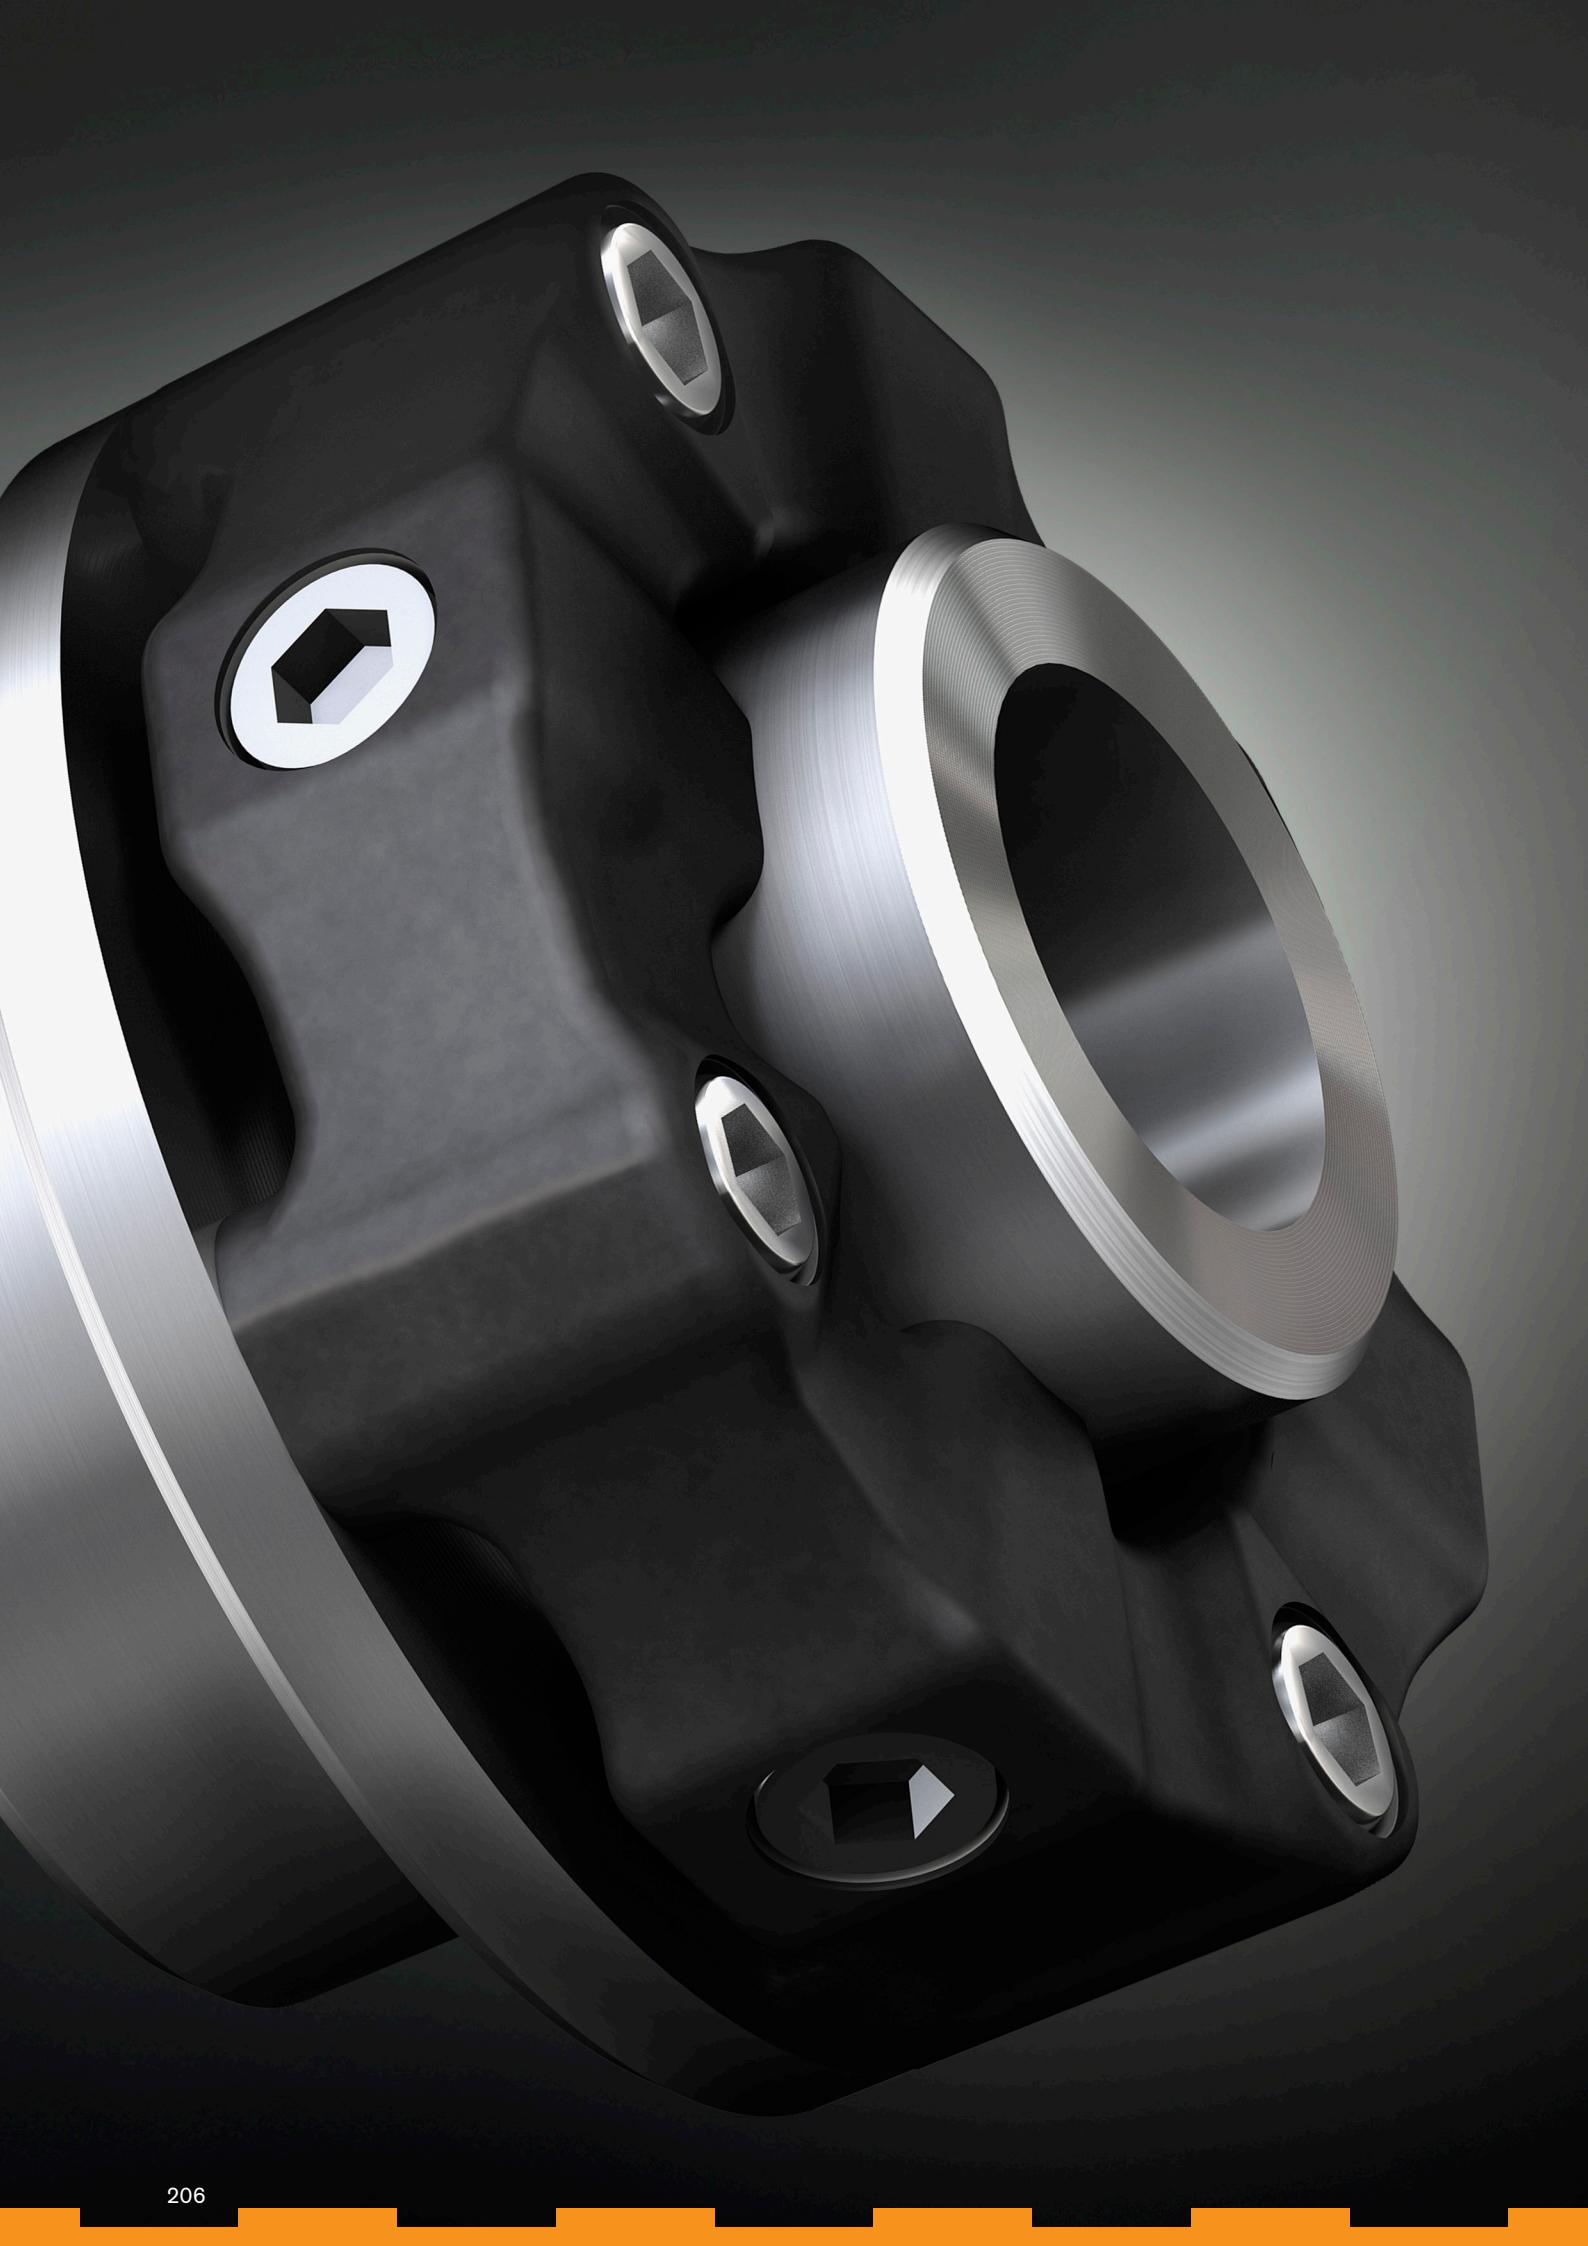

Highly flexible shaft couplings

Types and operating description

208

EVOLASTIC®

Description of product and application	210
Type E	212
Type EH	213
Type E2H	214
Type EFH	215
Type EP	216
Type EHP	217
Type E2HP	218
Type EFHP	219
Type D2H	220
Type DFH	221

BoWex-ELASTIC®

Type HEW Compact

222



Please note: torque increase



Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of rated torques with some sizes of this series.

EVOLASTIC®



BoWex® HEW Compact



HIGHLY FLEXIBLE SHAFT COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of highly flexible shaft couplings

		
Product	EVOELASTIC®	BoWex® HEW Compact
Type	Highly flexible jaw coupling	Highly flexible gear coupling
Properties		
Highly flexible	●	●
Damping vibrations	●	
Maintenance-free	●	●
Axial plug-in	●	●
Shear type		●
Fail-safe	●	
Compensating for misalignment	●	●
Types		
Variant diversity	very high	average
Special features	reducing torsional vibrations and compensating for misalignment above average with compact dimensions, extremely flexible for individual drives	this type combines a compact design, ability for axial plug-in and low restoring forces
Applications / core industries	flexible all-rounder coupling for wide applications in mechanical and plant engineering	applications critical to rotation such as screw compressors, piston compressors or transfer pumps
Torque range T_{KN} [Nm]		
Min.	100	200
Max.	5,600	8400
Max. circumferential speed v [m/s]		
Steel + cast EN-GJS (dynamic balancing)	60	50
Hub materials available		
Steel (semi-finished product) » customised solutions available	●	●
Stainless steel	○	○
Corrosion-protected types	○	○
Spiders / elastomers		
Material	NR + EPDM	NR + EPDM
Degree of hardness	highly flexible compounds W, S, M	40 - 70 Shore A
Temperature range in °C, min. / max. (standard)	-40 / +80	-40 / +100
Temperature range in °C, min. / max. (special)	-30 / +100	-30 / 120

● ≈ Standard
○ ≈ On request

HIGHLY FLEXIBLE SHAFT COUPLINGS

TYPES AND OPERATING DESCRIPTION

Product finder for highly flexible shaft couplings

		
Product	EVOLASTIC®	BoWex® HEW Compact
Type	Highly flexible jaw coupling	Highly flexible gear coupling
Geometries		
Design	short	short
Mass moment of inertia	low	low
Shaft distance dimension	low	low
Types (extract)		
Elastomers can be radially disassembled » without displacing driving/driven side	D2H, DFH	–
Intermediate shaft types » bridging larger shaft distances	D2H, DFH	–
Shaft-to-shaft connection	EH, E2H, EHP, E2HP	Standard
Flange-to-shaft connection	EFH, EFHP	–
Flange-to-flange connection » particularly short mounting length	customised	–
Double-cardanic » compensating for big displacements, lower restoring forces	D2H, DFH	–
Certifications / type examinations		
ATEX 	○	●
GOST R / GOST TR 	○	●
DNV/GL 	○	●
Bureau Veritas 	○	●

● ≈ Standard

○ ≈ On request

EVOLASTIC®

Highly flexible couplings

Description of product and application

The EVOLASTIC® is a highly flexible, non-slip and backlash-free shaft and flange coupling for versatile use in a large number of main and auxiliary drives in mechanical and plant engineering.

Subject to the elastomer element pre-stressed to pressure, the coupling is able to reduce torsional vibrations in the drive train and absorb overload shocks smoothly. Structure-borne noise is damped efficiently. At the same time it offsets misalignment above average in three dimensions (axially, radially and angularly).

The key component of this series is a vulcanised, circularly closed elastomer element made of natural rubber (WN, SN, MN, up to 80 °C) or for higher temperatures made of synthetical EPDM material (WE, SE, ME, up to 100 °C). The various kinds of rubber hardness cover one application and torque range per size.

The basic variants distinguish between directly screwed types and pluggable types. They cover all practical mounting conditions ranging from a finished individual component through hub/hub and flange/hub applications to the driving shaft. Apart from that the product portfolio allows for highly individual and flexible mounting options, tailor-made for the special application.



Size	Elastomer type ²⁾	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn} . [Nm/rad]	Relative damping ψ [-]		Perm. damping power P _{KW} [kW]	Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}		30 °C	60 °C		n	n _{max}
		100	200	300	40		900	720	0.80	0.64	4,500
12	MN	120	240	360	48	1,500	1,200	1.10	0.88	25	15
	SN	200	400	600	80	2,000	1,600	0.80	0.64	5,400	6,000
24	MN	240	480	720	96	3,600	2,880	1.10	0.88	40	24
	SN	420	840	1,260	168	6,800	5,440	0.80	0.64	75	45
48	MN	480	960	1,440	192	13,500	10,800	1.10	0.88	4,500	5,000
	SN	500	1,000	1,500	200	4,600	3,680	0.80	0.64	3,240	3,600
60	MN	600	1,200	1,800	240	7,750	6,200	1.10	0.88	80	48
	SN	760	1,520	2,280	304	12,500	10,000	0.90	0.72	90	54
86	MN	860	1,720	2,580	344	21,000	16,800	1.10	0.88	4,050	4,500
	SN	1,100	2,200	3,300	440	8,800	7,040	0.80	0.64	2,880	3,200
125	MN	1,250	2,500	3,750	500	16,000	13,600	1.10	0.88	120	72
	SN	1,700	3,400	5,100	680	29,000	23,200	0.90	0.72	3,240	3,600
200	MN	2,000	4,000	5,250	800	44,000	35,200	1.10	0.88	150	90
	WN	2,400	4,800	6,100	960	38,000	30,400	0.70	0.56	3,240	3,600
280	MN	2,800	5,600	6,100	1,120	78,000	62,400	1.10	0.88	170	102
	WN	3,200	6,400	9,600	1,280	48,500	38,800	0.70	0.56	3,060	3,400
360	SN	3,400	6,800	10,200	1,360	67,000	53,600	0.90	0.72	200	120
	MN	3,600	7,200	10,800	1,440	115,000	92,000	1.10	0.88	3,060	3,400
560	WN	5,000	10,000	14,000	2,000	73,500	58,800	0.80	0.64	2,250	2,500
	SN	5,200	10,400	14,000	2,080	105,000	84,000	1.00	0.80	2,520	2,800
	MN	5,600	11,200	14,000	2,240	138,000	110,400	1.10	0.88	2,700	3,000

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.

T_{Kmax} Transient torque peaks (e. g. resonance passage), max. 100,000 load alternation pulsating / 50,000 load alternation vibratory

T_{Kmax1} Impact loads rarely, max. 1,000 load alternation

For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.

²⁾ Higher strength on request.

Types


Types screwed axially	
E	Elastomer + set of screws
EH	Elastomer + hub (drive)
E2H	Elastomer + two hubs (driving and driven side)
EFH	Elastomer + flange (drive) + hub (driven side)
D2H	Two elastomers + intermediate shaft + two hubs
DFH	Two elastomers + intermediate shaft + flange and hub




Types plugged in axially	
EP	Elastomer + locking pin
EHP	Elastomer + hub (drive), pluggable
E2HP	Elastomer + two hubs (driving and driven side), pluggable
EFHP	Elastomer + flange (drive) + hub (driven side), pluggable




Types of hubs



Type 1.0
with feather keyway
and setscrew



Type 1.3
spline toothed




Type 3.1
spline/clamping hub N

Other hub types on request.

Examples:

- slotted clamping hub
- clamping ring hub
- taper or cylindrical press fit
- SPLIT hub

Displacements / Displacement stiffness

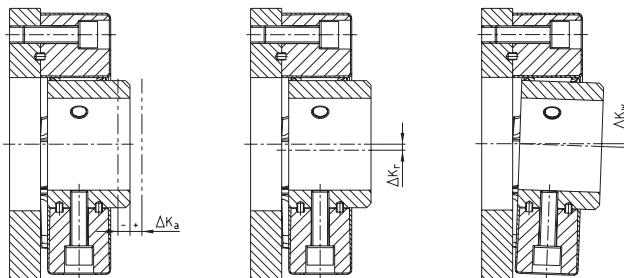



EVOLASTIC® size	12	24	48	60	86	125	200	280	360	560
Perm. axial displacement ΔK_a [mm]	± 2.5	± 3.0	± 2.5	± 3.0	± 3.0	± 3.5	± 3.0	± 3.5	± 4.0	± 4.0
Perm. radial displacement ΔK_r [mm]	1,500 rpm Max. ¹⁾	2	2	2	2.5	2.5	2.5	2.5	3	3
Perm. angular displacement ΔK_w [°]	1,500 rpm Max. ^{1) 2)}	3.0	3.0	2.0	3.0	3.0	2.0	2.0	2.0	2.0

¹⁾ With assembly for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

²⁾ Check for cardanic free movement

The radial and angular displacement of a coupling element refers to an operating speed of 1,500 RPM. Following the graph the permissible operating displacement increases with lower speed or reduces with rising speed by the factor f_{rpm} . The combination of radial and angular displacement in an application is divided up as a percentage. The permissible displacement refers to the total of alignment and operating displacement.

Size	Elastomer hardness	Axial stiffness C_a [N/mm]		Radial stiffness C_r [N/mm]		Angular stiffness C_w [Nm²]	
		30 °C	60 °C	30 °C	60 °C	30 °C	60 °C
12	S	50	40	280	224	2.0	1.6
	M	70	56	400	320	3.0	2.4
24	S	70	56	400	320	4.0	3.2
	M	100	80	550	440	5.0	4.0
48	S	270	216	1,000	800	10	8.0
	M	420	336	1,500	1,200	15	12
60	S	100	80	440	352	10	8.0
	M	120	96	650	520	14	11
86	S	390	312	1,300	1,040	24	19
	M	490	392	1,625	1,300	30	24
125	S	150	120	650	520	15	12
	M	200	160	920	736	22	18
200	S	420	336	1,700	1,360	45	36
	M	525	420	2,125	1,700	56	45
280	W	460	368	1,150	920	58	46
	M	800	640	2,800	2,240	95	76
360	W	450	360	1,800	1,440	66	53
	S	550	440	2,200	1,760	80	64
560	S	710	568	2,500	2,000	100	80
	W	380	304	1,950	1,560	95	76
	M	620	496	3,000	2,400	150	120

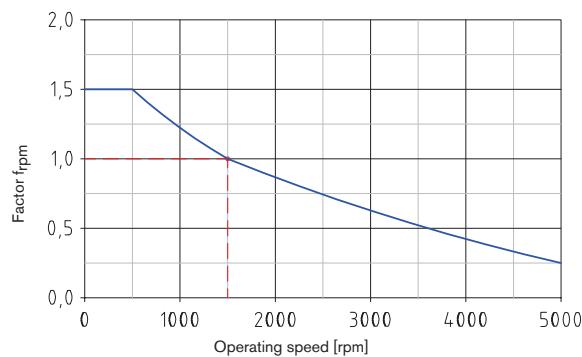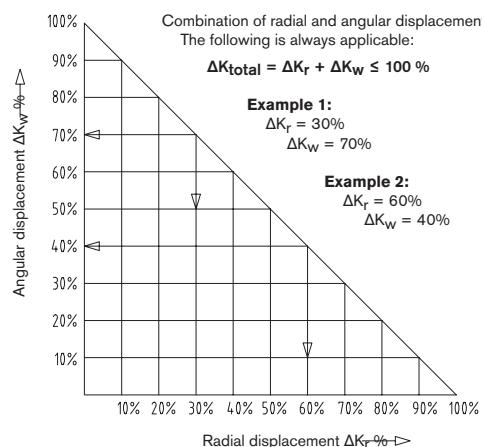


EVOLASTIC® E

Highly flexible couplings


Individual element - available in various kinds of Shore hardness




Components

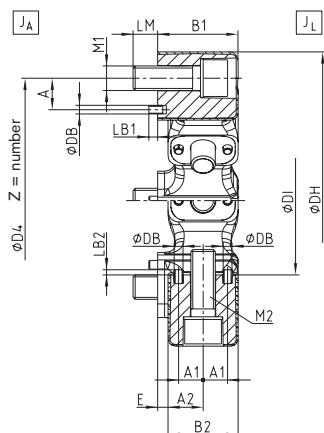

Size 12 - 280

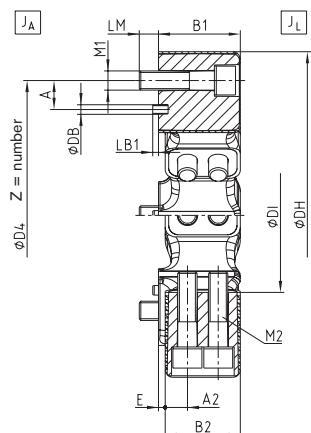

Size 360 - 560

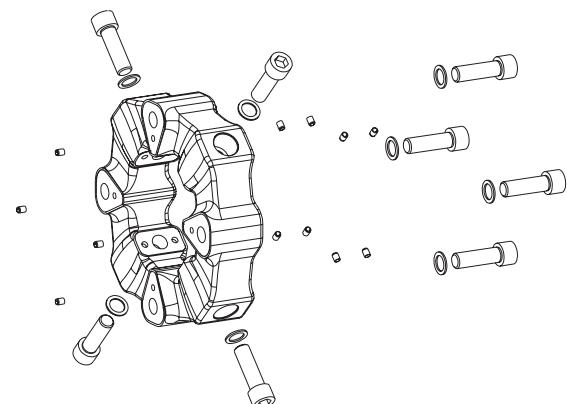

Size	EVOLASTIC® type E															Mass moment of inertia [kgm ²] ¹⁾	Weight [kg] ¹⁾	
	Dimensions [mm]																	
	DH	DI	B1	B2	E	D4	Z x Pitch	A	LM	LB1	DB	A1	A2	LB2	J _A	J _L		
12	122	60	32	28	4	100	3 x 120°	12	10	4	4	10	14	-	0.0005	0.0005	0.50	
24	150	70	42	36	6	125	3 x 120°	18	12	4	5	13.5	18	5	0.0010	0.0010	0.93	
48	170	85	46	40	6	140	4 x 90°	18	14	5	5	14	20	5	0.0040	0.0030	1.55	
60	200	100	58	50	8	165	3 x 120°	20	16	5	5	18	25	5	0.0070	0.0070	2.28	
86	200	100	58	50	8	165	4 x 90°	20	16	5	5	18	25	5	0.0090	0.0080	2.76	
125	260	125	70	63	7	215	3 x 120°	25	20	5	8	22.5	31.5	5	0.0240	0.0220	4.74	
200	260	125	70	63	7	215	4 x 90°	25	20	5	8	22.5	31.5	5	0.0300	0.0280	5.79	
280	300	145	80	72	8	250	4 x 90°	25	20	5	8	22.5	36	5	0.0550	0.0500	7.89	
360	340	160	85	78	7	280	4 x 90°	30	20	6	10	-	2 x 23	-	0.0960	0.0950	11.50	
560	363	170	105	95	10	300	4 x 90°	40	24	6	10	-	2 x 28.5	-	0.1510	0.1450	15.38	

¹⁾ With max. bore

Delivery condition:

EVOLASTIC® couplings type E are supplied with a mounting kit consisting of cap screws, screw locking washers and positioning sleeves. With the connection design make sure sufficient screw-in depth.


Size	Cap screw DIN EN ISO 4762 - 12.9		Tightening torque T _A [Nm]
	M1 / axial	M2 / radial	
12	M10 x 30	M10 x 30	71
24	M12 x 35	M12 x 35	123
48	M14 x 40	M14 x 40	195
60	M16 x 50	M16 x 50	302
86	M16 x 50	M16 x 50	302
125	M20 x 65	M20 x 65	592
200	M20 x 65	M20 x 65	592
280	M20 x 65	M20 x 65	592
360	M20 x 80	M20 x 80	592
560	M24 x 90	M20 x 90	1,017 / 592

Ordering example:	EVOLASTIC® 48	E	S
	Coupling size	Type	Elastomer hardness


EVOLASTIC® EH

Highly flexible couplings


Individual element + shaft connection

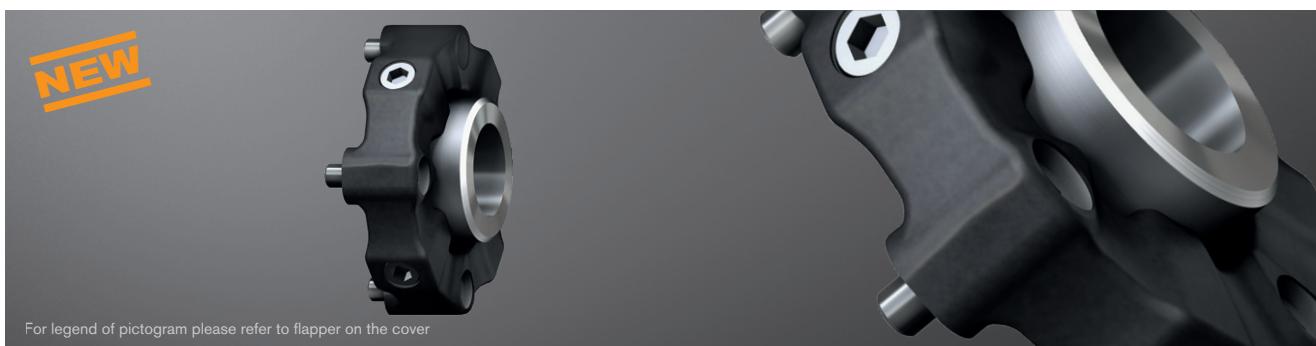


Components

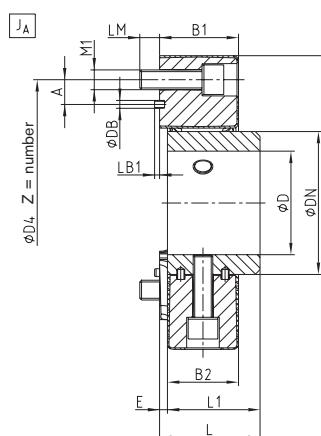

Size 12 - 280

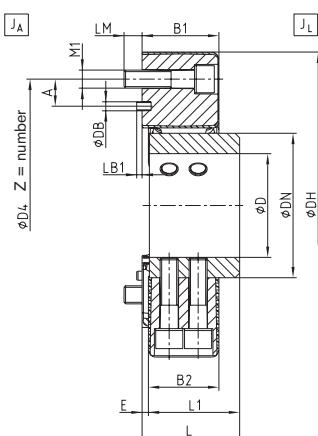

Size 360 - 560

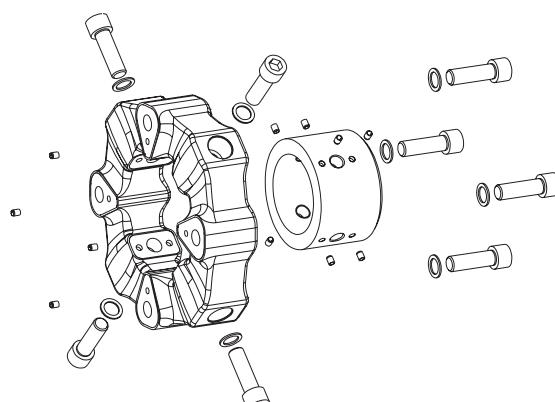

Size	Dimensions [mm]														Mass moment of inertia [kgm^2] ¹⁾		Weight [kg] ¹⁾	
	DH	D ¹⁾	DN	B1	B2	E	L	L1	D4	Z x Pitch	M1	A	LM	LB1	DB	J _A	J _L	
12	122	38	60	32	28	4	46	42	100	3 x 120°	M10	12	10	4	4	0.0006	0.0009	1.04
24	150	46	70	42	36	6	56	50	125	3 x 120°	M12	18	12	4	5	0.0016	0.0021	1.76
48	170	55	85	46	40	6	61	55	140	4 x 90°	M14	18	14	5	5	0.0040	0.0050	2.90
60	200	65	100	58	50	8	74	66	165	3 x 120°	M16	20	16	5	5	0.0070	0.0110	4.55
86	200	65	100	58	50	8	74	66	165	4 x 90°	M16	20	16	5	5	0.0090	0.0120	5.03
125	257	85	125	70	63	8	88	80	215	3 x 120°	M20	25	20	5	8	0.0240	0.0340	8.77
200	257	85	125	70	63	8	88	80	215	4 x 90°	M20	25	20	5	8	0.0300	0.0400	9.80
280	299	105	145	80	72	8	102	94	250	4 x 90°	M20	25	20	5	8	0.0560	0.0730	13.54
360	340	115	160	85	78	8	108	100	280	4 x 90°	M20	30	20	6	10	0.0960	0.1320	18.85
560	363	120	170	105	95	10	135	125	300	4 x 90°	M24	40	24	6	10	0.1530	0.2080	26.34

¹⁾ With max. bore

EVOLASTIC®

Highly flexible
shaft couplings

BoWex® HEW Compact


Ordering example:

EVOLASTIC® 48	EH	S	1.0	Ø52
Coupling size	Type	Elastomer hardness	Hub type	Finish bore


EVOLASTIC® E2H

Highly flexible couplings


Shaft-to-shaft connection

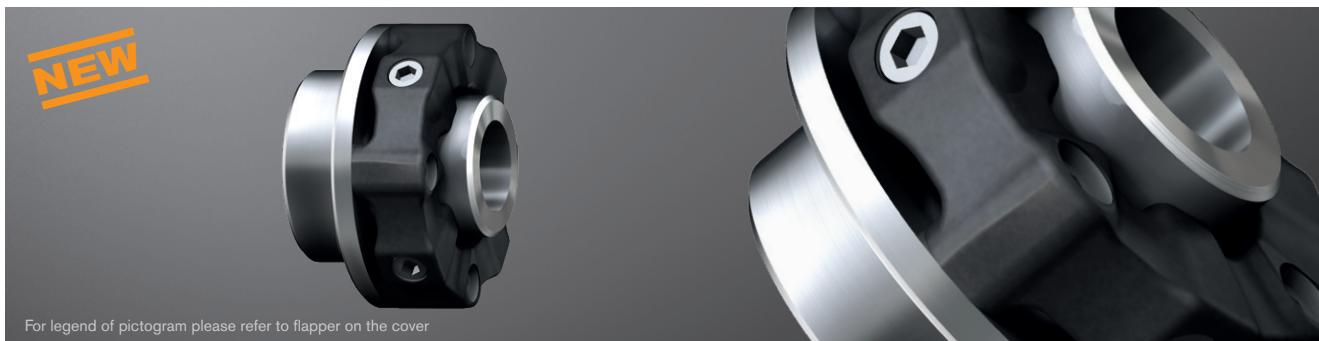


Components

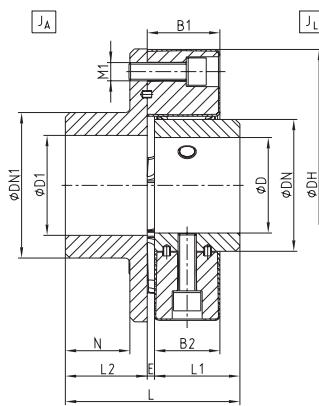

Size 12 - 280

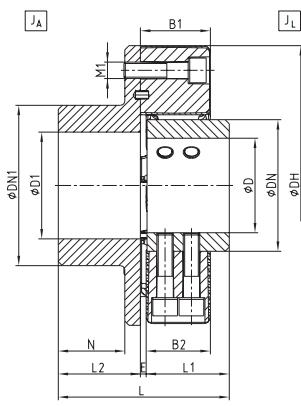

Size 360 - 560

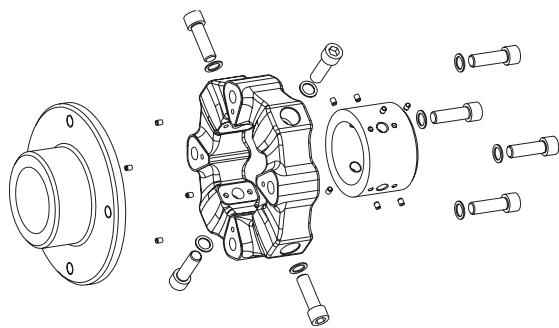

Size	EVOLASTIC® type E2H															Weight [kg] ¹⁾		
	Dimensions [mm]																	
	DH	D ¹⁾	DN	D1 ¹⁾	DN1	B1	B2	E	N	L	L1	L2	M1	J _A	J _L			
12	122	38	60	55	80	32	28	4	32	88	42	42	M10	0.0030	0.0010	2.38		
24	150	46	70	70	100	42	36	6	38	106	50	50	M12	0.0081	0.0021	4.22		
48	170	55	85	85	115	46	40	6	41	116	55	55	M14	0.0160	0.0050	6.21		
60	200	65	100	100	140	58	50	8	50	140	66	66	M16	0.0360	0.0110	10.39		
86	200	65	100	100	140	58	50	8	50	140	66	66	M16	0.0370	0.0120	10.83		
125	260	85	125	110	160	70	63	8	60	168	80	80	M20	0.1110	0.0340	20.17		
200	260	85	125	110	160	70	63	8	60	168	80	80	M20	0.1160	0.0400	21.15		
280	300	105	145	110	160	80	72	8	70	192	94	90	M20	0.1960	0.0730	28.30		
360	340	115	160	130	195	85	78	8	80	208	100	100	M20	0.3540	0.1320	40.66		
560	370	120	170	140	200	105	95	10	100	260	125	125	M24	0.5890	0.2080	56.56		

¹⁾ With max. bore

Ordering example:

EVOLASTIC® 48	E2H	S	1.0	Ø52	1.0	Ø52
Coupling size	Type	Elastomer hard-ness	Hub type	Finish bore	Hub type	Finish bore


EVOLASTIC® EFH

Highly flexible couplings


Flange-to-shaft connection




Components

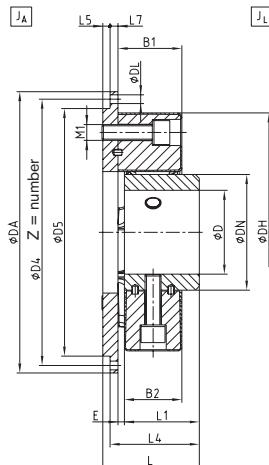

Size 12 - 280

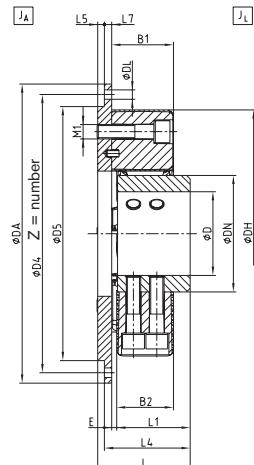

Size 360 - 560

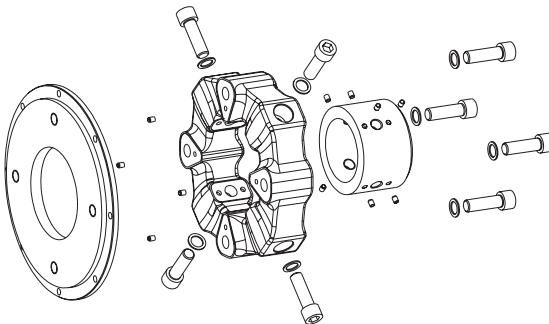

Flange dimensions according to SAE J620 [mm]				
Size	DA	D4	Z	DL
6 1/2"	215.90	200.02	6	9
7 1/2"	241.30	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13

		EVOLASTIC® type EFH																				
Size	Flange connection acc. to SAE - J620					Dimensions [mm]												Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾		
	6.5"	7.5"	8"	10"	11.5"	14"	DH	D ¹⁾	DN	B1	B2	E	L	L1	L4	L5	L7	M1	D5	J _A	J _L	
12	●						122	38	60	32	28	4	56	42	52	4	6	M10	180	0.013	0.001	3.26
		●																	190	0.020	0.001	3.78
24	●						150	46	70	42	36	6	68	50	62	6	6	M12	180	0.016	0.002	4.26
		●																	190	0.023	0.002	4.82
48	●	●					170	55	85	46	40	6	75	55	67	8	6	M14	190	0.026	0.005	6.03
			●																200	0.034	0.005	6.62
60		●					200	65	100	58	50	8	90	66	84	6	10	M16	260	0.091	0.005	9.91
			●																270	0.103	0.011	12.07
86			●				200	65	100	58	50	8	90	66	84	6	10	M16	310	0.165	0.011	14.49
				●															270	0.105	0.012	12.52
125			●				260	85	125	70	63	8	107	80	98	9	10	M16	360	0.166	0.012	14.94
				●															270	0.129	0.034	16.72
200			●				260	85	125	70	63	8	107	80	98	9	10	M20	310	0.199	0.034	19.57
				●															270	0.135	0.039	17.64
280				●			300	105	145	80	72	8	121	94	112	9	10	M20	405	0.572	0.039	30.01
					●														310	0.226	0.072	23.54
360					●		340	115	160	85	78	8	127	100	118	9	10	M20	405	0.593	0.072	33.05
						●													405	0.628	0.130	37.55
560						●	363	120	170	105	95	10	160	125	145	15	25	M24	405	0.794	0.203	49.06

¹⁾ With max. bore

Ordering example:	EVOLASTIC® 48	EFH	S	8	1.0	Ø52
Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore	



EVOLASTIC® EP

Highly flexible couplings

Pluggable elastomer - available in various kinds of Shore hardness



Components

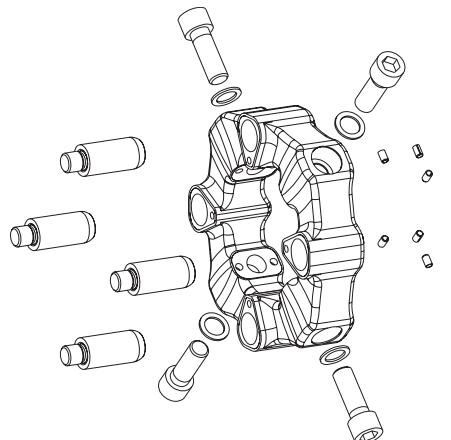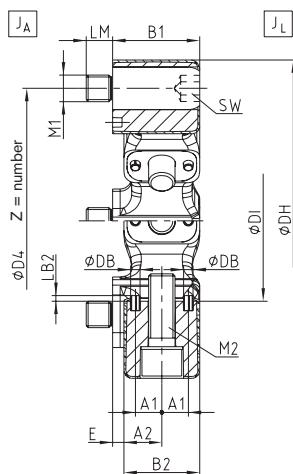

Size	Dimensions [mm]													Mass moment of inertia [kgm ² ¹⁾		Weight [kg] ¹⁾
	DH	DI	B1	B2	E	D4	Z x Pitch	LM	DB	A1	A2	LB2	J _A	J _L		
12	122	60	32	28	4	100	3 x 120°	10	4	10	14	-	0.001	0.001	0.55	
24	150	70	42	36	6	125	3 x 120°	12	5	13.5	18	5	0.002	0.001	1.03	
48	170	85	46	40	6	140	4 x 90°	14	5	14	20	5	0.005	0.003	1.74	
60	200	100	58	50	8	165	3 x 120°	16	5	18	25	5	0.009	0.007	1.52	
86	200	100	58	50	8	165	4 x 90°	16	5	18	25	5	0.010	0.008	3.08	
125	260	125	70	63	7	215	3 x 120°	20	8	22.5	31.5	5	0.028	0.022	5.16	
200	260	125	70	63	7	215	4 x 90°	20	8	22.5	31.5	5	0.036	0.028	6.35	
280	On request															
360	On request															
560	On request															

¹⁾ With max. bore

Delivery condition:

EVOLASTIC® couplings type EP are supplied with a mounting kit consisting of cap screws, screw locking washers, locking pins and positioning sleeves. With the connection design make sure sufficient screw-in depth. For the locking pin provide for an adhesive (e. g. Loctite® 243).

Size	Pin		Cap screw radial DIN EN ISO 4762 - 12.9		
	M1 / axial	Tightening torque [Nm]	M2 / radial	SW	Tightening torque [Nm]
12	M10	71	M10 x 30	8	71
24	M12	123	M12 x 35	10	123
48	M14	195	M14 x 40	12	195
60	M16	302	M16 x 50	14	302
86	M16	302	M16 x 50	14	302
125	M20	592	M20 x 65	17	592
200	M20	592	M20 x 65	17	592

Ordering example:

EVOLASTIC® 48	EP	S
Coupling size	Type	Elastomer hardness



EVOLASTIC® EHP

Highly flexible couplings

Pluggable elastomer + shaft connection



Components

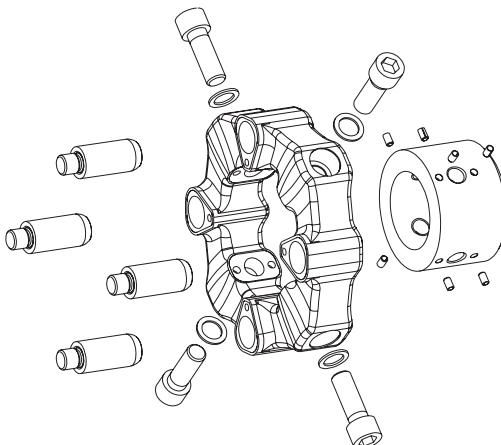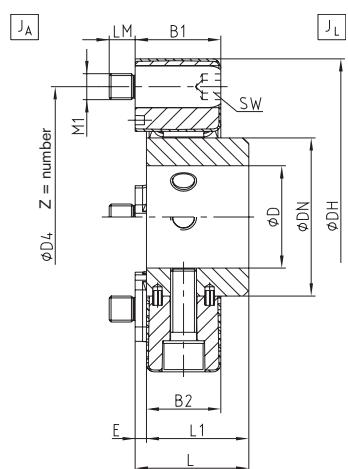

Size	EVOLASTIC® type EHP															Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾	
	Dimensions [mm]																		
	DH	DN	D	B1	B2	E	L	L1	LM	LB	DB	D4	Z x Pitch	M1	SW	J_A	J_L		
12	122	60	38	32	28	4	46	42	10	4	4	100	3 x 120°	M10	8	0.001	0.001	1.09	
24	150	70	46	42	36	6	56	50	12	4	5	125	3 x 120°	M12	10	0.002	0.002	1.83	
48	170	85	55	46	40	6	61	55	14	5	5	140	4 x 90°	M14	12	0.004	0.005	3.07	
60	200	100	65	58	50	8	74	66	16	5	5	165	3 x 120°	M16	14	0.009	0.010	4.79	
86	200	100	65	58	50	8	74	66	16	5	5	165	4 x 90°	M16	14	0.010	0.012	5.32	
125	260	125	85	70	63	8	88	80	20	5	8	215	3 x 120°	M20	17	0.028	0.024	9.15	
200	260	125	85	70	63	8	88	80	20	5	8	215	4 x 90°	M20	17	0.036	0.039	10.30	
280																			
360																			
560																			

¹⁾ With max. bore

On request

Ordering example:

EVOLASTIC® 48	EHP	S	1.0	Ø52
Coupling size	Type	Elastomer hardness	Hub type	Finish bore


EVOLASTIC® E2HP

Highly flexible couplings

Shaft-to-shaft connection, plug-in



Components

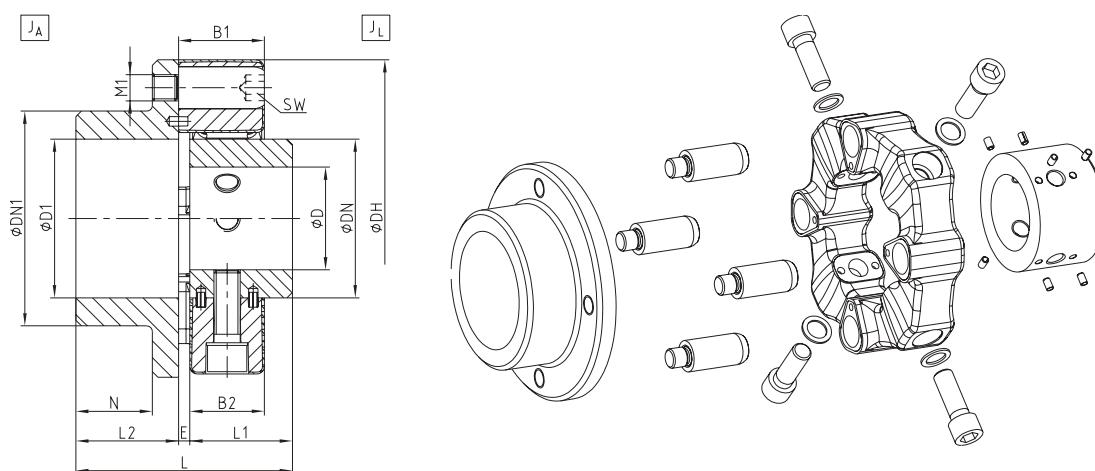

EVOLASTIC® type E2HP																		
Size	Dimensions [mm]															Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾
	DH	DN	D	DN1	D1	B1	B2	E	N	L	L1	L2	M1	SW	J _A	J _L		
12	122	60	38	80	55	32	28	4	32	88	42	42	M10	8	0.003	0.001	2.44	
24	150	70	46	100	70	42	36	6	38	106	50	50	M12	10	0.009	0.002	4.31	
48	170	85	55	115	85	46	40	6	41	116	55	55	M14	12	0.016	0.005	6.41	
60	200	100	65	140	100	58	50	8	50	140	66	66	M16	14	0.038	0.010	10.62	
86	200	100	65	140	100	58	50	8	50	140	66	66	M16	14	0.039	0.012	11.13	
125	260	125	85	160	110	70	63	8	60	168	80	80	M20	17	0.115	0.034	20.55	
200	260	125	85	160	110	70	63	8	60	168	80	80	M20	17	0.123	0.039	21.65	
280	On request																	
360	On request																	
560	On request																	

¹⁾ With max. bore

Ordering example:

EVOLASTIC® 48	E2HP	S	1.0	Ø52	1.0	Ø52
Coupling size	Type	Elastomer hardness	Hub type	Finish bore	Hub type	Finish bore



EVOLASTIC® EFHP

Highly flexible couplings

Flange-to-shaft connection, pluggable



Components

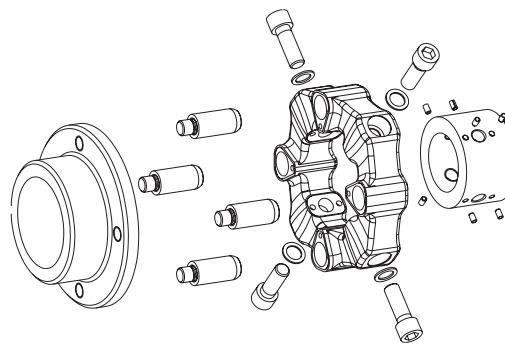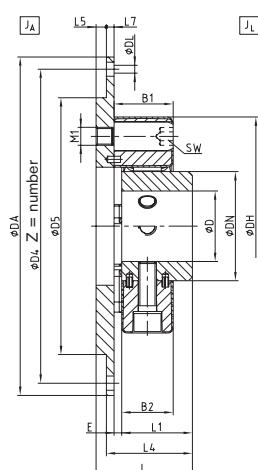

Flange dimensions according to SAE J620 [mm]				
Size	DA	D4	Z	DL
6 1/2"	215.90	200.02	6	9
7 1/2"	241.30	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13

EVOLASTIC® type EFHP																	Weight [kg] ¹⁾						
Size	Flange connection acc. to SAE - J620					Dimensions [mm]										Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾					
	6.5"	7.5"	8"	10"	11.5"	14"	D5	DH	DN	D	B1	B2	L5	L7	E	L4	L	L1	M1	SW	J _A	J _L	
12	●						180	122	60	38	32	28	4	6	4	52	56	42	M10	8	0.014	0.001	3.33
		●					190														0.020	0.001	3.84
24	●						180	150	70	46	42	36	6	6	6	62	68	50	M12	10	0.016	0.002	4.36
		●					190														0.249	0.002	4.92
48		●					190	170	85	55	46	40	8	6	6	67	75	55	M14	12	0.027	0.005	6.20
			●				200						4	10		71	75				0.035	0.005	6.80
60			●				200	170	85	55	46	40	8	6	6	67	75	55	M14	12	0.091	0.005	10.09
				●			260														0.105	0.011	12.30
86				●			270	200	100	65	58	50	6	10	8	84	90	66	M16	14	0.166	0.011	14.73
					●		310						6	10	8	84	90	66	M16	14	0.107	0.012	12.82
125					●		270	260	125	85	70	63	9	10	8	98	107	80	M20	17	0.168	0.012	15.24
						310														0.134	0.034	17.10	
200					●		270	260	125	85	70	63	9	10	8	98	107	80	M20	17	0.204	0.034	19.95
						310														0.141	0.039	18.20	
280							405														0.212	0.039	21.06
360																					0.578	0.039	30.57
560																							

On request

¹⁾ With max. bore



EVOLASTIC® 48	EFHP	S	8	1.0	Ø55
Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore


EVOLASTIC® D2H

Highly flexible couplings


Double-cardanic shaft-to-shaft connection




Components

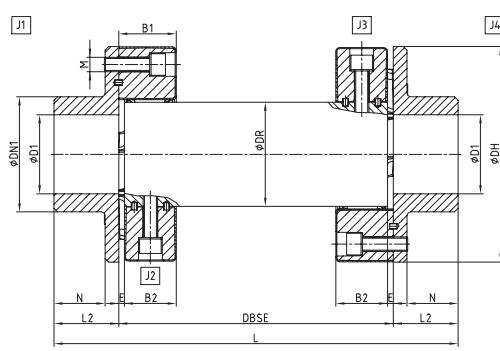

Size 12 - 280

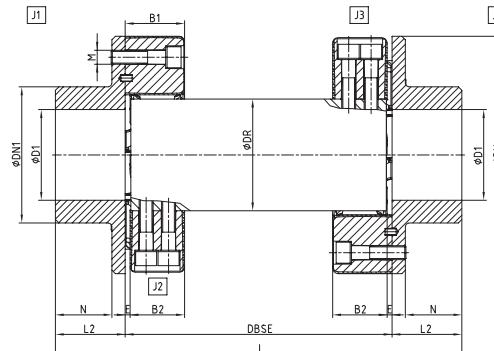

Size 360 - 560

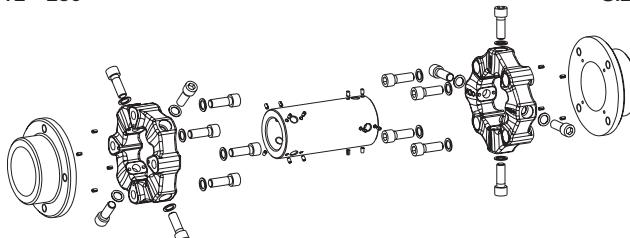

EVOLASTIC® type D2H

Size	Dimensions [mm]										Mass moment of inertia [kgm ²] ¹⁾	
	DH	DN1	D1	DR	B1	B2	E	L2	N	M	J1	J4
12	122	80	55	60	32	28	4	42	32	M10	0.0030	0.0030
24	150	100	70	70	42	36	6	50	38	M12	0.0080	0.0080
48	170	115	85	85	46	40	6	55	41	M14	0.0160	0.0160
60	200	140	100	100	58	50	8	66	50	M16	0.0360	0.0360
86	200	140	100	100	58	50	8	66	50	M16	0.0370	0.0370
125	260	160	110	125	70	63	8	80	60	M20	0.1110	0.1110
200	260	160	110	125	70	63	8	80	60	M20	0.1160	0.1160
280	300	160	110	145	80	72	8	94	70	M20	0.1960	0.1960
360	340	195	130	160	85	78	8	100	80	M20	0.3540	0.3540
560	370	200	140	170	105	95	10	125	100	M24	0.5890	0.5890

Dimension L and DBSE as well as total weight depend on the mounting length

¹⁾ With max. bore

Mass moments J2 and J3 depend on the mounting length and are available on request

Ordering example:

EVOLASTIC® 48	D2H	140	S	1.0	Ø52	1.0	Ø52
Coupling size	Type	Shaft distance DBSE	Elastomer hardness	Hub type	Finish bore	Hub type	Finish bore


EVOLASTIC® DFH

Highly flexible couplings


Double-cardanic flange-to-shaft connection




Components

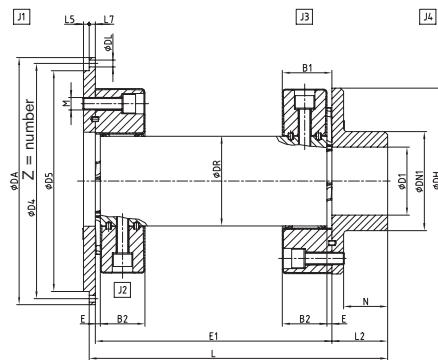

Size 12 - 280

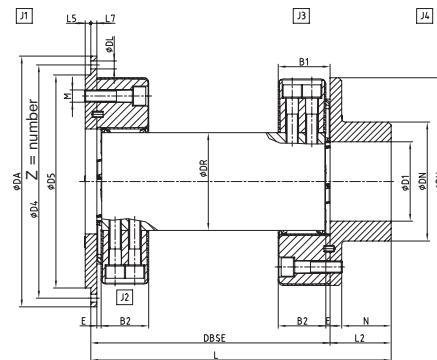

Size 360 - 560

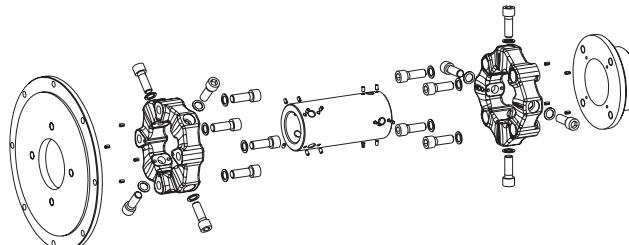

Flange dimensions according to SAE J620 [mm]				
Size	DA	D4	Z	DL
6 1/2"	215.90	200.02	6	9
7 1/2"	241.30	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13

EVOLASTIC® type DFH

Size	Flange connection acc. to SAE - J620					Dimensions [mm]										Mass moment of inertia [kgm²] ¹⁾					
	6.5"	7.5"	8"	10"	11.5"	14"	D5	DH	DN1	D1	DR	B1	B2	E	L5	L7	L2	N	M	J1	J4
12	●						180													0.013	
		●					190	122	80	55	60	32	28	4	4	6	42	32	M10	0.020	0.003
24	●						180													0.016	
		●					190	150	100	70	70	42	36	6	6	6	50	38	M12	0.023	0.008
48		●					200	170	115	85	85	46	40	6	8	6	55	41	M14	0.034	0.016
			●				260								4	10				0.091	
60			●				270													0.103	
				●			310	200	140	100	100	58	50	8	6	10	66	50	M16	0.165	0.036
86				●			270													0.105	
					●		310	200	140	100	100	58	50	8	6	10	66	50	M16	0.166	0.037
125					●		270													0.129	
						310	260	160	110	125	70	63	8	9	10	80	60	M20	0.199	0.111	
200					●		270													0.135	
						310	260	160	110	125	70	63	8	9	10	80	60	M20	0.205	0.116	
280					●		405													0.572	
						310	300	160	110	145	80	72	8	9	10	94	70	M20	0.226	0.196	
360					●		405	340	195	130	160	85	78	8	9	10	100	80	M20	0.593	0.354
						370	200	140	170	105	95	10	15	25	125	100	M24	0.794	0.589		

Dimension L and DBSE as well as total weight depend on the mounting length

¹⁾ With max. bore

Mass moments J2 and J3 depend on the mounting length and are available on request



Ordering example:

EVOLASTIC® 48	DFH	140	S	8	1.0	Ø52
Coupling size	Type	Shaft distance DBSE	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore

BoWex® HEW Compact

Curved-tooth gear coupling®

Compensating for large displacements, very compact design

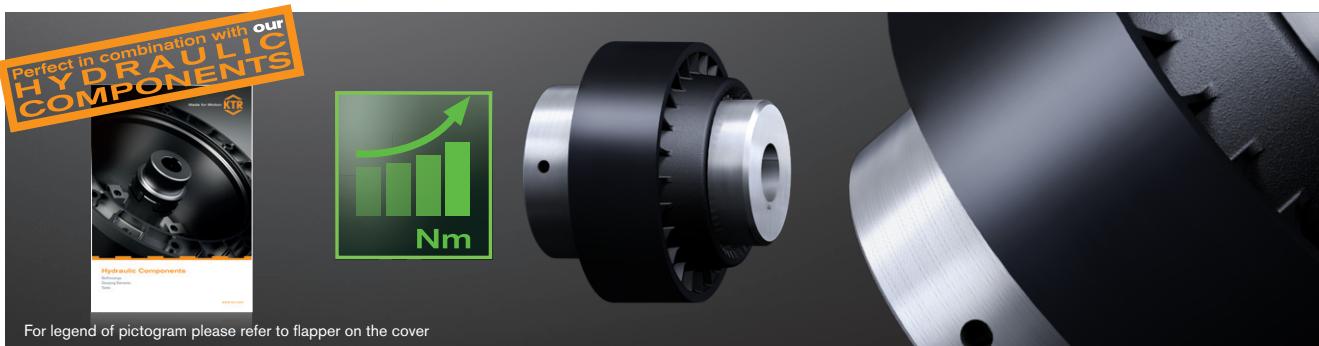


BoWex® Type HEW Compact																					
Size	Finish bore $d_{max.}$		Dimensions [mm]														Weight with pilot bored coupling [kg]	Mass moment of inertia with pilot bored coupling J_1 [kgm²]	Mass moment of inertia with pilot bored coupling J_2 [kgm²]	Mass moment of inertia with pilot bored coupling J_3 [kgm²]	
	d_1	d_2	D_1	D_2	D_4	l_1	l_2	l_3	l_4	l_5	E	L	L_1	D_5	D_3	z	M				
42-130	42	42	90	65	131	42	42	45	37	42	34	118	98	65	78	6	M6	3.4	0.003	0.001	0.001
65-180	65	65	130	96	180	60	55	55	47	55	30	145	122	85	110	8	M10	9	0.014	0.006	0.006
80-225	75	90	145	124	225	70	90	77	51	70	50	210	158	100	120	10	M12	18.9	0.035	0.029	0.021
100-305	100	100	200	152	305	90	110	90	73	70	58	258	187	170	175	16	M12	40.2	0.152	0.087	0.068
125-365	125	125	235	192	365	120	140	105	90	100	68	328	240	170	205	12	M16	75	0.36	0.26	0.192

Technical data																					
Coupling size			Elastomer hardness [Shore A]	Torque [Nm]			Perm. speed $n_{max.}$ [rpm]	Perm. damping power			Dynamic torsion spring stiffness $C_{dyn.}$ [Nm/rad]	Relative damp- ing ψ	Resonance factor $V_R \approx 2 \cdot \Pi \cdot \psi$	Radial spring stiffness C_r [N/mm]							
				T_K	$T_{K max.}$	T_{KW}		PKW													
								60 °C	80 °C	90 °C											
BoWex® 42 HEW Compact			T50	200	400	50	7300	30	18	12	780	0.8	7.9	178							
				270	540	68					2400	1.2	5.2	600							
				320	640	80					2900	1.2	5.2	710							
BoWex® 65 HEW Compact			T50	550	1100	138	5500	55	33	22	2850	0.8	7.9	379							
				740	1500	185					7800	1.2	5.2	955							
				860	1700	215					9500	1.2	5.2	1240							
BoWex® 80 HEW Compact			T50	1250	2500	313	4400	90	54	36	5000	0.8	7.9	420							
				1600	3200	400					13000	1.2	5.2	1090							
				1900	3800	475					16500	1.2	5.2	1450							
BoWex® 100 HEW Compact			T50	2750	5500	688	3200	150	90	60	17000	0.8	7.9	760							
				3900	7800	975					44000	1.2	5.2	1850							
				4500	9000	1125					50000	1.2	5.2	2250							
BoWex® 125 HEW Compact			T50	5500	11000	1375	2900	220	132	88	25000	0.8	7.9	750							
				7500	15000	1875					62000	1.2	5.2	1930							
				8400	16800	2100					70000	1.2	5.2	2300							


= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated torques with some sizes of this series.

Ordering example:

BoWex® 65 HEW Compact	T50	$d_1 \varnothing 40$	$d_2 \varnothing 65$
Size and type of coupling	Elastomer hardness	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)	Finish bore H7 keyway to DIN 6885 sheet 1 (JS9)

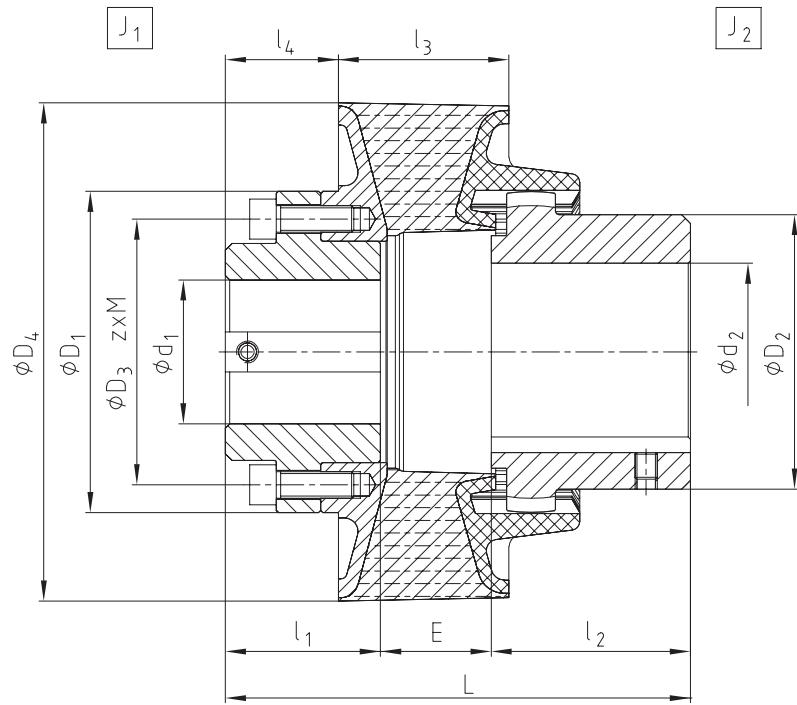

BoWex® HEW Compact with reduced hub

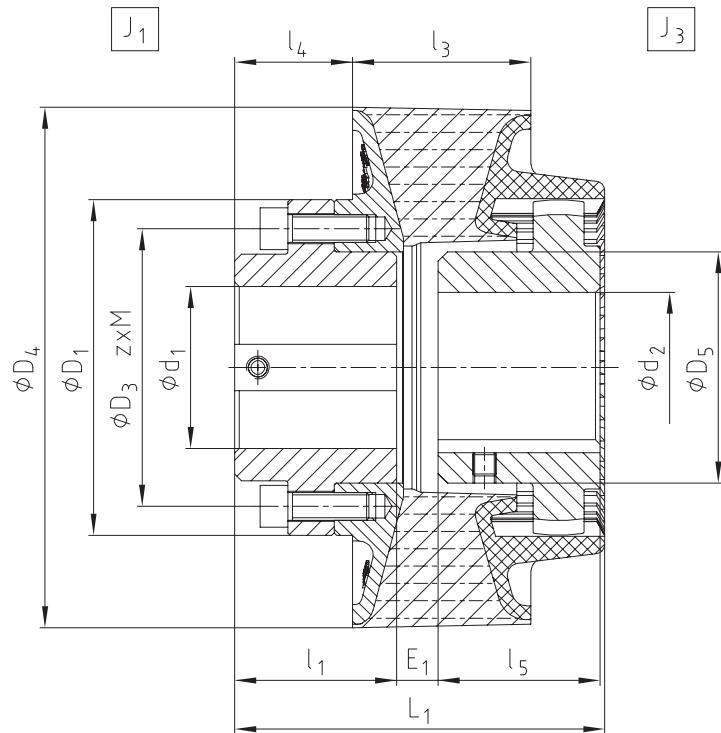



Flange couplings

Types and operating description 226

BoWex®

BoWex® FLE-PA	228
BoWex® FLE-PAC	230
Selection according to SAE standard	232
Mounting dimensions according to SAE standard	233
Programme of special flanges deviating from SAE standard	235
Flange couplings in KUBOTA engines	236
Flange couplings in Perkins engines	237
Flange couplings in DEUTZ engines	238



MONOLASTIC®

Type with 3 holes	240
SAE type	241
Examples of application	242



BoWex-ELASTIC®

Type HE1 - HE4	244
Type HE3, HE4 and HE-D	246
Type HE-ZS and HEW	248
Type HEG	250



SINULASTIC®

Description of product and application	252
Properties of types compared	253
Type A	254
Type T	258
Type B	260
Type V	262

Please note: torque increase



Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of rated torques with some sizes of this series.

BoWex® FLE-PA

BoWex® FLE-PAC

MONOLASTIC®

BoWex-ELASTIC®

SINULASTIC®



FLANGE COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of flange couplings

				
Product	BoWex® FLE-PA/-PAC	MONOLASTIC®	BoWex-ELASTIC®	SINULASTIC®
Type	Torsionally stiff flange coupling	Flexible flange coupling	Highly flexible flange coupling	Highly flexible flange coupling
Properties				
Torsionally stiff	●			
Torsionally flexible		●		
Highly flexible			●	●
Damping vibrations		●	●	●
Maintenance-free	●	●	●	●
Axial plug-in	●	●	●	●
Special features/applications				
Variant diversity	very high	high	very high	very high (type A, B, T, V)
Flange dimension	SAE standard and special dimensions	type 3/4 hole, SAE standard and special dimensions	SAE standard and special dimensions	SAE standard and special dimensions
Internal spline	see standard programme of BoWex® hubs	for SAE or DIN pump shafts	see standard programme of BoWex® hubs	Type B
Applications	hydrostatic drives of construction machines, agricultural machines, ...	hydrostatic drives of construction machines, agricultural machines, ...	generators, splitterboxes, water pumps, piston compressors, agricultural machines, gensets, mill drives, separator drives, ...	generators, gensets, splitter-boxes, traction drives, hydraulic pumps, piston compressors, ...
Performance data				
Max. rated torque TKN [Nm]	6,600	1,850	70,000	25,000
Max. speed n [rpm]	6,000	6,000	6,200	3,800
Flange (standard and special)				
Material	fibre-glass reinforced polyamide (PA)	natural rubber	natural rubber	natural rubber EPDM
	combination of polyamide with carbon fibre share and steel flange (PAC)			
Elastomer hardness	torsionally stiff	65, 70 Shore A	various kinds of hardness for vibration adaptation of drives	miscellaneous: S, M, H, U
Flange (standard)				
Temperature range [°C] min./max.	-25 / +130 (PA)	-40 / +100	-40 / +100	-40 / +120
	-25 / +130 (PAC)			
Engine power [kW]				
Max.	800	250	5,000	3,500

● ≈ Standard

○ ≈ On request

* ≈ Depending on size

FLANGE COUPLINGS

TYPES AND OPERATING DESCRIPTION

Product finder of flange couplings



Product	BoWex® FLE-PA/-PAC	MONOLASTIC®	BoWex-ELASTIC®	SINULASTIC®
Type	Torsionally stiff flange coupling	Flexible flange coupling	Highly flexible flange coupling	Highly flexible flange coupling
Geometries				
Design	extremely short	short	short	short
Max. radial displacement	0.5 mm	1 mm	9.5 mm	3 mm
Shaft diameter min./max. [mm]	20 / 125	20 / 60	21 / 275	20 / 240
Types (extract)				
Intermediate shaft types » bridging larger shaft distances	–	–	HE-ZS	Type B and V
Shaft-to-shaft connection	–	–	HEW1 and HEW2, HEW-ZS	○
Flange-to-shaft connection	Standard	Standard	HE1, HE2, HE3 and HE4, HE-ZS	●
For cardan shafts » connecting couplings for I. C.-engines	–	–	HEG1 and HEG2	○
Combination with pump mounting flange	●	●	●	●
Certifications / type examinations				
ATEX			●	○
Bureau Veritas		●	●	○
DNV/GL			●	○
GOST R / GOST TR		●	●	○

● ≈ Standard

Please note: Pump mounting flanges





For connecting hydraulic pumps to the diesel engine KTR supplies mounting flanges according to SAE connection dimensions sizes SAE 6 to SAE 1. These flanges are made of steel and EN-GJL-250 for hydraulic pumps with flange connections according to SAE-A, -B, -C, -D and -E as types with 2 and 4 holes.

Pump connection housings made of EN-GJL-250 to be mounted directly to the back plate of the engine.

BoWex® FLE-PA

Torsionally stiff flange couplings

Axial plug-in, maintenance-free, torsionally stiff

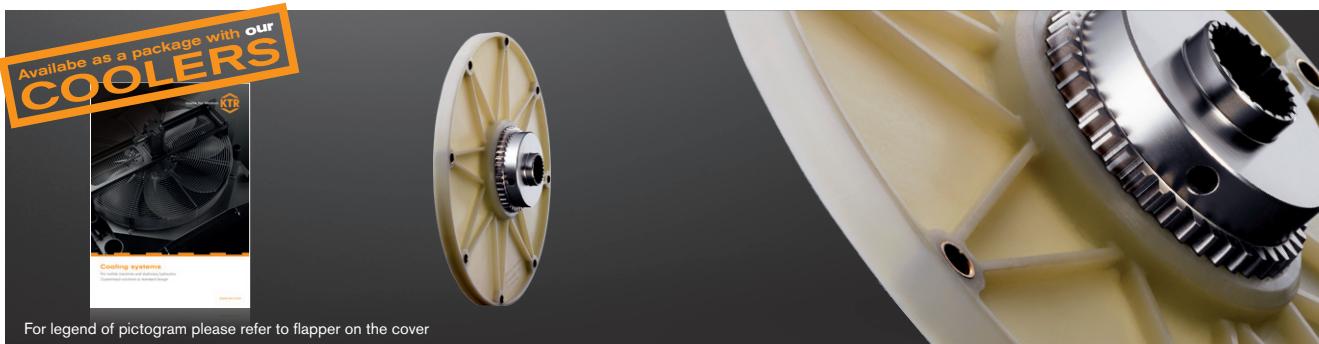


BoWex® FLE-PA – Dimensions/nominal dimension acc. to SAE																				
Size	Pilot bore	Finish bore d		Dimensions [mm]								Special length l ₁ max.	Nominal size acc. to SAE (D ₃)					Max. axial displacement [mm]		
		Min.	Max.	D	D ₁	l ₁	l ₃	l ₇	l ₈	l ₁₀	l ₁₁		6 1/2"	7 1/2"	8"	10"	11 1/2"	14"		
48	-	20	48	68	100	50	41	50	20	13	48	up to 60	●	●	●	●			± 2	
T 48	13	15	48	68	100	50	38	45	20	13	46	-	●	●	●	●			± 1	
T 55	17	20	55	85	115	50	37	48	24	13	48	-	●	●	●	●			± 2	
65 / T 65	21	30	65	96	132	55	45	54	27	21	51	up to 70		●	●	●	●			± 2
T 70	26	30	70	100	153	60	48	56	30	21	57	-			●					± 2
80 / T 80	31	35	90	124	170	90	78	87	30	21	87	-			●	●				± 2
100 / T 100	38	40	100	152	265	110	78	108	35	21	110	-			●	●				± 2
125 / T 125	45	50	125	192	250	140	113	140	50	28	97	-				●	●			± 2

Special flange dimensions see page 234 et seqq. and on request


Technical data of BoWex® FLE-PA – Torques/weights/mass moments of inertia/torsion spring stiffness																
Size	Torque T _K [Nm]			Weight/mass moment of inertia J	Hub with max. bore	FLE-PA flanges according to SAE						Dynamic torsion spring stiffness with +60 °C/ψ = 0.4 [Nm/rad]				
	T _{KN}	T _K max.	T _{KW}			6 1/2"	7 1/2"	8"	10"	11 1/2"	14"	0.30 T _{KN}	0.50 T _{KN}	0.75 T _{KN}	1.00 T _{KN}	
48	240	600	120	[kg]	0.79	0.32	0.43	0.51	0.64	-	-	35 x 10 ³	75 x 10 ³	105 x 10 ³	125 x 10 ³	
				[kgm ²]	0.0007	0.0021	0.0035	0.0049	0.0085							
T 48	300	750	150	[kg]	0.79	0.32	0.43	0.51	0.64	-	-	40 x 10 ³	86 x 10 ³	120 x 10 ³	143 x 10 ³	
				[kgm ²]	0.0007	0.0021	0.0035	0.0049	0.0085							
T 55	450	1125	225	[kg]	1.20	0.34	0.62	0.45	0.646	-	-	90 x 10 ³	140 x 10 ³	170 x 10 ³	195 x 10 ³	
				[kgm ²]	0.0016	0.0022	0.0053	0.0044	0.0086							
65	650	1600	325	[kg]	1.50	-	-	0.63	0.64	0.89	-	110 x 10 ³	160 x 10 ³	200 x 10 ³	230 x 10 ³	
				[kgm ²]	0.0027			0.0064	0.0065	0.012						
T 65	800	2000	400	[kg]	1.60	-	-	0.63	0.64	0.89	-	130 x 10 ³	190 x 10 ³	240 x 10 ³	280 x 10 ³	
				[kgm ²]	0.0035			0.0064	0.0065	0.012						
T 70	1000	2500	500	[kg]	2.60	-	-	-	0.941	-	-	165 x 10 ³	315 x 10 ³	345 x 10 ³	368 x 10 ³	
				[kgm ²]	0.0059				0.0132							
80	1200	3000	600	[kg]	5.20	-	-	-	1.05	1.12	-	200 x 10 ³	410 x 10 ³	580 x 10 ³	700 x 10 ³	
				[kgm ²]	0.0151				0.015	0.022						
T 80	1500	3750	750	[kg]	5.20	-	-	-	1.05	1.12	-	240 x 10 ³	450 x 10 ³	638 x 10 ³	770 x 10 ³	
				[kgm ²]	0.0151				0.015	0.022						
100	2050	5150	1025	[kg]	9.37	-	-	-	-	1.16	8.45	500 x 10 ³	700 x 10 ³	856 x 10 ³	950 x 10 ³	
				[kgm ²]	0.0401					0.021	0.234					
T 100	2500	6250	1250	[kg]	9.37	-	-	-	-	1.16	8.45	600 x 10 ³	830 x 10 ³	960 x 10 ³	1070 x 10 ³	
				[kgm ²]	0.0401					0.021	0.234					
125	4250	10700	2125	[kg]	19.73	-	-	-	-	2.09	9.85	1280 x 10 ³	1885 x 10 ³	2280 x 10 ³	2665 x 10 ³	
				[kgm ²]	0.1359					0.043	0.306					
T 125	5300	13250	2650	[kg]	19.73	-	-	-	-	2.09	9.85	1600 x 10 ³	2250 x 10 ³	2700 x 10 ³	3200 x 10 ³	
				[kgm ²]	0.1359					0.043	0.306					

Mounting procedure, screw type with property class, tightening torques as per KTR assembly instructions (see www.ktr.com).

Short mounting version

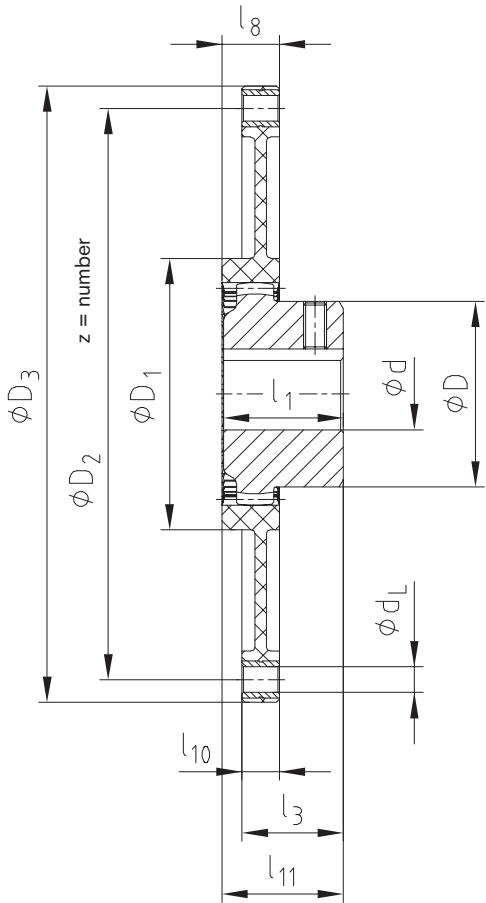


Long mounting version

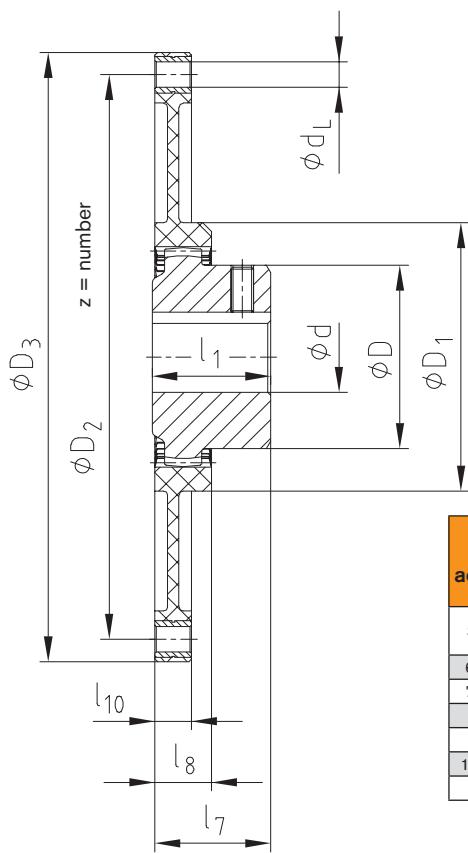Flange dimensions
according to SAE J620 [mm]

Size	D ₃	D ₂	z	d _L
6 1/2"	215.9	200.02	6	9
7 1/2"	241.3	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13



Example of installation

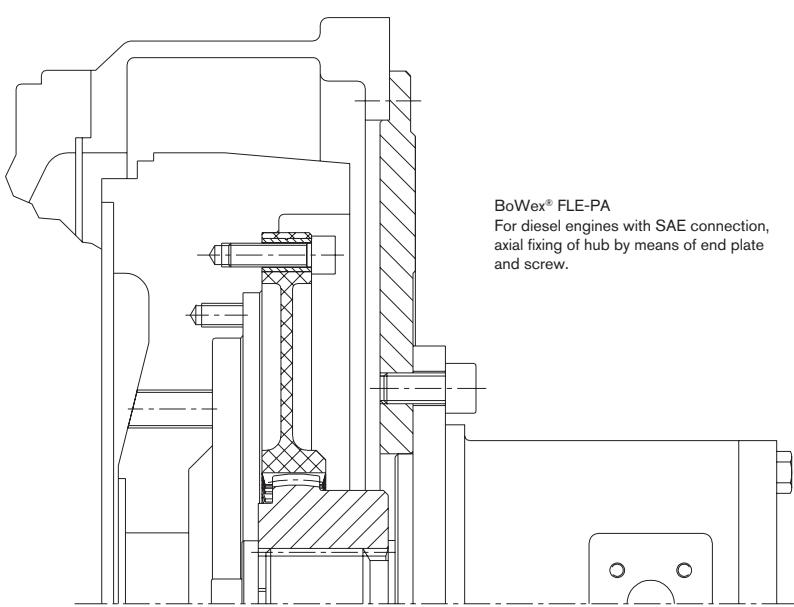

BoWex® FLE-PAC

Torsionally stiff flange couplings

Axial plug-in, extremely short design, carbon-fibre reinforced material

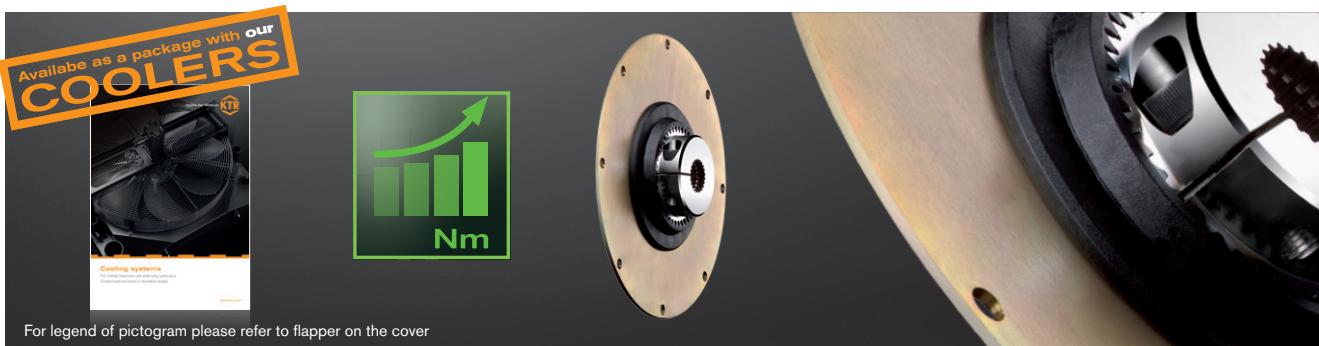


BoWex® FLE-PAC – Dimensions/nominal dimension to SAE																	
Size	Pilot bore	Finish bore d		Dimensions [mm]							Special length l ₁ max.	Nominal size acc. to SAE (D3)					Max. axial displacement [mm]
		Min.	Max.	D	D ₁	l ₁	l ₃	l ₇	l ₈	l ₁₀		6 1/2"	7 1/2"	8"	10"	11 1/2"	
48 / T 48	13	15	48	68	110	50	35	46	25	3	up to 60	●	●	●	●	●	± 3
T 55	17	20	55	85	148	50	32	42	28	3	-	●	●	●	●	●	± 3
65 / T 65	21	30	65	96	165	55	36	46	32	4	up to 70	●	●	●	●	●	± 3
80 / T 80	31	35	90	124	220	90	72	76	35	4	-				●	●	± 3
100 / T 100	38	40	100	152	280	110	85	102	47	5	-				●	●	± 3
125 / T 125	45	50	125	192	250	140	113	140	50	28	-				●	●	± 3

Special flange dimensions deviating from SAE standard are also available.


Technical data of BoWex® FLE-PAC – Torques/weights/mass moments of inertia/torsion spring stiffness															
Size	Torque T _K [Nm]			Weight/mass moment of inertia J	Hub with max. bore	FLE-PAC flanges according to SAE						Dynamic torsion spring stiffness with +60 °C/ψ = 0.45 [Nm/rad]			
	T _{KN}	T _K max.	T _{KW}			6 1/2"	7 1/2"	8"	10"	11 1/2"	14"	0.30 T _{KN}	0.50 T _{KN}	0.75 T _{KN}	1.00 T _{KN}
48	300	600	150	[kg]	0.79	0.77	0.98	1.19	1.73			64 x 10 ³	95 x 10 ³	114 x 10 ³	132 x 10 ³
				[kgm ²]	0.0007	0.0049	0.0077	0.0109	0.0221						
T 48	370	740	185	[kg]	0.79	0.77	0.98	1.19	1.73			91 x 10 ³	129 x 10 ³	155 x 10 ³	182 x 10 ³
				[kgm ²]	0.0007	0.0049	0.0077	0.0109	0.0221						
T 55	550	1100	275	[kg]	1.20	0.74	0.95	1.16	1.7			181 x 10 ³	258 x 10 ³	312 x 10 ³	358 x 10 ³
				[kgm ²]	0.0016	0.0049	0.0077	0.0109	0.0222						
65	800	1600	400	[kg]	1.50	0.93	1.2	1.48	2.20	2.83		214 x 10 ³	329 x 10 ³	397 x 10 ³	451 x 10 ³
				[kgm ²]	0.0027	0.0065	0.0101	0.0145	0.0294	0.0467					
T 65	1000	2000	500	[kg]	1.60	0.93	1.2	1.48	2.20	2.83		256 x 10 ³	381 x 10 ³	461 x 10 ³	516 x 10 ³
				[kgm ²]	0.0035	0.0065	0.0101	0.0145	0.0294	0.0467					
80	1500	3000	750	[kg]	5.20				2.27	2.90	5.20	486 x 10 ³	713 x 10 ³	923 x 10 ³	1156 x 10 ³
				[kgm ²]	0.0151				0.0312	0.0485	0.1462				
T 80	1850	3700	925	[kg]	5.20				2.27	2.90	5.20	556 x 10 ³	815 x 10 ³	1065 x 10 ³	1329 x 10 ³
				[kgm ²]	0.0151				0.0312	0.0485	0.1462				
100	2550	5100	1275	[kg]	9.37					3.35	6.22	679 x 10 ³	929 x 10 ³	1218 x 10 ³	1457 x 10 ³
				[kgm ²]	0.0401					0.0606	0.1828				
T 100	3100	6200	1550	[kg]	9.37					3.35	6.22	767 x 10 ³	1030 x 10 ³	1343 x 10 ³	1594 x 10 ³
				[kgm ²]	0.0401					0.0606	0.1828				
125	5350	10700	2675	[kg]	19.73					2.09	9.85	1538 x 10 ³	2098 x 10 ³	2528 x 10 ³	2980 x 10 ³
				[kgm ²]	0.1359					0.043	0.306				
T 125	6600	13200	3300	[kg]	19.73					2.09	9.85	1887 x 10 ³	2495 x 10 ³	3035 x 10 ³	3629 x 10 ³
				[kgm ²]	0.1359					0.043	0.306				

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated torques with some sizes of this series.

Mounting procedure, screw type with property class, tightening torques as per KTR assembly instructions (see www.ktr.com).

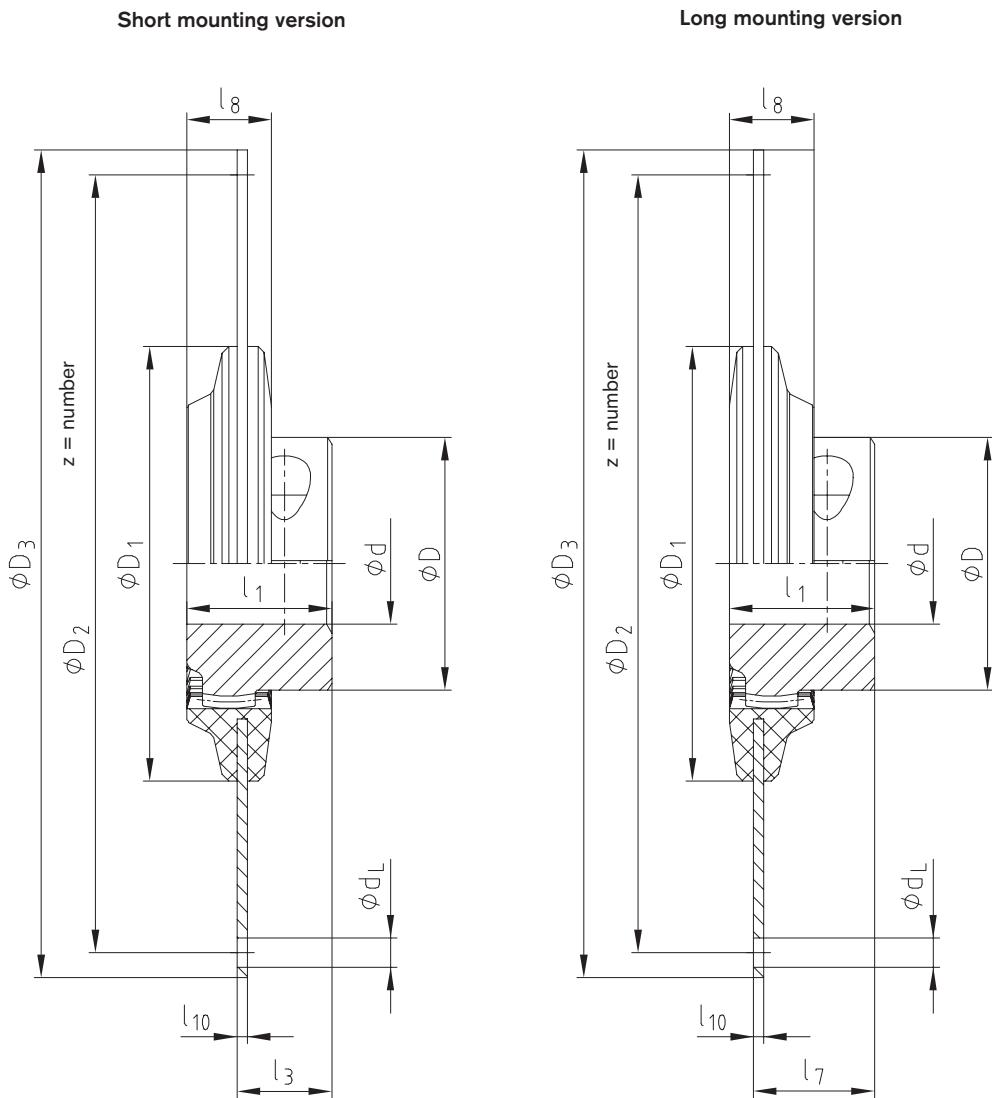

Flange dimensions according to SAE J620 [mm]				
Size	D ₃	D ₂	z	d _L
6 1/2"	215.9	200.02	6	9
7 1/2"	241.3	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	14

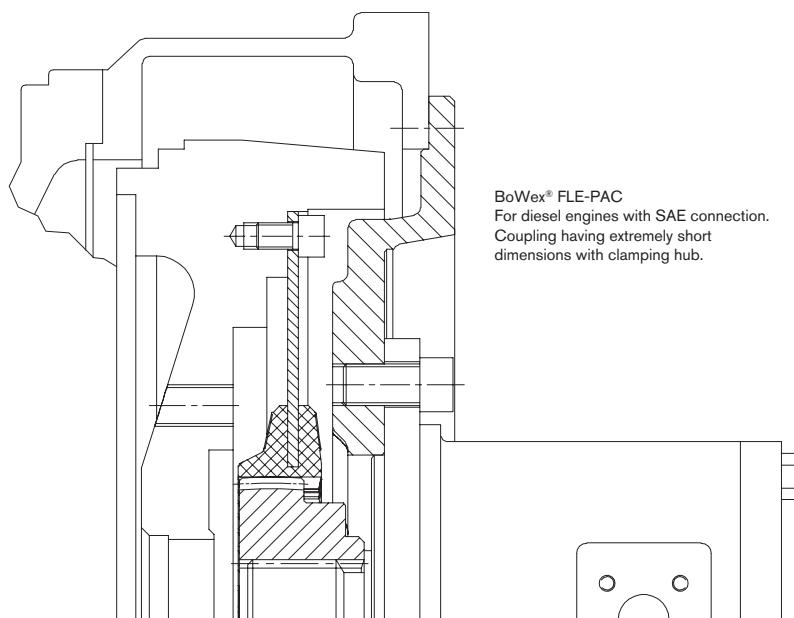

BoWex® FLE-PA / FLE-PAC

Torsionally stiff flange couplings

Selection according to SAE standard



Determination of coupling

Determination of coupling size

Table 1

Connection dimension of coupling

Table 2

Hub type/mounting length

Table 3

SAE pump mounting flange


Flange size according to SAE 617

Table 4


Connection flange of hydraulic pump

Table 5


Short mounting version of coupling (l_3)

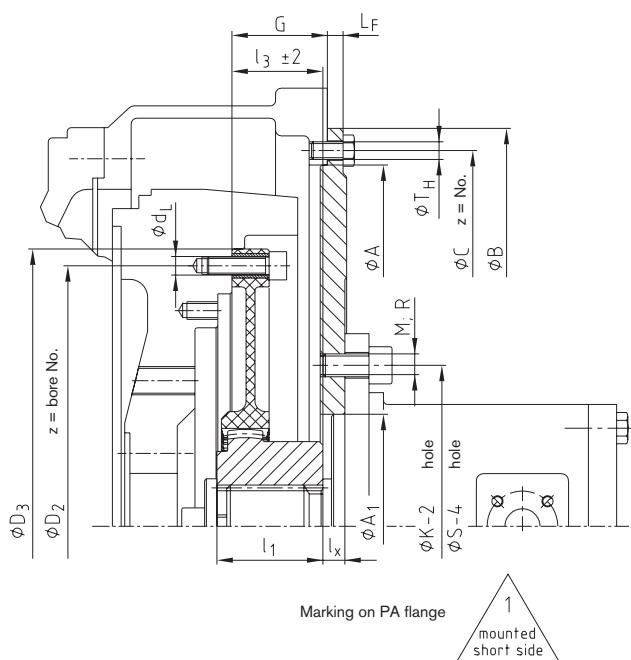


Long mounting version of coupling (l_7)

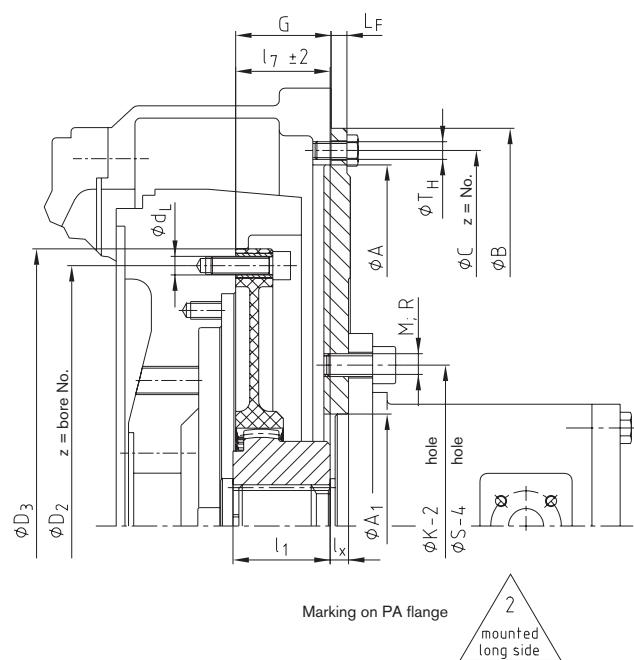

Spline hub

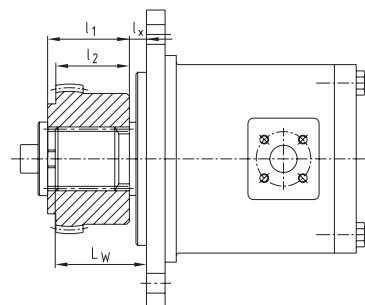

Clamping hub

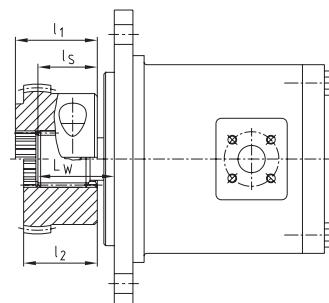

Determination of mounting length l_3 or l_7

SAE shaft	$l_3 / l_7 = G + L_F - L_W + l_S$
DIN shaft	$l_3 / l_7 = G + L_F - l_X$

If axial fixing of the hub by means of an end plate and a screw is not possible for a pump shaft with involute spline, we recommend to use a clamping hub.

Mounting instructions:

The flange can be fastened to the engine flywheel by means of socket head cap screws according to DIN EN ISO 4762 quality 8.8 or by hexagon head screws quality 8.8. We recommend screws are loctited in position.

Screw tightening torque of FLE-PA flange on the flywheel

M8	25 Nm
M10	49 Nm
M12	86 Nm

Screw tightening torque of spline clamping hubs DIN EN ISO 4762

42/48	M10	49 Nm
T55/65/T70	M12	86 Nm
80/100/125	M16	210 Nm

BoWex® FLE-PA / FLE-PAC

Torsionally stiff flange couplings

Mounting dimensions according to SAE standard

1. Selection of coupling for diesel engine									
Diesel engine power kW	PS	Coupling size	Flywheel to SAE		Pump mounting flange		Driving shaft of pump	G	LF
			6 1/2"	30.15	1.19"				
up to 40	up to 55	48 FLE-PA	7 1/2"	30.15	1.19"				
			8	62	2.44"				
			10	54	2.12"				
			6 1/2"	30.15	1.19"	9.5	0.375"		
up to 75	up to 100	T55 FLE-PA	7 1/2"	30.15	1.19"				
			8	62	2.44"				
			10	54	2.12"				
			8	62	2.44"				
up to 90	up to 120	65 FLE-PA	10	54	2.12"				
			11 1/2"	39.6	1.56"	9.5	0.375"		
			10	54	2.12"	12.7	0.5"		
			11 1/2"	39.6	1.56"				
up to 150	up to 200	T70 FLE-PA	10	54	2.12"				
			10	54	2.12"	9.5	0.375"		
			10	54	2.12"	9.5	0.375"		
			11 1/2"	39.6	1.56"				
up to 180	up to 240	80 FLE-PA	11 1/2"	39.6	1.56"				
			11 1/2"	39.6	1.56"				
			14	25.4	1"				
			11 1/2"	39.6	1.56"				
up to 285	380	100 FLE-PA	14	25.4	1"				
			11 1/2"	39.6	1.56"				
			14	25.4	1"				
			14	25.4	1"				

2. Dimensions of coupling flange according to SAE J620 [mm]				
Nominal size	D ₃	D ₂	z = number	d _L
6 1/2"	215.90	200.02	6	9
7 1/2"	241.30	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	14

3. Selection of coupling hubs - Determination of mounting length l ₃ or l ₇														
BoWex® coupling size	Pump shaft to SAE J 498 and DIN 5480	Spine hub	Spine clamping hub	Dimensions of coupling hub [mm]		Mounting length of coupling l ₃ or l ₇								Code to order coupling hub Specify coupling size
						Flange size 6 1/2" and 7 1/2"		Flange size 8"		Flange size 10"		Flange size 11 1/2"		
				K	L	K	L	K	L	K	L			
42	SAE-16/32 DP PI-S 3/4" z = 11		x	42	-	33	33	42					P559101	
42	SAE-16/32 DP PB-S 7/8" z = 13		x	42	-	-	33	42					P567101	
42	SAE-16/32 DP PB-BS 1" z = 15		x	42	-	27	33	42					P660201	
48	SAE-16/32 DP PA-S 1 3/8" z = 21		x	50	-	45	41	50	50	41	50		P663301	
65	SAE-12/24 DP PC-S 1 1/4" z = 14		x	55	-	44			54	45	54	41	P656201	
65	SAE-16/32 DP PD-S 1 1/2" z = 23		x	-	49	45				53	41		P664301	
80	SAE-16/32 DP PE-S 1 3/4" z = 27		x	55	-	-				33	44		P565402	
42	25 x 1.25 x 18	x		42	-	-	33	42					P000205	
42	DIN 5480		x	42	-	-	33	42					P500202	
42			x	42	-	-	33	42					P500203	
48	30 x 2 x 14	x		50	-	-	41	50		50			P000206	
48	DIN 5480		x	50	-	-	41	50		50			P500203	
48	35 x 2 x 16	x		46	-	-	37	46					P000303	
65		x		55	-	-				54	39		P000303	
65		x		60	-	-			50	59	50	39	P500301	
65	40 x 2 x 18	x		55	-	-				54	39		P000304	
65	DIN 5480		x	55	-	-			54	45	54	39	P500302	
65	45 x 2 x 21	x		-	64	-			60	69	60	39	P000403	
65	DIN 5480		x	55	-	-			54	45	54	39	P500401	
80	50 x 2 x 24	x		55	-	-				37	42		P500405	
Shown above is a small overview of splines available, other SAE or DIN splines are also available.														

Shown above is a small overview of splines available, other SAE or DIN splines are also available.

4. Housing dimensions according to SAE 617 [mm]					
SAE size	A	B	C	Z	TH
SAE-1	511.18	552	530.2	12	M10 3/8"
SAE-2	447.68	489	466.7	12	M10 3/8"
SAE-3	409.58	451	428.6	12	M10 3/8"
SAE-4	361.95	403	381.0	12	M10 3/8"
SAE-5	314.33	356	333.4	8	M10 3/8"
SAE-6	266.7	308	285.7	8	M10 3/8"

SAE size	SAE flange with 2 holes				SAE flange with 4 holes				
	A1	K-2	M	Z	A1	S-4	R	Z	
A	82.55	106.4	M10 3/8"	2	82.55	104.6	M10 3/8"	4	
B	101.6	146.0	M12 1/2"	2	101.6	127.0	M12 1/2"	4	
C	127.0	181.0	M16 5/8"	2	127.0	162.0	M12 1/2"	4	
D	152.4	228.6	M16 5/8"	2	152.4	228.6	M16 5/8"	4	
E	-	-	-	-	-	165.1	317.5	M20 3/4"	4


Ordering example: Coupling FLE-PA/FLE-PAC			SAE pump mounting flange		
BoWex® 48 FLE-PA	7 1/2"	P663301	SAE-4	B-2L	
Coupling size	SAE connection of coupling	Code of coupling hub	Pump mounting flange for engine housing	Pump flange acc. to SAE 2 holes/4 holes standard metric fastening thread	
Table 1	Table 2	Table 3	Table 4	Table 5	

BoWex® FLE-PA

Torsionally stiff flange couplings

Special flange programme, deviations from the SAE standard

Fitting to
diesel engines:
Hatz

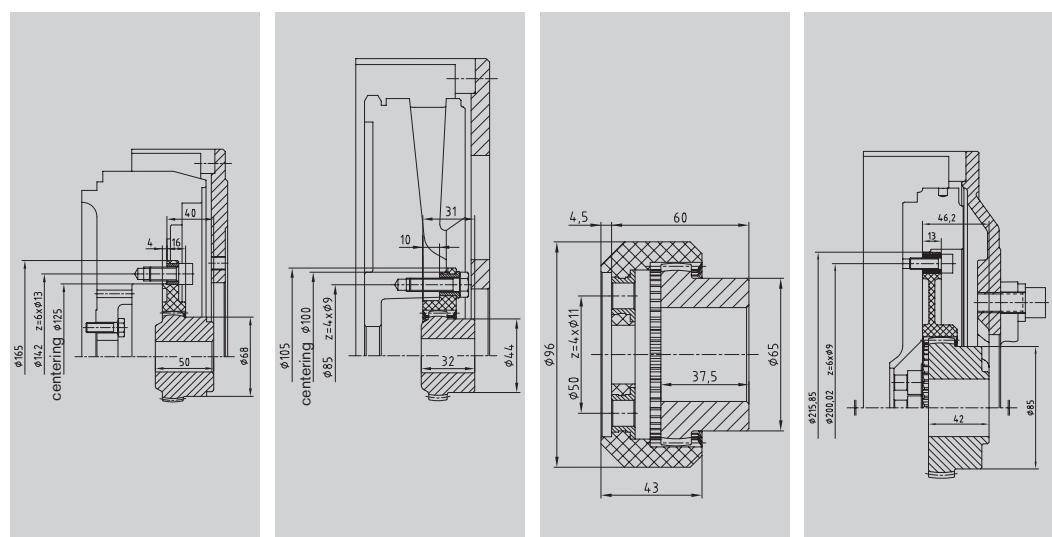


Coupling size BoWex® 48 FLE-PA, Ø165
Hatz
Engine type 2L/3L/4L41C 2M/3M/4M41
4M42,4L42C

BoWex® 28 FLE-PA, Ø105
Hatz
Engine type 1D81 / 1D90

BoWex® 48 FLE-PA, Ø96
Hatz
Engine type Z788 / Z789 / Z790

BoWex® T55 FLE-PA
Hatz
Engine type 2-4 H50

Fitting to
diesel engines:
VW
Mitsubishi

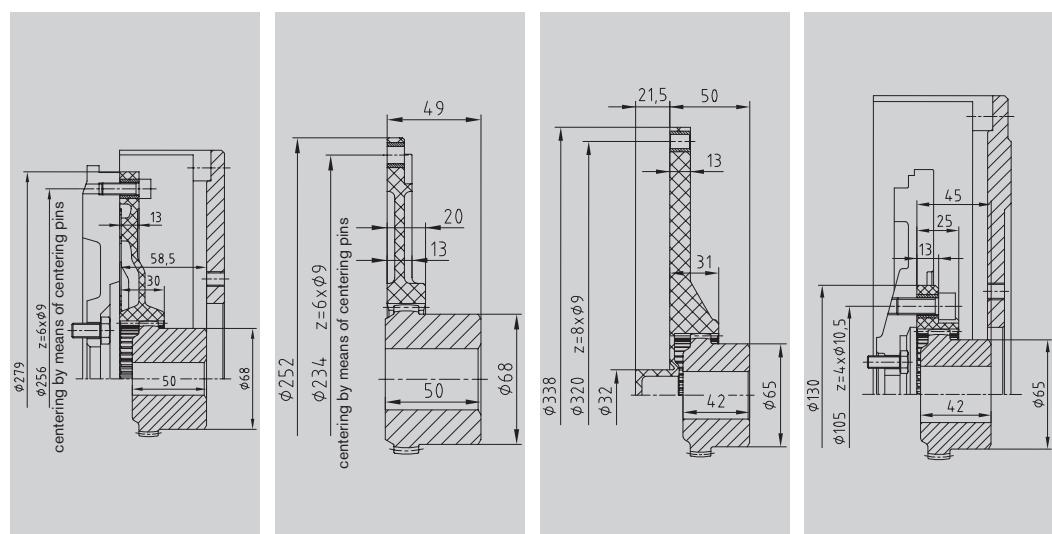


Coupling size BoWex® 48 FLE-PA, Ø279
VW
Engine type 028.B / M344

BoWex® 48 FLE-PA, Ø252
VW
Engine type 062.2 / 068.5 / 6 / A / D

BoWex® 48 FLE-PA
Mitsubishi
Ø338-32

BoWex® 48 FLE-PA, Ø130
Mitsubishi
Series L / Series K

Fitting to
diesel engines:
Perkins
Lombardini

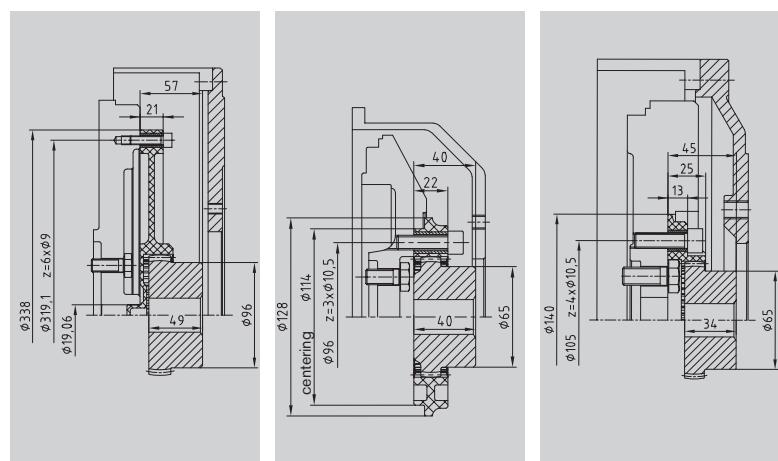

Coupling size BoWex® 65 FLE-PA, Ø338
Perkins 1104C-44T
Flywheel No. D0014

BoWex® 48 FLE-PA, Ø128
Lombardini
FOCS series


BoWex® 48 FLE-PA, Ø140
Lombardini
LDW

BoWex® FLE-PA

Torsionally stiff flange couplings

Special flange programme, deviations from the SAE standard

Fitting to
diesel engines:
Perkins
Isuzu
Cummins

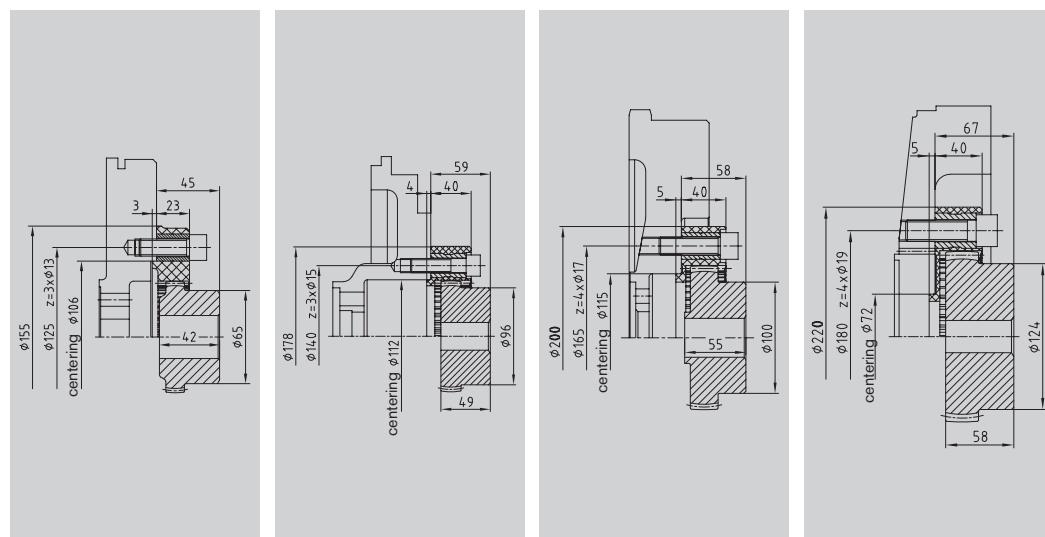

Coupling size

BoWex® 48 FLE-PA,
Ø155

Engine type

3 holes, Ø125

BoWex® 65 FLE-PA,
Ø178

3 holes, Ø140


BoWex® 70 FLE-PA,
Ø200

4 holes, Ø165

BoWex® 80 FLE-PA,
Ø220

4 holes, Ø180

Fitting to
diesel engines:
Caterpillar
Daimler
Cummins
John Deere

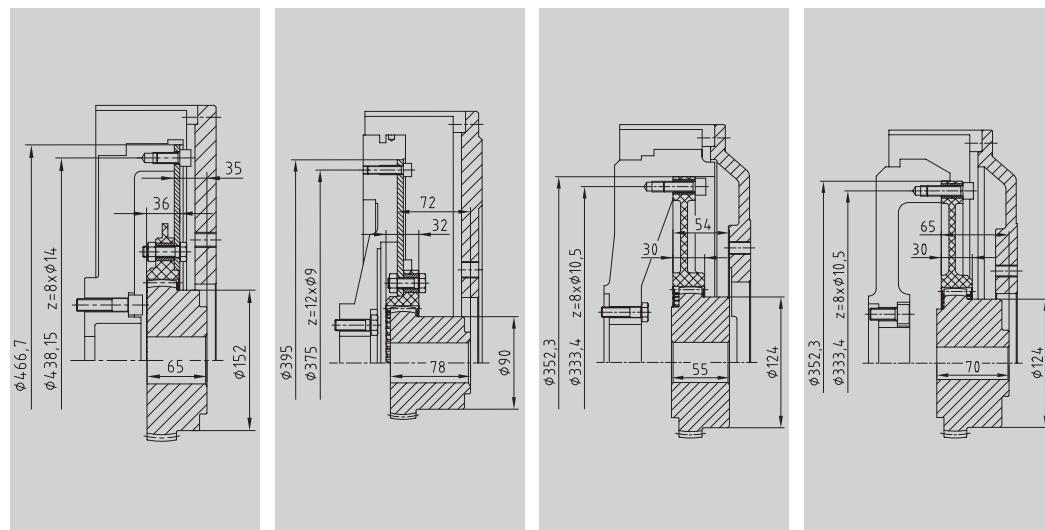

Coupling size

BoWex® T100 FLE-PA, 14"
Caterpillar

Engine type

C 10 / C 12

BoWex® T65 FLE-PA, Ø395
Daimler


OM904

BoWex® 80 FLE-PA, 11 1/2"
Cummins

QSX/QSB

BoWex® 80 FLE-PA 11 1/2"
John Deere

Fitting to
shaft motors:
Hatz
Honda
Briggs & Stratton
Yanmar
Kohler
Robin

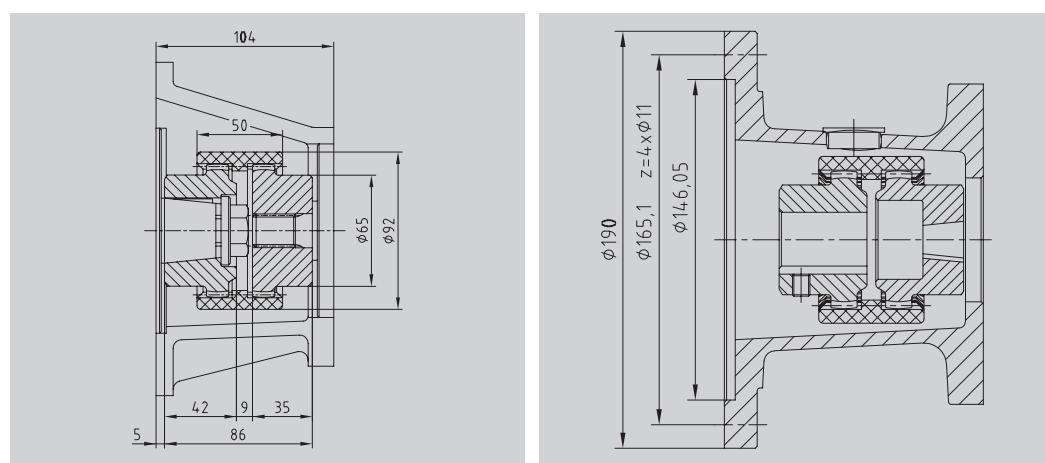

Coupling size

BoWex® M42
Hatz 2G30

Engine type

BoWex® shaft coupling type M28 and M32
Housing connection according to SAE J609A

Torsionally stiff flange couplings

Flange couplings and pump connection housings for KUBOTA engines

KUBOTA

Super MINI series

Z-400

Z-442-B



Z-482-B

D-600

D-662-B

D-902-B

V-800

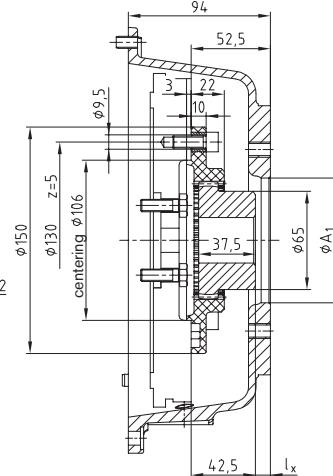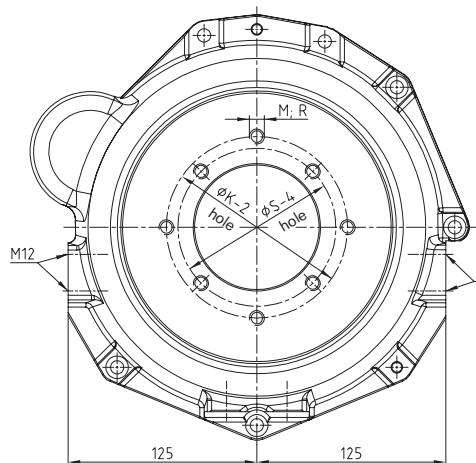

BoWex® 48 FLE-PA Ø 150 / pump connection housings

KUBOTA

Super 3 series

D 1403/1703

Flywheel



No. 190027991

V 1903/2203

Flywheel

No. 190002369

V 2003-T

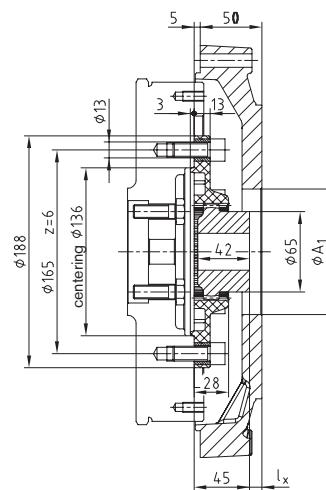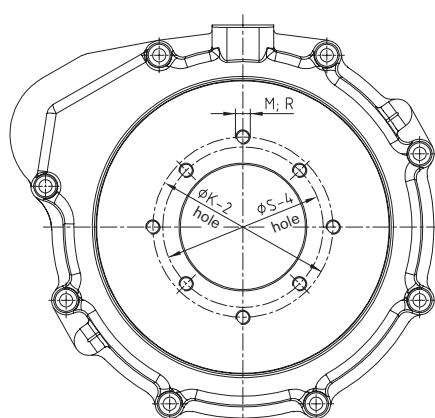

BoWex® 48 FLE-PA Ø 188 / pump connection housings

KUBOTA

Super 5 series

D 905

D 1005



D 1105

D 1105-T

V 1205

V 1305

V 1505

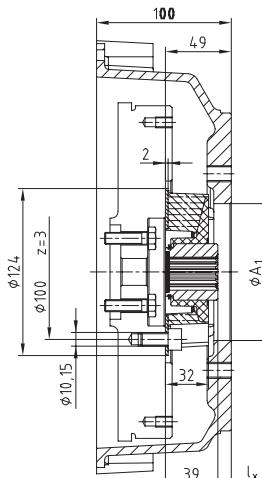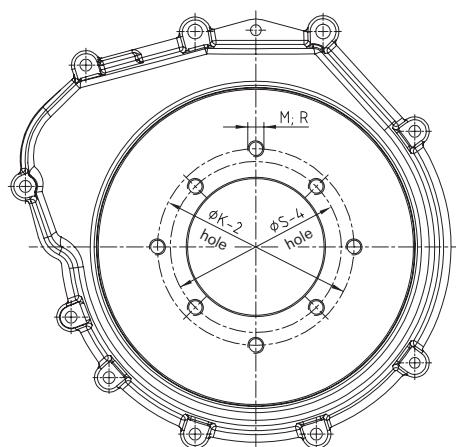


MONOLASTIC® 28 Ø 124 / pump connection housings



BoWex® FLE-PA

Torsionally stiff flange couplings


Flange couplings and pump connection housings for Perkins engines

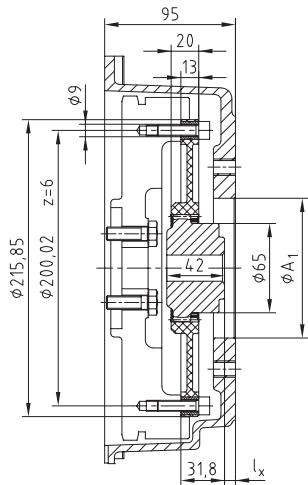



Perkins 403D - 10/11

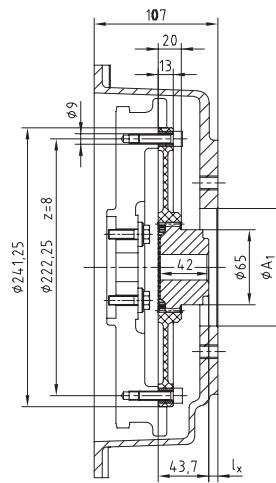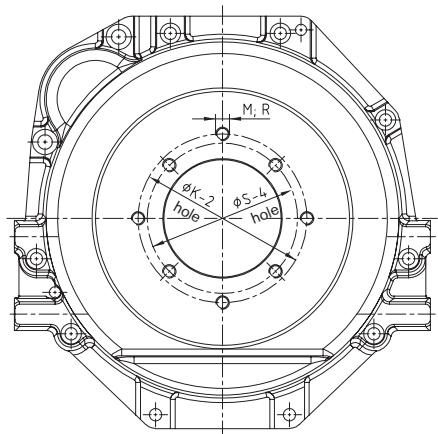

Perkins 403D - 13/15

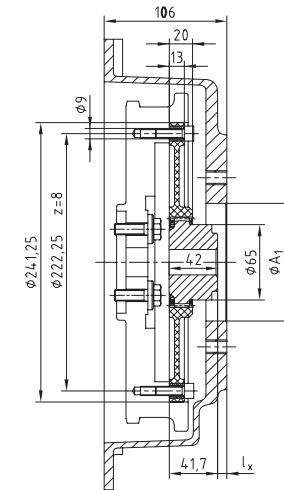


Perkins 404D - 20

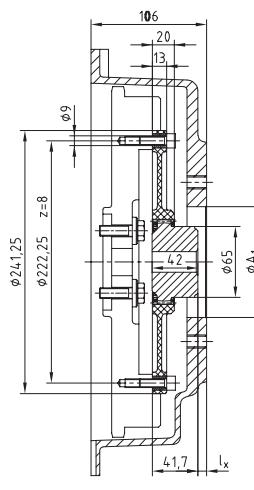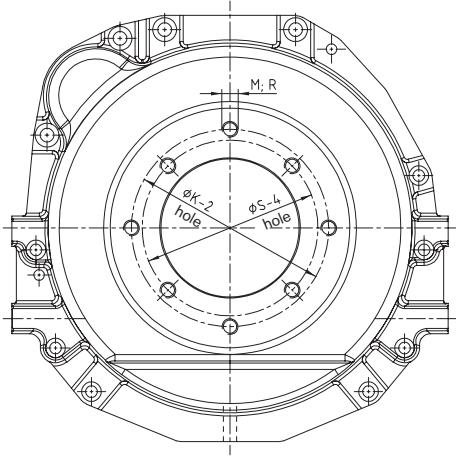


Perkins 404D - 22

Other
selections
on request for
Yanmar
Mitsubishi
etc.

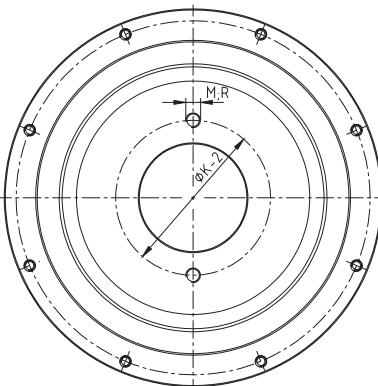

Mitsubishi SL series

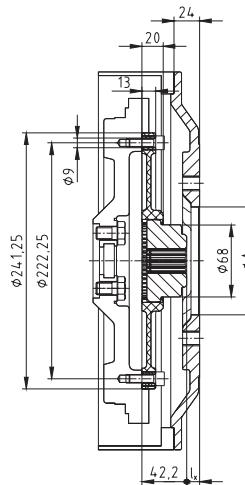


Yanmar TNV series

BoWex® FLE-PA

Torsionally stiff flange couplings

Selection of DEUTZ engines FL/M 1011 and FL/M 2011, TCD/TD/D 2.9 L4, TDC/T 3.6 L

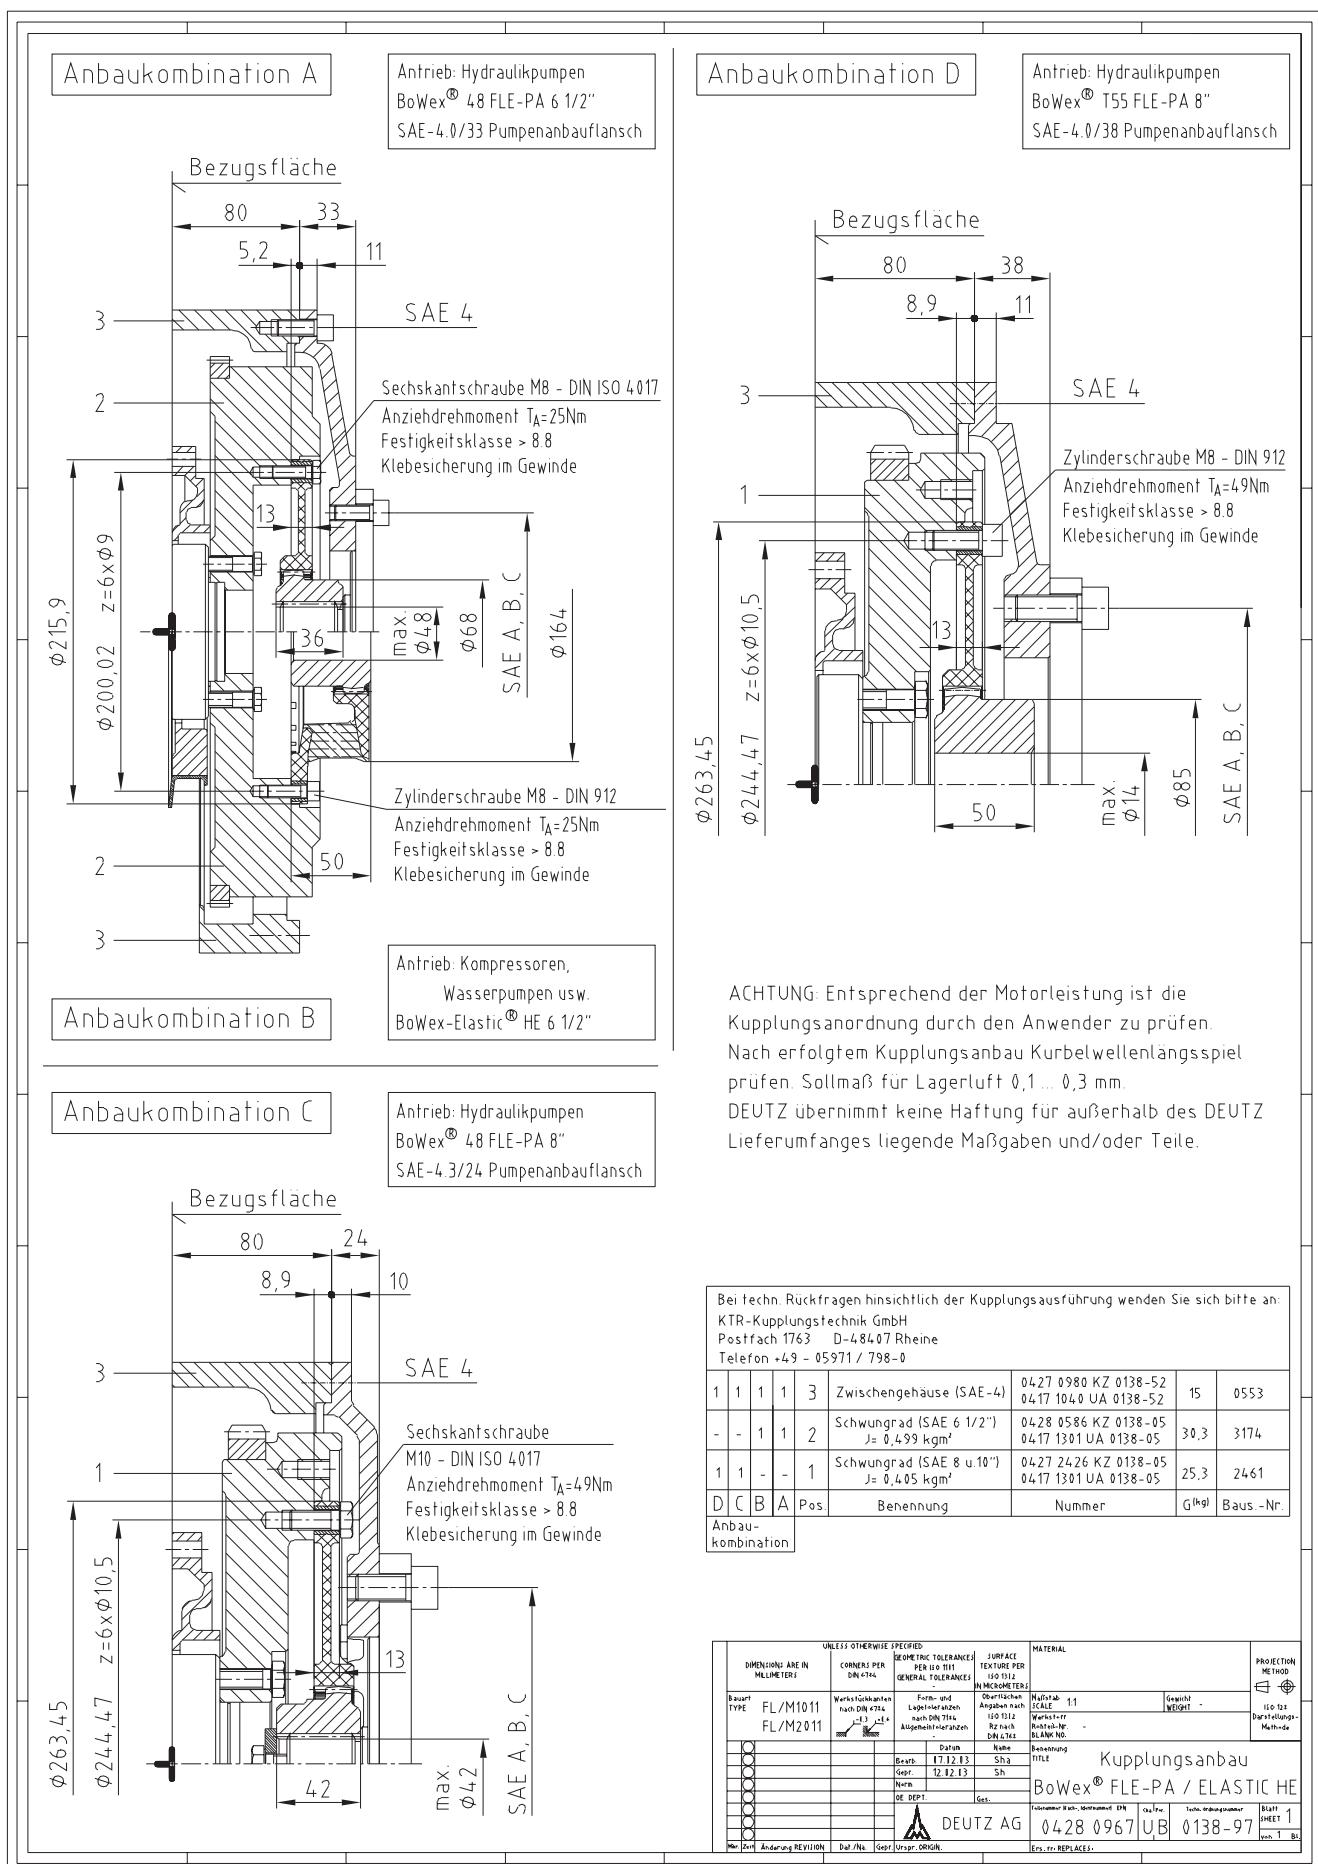

BoWex® FLE-PA

Torsionally stiff flange couplings

Selection of DEUTZ engines BFM 1012/1013/2012/2013/1015

Anbaukombination A

Deutz-Motor
BF4/6M 1012/2012, BF4/6 1013/2013,
TCD/TD 2012 L04/06 2V/4V, TCD/TD 2013 L04 2V, TCD 4.1L4

Bezugsfläche

BoWex® 65 FLE-PA 10"
SAE-4/9 Pumpenanbauflansch

Anbaukombination D

Deutz-Motor
BF6/8M 1015/2015,
TCD 2015 V06, TCD 12.0 V6

Bezugsfläche

BoWex® 100 FLE-PA 14"
SAE-1/20 Pumpenanbauflansch

Anbaukombination B

Deutz-Motor
BF4/6M 1012/2012, BF4/6 1013/2013,
TCD/TD 2012 L04/06 2V/4V, TCD/TD 2013 L04 2V, TCD 4.1L4

Bezugsfläche

BoWex® 65 FLE-PA 8"
SAE-4 2/-17 Pumpenanbauflansch

Anbaukombination E

Deutz-Motor
BF6/8M 1015/2015,
TCD 2015 V06, TCD 12.0 V6

Bezugsfläche

BoWex® 100 FLE-PA 11 1/2"
SAE-1/20 Pumpenanbauflansch

Anbaukombination C

Deutz-Motor
BF4/6M 1012/2012, BF4/6 1013/2013,
TCD/TD 2012 L04/06 2V/4V, TCD/TD 2013 L04/06 2V, TCD 4.1L4, TCD 6.1L6

Bezugsfläche

BoWex® 80 FLE-PA 11 1/2"
SAE-3/9 Pumpenanbauflansch

ACHTUNG: Entsprechend der Motorleistung ist die Kupplungsanordnung durch den Anwender zu prüfen. Nach erfolgtem Kupplungsanbau Kurbelwellenlängspiel prüfen. Sollmaß für Lagerluft: Motor 1012/1013/2012/2013 = 0,1 - 0,28 mm; Motor 1015 = 0,2 - 0,4 mm
DEUTZ übernimmt keine Haftung für außerhalb des DEUTZ Lieferumfanges liegende Maßgaben und/oder Teile.



Bei techn. Rückfragen hinsichtlich der Kupplungsausführung wenden Sie sich bitte an KTR-Kupplungstechnik GmbH, Postfach 1763, D-48407 Rheine, Tel.: 05971/798-0							
1	-	-	-	-	7	Schwungrad (SAE-11 1/2") $J=2,255 \text{ kgm}^2$	66,7
1	1	-	-	-	6	Anschlußgehäuse (SAE-1)	45,6
-	1	-	-	-	5	Schwungrad (SAE-14") $J=2,264 \text{ kgm}^2$	61,6
-	-	1	-	-	4	Anschlußgehäuse (SAE-3)	
-	-	-	1	1	3	Anschlußgehäuse (SAE-4)	
-	-	-	1	-	2	Schwungrad (SAE-10 u. 11 1/2") $J=0,872 \text{ kgm}^2$	
-	-	-	1	1	1	Schwungrad (SAE-8 u. 10") $J=1,03 \text{ kgm}^2$	
Anbau-kombination					Pos.	Benennung	Nummer
						G/kg	Baus.-Nr.

DEUTZ 1012 / 1013
siehe 0420 8900 UB 0130-97

MONOLASTIC®

One-piece, flexible flange couplings

Type with 3 holes (EP 0853203/U.S. Patent 6,117,017)

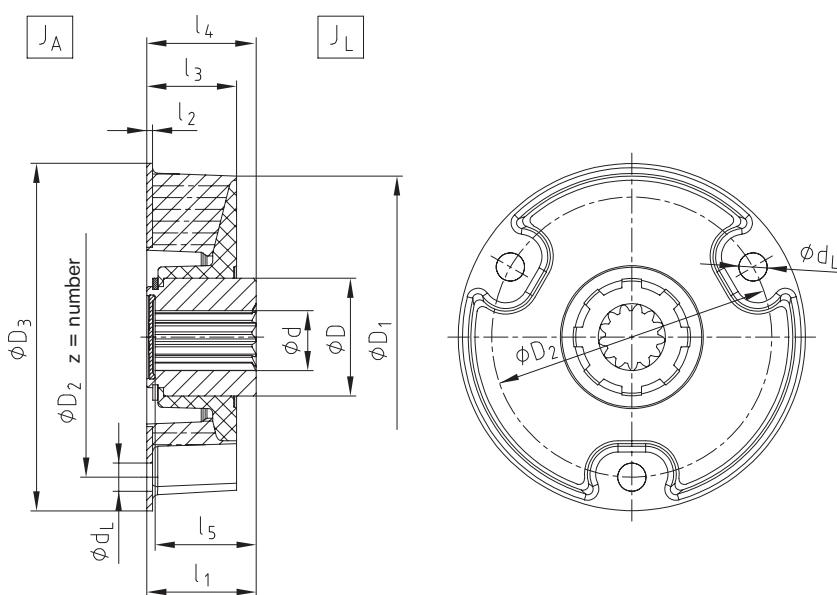



Size	Elastomer hardness [Shore A]	Torque [Nm]			Dimensions [mm]											
		T _{KN}	T _{K max.}	T _{KW}	d	D	D ₁	D ₂	z	d _L	D ₃	I ₁	I ₂	I ₃	I ₄	I ₅
22	T65	40	100	20	20	34	93	80	3	8.10	100	33	1.5	32	34	30
28	T65	70	175	35	25	42	115	100	3	10.10	124	40	2	32	40	38
	T70	100	250	50												
32	T65	160	400	80	32	50	140	125	3	12.10	150	42	2	42	43	38
	T70	225	562	112												
50-140	T70	260	650	130	32	50	167	140	3	14.10	175	46	3	35	46	43
50-165	T70	300	750	150	32	50	175	165	3	16.15	200	46	3	35	46	43
50-170	T70	300	750	150	32	50	175	170	3	16.15	200	46	3	35	46	43
60-165	T70	400	1000	200	48	68	191	165	3	16.15	205	50	3	40	55	46

Technical data										Mass moment of inertia [kgm ²]		Perm. operating speed n _{max.} [rpm]			
Size	Elastomer hardness [Shore A]	C _{dyn.} with 60 °C [Nm/rad]	Perm. damping power with 60 °C P _{KW} [W]	Max. displacement with 2200 rpm ΔK _r [mm]	Perm. angular displacement with 2200 rpm ΔK _w [°]	Radial spring stiffness C _r [N/mm]									
22	T65	600	10	0.6		1	200	0.00017	0.00010	6000					
	T65	900		0.6			300								
28	T70	1300	15	0.5		1	400	0.00054	0.00033	6000					
	T65	1800	25	0.6			400	0.00120	0.00081	6000					
32	T70	2400	25	0.5		1	500								
	T70	4200	35				1365	0.00210	0.00130	6000					
50-140						1	1550	0.00250	0.00130	6000					
	T70	5600	40	0.5			1500	0.00599	0.00358	6000					
50-165	T70	7800	40	0.5											

T = Temperature-stable rubber compound. The technical data specified apply for an ambient temperature of T = 60 °C.

Type SAE (EP 0853203/U.S. Patent 6,117,017)

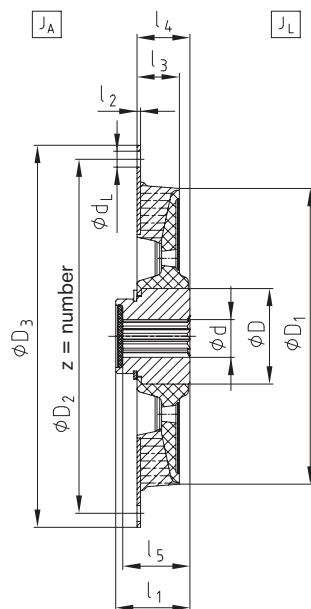

Flange dimensions according to SAE J620 [mm]					
Size	D ₃	D ₂	z	d _L	
6 1/2"	215.9	200.02	6	9	
7 1/2"	241.3	222.25	8	9	
8"	263.52	244.47	6	11	
10"	314.32	295.27	8	11	
11 1/2"	352.42	333.37	8	11	

MONOLASTIC®																
Size	Elastomer hardness [Shore A]	Torque [Nm]			Dimensions [mm]							MONOLASTIC® flanges according to SAE				
		T _{KN}	T _{K max.}	T _{KW}	d _{max.}	D	D ₁	l ₁	l ₂	l ₃	l ₄	6 1/2"	7 1/2"	8"	10"	11 1/2"
30	T65	200	400	100	25	42	120	39	2	21	30	36	X	X		
	T70	250	500	125												
50	T65	350	700	175	32	50	167	42	2	24	30	38	X	X	X	
	T70	450	900	225												
G50	T70	600	1200	300	32	50	178	42	2	24	36	38	X	X	X	
65	T65	750	1500	375	48	68	200	45	3	32	45	42			X	X
	T70	1000	2000	500												
75	T65	1500	3000	750	60	90	265	58	3	35	50	54			X	X
	T70	1850	3700	925												

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated torques with some sizes of this series.


Technical data									
Size	Elastomer hardness [Shore A]	C _{dyn.} with 60 °C [Nm/rad]	Perm. damping power with 60 °C PKW [W]	Max. displacement with 2200 rpm ΔK _r [mm]	Perm. angular displacement with 2200 rpm ΔK _w [°]	Radial spring stiffness C _r [N/mm]	Mass moment of inertia [kgm ²]		Perm. operating speed n _{max.} [rpm]
							J _A	J _L	
30	T65	3750	25	0.5	1	1150	6 1/2"	0.0038	0.00030
	T70	4875					7 1/2"	0.0057	
50	T65	9000	35	0.5	1	1300	8"	0.0078	0.00120
	T70	12000					10"	0.0153	
G50	T70	17500	40	0.5	1	1910	7 1/2"	0.0060	
							8"	0.0080	0.00120
65	T65	14000	45	0.5	1	1900	10"	0.0238	0.00380
	T70	18000					11 1/2"	0.0368	
75	T65	34000	80	0.5	1	1850	10"	0.0272	0.01450
	T70	42000					11 1/2"	0.0402	

T = Temperature-stable rubber compound. The technical data specified apply for an ambient temperature of T = 60 °C.


MONOLASTIC®

One-piece, flexible flange couplings


Examples of installation for type with 3 holes (EP 0853203/U.S. Patent 6,117,017)

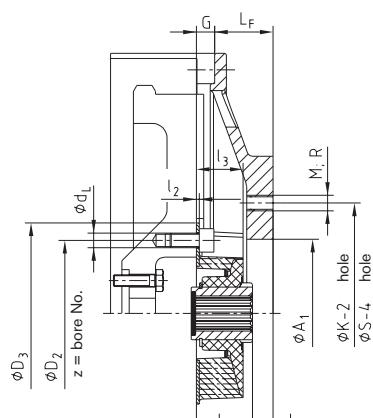


MONOLASTIC® 28
with spline shaft

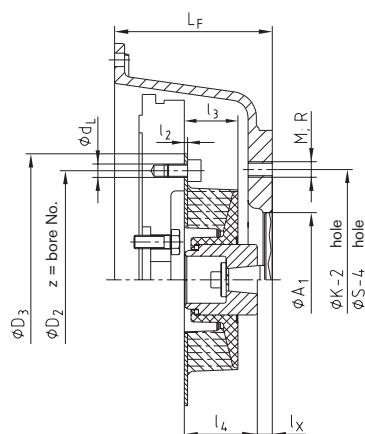


MONOLASTIC® 28
with taper shaft

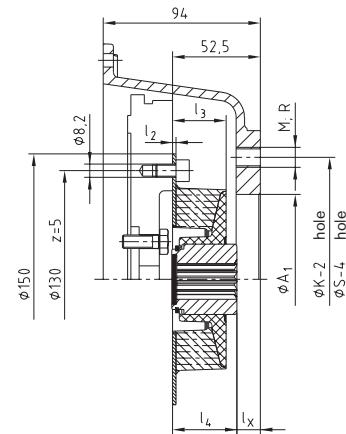


MONOLASTIC® 28
KUBOTA-Mini

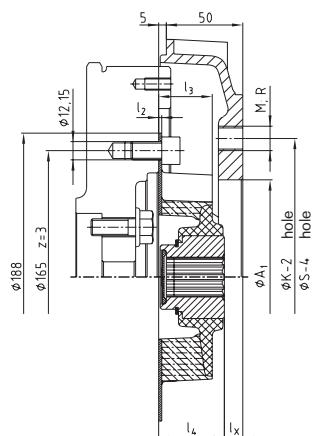


MONOLASTIC® 32 - 188
KUBOTA Super Three Series

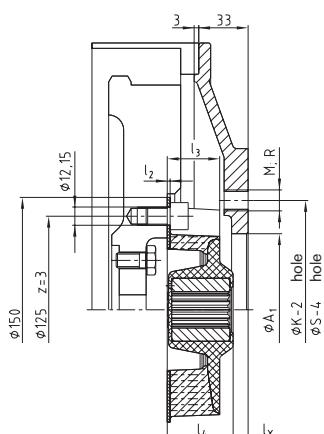


MONOLASTIC® 32 S

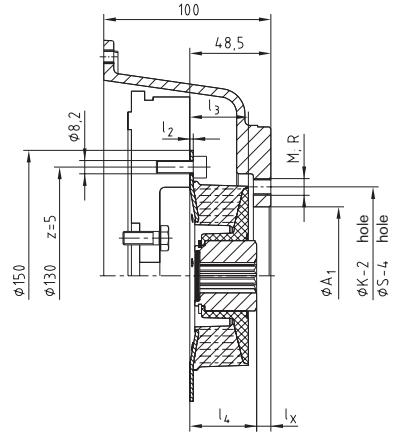


MONOLASTIC® 28
KUBOTA Super Mini

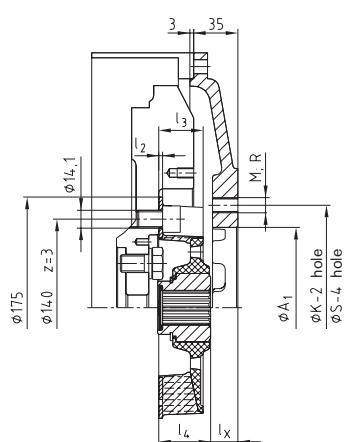

MONOLASTIC® 50 - 140



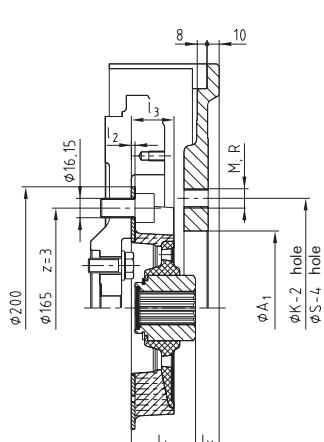


MONOLASTIC® 50 - 165



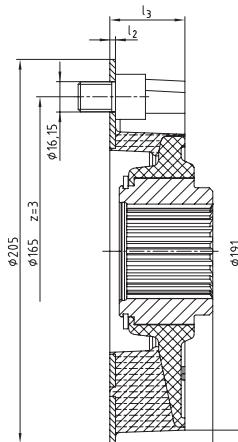


MONOLASTIC® 60 - 165


Examples of installation for SAE type (EP 0853203/U.S. Patent 6,117,017)

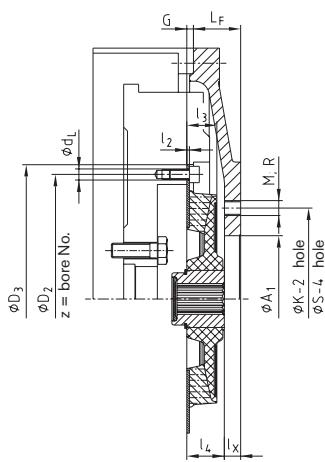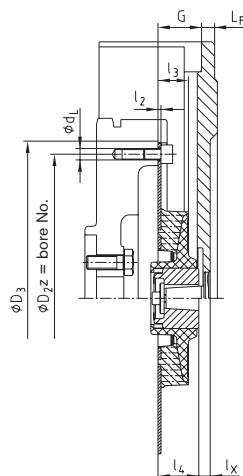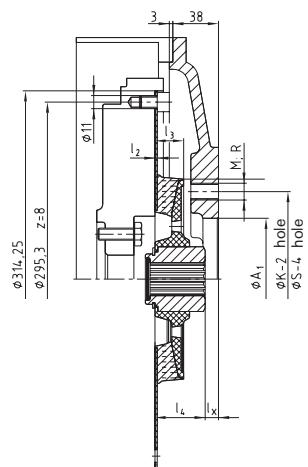MONOLASTIC® 30
with spline shaftMONOLASTIC® 30
with taper shaft


MONOLASTIC® 50 - 10"

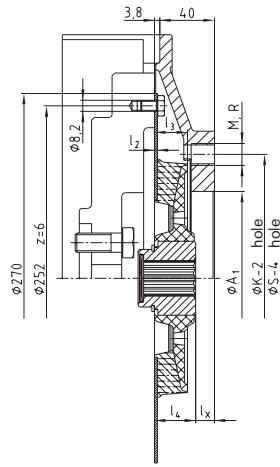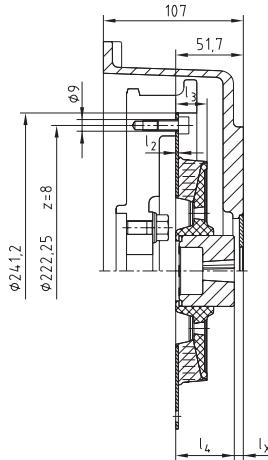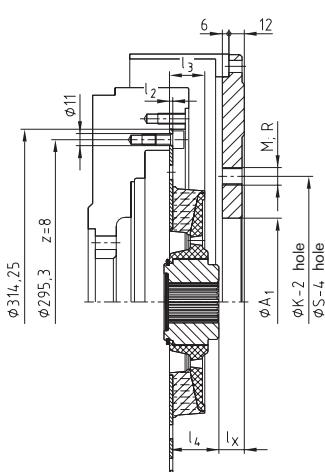MONOLASTIC® 50 - 270
KUBOTA engine
D1803, V2403, V2403TMONOLASTIC® 50
Perkins engine
403-13/403-15

MONOLASTIC® 65 - 10"

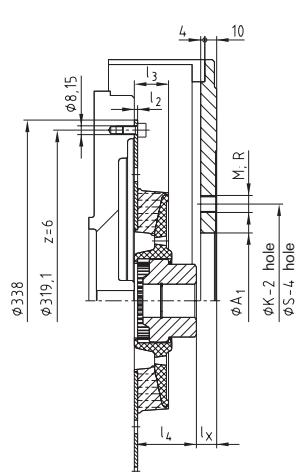

MONOLASTIC® 65 / T48

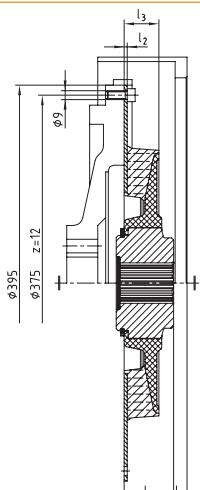


MONOLASTIC® 75 - 395

BoWex-ELASTIC® HE1 - HE4

Highly flexible flange couplings

Axial plug-in, available in different kinds of hardness

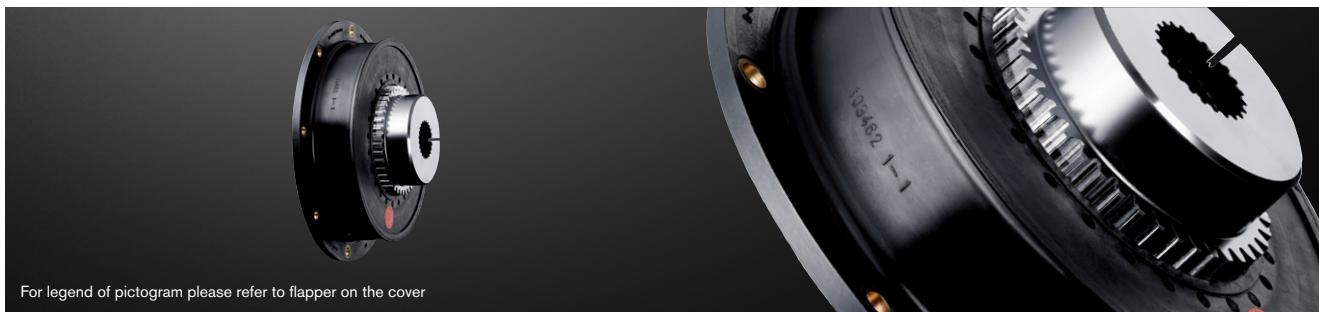


		BoWex-ELASTIC® Type HE1 - HE4												Type HE1 / HE2		Type HE3 / HE4													
Size	Bore d [mm]		Flange connection acc. to SAE - J620						Dimensions [mm]								Weight with max. bore [kg]	Mass moment of inertia with max. bore [kgm²]	Weight with max. bore [kg]	Mass moment of inertia with max. bore [kgm²]									
	Pilot bored	Max.	6 1/2"	7 1/2"	8"	10"	11 1/2"	14"	I ₃ HE1 / HE2	I ₃ HE3 / HE4	D ₅	I ₂ HE1 / HE2	I ₂ HE3 / HE4	D ₄	D	I ₁	L _H E1	L _H E2	L _H E3	L _H E4									
42 HE	-	42	●	●					4	2	180	44.5	37	145	65	42	70	50	55	40	1.8 2.8 2.8 2.3 2.6 3.4 4.9 5.7	0.0074 0.0172 0.0016 0.0119 0.0021 0.0170 0.0021 0.0647	0.0016 0.0016 -	1.8 -	0.0071 0.0070 0.0022 1.9 2.1 2.5 -	0.0021 0.0070 0.0022 0.0103 0.0201 0.0201 -			
48 HE	-	48	●	●	●				4	2	198	45	37	163	68	50	78	50	68	42	- - - - - - -	- - - - - - -	- -	- -	- -	- -			
65 HE	21	65			●				5	-	244	55.5	-	205	96	55	85	62	-	-	- - - - -	- - - -	- -	- -	- -	- -			
G 65 HE	21	65			●				-	3	-	-	45	205	96	55	-	-	73	50	- - -	- -	- -	- -	3.9 4.1 4.6	0.0147 0.0281 0.0423	0.0075 0.0075 0.0075		
GG 65 HE	21	65			●				-	3	-	-	45	220	96	55	-	-	73	50	- - -	- -	- -	- -	3.8 4.4 4.9	0.0163 0.0294 0.0439	0.0093 0.0093 0.0093		
80 HE	31	90			●				-	6	4	316	70	56	265	124	90	126 132	74 80	112	60	8.1 10.2	0.0239 0.0765	0.0307 0.0307	9.1 -	0.0414 -	0.0305		
G 80 HE	31	90			●				-	6	4	356	80	66	300	124	90	136 142	80 84	122	70	9.7 14.7	0.0426 0.2851	0.0471 0.0471	11.1 -	0.0713 -	0.0472		
GG 80 HE	31	90			●				-	4	-	-	71	302	124	90	-	-	130	80	- -	- -	- -	- -	11.9 18.3	0.0768 0.2028	0.0498 0.1104		
100 HE	38	100			●				-	4	-	-	76	350	152	110	142	90	150	82	- -	- -	- -	- -	- -	16	0.2172	0.1013	
G 100 HE	38	100			●				-	4	-	-	76	350	152	65	-	-	102	85	- -	- -	- -	- -	- -	- -	16	0.2172	0.1013

Other flange connections on request


Technical data															
Size	Elastomer hardness [Shore A]	Torque [Nm]				Perm. damping power PKW [W]			Perm. operating speed nmax. [rpm]			Dynamic torsion spring stiffness Cdyn. [Nm/rad]	Relative damping ψ	Resonance factor VR ≈ 2 • π / ψ	Radial spring stiffness Cr [N/mm]
		T _{KN}	T _K max. 10,000 LA [Nm]	T _K max. 50,000 LA [Nm]	with 10 Hz T _{KW}	60 °C	80 °C	90 °C							
42 HE	T40	165	395	330	41	26.0	15.6	10.4	6200			550	0.6	10.5	142
	T50	205	490	410	51							850	0.8	7.9	219
	T65	260	625	520	65							2700	1.2	5.2	697
48 HE	T40	250	600	500	63	36.0	21.6	14.4	5600			850	0.6	10.5	176
	T50	315	755	630	79							1300	0.8	7.9	269
	T65	400	960	800	100							3500	1.2	5.2	724
65 HE	T40	440	1050	880	110	60.0	36.0	24.0	4500			1600	0.6	10.5	209
	T50	550	1320	1100	138							2200	0.8	7.9	288
	T65	720	1730	1440	180							6000	1.2	5.2	784
G 65 HE	T40	540	1300	1080	135	68.0	40.8	27.2	4300			2350	0.6	10.5	294
	T50	700	1700	1400	175							3000	0.8	7.9	375
	T65	890	2140	1780	223							8500	1.2	5.2	1063
GG 65 HE	T40	750	1800	1500	188	76.0	45.6	30.4	4000			3650	0.6	10.5	420
	T50	960	2300	1920	240							4800	0.8	7.9	550
	T65	1250	3000	2500	313							13500	1.2	5.2	1550
80 HE	T40	950	2280	1900	238	120.0	72.0	48.0	3600			4500	0.6	10.5	351
	T50	1300	3120	2600	325							6500	0.8	7.9	507
	T65	1750	4200	3500	438							18000	1.2	5.2	1404
G 80 HE	T40	1600	3850	3200	400	180.0	108.0	72.0	3000			7500	0.6	10.5	476
	T50	2200	5280	4400	550							12000	0.8	7.9	762
	T65	2900	6960	5800	725							32000	1.2	5.2	2031
GG 80 HE	T40	2000	4800	4000	500	196.0	117.6	78.4	3000			9200	0.6	10.5	660
	T50	2750	6600	5500	688							14200	0.8	7.9	1020
	T65	3600	8650	7200	900							39600	1.2	5.2	2800
100 HE	T40	2500	6000	5000	625	210.0	126.0	84.0	2700			12000	0.6	10.5	460
	T50	3250	7800	6500	813							19000	0.8	7.9	730
	T65	4250	10200	8500	1063							48000	1.2	5.2	1840
G 100 HE	T40	3000	7200	6000	750	215.0	129.0	86.0	2700			14200	0.6	10.5	584
	T50	3800	9120	7600	950							22600	0.8	7.9	935
	T65	5000	12000	10000	1250							57000	1.2	5.2	2350

T = Temperature-stable rubber compound. The technical data specified apply for an ambient temperature of T = 60 °C.

Ordering example:	BoWex-ELASTIC® 42	HE1	T40	8	70	U
	Coupling size	Type	Elastomer hardness	Flange Ø DA according to SAE or special	Mounting length L _H E	Unbored or with finish bore

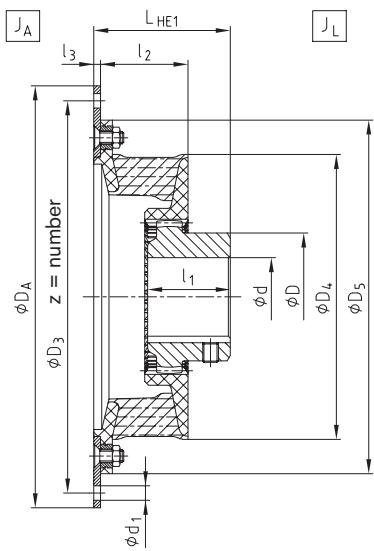


Type HE1

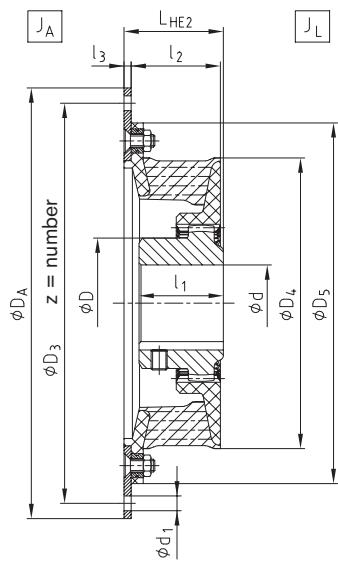


Type HE2

Flange dimensions according to SAE J620 [mm]				
Nominal size	D_A	D_3	z	d_1
6 1/2"	215.90	200.02	6	9
7 1/2"	241.30	222.25	8	9
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13

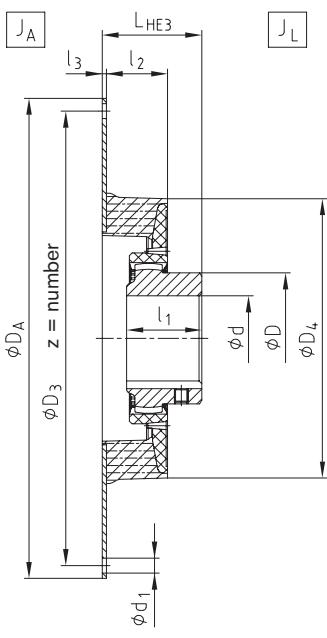

Type HE3

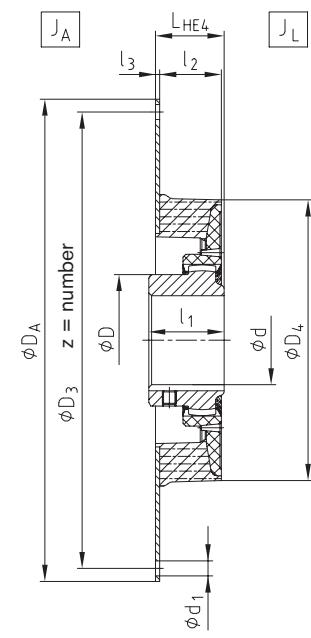

Type HE4


Displacements																
Size		42 HE			48 HE			65 HE			80 HE			100 HE		
Elastomer hardness [Shore A]		T40	T50	T65	T40	T50	T65	T40	T50	T65	T40	T50	T65	T40	T50	T65
Perm. radial displacement ΔK_r [mm]	n=1500 rpm	1.1	1.0	0.5	1.2	1.1	0.5	1.6	1.5	0.7	1.8	1.7	0.8	2.2	2.0	1.0
	max. ¹⁾	3.6	3.3	1.5	3.8	3.5	1.7	5.1	4.7	2.2	5.7	5.3	2.4	6.5	6.0	3.0
Perm. angular displacement ΔK_w [°]	n=1500 rpm	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5
	n=3000 rpm	0.5	0.4	0.25	0.5	0.4	0.25	0.5	0.4	0.25	0.5	0.4	0.25	0.5	0.4	0.25
Perm. angular displacement ΔK_w [°]	max. ¹⁾	1.5		1.5		1.5		1.5		1.5		1.5		1.5		
Perm. axial displacement ΔK_a [mm]		± 2		± 2		± 2		± 2		± 2		± 3		± 3		

¹⁾ For short-term start-up operationMounting procedure, screw type with property class, tightening torques as per KTR assembly instructions (see www.ktr.com).

BoWex-ELASTIC® HE3 / HE4 / HE-D

Highly flexible flange couplings

Axial plug-in, available in different kinds of hardness




BoWex-ELASTIC® Type HE3, HE4 and HE-D																			
Size	Bore d [mm]		Flange connection acc. to SAE - J620						Dimensions [mm]						Weight with max. bore [kg]	Mass moment of inertia with max. bore [kgm²]			
	Pilot bored	Max.	14"	16"	18"	21"	24"	Ø800	Ø885	l ₃	l ₂	D ₄	D	l ₁	L _{HE3}	L _{HE4}	J _A	J _L	
125 HE	45	125	●							6	92	416	192	140	186	103	33.1	0.3142	0.2750
G125 HE	45	125	●	●						6	89	440	192	140	192	109	34.8	0.4231	0.2750
150 HE	44	160		●	●					6	140	470	225	150	205	160	36.6	0.4634	0.3264
150 HE-D	44	160		●	●					-	286	470	225	275	291	-	39.5	0.6812	0.3264
G150 HE	44	160		●	●					6	140	504	225	150	205	160	46.8	0.7277	0.5414
G150 HE-D	44	160		●	●					-	286	504	225	275	291	-	51.5	1.2120	0.5414
200 HE	46	180			●	●				6	149	568	250	175	240	160	113	3.0045	1.0738
200 HE-D	46	180			●	●				-	325	568	250	298	310	-	155	6.4399	1.0738
G200 HE	46	180			●	●				6	149	600	250	175	240	160	51.9	0.8164	0.6500
G200 HE-D	46	180			●	●				-	325	600	250	298	310	-	56.6	1.3007	0.6500
240 HE	80	240				●				8	172	772	326	200	270	205	123	3.1820	1.291
275 HE	80	275					●			10	185	810	372	240	312	215	165	6.6173	1.291
																76.8	1.4880	1.2952	
																81.2	2.0390	1.2952	
																228	11.80	2.4672	
																216	10.66	2.4672	
																81.6	1.6272	1.5409	
																86.0	2.1782	1.5409	
																238	12.00	3.0387	
																230	10.92	3.0387	
																138	4.2414	4.0410	
																206	7.3696	7.6845	

Technical data																
Size	Elastomer hardness [Shore A]	Torque [Nm]				Perm. damping power PKW [W]			Perm. operating speed n _{max.} [rpm]	Dynamic torsion spring stiffness C _{dyn.} [Nm/rad]	Relative damping ψ	Resonance factor V _R ≈ 2 • π / ψ	Radial spring stiffness C _r [N/mm]			
		T _{KN} [Nm]	T _K max. 10,000 LA [Nm]	T _K max. 50,000 LA [Nm]	T _{KW} [Nm]	60 °C	80 °C	90 °C								
T40	3500	10500	7000	875					20000	0.6	10.5	625				
125 HE	T50	4800	11400	9600	1200	221	133	88	2300	30000	0.8	7.9	988			
	T70	6800	20400	13600	1700					54000	1.2	5.2	2434			
T40	4800	14400	7200	1200					34000	0.6	10.5	890				
G125 HE	T50	6600	19800	9900	1650	240	144	96	2250	51000	0.8	7.9	1305			
	T70	10000	30000	15000	2500					98000	1.2	5.2	1915			
T50	8000	24000	12000	2000		262	157	105	2200	67500	0.8	7.9	714			
150 HE	T70	14000	42000	21000	3500					140000	1.2	5.2	2500			
T50	16000	48000	24000	4000		524	314	210	2200	134000	0.8	7.9	1428			
150 HE-D	T70	28000	84000	42000	7000					279000	1.2	5.2	5000			
T50	10000	30000	15000	2500		278	167	111	2100	85000	0.8	7.9	1485			
G150 HE	T70	18000	54000	27000	4500					160000	1.2	5.2	5874			
	T50	20000	60000	30000	5000	556	334	222	2100	170000	0.8	7.9	2970			
T70	36000	108000	54000	9000					320000	1.2	5.2	11748				
T50	14500	43500	21750	3625		308	185	123	1900	119000	0.8	7.9	1720			
200 HE	T70	25000	75000	37500	6250	616	370	246	1900	241000	1.2	5.2	6769			
T50	29000	87000	43500	7250					238000	0.8	7.9	3440				
200 HE-D	T70	50000	150000	75000	12500					482000	1.2	5.2	13538			
T50	17500	52500	26250	4375		324	194	130	1800	139000	0.8	7.9	1952			
G200 HE	T70	30000	90000	45000	7500					281500	1.2	5.2	7708			
T50	35000	105000	52500	8750		648	388	260	1800	278000	0.8	7.9	3904			
G200 HE-D	T70	60000	180000	90000	15000					563000	1.2	5.2	15416			
	T50	29000	87000	43500	7250	372	223	149	1500	259000	0.8	7.9	2326			
240 HE	T70	49000	147000	73500	12250					521000	1.2	5.2	9160			
T50	42000	126000	63000	10500		410	246	164	1500	375000	0.8	7.9	2950			
275 HE	T70	70000	210000	105000	17500					758000	1.2	5.2	11785			


= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated torques with some sizes of this series.

Other kinds of elastomer hardness on request.

Ordering example:	BoWex-ELASTIC® 125	HE3	T40	14"	186	U
	Coupling size	Type	Elastomer hardness	Flange Ø DA according to SAE or special	Mounting length L _{HE}	Unbored or with finish bore

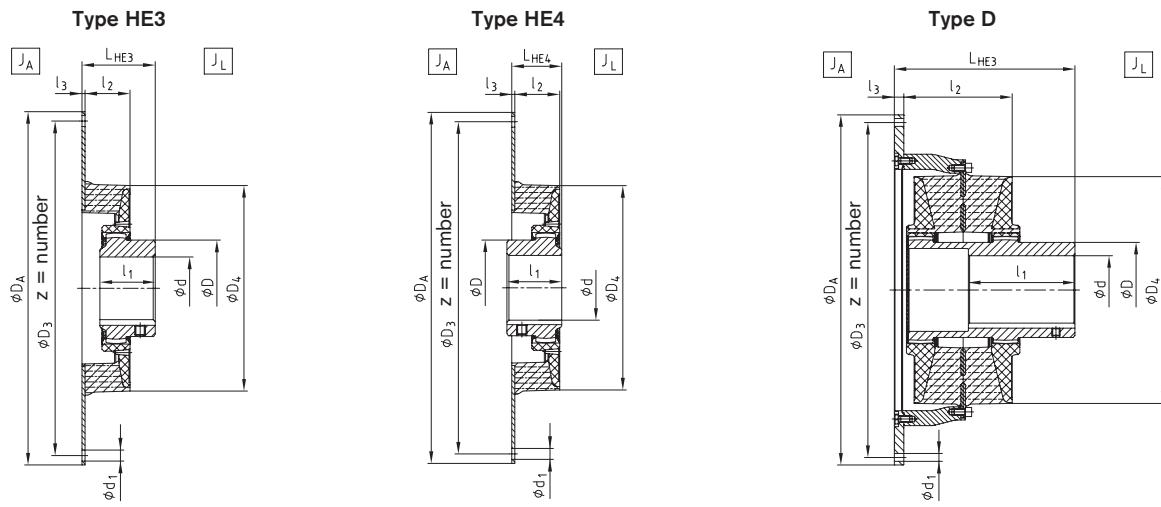

Type HE4 with taper clamping sleeve

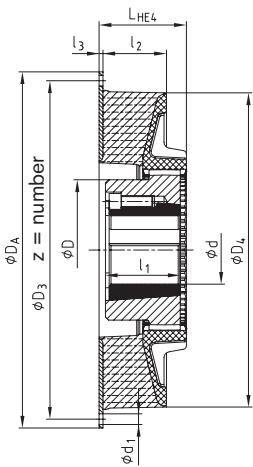

Flange dimensions according to SAE J620 [mm]

Nominal size	DA	D ₃	z	d ₁
14"	466.72	438.15	8	13
16"	517.50	489.00	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø800 ¹⁾	800	770	32	17
Ø885 ¹⁾	885	855	36	17

¹⁾ Flange connection differing from SAE standard, dimensions in mm.


Displacements

For different operating speeds or higher operating temperatures the permissible radial displacement is calculated as follows:

$$\Delta K_r \text{ perm.} = \Delta K_r \cdot St \cdot \sqrt{1500 / n_x}$$

n_x = speed / St = temperature factor

Radial displacement ΔK_r Angular displacement

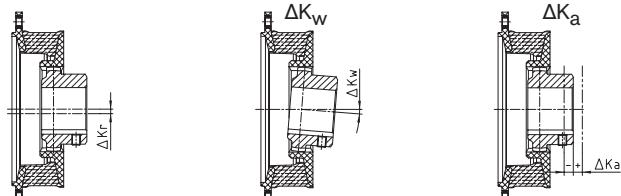

Displacements																
Size		125 HE G125 HE			150 HE G150 HE			200 HE G200 HE			240 HE			275 HE		
Elastomer hardness [Shore A]		T40	T50	T70	T40	T50	T70	T40	T50	T70	T40 Sh	T50	T70	T40	T50	T70
Perm. radial displacement ΔK_r [mm]	n=1500 rpm	2.5	2.3	1.1	2.8	2.5	1.3	3.0	2.7	1.5	3.2	2.9	1.6	3.4	3.1	1.8
	max. ²⁾	7.5	6.9	3.3	8.0	7.5	4.0	8.5	8.0	4.5	9.0	8.5	5.0	9.5	9.0	5.5
Perm. angular displacement ΔK_w [°]	n=1500 rpm	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5	1.0	0.75	0.5
	n=3000 rpm	0.5	0.4	0.25	-	-	-	-	-	-	-	-	-	-	-	
Perm. angular displacement ΔK_w [°]	max. ²⁾	1.5			1.5			1.5			1.5			1.5		
Perm. axial displacement ΔK_a [mm]		± 3			± 4			± 4			± 4			± 4		


²⁾ For short-term start-up operation

Mounting procedure, screw type with property class, tightening torques as per KTR assembly instructions (see www.ktr.com).

BoWex-ELASTIC® HE-ZS and HEW

Highly flexible flange couplings

With drop-out center part for pump drives, highly flexible shaft-to-shaft coupling



		BoWex-ELASTIC® Type HE-ZS												Dimensions [mm]						Drop-out center part HE-ZS Lz [mm]					Mass moment of inertia [kgm²]				
Size	Max. finish bore d4	Flange connection acc. to SAE - J620 D4 for HE-ZS												Dimensions [mm]						Drop-out center part HE-ZS Lz [mm]					Weight with max. bore [kg]	J _A	J _L		
		6 1/2"	7 1/2"	8"	10"	11 1/2"	14"	16"	18"	21"	24"	D1	D4	D5	D7	D8	I1	I2	I3	I6	100	120	140	180	250				
48 ³⁾	28	●														48	10			●	●					2.9 ¹⁾	0.0026	0.0033	
			●									160	164	200	78	45	40			37	4	37					3.6 ¹⁾	0.0106	0.0033
				●																●	●					3.9 ¹⁾	0.0148	0.0033	
G65 ³⁾	45			●											205		110	72	60	48	3	56					4.6 ¹⁾	0.0298	0.0033
					●															●	●					7.3 ¹⁾	0.0242	0.0129	
80 ³⁾	65				●							265	266	318	145	100	80	70	11		76					8.9 ²⁾	0.0372	0.0150	
						●													6	76					13.7 ²⁾	0.0211	0.0497		
G80 ³⁾	65					●						300	302	358	145	100	80	80	11		76					15.9 ²⁾	0.0726	0.0497	
							●											6	76					14.6 ²⁾	0.0402	0.0634			
100 ³⁾	95					●						350		202	148	110	80	4	106						19.5 ²⁾	0.2251	0.0634		
							●													●	●					29.8 ²⁾	0.1951	0.1779	
125 ⁴⁾	100					●						416		225	165	120	99	6	116						41.7 ²⁾	0.3013	0.3363		
							●													●	●					43.6 ²⁾	0.4123	0.3363	
G125 ⁴⁾	120					●						440		225	165	120	95	6	116						45.6 ²⁾	0.4781	0.3700		
							●													●	●					47.7 ²⁾	0.6380	0.3700	
150 ⁴⁾	135						●					470		245	185	140	140	6	136						63.2	0.6918	0.6647		
								●				504		245	185	140	140	6	136						67.9	1.1410	0.6647		
G150 ⁴⁾	135							●																		68.3	0.7540	0.7677	
									●																	73.0	1.2460	0.7677	
200 ⁴⁾	150							●				568		270	205	160	149	6	156						98.7	1.5348	1.4109		
									●			600		270	205	160	149	6	156						101.7	1.9138	1.4109		
G200 ⁴⁾	150									●															103.5	1.7270	1.6401		
																									106.6	2.1060	1.6401		

¹⁾ with L_z 120

²⁾ with L_z 100

³⁾ For technical data see page 245

⁴⁾ For technical data see page 246


		BoWex-ELASTIC® Type HEW																			
Size	Max. finish bore	Dimensions [mm]																Weight with max. bore [kg]	Mass moment of inertia [kgm²]		
		d ₂	d ₃	D	D ₂	z x M		D ₄	D ₅	D ₆	I ₁	I ₂	I ₃	I ₄	I ₅	E	E ₁	L _{HEW1}	L _{HEW2}	J _A	J _L
42	48	50	68	162	6	M6	146	180	85	50	45	15	50	42	4	32	132	104	4.3	0.0121	0.0015
48 ³⁾	48	55	68	180	8	M6	164	200	92	50	45	17	55	45	4	32	137	109	5.5	0.0204	0.0019
65 ³⁾	65	75	96	224	8	M8	205	245	125	70	55	28	75	63	5	42	187	150	13.2	0.0752	0.0071
80 ³⁾	90	80	124	295.27	8	M10	266	318	130	90	70	17	80	70	5	45	215	160	19.7	0.1449	0.0285
G80 ³⁾	90	95	124	333.4	8	M10	302	358	145	90	80	22	90	78	5	55	235	185	25.9	0.2748	0.0422
100 ³⁾	100	110	152	438.15	8	M12	350	478	158	110	80	14	111.5	113	26	57	278	207	48.5	0.8356	0.1050
125 ⁴⁾	125	125	192	489	8	M12	440	530	175	140	95	14	170	158	-	45	335	-	67.2	0.9498	0.2617
G125 ⁴⁾	125	125	192	489	8	M12	440	530	175	140	95	14	170	158	-	45	335	-	76.6	1.4492	0.3034
150 ⁴⁾	160	160	225	542.9	6	M16	470	585	225	150	100	18	160	145	-	70	380	-	110	2.7206	0.5303
G150 ⁴⁾	160	160	225	542.9	6	M16	504	585	225	150	108	18	160	145	-	70	380	-	113.4	2.7809	0.5861
200 ⁴⁾	180	200	250	641.35	12	M16	568	683	280	175	149	26	220	214	-	85	480	-	200	6.6099	1.3419

³⁾ For technical data see page 245


⁴⁾ For technical data see page 246

Other sizes available. Please consult with us.

Type HE-ZS

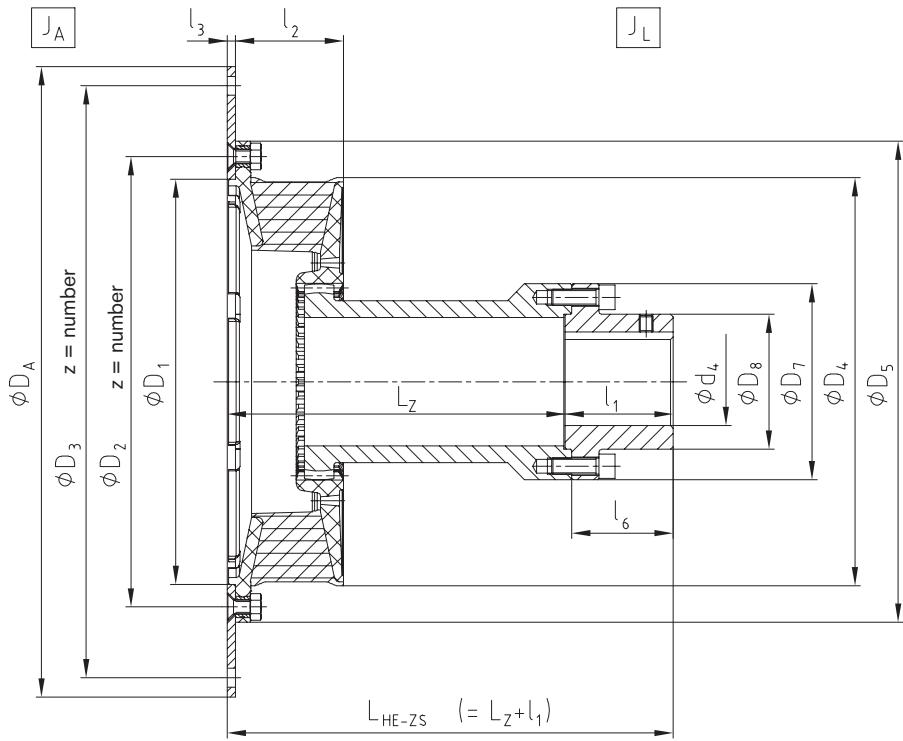

Type HEW1

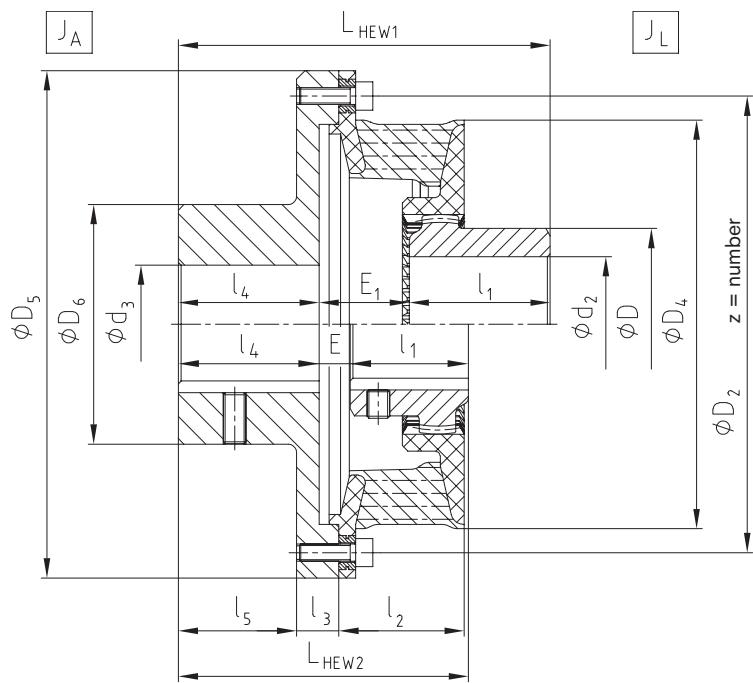


Type HEW2

BoWex-ELASTIC® HEG

Highly flexible flange couplings

Cardan shaft connecting coupling



BoWex-ELASTIC® Type HEG1 and type HEG2

Size	Flywheel connection acc. to SAE-J620						Metric flange connection HEG1 dimensions [mm]								MECHANICS cardan shaft connection HEG2 dimensions [mm]								Dimensions [mm]			Weight [kg]	Mass moment of inertia					
	8"	10"	11 1/2"	14"	16"		58	65	75	90	100	120	150	180	l_4	L	2 C	4 C	5 C	6 C	7 C	8,5 C	8 C	L_1	D_4	l_2	l_3	J_A [kgm ²]	J_L [kgm ²]			
48 ¹⁾	●						●	●	●						8	58.5									163	43.5	8	7	0.03	0.006		
		●					●	●	●																	8	0.06	0.006				
G65 ¹⁾		●					●	●	●						8	66	●	●	●						71	205	48.0	10	12	0.07	0.02	
			●				●	●	●								●	●	●							14	0.10	0.02				
80 ¹⁾		●					●	●	●	●	●				10	88.5	●	●	●	●					104	265	68.5	23	21	0.11	0.06	
			●				●	●	●	●	●						●	●	●	●						12	23	0.17	0.06			
G80 ¹⁾			●				●	●	●	●	●				10	96	●	●	●	●						110	302	74.0	23	26	0.18	0.09
				●			●	●	●	●	●						●	●	●	●						12	33	0.48	0.09			
100 ¹⁾				●				●	●	●	●	●	●	●	12	98					●	●			128	350	78.0	16	41	0.63	0.19	
125 ²⁾				●					●	●	●	●	●	●	12	111					●	●				135	416	96.0	18	56	0.74	0.42
					●					●	●	●	●	●							●	●				12	59	0.97	0.42			

¹⁾ For technical data see page 245

²⁾ For technical data see page 246



Flywheel connection acc. to SAE-J620				
Size	D_A	D_1	z_1	d_1
8"	263.52	244.47	6	11
10"	314.32	295.27	8	11
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	14
16"	517.50	489.00	8	14

Metric flange connection HEG1 [mm]					
Size	D_2	l_1	D_3	z_2	d_2
58	30	1.0	47.0	4	M5
65	35	1.0	52.0	4	M6
75	42	1.5	62.0	6	M6
90	47	2.0	74.5	4	M8
100	57	2.0	84.0	6	M8
120	75	2.0	101.5	8	M10
150	90	2.5	130.0	8	M12
180	110	3.0	155.5	8	M14

MECHANICS cardan shaft connection HEG2 [mm]						
Size	D_5	l_5	l_6	l_7	l_8	z_3
2 C	79.35	33.3	59.5	9.50	3.8	M8
4 C	107.92	36.5	87.3	9.50	3.8	M8
5 C	115.06	42.9	88.9	14.26	5.1	M10
6 C	140.46	42.9	114.3	14.26	5.1	M10
7 C	148.39	49.2	117.5	15.85	6.0	M12
8,5 C	165.08	71.4	123.8	15.85	6.0	M12
8 C	206.32	49.2	174.6	15.85	6.0	M12

BoWex-ELASTIC® type HEG has a maintenance-free plain bearing compensating for the radial loads generated by the cardan shaft. Moreover, the coupling has a friction disk which is axially prestressed by the elastomer part. The elastomer part is made of natural rubber via vulcanizing.

The permanent friction provides the coupling with excellent damping properties reducing the high vibratory torques generated in the coupling during the starting process and passing through resonance considerably.

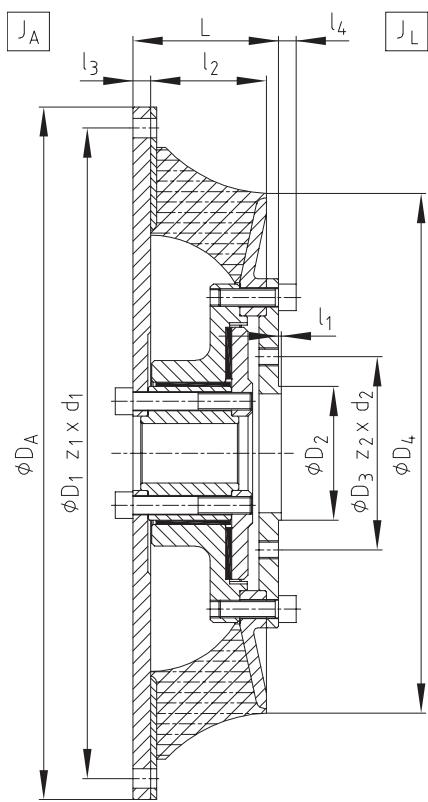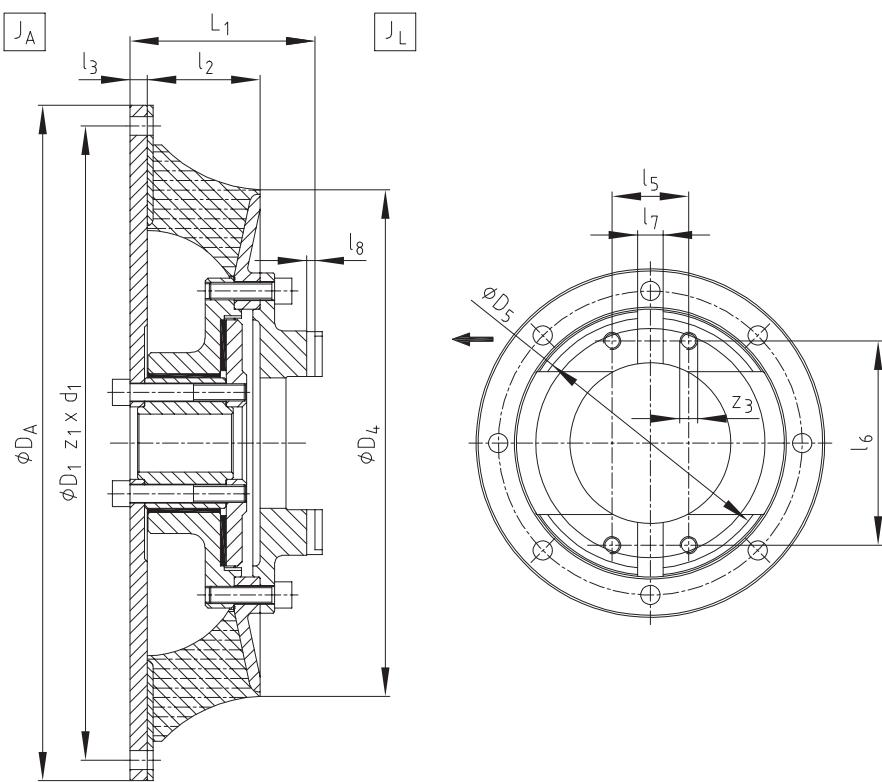Type HEG1**Type HEG2**

Highly flexible flange coupling

Description of product and application

SINULASTIC® is a modularly structured series of highly flexible flange couplings based on a disk-shaped coupling body. Four practical basic versions with individual properties cover a wide range of applications primarily for diesel engine drives, but also general drive tasks.

The main task of the coupling is reducing torsional vibrations resulting from excitations of the I. C.-engine during standard operation and misfire operation as well as protecting the drive from overload. It is a good option both for variable speed and constant speed drives, while a supercritical selection of the drive train above resonance level is always made. Particularly for the series the coupling disk requires smallest possible axial mounting space.

Depending on the type the coupling is pluggable and compensates for displacements resp. tolerances moderately to very well. It is a non-slip or shear type and radially mountable.

The elastomer element is available in various qualities for all types. It is composed of natural rubber compounds optimised over many years (SN, MN, HN, UN up to 80 °C) or upon request of synthetical EPDM material for higher temperatures (SE, ME, HE, UE up to 100 °C). The various kinds of rubber hardness cover one application and torque range per size. The vibratory properties of the four types are compatible within one size.

A wide portfolio of hub connections covers a large variety of shaft configurations on the driven side while special connections can be realised.



SINULASTIC® - The types



A



T



B



V

SINULASTIC® A is the evolution design of the renowned disk coupling with plug-in spline between elastomer and flange ring as well as hub vulcanized on. The tooth shape that is subject to high loads particularly with alternating loads in the contact area between motor flange and rubber was extensively optimized, the new sinusoidal tooth shape being eponymous for the series. For the first time the engine flange was realised by a deep-drawn sheet metal section creating a beneficial and smooth surface to the elastomer. Another benefit is the tight contact gap for easy mountability with simultaneously highly sound and defined form fit.

In contrast to type A a Taperlock shaft connection as a standard version with feather key is used with SINULASTIC® T. The modular concept makes use of the plug-in ability of type A on the flange side.

Type B and V make use of a deep-drawn and inherently stable flange ring that the elastomer part is vulcanized on externally. This results in a low-cost solution for high speeds and overloads.

In combination with the renowned BoWex® inner hub the SINULASTIC® B as an all-rounder of the overall series is formed. The so-called BoWex® hub defines a pluggable connection resistant to high loads as well as beneficial adaptations on the driven side up to long driving shaft systems owing to the potentials for particularly high displacements. The hub and connection variants of BoWex®-ELASTIC are fully compatible with the elastomer elements of this series.

SINULASTIC® V is used beneficially where the ability for axial plug-in is not required. A resulting radial assembly is realised by a split ring on the hub side.

The slim wasteline shape of the elastomer elements of this type allows for significant displacements in axial, radial and angular direction without any wear, while the coupling element is suitable both for not flange-mounted assembly, i. e. for system configurations set up freely, and as a shaft coupling with cardanic misalignment.

SINULASTIC®

Highly flexible couplings

Properties of types compared


Properties of types compared			
Properties	SINULASTIC® A SINULASTIC® T	SINULASTIC® V	SINULASTIC® B
Rated torque T_{KN}	Compatible within the series		
Maximum torque T_{Kmax}	$\geq 2x T_{KN}$	$3x T_{KN}$	$3x T_{KN}$
Vibratory properties, e. g. torsional stiffness	Compatible within the series		
Materials ¹⁾	Natural rubber compounds up to 80 °C for hardness ranges WN, SN, MN and HN, synthetical EPDM up to 100 °C for hardness ranges WE, SE, ME and HE		
Plug-in	Yes	No	Yes
Radial assembly	Partially possible	Yes	No
Mounting length	++	Ø	++
Axial displacement	++	+	++
Radial displacement	Ø	+	+
Angular displacement	Ø	++	++
Standard	For flywheel flange and shaft connection (SAE J620, DIN 5480 et seqq., DIN 6281, etc.)		
Special solutions	Bearing-mounted intermediate coupling, with failure protection, combination with shifting unit	Cardanic offset joint, failure protection, shaft systems	
	Application-specific shaft connections of elastomer elements		

¹⁾The standard materials and availabilities depend on the size and type, special compounds available on request

BoWex® FLE-PA/PAC

MONOLASTIC®

Flange
couplings

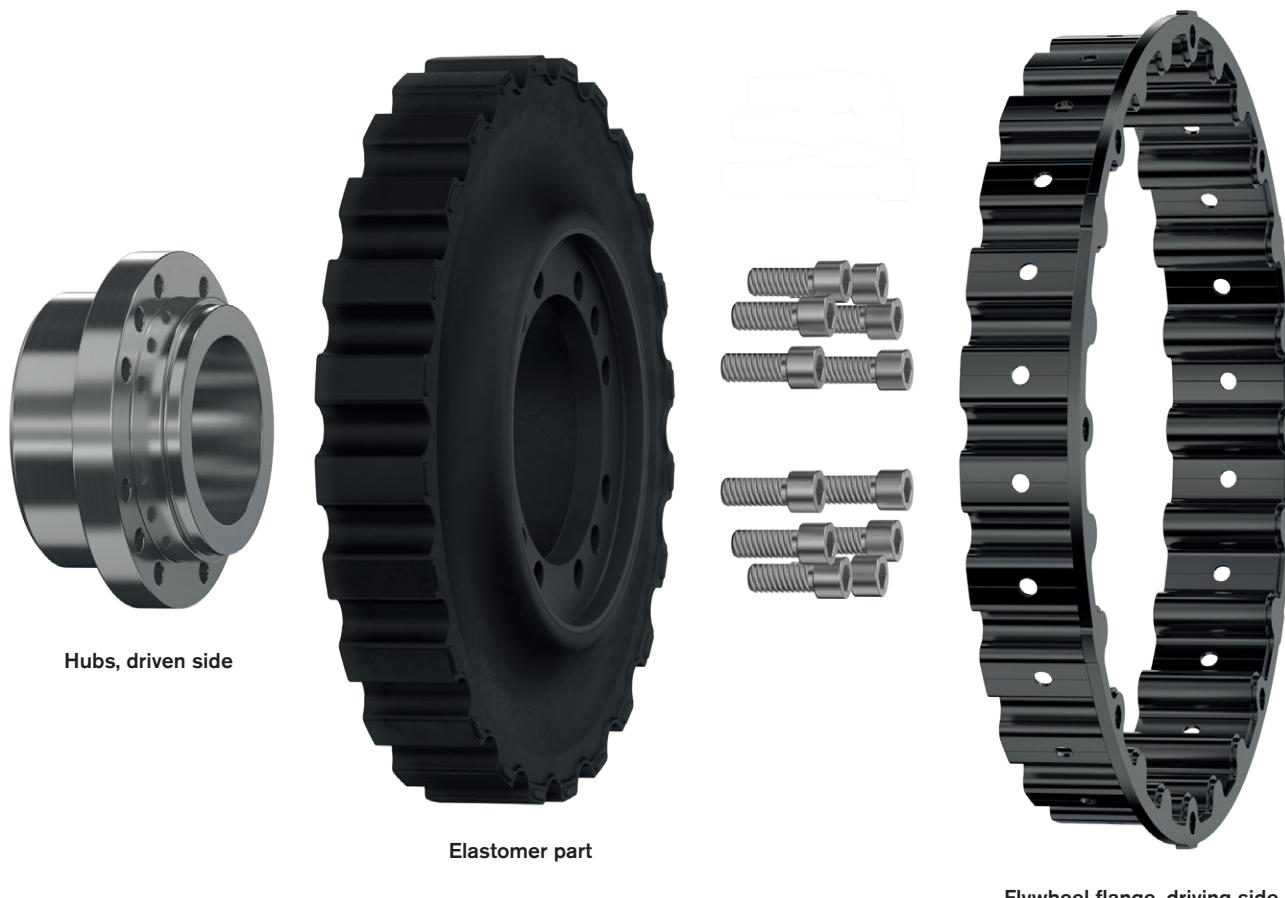


SINULASTIC®

SINULASTIC® A

Highly flexible flange coupling

Pluggable disk coupling with optimal tooth contact



Technical data													
Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness Cdyn. [Nm/rad]		Relative damping ψ [-]		Perm. damping power PKW [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max.}
20	SN	1750	2625	3500	700	7200	5760	1,00	0,80	210	126	2700	3000
	MN	2000	3000	4000	800	11500	9200	1,10	0,90	240	144	2700	3000
	HN	2500	3750	7500	1000	18500	14800	1,30	1,10	270	162	3240	3600
28	SN	2200	3300	4400	880	9500	7600	1,00	0,80	260	156	2340	2600
	MN	2800	4200	5600	1120	14000	11200	1,10	0,90	270	162	2340	2600
	HN	3400	5100	10200	1360	21000	16800	1,30	1,10	290	174	2520	2800
38	SN	3000	4500	6000	1200	14500	11600	1,00	0,80	275	165	2520	2800
	MN	3800	5700	7600	1520	22000	17600	1,10	0,90	300	180	2520	2800
	HN	4600	6900	13800	1840	34000	27200	1,30	1,10	330	198	2880	3200
53	SN	4000	6000	8000	1600	17000	13600	1,00	0,80	285	171	2340	2600
	MN	5300	7950	10600	2120	28000	22400	1,10	0,90	325	195	2340	2600
	HN	6200	9300	18600	2480	43500	34800	1,30	1,10	370	222	2700	3000
96	SN	7800	11700	15600	3120	60000	48000	1,00	0,80	480	288	2070	2300
	MN	9600	14400	19200	3840	84000	67200	1,10	0,90	500	300	2070	2300
	HN	11200	16800	33600	4480	125000	100000	1,30	1,10	510	306	2250	2500
114	UN	13200	19800	39600	5280	156000	124800	1,40	1,20	520	312	2250	2500
	SN	9200	13800	18400	3680	70000	56000	1,00	0,80	500	300	2070	2300
	MN	11400	17100	22800	4560	100000	80000	1,10	0,90	530	318	2070	2300
140	HN	13400	20100	40200	5360	148000	118400	1,30	1,10	550	330	2250	2500
	UN	15600	23400	46800	6240	185000	148000	1,40	1,20	560	336	2250	2500
	SN	12000	18000	24000	4800	106000	84800	1,00	0,80	540	324	1890	2100
180	MN	14000	21000	28000	5600	149000	119200	1,10	0,90	550	330	1890	2100
	HN	16200	24300	48600	6480	235000	188000	1,30	1,10	570	342	2070	2300
	UN	19000	28500	57000	7600	310000	248000	1,40	1,20	590	354	2070	2300
140	SN	14600	21900	29200	5840	132000	105600	1,00	0,80	620	372	1890	2100
	MN	18000	27000	36000	7200	185000	148000	1,10	0,90	630	378	1890	2100
	HN	22000	33000	66000	8800	295000	236000	1,30	1,10	650	390	2070	2300
180	UN	25000	37500	75000	10000	410000	328000	1,40	1,20	670	402	2070	2300

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.

T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternations pulsating / 50,000 load alternations vibratory



T_{Kmax1} Impact loads rarely, min. 1,000 load alternations

For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.

²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.



SINULASTIC® type AK / AL																						
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620				Dimensions [mm]								Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾						
		11 1/2"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4	AK	AL	L5	L7	MxLM	G	T	J _A	J _L	
20	80	●						112	164	75	65	90.5+4.5/-3	127.5±4.5	5.5	41		M12x30	M10	30	0.0947	0.0533	13.71
			●											13.6						0.1350	0.0533	14.79
28	115		●					162	244	90	44	93.5+3/-1.5	109±3	7	7		M16x40	M12	35	0.1873	0.1667	21.90
				●																0.4968	0.1667	26.55
38	115			●				162	244	100	58	93.5+3/-1.5	123±3	7	7		M16x40	M12	35	0.2013	0.1667	22.16
					●															0.2412	0.1994	25.47
53	115				●			162	247	105	70	92.5+3/-1.5	146±3	13	7		M16x40	M12	40	0.5506	0.1994	30.12
						●														0.2583	0.1994	25.79
96	175					●		248	352	150	84	129+4/-2.5	192±4	1	11		M20x50	-	-	0.2981	0.2379	29.37
																				0.7310	0.10324	63.90
114	175						●	248	352	150	98	129+4/-2.5	206±4	1	11		M20x50	-	-	1.5407	1.0324	72.37
																				2.2186	1.0324	77.94
140	175							248	431	200	94	200+3/-1.5	206±4	3	14		M20x60	-	-	0.8367	1.1215	68.04
																				1.6680	2.1667	101.71
180	175							248	431	200	114	200+3/-1.5	300±3	3	14		M20x60	-	-	2.5308	2.1667	108.79
																				1.9588	2.4306	110.09
								248	431	200	114	200+3/-1.5	300±3	3	14		M20x60	-	-	2.8216	2.4306	117.17

¹⁾ With max. bore

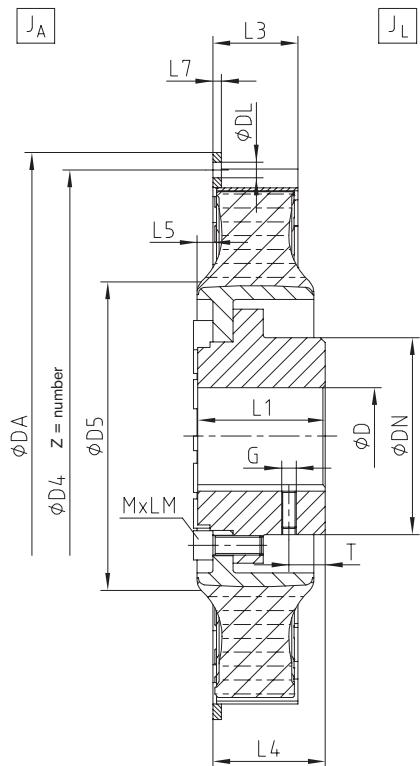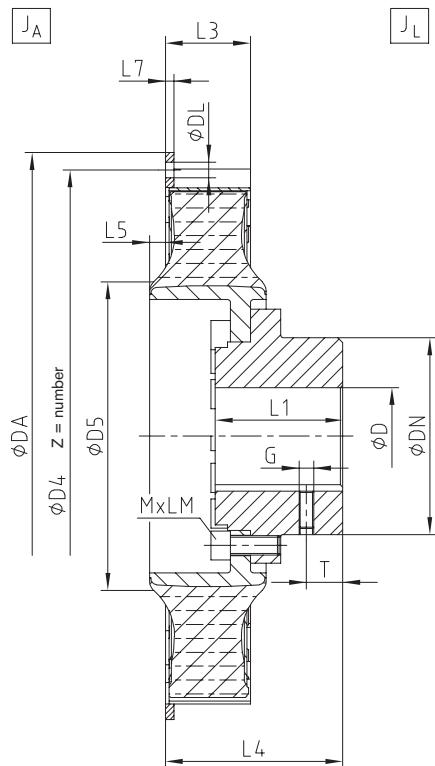
Type AK**Type AL**

Types AK and AL specify the standard with variable hub connections as a short or long version


Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11

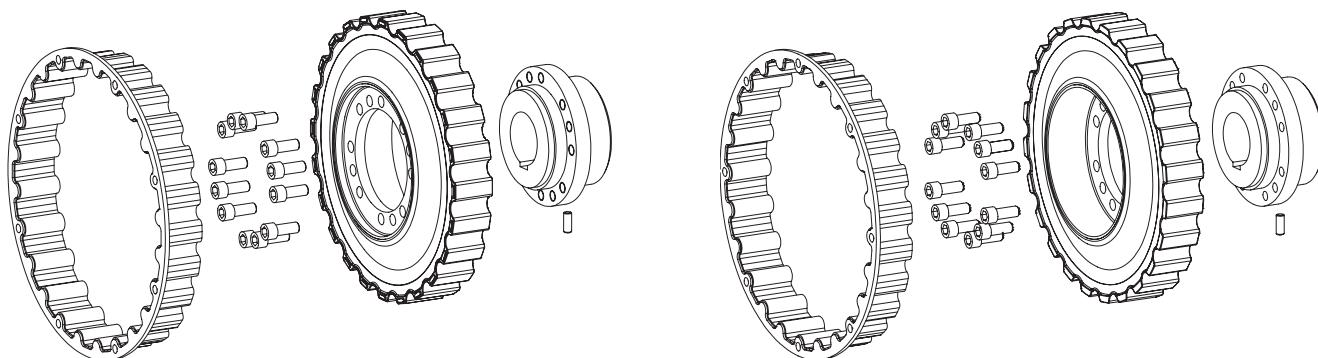**Types of hubs type AK / AL¹⁾**


Type 1.0
with feather keyway
and setscrew
(acc. to standard AK, AL)




Type 1.3
spline toothing



Type 2.1
clamping hub
single slot with
feather keyway



Type 3.1
spline/clamping hub N



Type 8.0
taper interference fit


¹⁾Dimensions and type may differ depending on size, other types of hubs on request

SINULASTIC® A


Highly flexible flange coupling

Type ALC / AKC

Type AKC

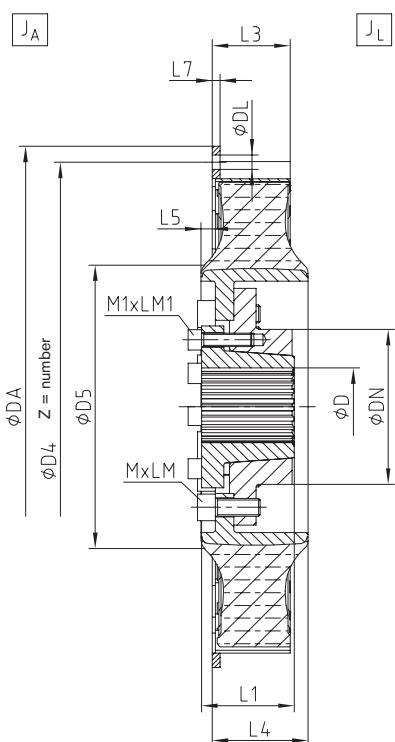


Type ALC

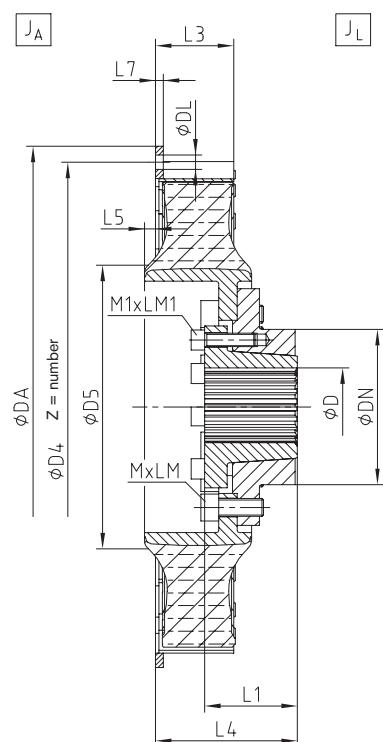

Types AKC and ALC specify the hub type as a spline clamping ring hub

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11

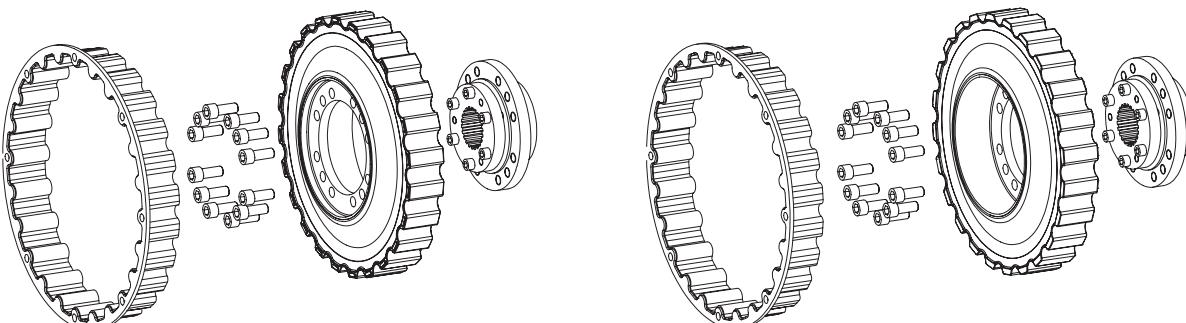

SINULASTIC® type AKC / ALC


Size	Bore D [mm]		Flange connection acc. to SAE - J620						Dimensions [mm]							Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾		
	Pilot bored	Max.	11 1/2"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4	AK	AL	L5	L7	MxLM	M1xLM1	
	J _A	J _L																		
20	30	50	●						109	164	57	65	70.5+4.5/-3	95.5±4.5	5.5	41	M12x30	M10x30	0.0947 0.0521 14.02	
			●													13.6				
28	46	65		●					139	244	63	44	56.5+3/-1.5	72±3	7	7	M16x40	M10x40	0.1353 0.0521 15.09 0.1873 0.1531 21.88 0.4968 0.1531 26.53 0.2013 0.1531 22.14	
					●															
38	46	80		●		●			139	244	69	58	65+3/-1.5	92±3	7	7	M16x40	M10x40	0.2412 0.1837 23.99 0.5506 0.1837 28.64 0.2583 0.1837 24.31	
					●															
53	46	80			●		●		139	247	83	70	83+3/-1.5	124±3	13	7	M16x40	M12x45	0.2870 0.2241 28.67 0.5965 0.2241 33.32 0.3042 0.2241 28.99	
96																				
114																				
140																				
180																				

¹⁾ With max. bore


SINULASTIC® A

Highly flexible flange coupling


Displacements

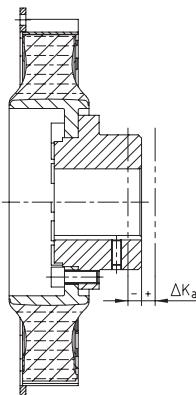

Axial displacement

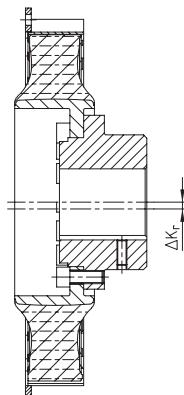

Radial displacement

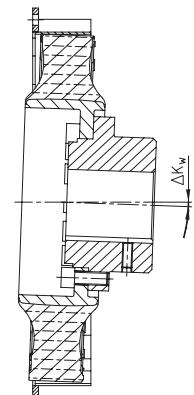

Angular displacement

SINULASTIC® A size	20	28	38	53	96	114	140	180
Perm. axial displacement ΔK_a [mm] ²⁾	± 2.0	± 3.0	± 3.0	± 3.0	± 3.0	± 3.0	± 3.0	± 3.0
Perm. radial displacement ΔK_r [mm]	1500 rpm n _{max.} max. ¹⁾	0.8 0.6 1.6	1.1 0.8 2.2	1.1 0.8 2.2	1.25 0.9 2.5	1.25 0.9 2.5	1.5 1.1 3.0	1.5 1.1 3.0
Perm. angular displacement ΔK_w [degree]	1500 rpm n _{max.} max. ¹⁾	0.7 0.5 1.1	0.6 0.4 0.9	0.6 0.4 0.9	0.5 0.4 0.8	0.5 0.4 0.8	0.4 0.3 0.6	0.4 0.3 0.6

¹⁾With assembly, for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

²⁾Plug-in fit in the tooth contact allows for alternative mounting lengths

Ordering
example:

SINULASTIC® 53	ALC	M	14	1.3	DIN 5480 - 60x2x28
Coupling size	Type	Elastomer hard-ness	Flange ØDA acc. to SAE or special	Hub type	Finish bore

SINULASTIC® T



Highly flexible flange coupling

Pluggable disk coupling with optimal tooth contact



Components

Type T specifies the hub type as
Taperlock shaft connection

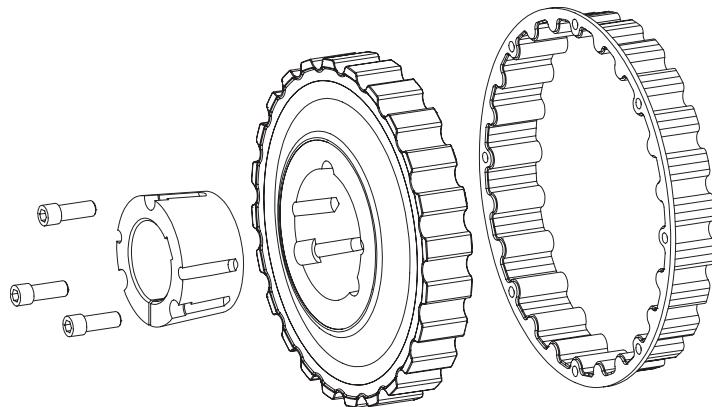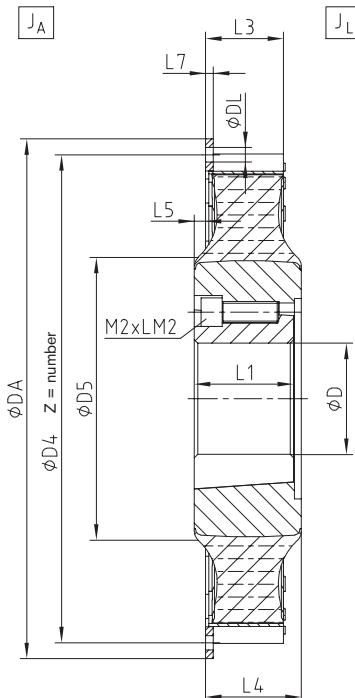

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352,42	333,37	8	11
14"	466,72	438,15	8	13
18"	571,50	542,90	6	17
21"	673,10	641,35	12	17
24"	733,42	692,15	12	21
Ø475	475	450	12	11

Technical data

Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn.} [Nm/rad]		Relative damping ψ [-]		Perm. damping power PKW [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max.}
20	SN	1750	2625	3500	700	7200	5760	1,00	0,80	210	126	2700	3000
	MN	2000	3000	4000	800	11500	9200	1,10	0,90	240	144	2700	3000
	HN	2500	3750	7500	1000	18500	14800	1,30	1,10	270	162	3240	3600
28	SN	2200	3300	4400	880	9500	7600	1,00	0,80	260	156	2340	2600
	MN	2800	4200	5600	1120	14000	11200	1,10	0,90	270	162	2340	2600
	HN	3400	5100	10200	1360	21000	16800	1,30	1,10	290	174	2820	2800
38	SN	3000	4500	6000	1200	14500	11600	1,00	0,80	275	165	2520	2800
	MN	3800	5700	7600	1520	22000	17600	1,10	0,90	300	180	2520	2800
	HN	4600	6900	13800	1840	34000	27200	1,30	1,10	330	198	2880	3200
53	SN	4000	6000	8000	1600	17000	13600	1,00	0,80	285	171	2340	2600
	MN	5300	7950	10600	2120	28000	22400	1,10	0,90	325	195	2340	2600
	HN	6200	9300	18600	2480	43500	34800	1,30	1,10	370	222	2700	3000

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.

T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternations pulsating / 50,000 load alternations vibratory

T_{Kmax1} Impact loads rarely, min. 1,000 load alternations


For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.

²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


SINULASTIC® type T																		
Size	Bore D [mm]		Flange connection acc. to SAE - J620					Dimensions [mm]					Taper clamping sleeve		Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾	
	Pilot bored	Max.	11 1/2"	14"	18"	21"	24"	Ø475	D5	L1	L3	L4	L5	L7	M2xLM2	Type	J _A	J _L
20	35	90	●					164	63.5	60	70.5 ± 4.5	5.5	41	1/2" x 38	3525	0.0947	0.0568	13.75
				●										13.6			0.1353	0.0568
28	35	90	●		●			244	63.5	44	57 ± 3	7	7	1/2" x 38	3525	0.1873	0.1919	24.37
						●											0.2013	0.1919
38	40	110	●		●			244	76.2	58	70 ± 3	7	7	5/8" x 44	4030	0.2412	0.2429	29.51
						●											0.2583	0.2429
53	55	125	●		●			247	89	70	83 ± 3	13	7	3/4" x 50	4535	0.2870	0.2993	33.84
						●											0.5965	0.2993
																0.3042	0.2993	34.18

¹⁾ With max. bore


Displacements

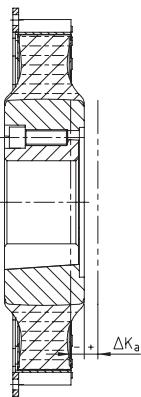

Axial displacement

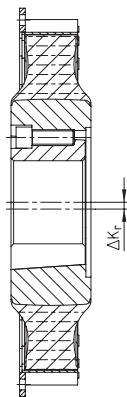

Radial displacement

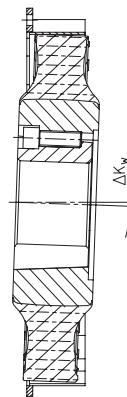

Angular displacement

SINULASTIC® T size	20	28	38	53
Perm. axial displacement ΔK _a [mm] ²⁾	±2.0	±3.0	±3.0	±3.0
Perm. radial displacement ΔK _r [mm]	1500 rpm	0.8	1.1	1.1
	n _{max.}	0.6	0.8	0.8
Perm. angular displacement ΔK _w [degree]	max. ¹⁾	1.6	2.2	2.2
	1500 rpm	0.7	0.6	0.6
	n _{max.}	0.5	0.4	0.4
	max. ¹⁾	1.1	0.9	0.9

¹⁾ With assembly, for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.²⁾ Plug-in fit in the tooth contact allows for alternative mounting lengths


Ordering example:

SINULASTIC® 53	T	M	14	1.0	Ø75
Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore



SINULASTIC® B

Highly flexible flange coupling

Disk coupling pluggable inside



Components

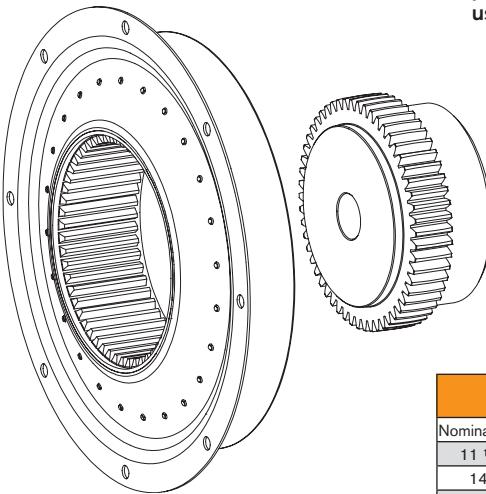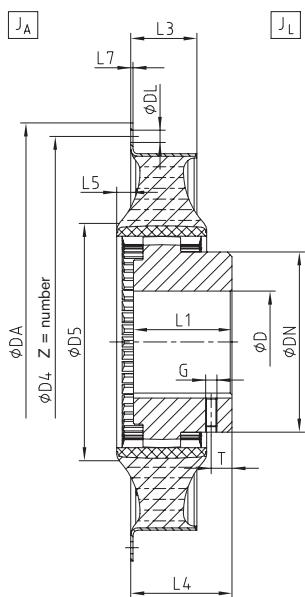

Type B specifies a type pluggable in the hub for variable use and high potential for offset

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352,42	333,37	8	11
14"	466,72	438,15	8	13
18"	571,50	542,90	6	17
21"	673,10	641,35	12	17
24"	733,42	692,15	12	21
Ø475	475	450	12	11

Technical data

Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn.} [Nm/rad]		Relative damping ψ [-]		Perm. damping power PKW [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max.}
20	SN	1750	2625	5250	700	7200	5760	1,00	0,80	210	126	3240	3600
	MN	2000	3000	6000	800	11500	9200	1,10	0,90	240	144	3240	3600
	HN	2500	3750	7500	1000	18500	14800	1,30	1,10	270	162	3420	3800
28	SN	2200	3300	6600	880	9500	7600	1,00	0,80	260	156	2880	3200
	MN	2800	4200	8400	1120	14000	11200	1,10	0,90	270	162	2880	3200
	HN	3400	5100	10200	1360	21000	16800	1,30	1,10	290	174	3240	3600
38	SN	3000	4500	9000	1200	14500	11600	1,00	0,80	275	165	2880	3200
	MN	3800	5700	9600	1520	22000	17600	1,10	0,90	300	180	2880	3200
	HN	4600	6900	13800	1840	34000	27200	1,30	1,10	330	198	3240	3600
53	SN	4000	6000	12000	1600	17000	13600	1,00	0,80	285	171	2700	3000
	MN	5300	7950	14400	2120	28000	22400	1,10	0,90	325	195	2700	3000
	HN	6200	9300	18600	2480	43500	34800	1,30	1,10	370	222	3060	3400
96	SN	7800	11700	23400	3120	60000	48000	1,00	0,80	480	288	2340	2600
	MN	9600	14400	28800	3840	84000	67200	1,10	0,90	500	300	2340	2600
	HN	11200	16800	33600	4480	125000	100000	1,30	1,10	510	306	2700	3000
114	SN	9200	13800	27600	3680	70000	56000	1,00	0,80	500	300	2340	2600
	MN	11400	17100	33900	4560	100000	80000	1,10	0,90	530	318	2340	2600
	HN	13400	20100	40200	5360	148000	118400	1,30	1,10	550	330	2520	2800
140	SN	12000	18000	36000	4800	106000	84800	1,00	0,80	540	324	2160	2400
	MN	14000	21000	42000	5600	149000	119200	1,10	0,90	550	330	2160	2400
	HN	16200	24300	48600	6480	235000	188000	1,30	1,10	570	342	2520	2800
180	SN	14600	21900	43800	5840	132000	105600	1,00	0,80	620	372	2160	2400
	MN	18000	27000	54000	7200	185000	148000	1,10	0,90	630	378	2160	2400
	HN	22000	33000	66000	8800	295000	236000	1,30	1,10	650	390	2340	2600

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.

T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternations pulsating / 50,000 load alternations vibratory

T_{Kmax1} Impact loads rarely, min. 1,000 load alternations


For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.

²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


		SINULASTIC® type B																	
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620				Dimensions [mm]							Mass moment of inertia [kgm²] ¹⁾		Weight [kg] ¹⁾				
		11 ½"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4	L5	L7	G	T	J _A	J _L	
20	80	●	●					124	169	75	60	80.5 ± 21	8.5	2.0	M10	20	0.0625	0.0338	9.71
																	0.1114	0.0338	10.85
				●													0.1159	0.1979	27.16
28	125			●				200	244	140	38	129 ± 7	10	2.5	M10	20	0.2291	0.1979	28.83
																	0.1213	0.1979	27.26
					●												0.1524	0.2076	28.94
38	125		●	●				200	245	140	52	136 ± 14	10	2.5	M16	40	0.1578	0.2076	30.62
																	0.2655	0.2076	29.04
						●											0.1888	0.2280	30.85
53	125		●	●				200	247	140	70.5	143 ± 20	15	2.5	M16	40	0.1942	0.2280	32.52
																	0.302	0.2280	30.95
					●												0.3857	0.5405	41.28
96	160			●				225	352	150	69	131.5 ± 13	7	2.5	-	-	0.5741	0.5405	43.23
																	0.7318	0.5405	44.50
						●											0.4591	0.5970	44.37
114	160			●				225	352	150	83	138.5 ± 20	7	2.5	-	-	0.6475	0.5970	46.32
																	0.8052	0.5970	47.60
140	240			●				326	431	200	81	175 ± 12	10	3	-	-	0.8816	1.8812	83.57
																	1.0708	1.8812	85.10
180	240			●				326	431	200	101	185 ± 22	10	3	-	-	1.0905	2.0194	88.83
																	1.2796	2.0194	90.37

¹⁾ With max. bore


Types of hubs type B ¹⁾



Type 1.0
with feather keyway
and setscrew



Type 2.1
clamping hub
single slot with
feather keyway




Type 8.0
taper interference fit


Type 8.1
cylindrical
interference fit

¹⁾ Dimensions and type may differ depending on size, other types of hubs on request


Displacements

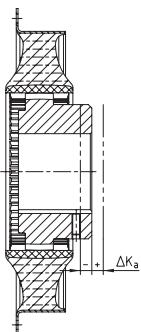

Axial displacement

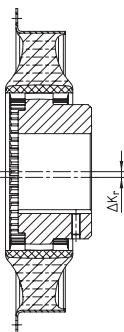

Radial displacement

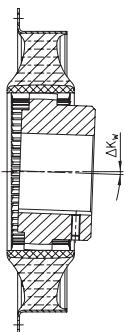

Angular displacement

SINULASTIC® B size	20	28	38	53	96	114	140	180
Perm. axial displacement ΔK _a [mm]	±2	±3	±3.0	±3.0	±4.0	±4.0	±4.0	±4.0
1500 rpm	0.8	1.1	1.1	1.1	1.25	1.25	1.5	1.5
Perm. radial displacement ΔK _r [mm]	0.6	0.8	0.8	0.8	0.9	0.9	1.1	1.1
max. ¹⁾	1.6	2.2	2.2	2.2	2.5	2.5	3.0	3.0
1500 rpm	1.0	0.8	0.8	0.8	0.7	0.7	0.6	0.6
max. ¹⁾	0.7	0.6	0.6	0.6	0.5	0.5	0.4	0.4
Perm. angular displacement ΔK _w [degree]	2.0	1.6	1.6	1.6	1.4	1.4	1.2	1.2
max. ¹⁾								

¹⁾ With assembly, for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.


Ordering example:

SINULASTIC® 53	B	M	14	1.3	DIN 5480 - 60x2x28
Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore


SINULASTIC® V

Highly flexible flange coupling


radially mountable disk coupling



Components

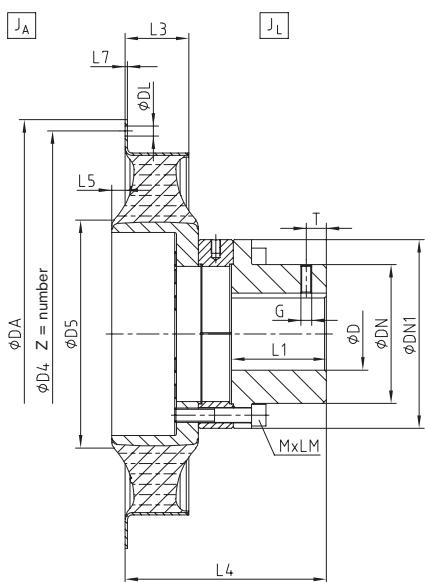

Type V specifies a radially replaceable type for not flange-mounted drives set up freely

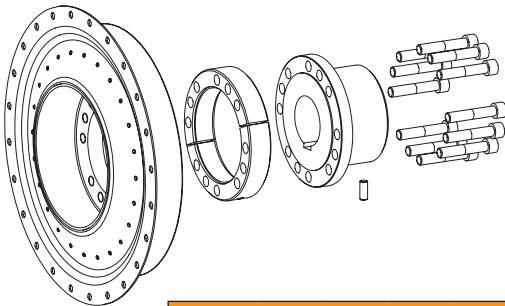

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352,42	333,37	8	11
14"	466,72	438,15	8	13
18"	571,50	542,90	6	17
21"	673,10	641,35	12	17
24"	733,42	692,15	12	21
Ø475	475	450	12	11

Technical data

Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn.} [Nm/rad]		Relative damping ψ [-]		Perm. damping power PKW [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max.}
20	SN	1750	2625	5250	700	7200	5760	1,00	0,80	210	126	3240	3600
	MN	2000	3000	6000	800	11500	9200	1,10	0,90	240	144	3240	3600
	HN	2500	3750	7500	1000	18500	14800	1,30	1,10	270	162	3420	3800
28	SN	2200	3300	6600	880	9500	7600	1,00	0,80	260	156	2880	3200
	MN	2800	4200	8400	1120	14000	11200	1,10	0,90	270	162	2880	3200
	HN	3400	5100	10200	1360	21000	16800	1,30	1,10	290	174	3240	3600
38	SN	3000	4500	9000	1200	14500	11600	1,00	0,80	275	165	2880	3200
	MN	3800	5700	9600	1520	22000	17600	1,10	0,90	300	180	2880	3200
	HN	4600	6900	13800	1840	34000	27200	1,30	1,10	330	198	3240	3600
53	SN	4000	6000	12000	1600	17000	13600	1,00	0,80	285	171	2700	3000
	MN	5300	7950	14400	2120	28000	22400	1,10	0,90	325	195	2700	3000
	HN	6200	9300	18600	2480	43500	34800	1,30	1,10	370	222	3060	3400
96	SN	7800	11700	23400	3120	60000	48000	1,00	0,80	480	288	2340	2600
	MN	9600	14400	28800	3840	84000	67200	1,10	0,90	500	300	2340	2600
	HN	11200	16800	33600	4480	125000	100000	1,30	1,10	510	306	2700	3000
114	SN	9200	13800	27600	3680	70000	56000	1,00	0,80	500	300	2340	2600
	MN	11400	17100	33900	4560	100000	80000	1,10	0,90	530	318	2340	2600
	HN	13400	20100	40200	5360	148000	118400	1,30	1,10	550	330	2520	2800
140	SN	12000	18000	36000	4800	106000	84800	1,00	0,80	540	324	2160	2400
	MN	14000	21000	42000	5600	149000	119200	1,10	0,90	550	330	2160	2400
	HN	16200	24300	48600	6480	235000	188000	1,30	1,10	570	342	2520	2800
180	SN	14600	21900	43800	5840	132000	105600	1,00	0,80	620	372	2160	2400
	MN	18000	27000	54000	7200	185000	148000	1,10	0,90	630	378	2160	2400
	HN	22000	33000	66000	8800	295000	236000	1,30	1,10	650	390	2340	2600

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.

T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternations pulsating / 50,000 load alternations vibratory

T_{Kmax1} Impact loads rarely, min. 1,000 load alternations


For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.

²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


SINULASTIC® type V																												
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620					Dimensions [mm]							Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾												
		11 1/2"	14"	18"	21"	24"	Ø475	DN	DN1	D5	L1	L3	L4	L5	L7	MxLM	G	T	J _A	J _L								
20	70													100		145	145	75	60	196	8.5	2	M12x90	M10	20	0.0625	0.0634	15.900
														154		209	244	100	38	181	191				0.1114	0.0594	16.083	
28	110													154		209	245	100	52	181	10	2.5	M16x90	M10	20	0.1159	0.2148	27.342
														154		209	245	100	52	195	205				0.2291	0.2053	27.867	
38	110													154		209	245	100	52	195	10	2.5	M16x90	M16	40	0.1213	0.2053	26.289
														154		209	247	105	70.5	223	15	2.5	M16x90	M16	40	0.1524	0.2380	29.777
53	110													154		209	247	105	70.5	223	15	2.5	M16x90	M16	40	0.1576	0.2275	28.598
														154		209	247	105	70.5	223	15	2.5	M16x90	M16	40	0.2655	0.2275	30.173
96	160													235		300	352	150	69	249	7	2.5	M20x80	-	-	0.1888	0.2733	33.369
														235		300	352	150	83	263	7	2.5	M20x80	-	-	0.1942	0.2672	32.239
114	160													235		300	352	150	83	263	7	2.5	M20x80	-	-	0.3020	0.2672	34.299
														235		300	352	150	83	263	7	2.5	M20x80	-	-	0.3857	1.1406	62.681
140	165													235		300	431	200	81	314	10	3	M20x80	-	-	0.8816	2.2675	97.598
														235		300	431	200	101	334	10	3	M20x80	-	-	1.0724	2.2675	109.896
180	165													235		300	431	200	101	334	10	3	M20x80	-	-	1.0905	2.3956	104.973
														235		300	431	200	101	334	10	3	M20x80	-	-	1.2796	2.3956	106.508

¹⁾ With max. bore


Types of hubs type V ¹⁾



Type 1.0
with feather keyway
and setscrew




Type 1.3
spline toothing




Type 2.1
clamping hub
single slot with
feather keyway



Type 3.1
spline/clamping hub N




Type 8.0
taper interference fit




Type 8.1
cylindrical
interference fit

¹⁾ Dimensions and type may differ depending on size, other types of hubs on request


Displacements

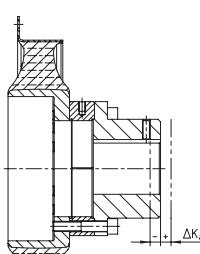

Axial displacement

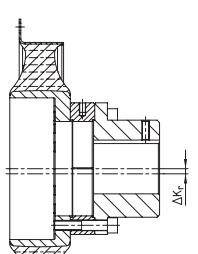

Radial displacement

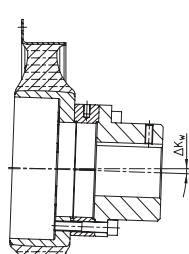


Angular displacement

SINULASTIC® V size	20	28	38	53	96	114	140	180
Perm. axial displacement ΔK _a [mm]	±2	±3	±3.0	±3.0	±4.0	±4.0	±4.0	±4.0
1500 rpm	0.8	1.1	1.1	1.1	1.25	1.25	1.5	1.5
Perm. radial displacement ΔK _r [mm]	0.6	0.8	0.8	0.8	0.9	0.9	1.1	1.1
max. ¹⁾	1.6	2.2	2.2	2.2	2.5	2.5	3.0	3.0
1500 rpm	1.0	0.8	0.8	0.8	0.7	0.7	0.6	0.6
0.7 ¹⁾	0.7	0.6	0.6	0.6	0.5	0.5	0.4	0.4
max. ¹⁾	2.0	1.6	1.6	1.6	1.4	1.4	1.2	1.2
Perm. angular displacement ΔK _w [degree]								

¹⁾With assembly, for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

Ordering example:	SINULASTIC® 53	V	M	14	1.0	Ø60
Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore	

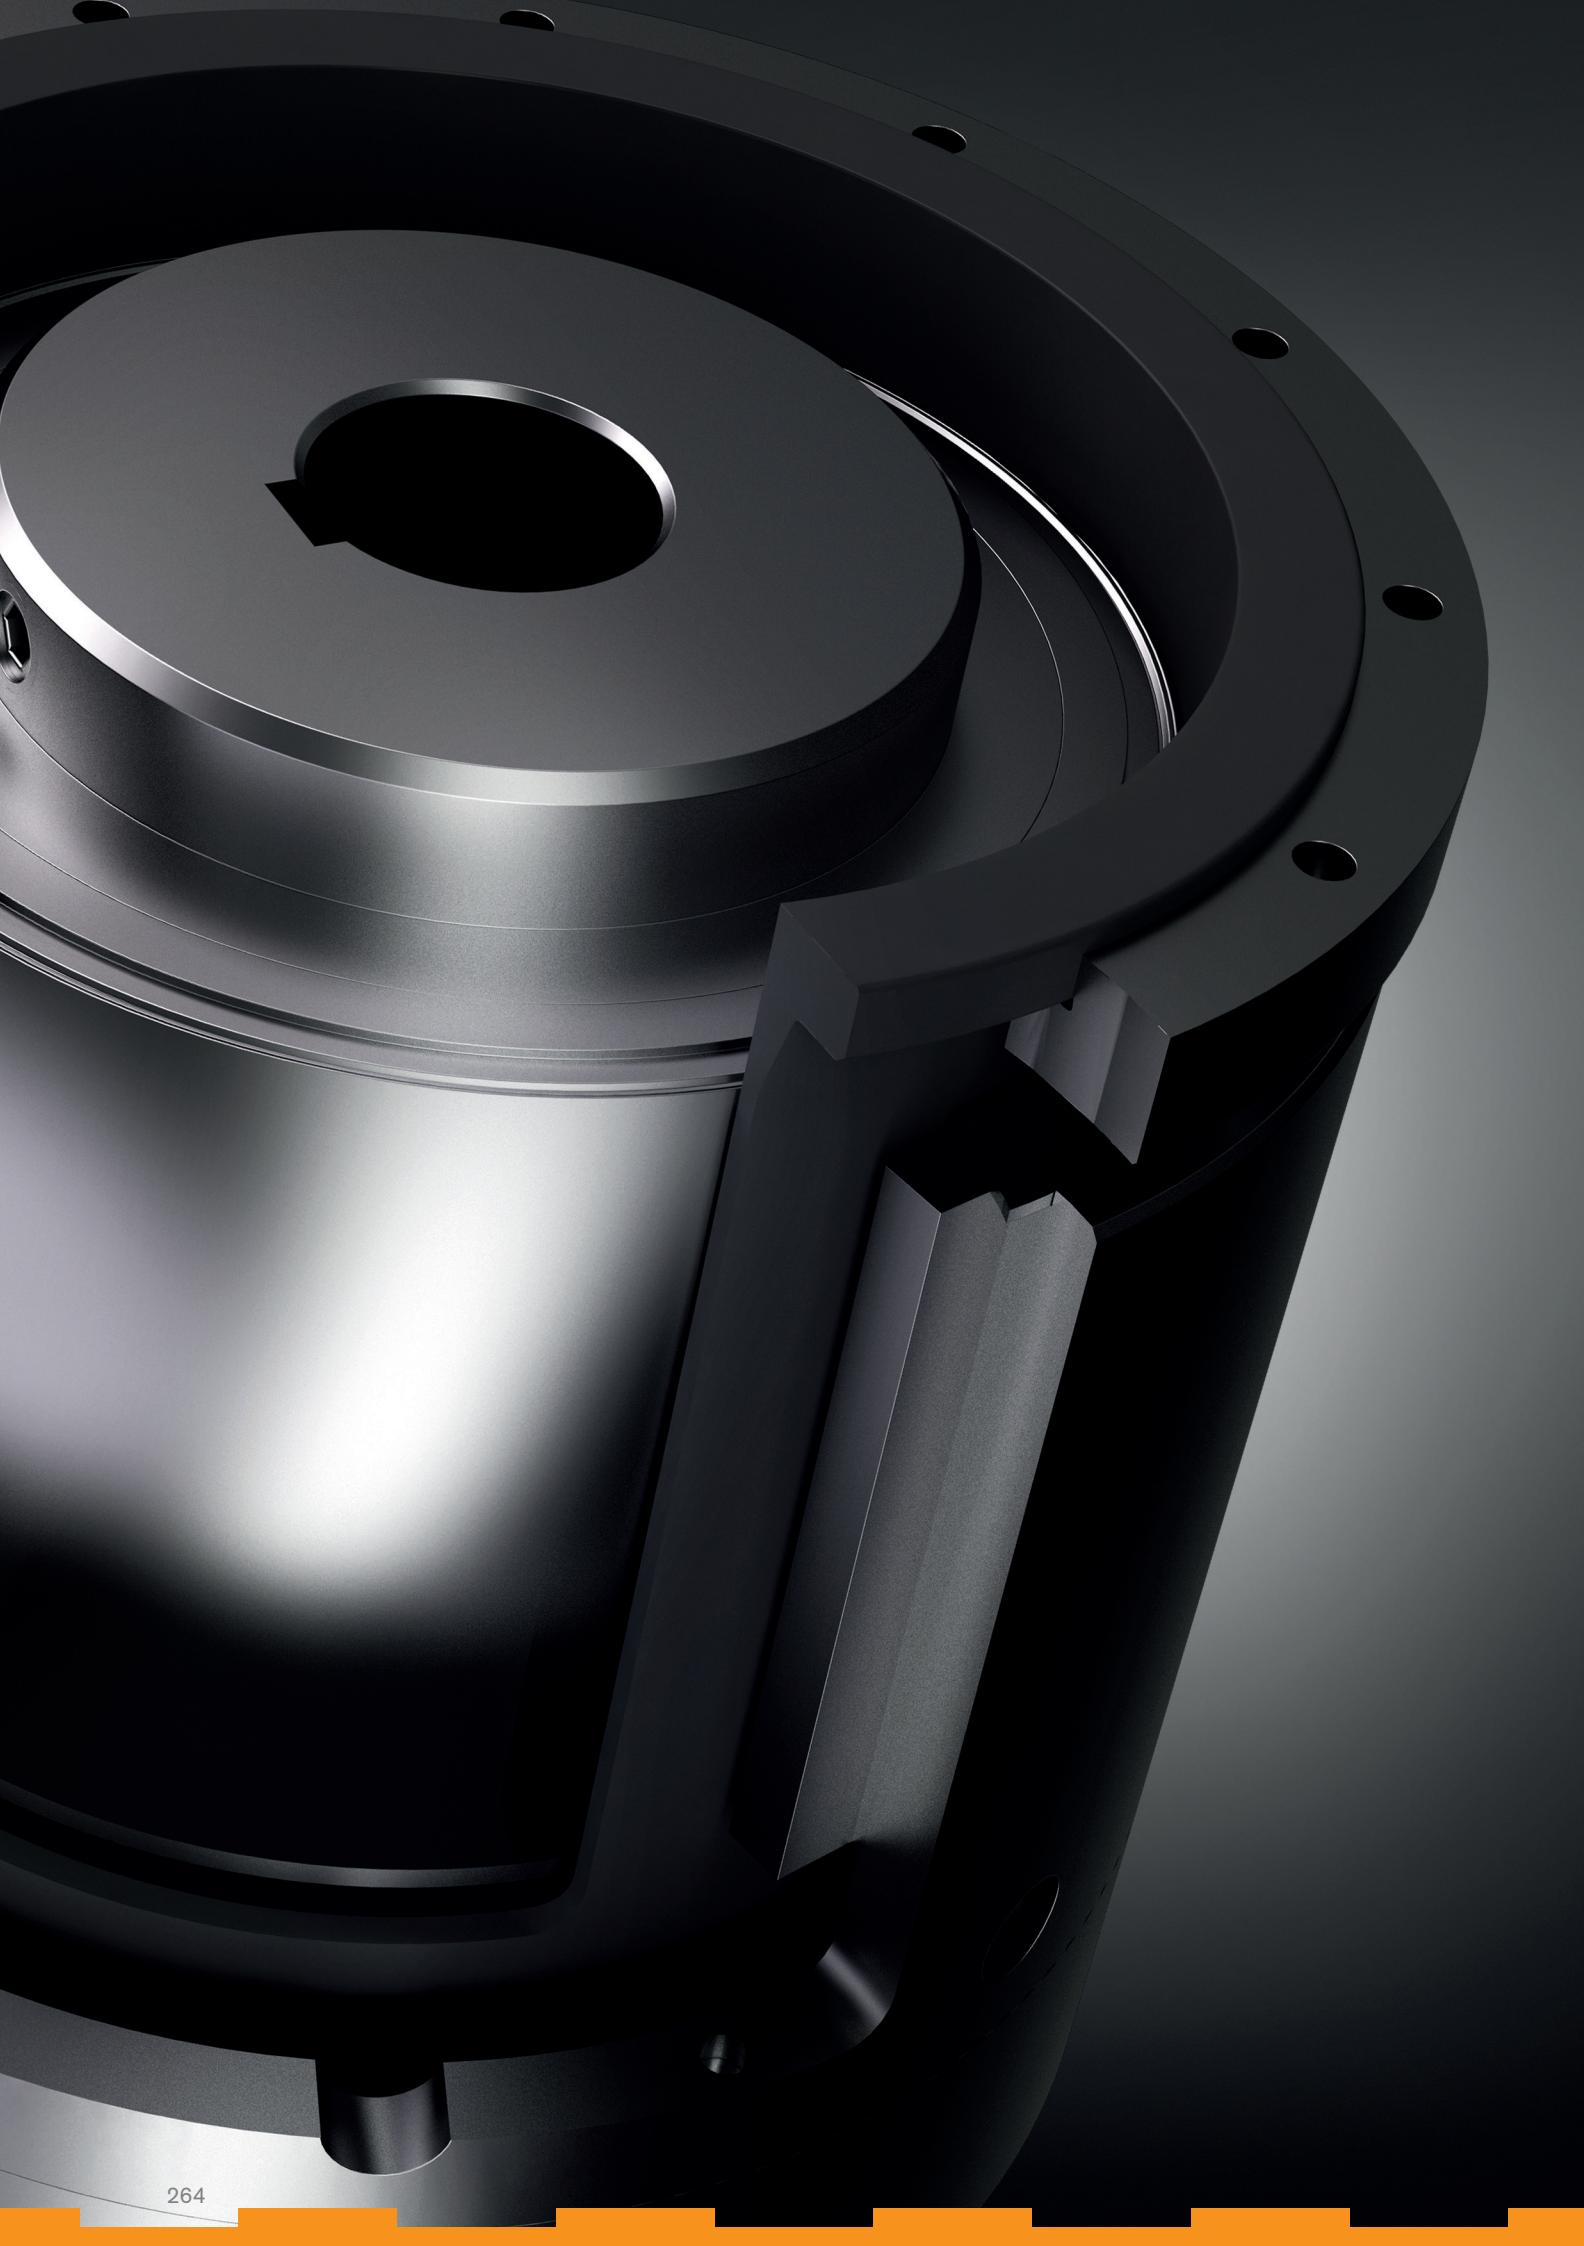

Magnetic couplings

Types and operating description 266

MINEX®-S

Containment shroud – material stainless steel	268
Containment shroud – material Hastelloy	270
Containment shroud – material PEEK	272
Containment shroud – material oxide ceramics	274
Conversion kits and customised subassemblies	276
Other types	277



MINEX®-H

Hysteresis coupling 278


Please note: Higher pressure resistance



Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of pressure resistance with some sizes of this series.

Magnetic
couplings

MINEX®-S

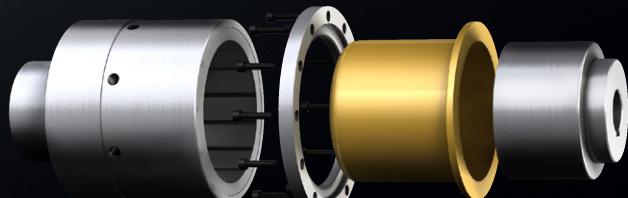

MINEX®-H



MAGNETIC COUPLINGS

TYPES AND OPERATING DESCRIPTION

General information



General description

MINEX®-S magnetic couplings transmit the torque without contact through magnetic forces between the internal and external rotor. They ensure hermetic separation between driving and driven side in pumps and agitators sealing hazardous liquids and gases reliably. As a result they prevent serious leakages operating as a reliable alternative to usual dynamic shaft seals.


Internal rotor



External rotor



Run of flux lines

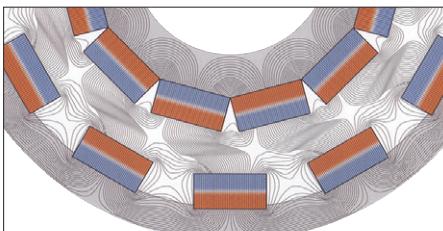

Operation/design

The coupling consists of an external and an internal rotor. The external rotor has got high-quality, permanent magnets of changing polarity on the inner side while the internal rotor has got them on the outside.

The external rotor is usually fixed on the drive side and the magnets are glued in the keyways. The magnets of the internal rotor on the driven side are fully encapsulated.

Torque transmission

In their non-operative states the north and south poles of the rotors face each other and the magnetic field is completely symmetric. It is only when the rotors are twisted that the magnetic field lines are moved, hence the torque is transmitted through the air gap. Then there is a synchronous operation under a constant torsion angle.

If the maximum coupling torque and the maximum torsion angle are exceeded, the power transmission is interrupted.

Containment shroud



Sealing function

The containment shroud that is fixed to the housing separates internal and external rotor from each other.

It ensures a completely leak-proof separation of product and atmosphere.

The sealing is achieved statically, e. g. with a flat seal or an O-ring, thus eliminating the need to use dynamically loaded sealing elements.

As a standard KTR supplies both metallic and non-metallic containment shrouds. The metallic types cover the widest application range, yet causing eddy current losses which might require cooling measures. If eddy current losses have to be entirely excluded, the energy-efficient alternative materials PEEK and ceramics are available.

Use in potentially explosive atmospheres

MINEX® couplings are suitable for power transmission in drives in potentially explosive atmospheres. The types with metallic, ceramic and PEEK containment shrouds are assessed and approved as components of category II according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 2G.


Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.



MAGNETIC COUPLINGS


TYPES AND OPERATING DESCRIPTION

Properties of magnetic couplings

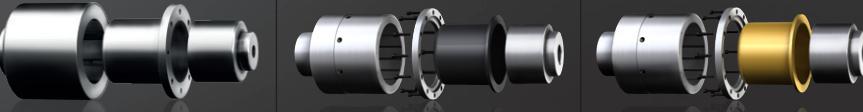

Product	Type with metallic containment shroud	Type with containment shroud made of PEEK CFRP	Type with containment shroud made of oxide ceramics
Type	Permanent-magnetic synchronous coupling		
Properties			
Permanent-magnetic	●	●	●
Contactless	●	●	●
Maintenance-free	●	●	●
Torsionally flexible	●	●	●
Low vibrations	●	●	●
Special features/applications			
	Most common type Covering the widest performance range Particularly suitable for pump drives/ Applications with liquids High t_{max} [°C] and p_{max} [bar]	No eddy current losses Energy-efficient and economic Particularly suitable for dry running	For average requirements on t_{max} [°C] and p_{max} [bar] High t_{max} [°C] and p_{max} [bar]
Torque range T_{KN} [Nm]	Max.	1,000	370
			550
Max. pressure resistance [bar]			
Pmax.	Up to 90 bars depending on size	Up to 16 bars with 130 °C	Up to 25 bars depending on size
Geometries			
Shaft diameter min./max. [mm]	Ø5 pilot bored	Ø5 pilot bored	Ø5 pilot bored
Max. temperature resistance [°C]			
t_{max}	150/300 depending on magnet material	130	300
Certifications/type examinations			
ATEX	●	CFRP reinforcement ●	GRP reinforcement ●
	For further details see catalogue pages 232 - 235	For further details see catalogue pages 236 - 237	For further details see catalogue pages 238 - 239

Torque reduction with temperature increase

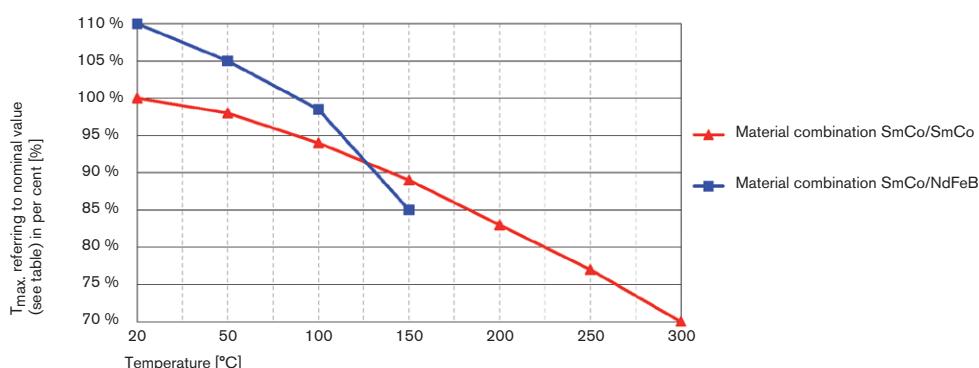

Temporary torque reduction with increased temperature for alternative material combinations [%].




Please note:

KTR recommends to use NdFeB magnets for the external rotor, provided that the operating temperature falls below 150 °C.

MINEX®-S

Magnetic couplings

Containment shroud – material stainless steel

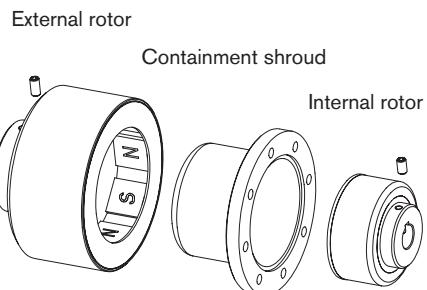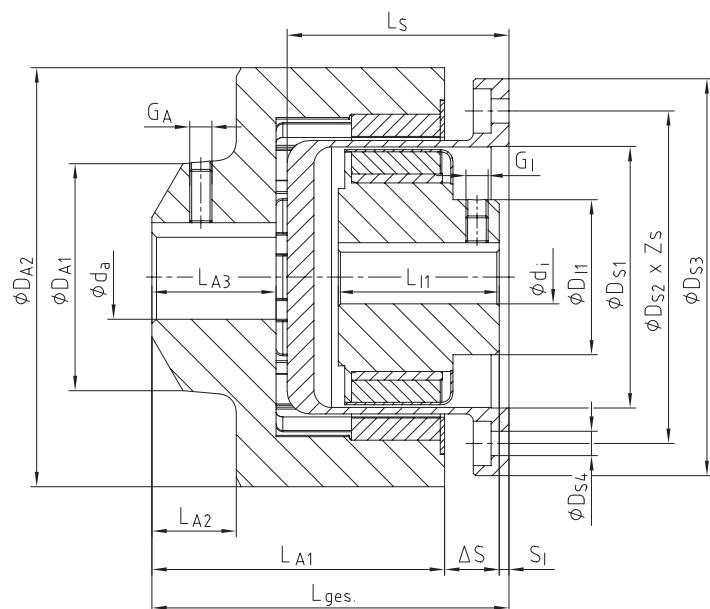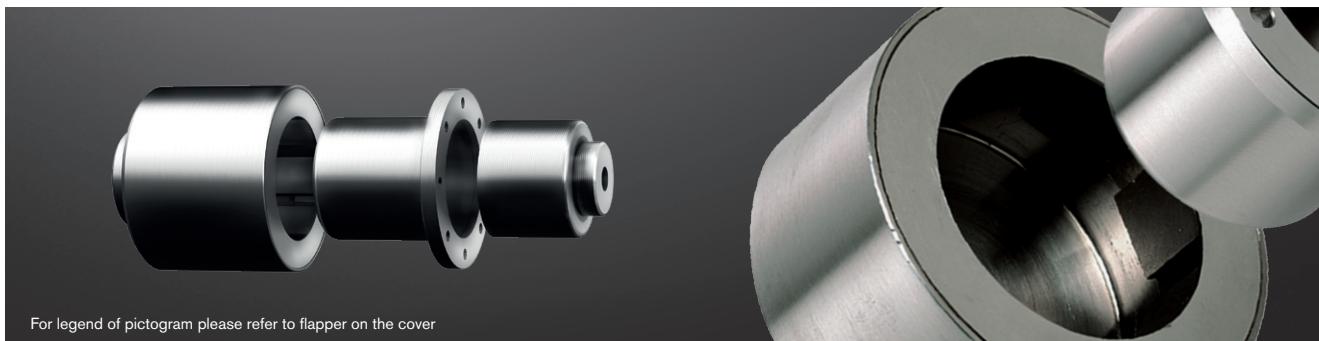

Technical data – Internal rotor and containment shroud															
Size	T _K max [Nm] with 20 °C	Dimensions [mm]													
		Internal rotor					Containment shroud								
		Finish bore ¹⁾ d _i		D ₁	L ₁	G _I	S _I	D _{S1}	D _{S2}	D _{S3}	D _{S4}				
		Min.	Max.				Min.	Max.			Z _S	L _S			
SA 22/4	0.15	5	9	20	20	M3	2.0	2.0	21.5	38	46	4.5	8	29	
SA 34/10	1	5	12	20	22	M3	2.0	5.5	34	46	55	4.5	4	30.5	
SA 46/6	3	8	16	28	33	M4	6.5	7.0	46	64	78	4.5	8	45	
SA 60/8	7		12	22	35	36.3	M5	1.7	5.5	59	75	89	5.5	8	50
SB 60/8	14			36	56	M5	0.0	4.0						70.3	

Technical data – External rotor and general												
Size	Dimensions [mm]										General	
	External rotor											
	Finish bore ¹⁾ d _a		D _{A1}	D _{A2}	G _A	L _{A1}	L _{A2}	L _{A3}	ΔS	L _{total}	Min.	Max.
SA 22/4	5	11	18	38	M4	35	8.5	11	5	42	42	
SA 34/10	5	14	22	53	M4	38.8	10.5	13	5.3	46	49.5	
SA 46/6	5	24	40	69.5	M5	53	16	22	9	69	69.5	
SA 60/8	9	32		50	94.5	M6	66	19	28	12	80	83.3
SB 60/8	9	38				M8	93.3	15	30		105.2	109.2

¹⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9]

Ordering example:	MINEX® SA 60/8	NdFeB	d _i Ø20 mm	d _a Ø24 mm
	Coupling size	NdFeB – t _{max.} = 150 °C Sm2Co17 – t _{max.} = 300 °C	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	

Examples of application

MINEX® couplings with containment shroud made of stainless steel are the most common type for pump drives and other applications with liquids in the lower performance range. Subject to their high resistance to pressure and temperature they cover a wide application range. The magnetic rotors are available from stock in an unbored or pilot bored design. If requested, the parts can be finish bored according to ISO fit H7 and provided with feather keyway to DIN 6885 sheet 1 [JS9].

Inside the rotating magnetic field metallic containment shrouds generally cause losses of eddy current which are converted into heat and which may require cooling measures. On applications with pumps the heat generated can basically be dissipated by the medium to be pumped. If higher pressure resistance than covered by the KTR standard is required, KTR provides for customised special solutions.

Typical applications: gear pumps, centrifugal pumps, screw spindle pumps, agitators, PU foaming lines

Use in potentially explosive atmospheres

MINEX® couplings with containment shroud made of stainless steel are suitable for power transmission in drives used in potentially explosive atmospheres. They are assessed and approved as components of category II according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 2G.

If the couplings operate in potentially explosive atmospheres, the user has to provide for special measures. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.





Technical data – Materials, temperature and pressure resistance										
Size	TK max [Nm] with 20 °C	Internal rotor			Containment shroud			External rotor (+ flange hub optionally)		
		Standard material		Max. temperature	Standard material		Max. pressure	Standard material		Max. temperature
		Hub	Magnets	t _{max.} [°C]	Hub	Cont. shroud	P _N /P _{max.} [bar]	Hub	Magnets	t _{max.} [°C]
SA 22/4	0.15	1.4462	NdFeB	150	1.4571	1.4571	60/90	S355J2	NdFeB	150
SA 34/10	1	1.4462	NdFeB	150	1.4571	1.4571	16/24	S355J2	NdFeB	150
SA 46/6	3	1.4571	Sm2Co17	300	1.4571	1.4571	16/24	S355J2	Sm2Co17	300
SA 60/8	7	1.4571	Sm2Co17	300	1.4571	1.4571	40/60	S355J2	Sm2Co17*	300
SB 60/8	14	1.4571	Sm2Co17	300	1.4571	1.4571	40/60	S355J2	Sm2Co17*	300

*) External rotor alternatively available with magnets made of NdFeB (t_{max.} = 150 °C)

MINEX®-S

Magnetic couplings

Containment shroud – material Hastelloy

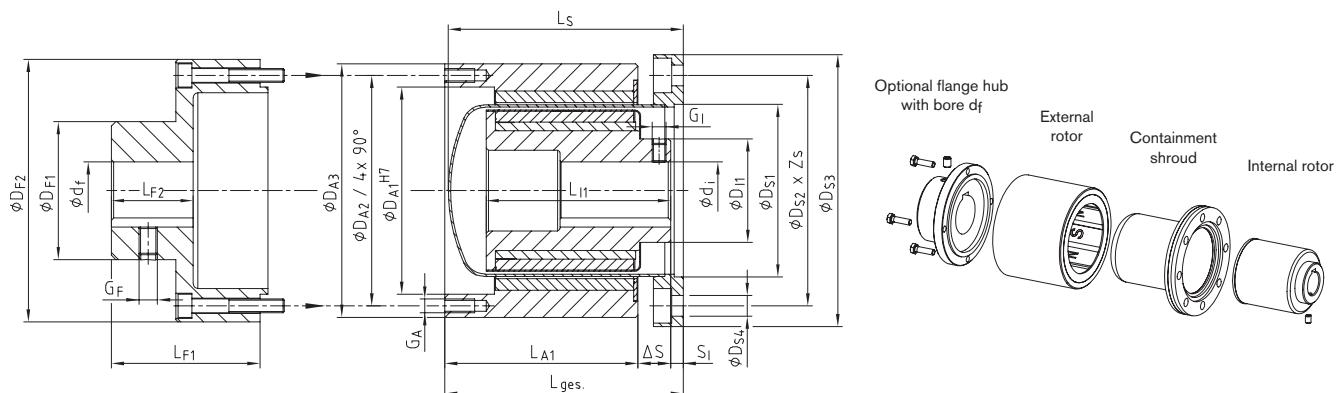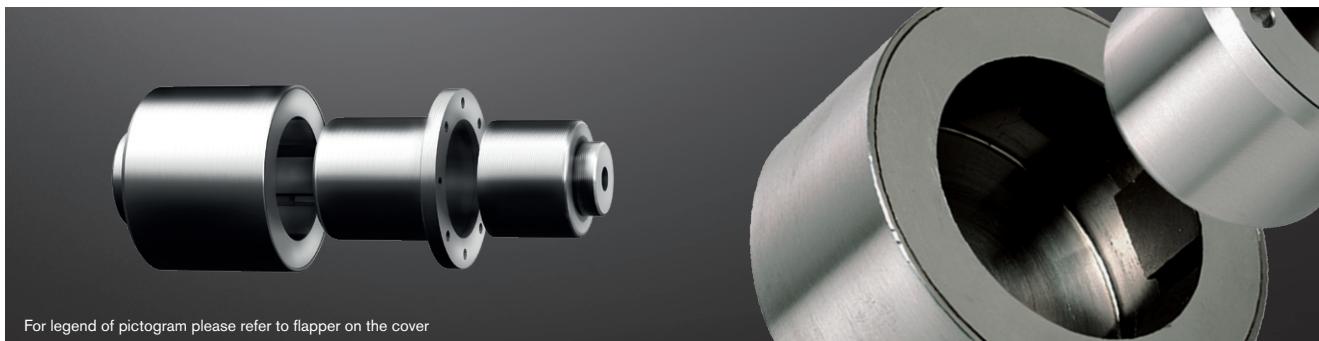

Technical data – Materials, temperature and pressure resistance								
Size	TK max [Nm] with 20 °C	Internal rotor		Containment shroud			External rotor (+ flange hub optionally)	
		Standard material	Max. temperature	Standard material	Max. pressure	Standard material	Max. temperature	Standard material
SA 75/10	10	1.4571	Sm2Co17	300	1.4571	2.4602**	25/37.5	S355J2
SB 75/10	24	1.4571	Sm2Co17	300	1.4571	2.4602**	25/37.5	S355J2
SC 75/10	40	1.4571	Sm2Co17	300	1.4571	2.4602**	25/37.5	S355J2
SA 110/16	25	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SB 110/16	60	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SC 110/16	95	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SB 135/20	100	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SC 135/20	145	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SD 135/20	200	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SC 165/24	210	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SD 165/24	280	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SE 165/24	370	1.4571	Sm2Co17	300	1.4571	2.4856	25/37.5	S355J2
SD 200/30	430	1.4571	Sm2Co17	300	1.4571	2.4856	16/24	S355J2
SE 200/30	550	1.4571	Sm2Co17	300	1.4571	2.4856	16/24	S355J2
SD 250/38	670	1.4571	Sm2Co17	300	1.4571	2.4856	16/24	S355J2
SE 250/38	820	1.4571	Sm2Co17	300	1.4571	2.4856	16/24	S355J2
SF 250/38	1000	1.4571	Sm2Co17	300	1.4571	2.4856	16/24	S355J2

*) External rotor alternatively available with magnets made of NdFeB ($t_{max.} = 150 \text{ }^{\circ}\text{C}$)

**) Containment shroud size 75 alternatively available made of stainless steel 1.4571 ($P_N/P_{max.} = 16/24$ bars)

Ordering example:

MINEX® SB 75/10	NdFeB	$d_1 \varnothing 20 \text{ mm}$	$d_a \varnothing 24 \text{ mm}$	Hastelloy
Coupling size	NdFeB – $t_{max.} = 150 \text{ }^{\circ}\text{C}$ Sm2Co17 – $t_{max.} = 300 \text{ }^{\circ}\text{C}$	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	Containment shroud type Stainless steel 1.4571 or Hastelloy	

Examples of application

MINEX® couplings with containment shroud made of Hastelloy are the most common type for pump drives and other applications with liquids in the average and higher performance range. Subject to their high resistance to pressure and temperature they cover a wide application range.

Inside the rotating magnetic field metallic containment shrouds generally cause losses of eddy current which are converted into heat and which may require cooling measures. On applications with pumps the heat generated can basically be dissipated by the medium to be pumped. If higher pressure resistance than covered by the KTR standard is required, KTR provides for customised special solutions.

Typical applications: gear pumps, centrifugal pumps, screw spindle pumps, agitators, PU foaming lines

Use in potentially explosive atmospheres

MINEX® couplings with containment shroud made of Hastelloy are suitable for power transmission in drives used in potentially explosive atmospheres. They are assessed and approved as components of category II according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 2G.

If the couplings operate in potentially explosive atmospheres, the user has to provide for special measures. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.



Size	Technical data – External rotor and general																								
	Dimensions [mm]																								
	Internal rotor						Containment shroud						External rotor						Flange hub						
	Finish bore ¹⁾	D _I 1	L _I 1	G _I	S _I		D _{S1}	D _{S2}	D _{S3}	D _{S4}	Z _S	L _S	D _{A1}	D _{A2}	D _{A3}	L _{A1}	G _A	d _f max.	D _{F1}	D _{F2}	L _{F1}	L _{F2}	G _F	ΔS	
	d _i min.	d _i max.			Min.	Max.																		Total length ²⁾ (with flange hub)	
SA 75/10					39.5																			140	
SB 75/10	12	32	45	58	M6	4	26.5	75	100	118	9	8	102	90	100	110	61.3	M6	42	60	114	64.5	35.5	M8	12.2
SC 75/10					80																			142	164.5
SA 110/16					45																				177.5
SB 110/16	14	55	80	65	M8	4	35.0	110	133	153	9	12	115	126	135	145	61.3	M6	55	85	150	99.5	59.5	M10	18.7
SC 110/16					85																				183.5
SB 135/20					65																				214.5
SC 135/20	20	70	90	85	M10	4	30.5	135	158	178	9	16	139	150	160	170	90.3	M6	70	100	170	65.5	48.5	M12	18.2
SD 135/20					110																				190.5
SC 165/24					85																				204.5
SD 165/24	24	80	110	110	M12	6	39.0	163.5	192	218	11	12	170	180	188	198	110.3	M6	75	110	198	77	60	M16	18.2
SE 165/24					130																				233
SD 200/30					135																				247
SE 200/30	38	90	130		M16	6	24.0	200	252	278	11	12	180	212	222	232	130.3	M6	80	120	232	120	98	M12	20.7
SD 250/38					115																				282
SE 250/38	38	100	165	135	M16	6	46.0	255	285	315	13.5	12	182	272	282	292	130.3	M6	100	150	300	140	93	M16	25.7
SF 250/38					155																				322


¹⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9]

²⁾ Total length without flange hub = L_S

MINEX®-S

Magnetic couplings

Containment shroud – material PEEK

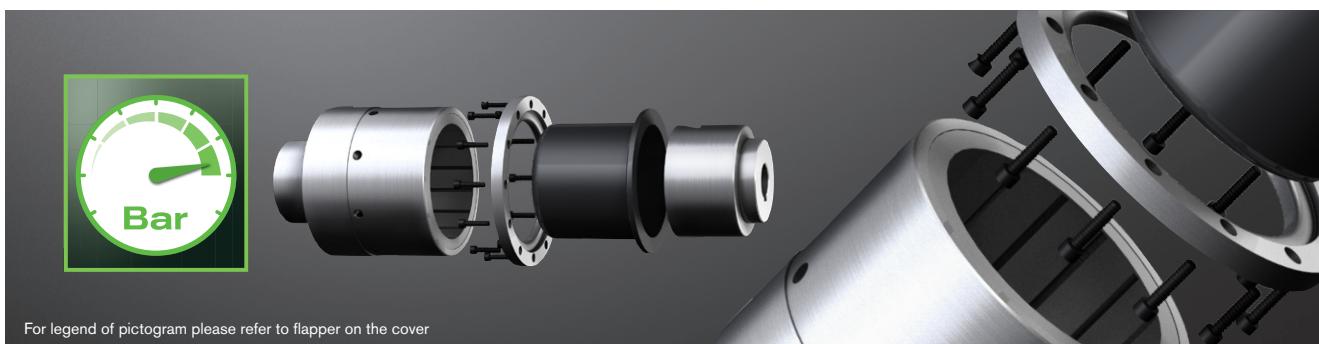

Technical data – Internal rotor and containment shroud																
Size	TK max [Nm] with 20 °C	Dimensions [mm]														
		Internal rotor						Containment shroud								
		Finish bore ¹⁾ d _i	Min.	Max.	D _{I1}	L _{I1}	G _I	SI	Min.	Max.	D _{S1}	D _{S2}	D _{S3}			
SA 75/10	10					39.5			30.5	54.5				Z _S	L _S = L _{total}	
SB 75/10	24	12	32		45	58	M6		8.5	35.5	-	100	118	9	8	108
SC 75/10	40					80			5.5	13.5						
SA 110/16	30					45			17.9	45						
SB 110/16	70	14	55		80	65	M8		4	25	140	151	168	9	12	115
SC 110/16	100					85			2	5						
SB 135/20	110					65			38.5	48						
SC 135/20	155	20	70		90	85	M10		18.5	28	157	167	180	6.6	12	144
SD 135/20	210					110			4	4						
SC 165/24	220					85			32							
SD 165/24	300	24	80		110	110	M12		4	8	196	210	228	9	12	156
SE 165/24	390					130			-6	-6						165

Technical data – External rotor, flange hub and general																
Size	Dimensions [mm]															
	External rotor				Flange hub				General							
	D _{A1}	D _{A2}	D _{A3}	L _{A1}	G _A	Max. finish bore ¹⁾ d _f	D _{F1}	D _{F2}	L _{F1}	L _{F2}	G _F	ΔS	Total length ²⁾ (with flange hub)	Min.	Max.	
SA 75/10				41.3										148.5	172.5	
SB 75/10	90	100	110	61.3	M6	42	60	114	64.5	35.5	M8	12.2	148.5	172.5		
SC 75/10				83.8										14.2	168	172.5
SA 110/16				41.3											165.5	193.5
SB 110/16	130	138	150	61.3	M6	55	85	153	87.5	45.5	M10	18.7	172.5	193.5		
SC 110/16				81.3											191.5	193.5
SB 135/20				70.3										18.2	216	225.5
SC 135/20	158	167	176	90.3	M6	70	100	176	89	67	M12			216	225.5	
SD 135/20				110.3										20.7	224	224
SC 165/24				90.3										18.5	231	234.8
SD 165/24	186	195	204	110.3	M6	75	110	204	94	70	M16			21	231	233.3
SE 165/24				130.3											254.3	254.3

¹⁾ Bores H7 with keyway to DIN 6885 sheet 1 (JS9) ²⁾ Total length without flange hub = L_S

Technical data													
Size	TK max [Nm] with 20 °C	Internal rotor			Containment shroud						External rotor (+ flange hub optionally)		
		Standard material			Standard material			Max. pressure	Max. temperature		Standard material		
		Hub	Magnets		Clamping ring	Cont. shroud		P _N [bar]	t _{max.} [°C]		Hub	Magnets	
SA 75/10	10	1.4571	Sm2Co17		-	PEEK		16	130		S355J2	NdFeB	
SB 75/10	24	1.4571	Sm2Co17		-	PEEK		16	130		S355J2	NdFeB	
SC 75/10	40	1.4571	Sm2Co17		-	PEEK		16	130		S355J2	NdFeB	
SA 110/16	30	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SB 110/16	70	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SC 110/16	100	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SB 135/20	110	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SC 135/20	155	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SD 135/20	210	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SC 165/24	220	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SD 165/24	300	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	
SE 165/24	390	1.4571	Sm2Co17		Aluminium	PEEK		16	130		S355J2	NdFeB	

= Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the pressure resistance with some sizes of this series.


Ordering example:	MINEX® SB 75/10	NdFeB	d _i Ø20 mm	d _a Ø24 mm	PEEK
	Coupling size	NdFeB – t _{max.} = 150 °C	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	Containment shroud type	

Examples of application


MINEX® couplings with containment shroud made of PEEK are an economic, energy-efficient alternative to the metallic types. They do not generate any eddy current losses and as a result do not generate any heat so that usually expensive cooling measures can be done without. Moreover, they are characterized by low susceptibility to fracture, low weight and easy handling.

They are ideally suitable for applications with low demands on temperature and pressure resistance.

Typical applications: vacuum pumps, fan drives, compressors, agitators, PU foaming lines

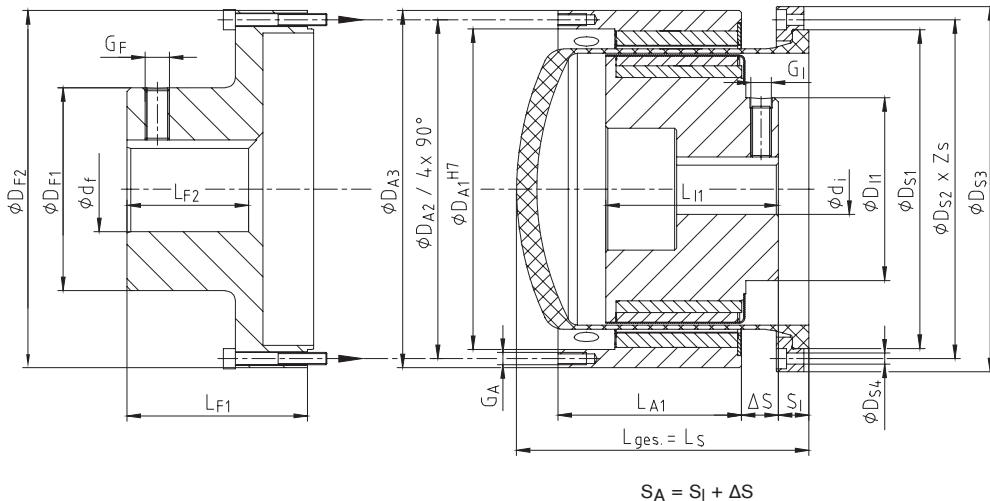

Optional flange hub with bore d_f

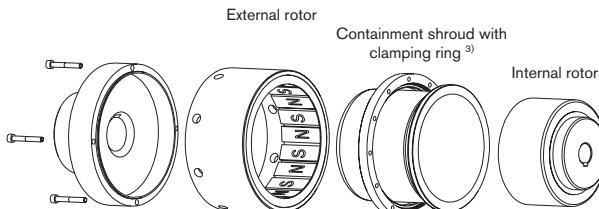

³⁾ Containment shroud size 75 also available as a one-piece design!

Use in potentially explosive atmospheres

MINEX® couplings with containment shrouds made of carbon fibre reinforced PEEK are suitable for power transmission in drives in potentially explosive atmospheres. They are assessed and approved as components of category II according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 2G.


If the couplings operate in potentially explosive atmospheres, the user has to provide for special measures. Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.



MINEX®-S

Magnetic couplings

Containment shroud – material oxide ceramics

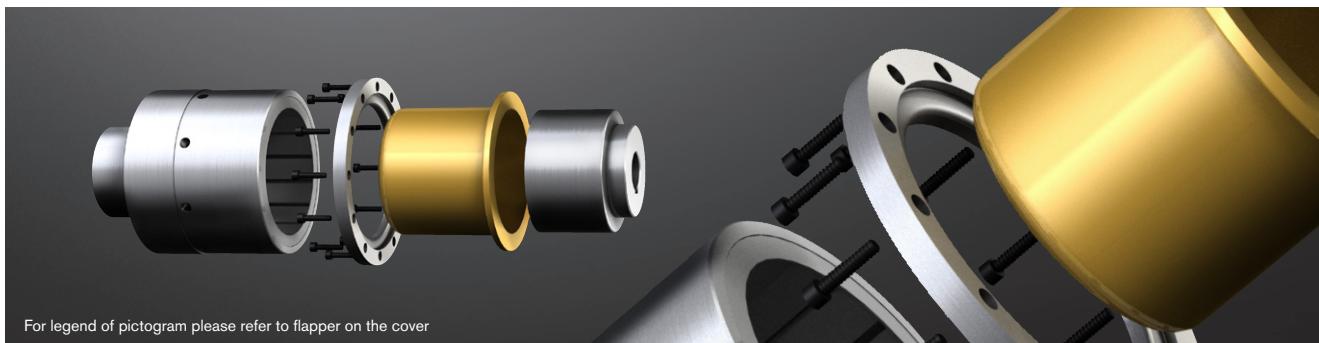

Technical data – Internal rotor and containment shroud													
Size	TK max [Nm] with 20 °C	Dimensions [mm]											
		Internal rotor						Containment shroud					
		Finish bore ¹⁾ d _i Min.	Finish bore ¹⁾ d _i Max.	D _{I1}	L _{I1}	G _I	S _I Min.	S _I Max.	D _{S1}	D _{S2}	D _{S3}	D _{S4}	Z _S
SA 110/16	30				45			48.0					
SB 110/16	70	14	55	72	65	M8	4	28.0	132	151	168	9	12
SC 110/16	100				85			9.0					
SB 135/20	110				65			46.5					
SC 135/20	155	20	70	90	85	M10	4	26.5	157	167	180	6.6	12
SD 135/20	210				110			4.0					
SC 165/24	220				85			28.0					
SD 165/24	300	24	90	110	110	M12	4	4.0	196	210	228	9	12
SE 165/24	390				130			17.0					
SD 200/30	430				135	M16	4	4.0	229	246	265	9	12
SE 200/30	550	38	90	130									

Technical data – External rotor, flange hub and general													
Size	Dimensions [mm]												General
	External rotor				Flange hub						Total length ²⁾ (with flange hub)		
	D _{A1}	D _{A2}	D _{A3}	L _{A1}	G _A	Max. finish bore ¹⁾ d _f	D _{F1}	D _{F2}	L _{F1}	L _{F2}	G _F	ΔS	Min.
SA 110/16				41.3									165.5
SB 110/16	130	138	150	61.3	M6	55	85	153	87.5	45.5	M10	18.7	195.5
SC 110/16				81.3									191.5
SB 135/20				70.3									215
SC 135/20	158	167	176	90.3	M6	70	100	176	89	67	M12	18.2	224
SD 135/20				110.3									20.7
SC 165/24				90.3									18.5
SD 165/24	186	195	204	110.3	M6	75	110	204	94	70	M16	22.9	230.5
SE 165/24				130.3									20.7
SD 200/30	212	222	232	130.3	M6	80	120	240	120	88	M16	25.7	280
SE 200/30													260

¹⁾ Bores H7 with keyway to DIN 6885 sheet 1 [JS9]

²⁾ Total length without flange hub = L_S

Technical data													
Size	TK max [Nm] with 20 °C	Internal rotor				Containment shroud				External rotor (+ flange hub optionally)			
		Standard material		Max. temperature		Standard material		Max. pressure		Standard material		Max. temperature	
		Hub	Magnets	t _{max.} [°C]		Hub	Cont. shroud	P _N /P _{max.} [bar]		Hub	Magnets	t _{max.} [°C]	
SA 110/16	25	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SB 110/16	60	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SC 110/16	95	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SB 135/20	100	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SC 135/20	145	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SD 135/20	200	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SC 165/24	210	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SD 165/24	280	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SE 165/24	370	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SD 200/30	430	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	
SE 200/30	550	1.4571	Sm2Co17	300		Aluminium	ZrO ₂ MgO	25/37.5		S355J2	Sm2Co17	300	



Ordering example:

MINEX® SB 135/20	NdFeB	d _i Ø20 mm	d _a Ø24 mm	Oxide ceramics ZrO ₂ MgO
Coupling size	NdFeB – t _{max.} = 150 °C Sm2Co17 – t _{max.} = 300 °C	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	Containment shroud type	

Examples of application

Like with the types with containment shroud made of PEEK, MINEX® couplings with containment shroud made of ceramics are an economic, energy-efficient alternative to the metallic types. Again they do not generate any eddy current losses and as a result do not generate any heat so that usually expensive cooling measures can be done without. Compared to PEEK, the containment shrouds made of ceramics are characterized by higher resistance to pressure and an excellent temperature resistance.

Typical applications: vacuum pumps, fan drives, compressors, agitators, PU foaming lines

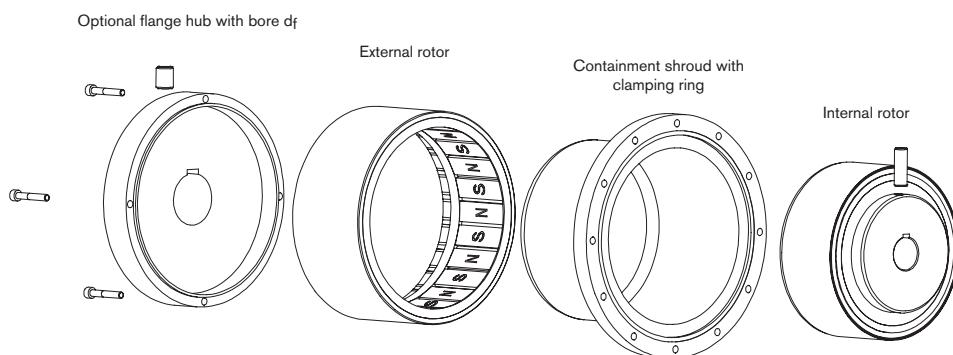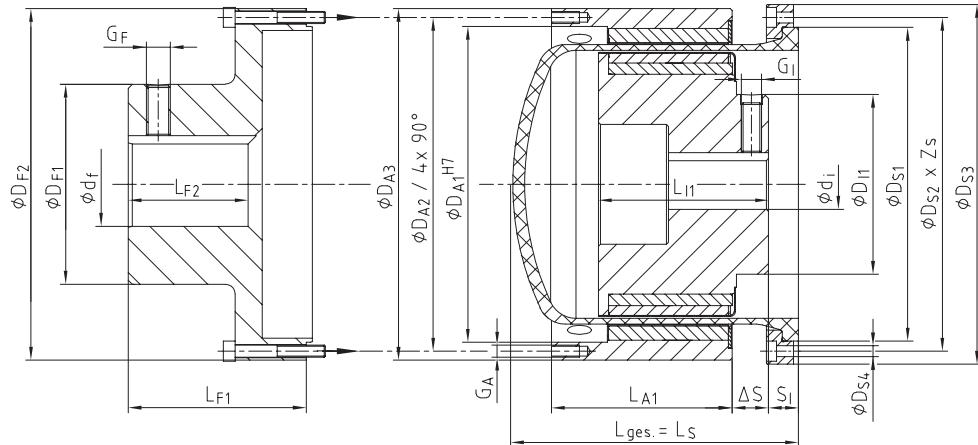

Use in potentially explosive atmospheres

MINEX® couplings with containment shrouds made of oxide ceramics are suitable for power transmission in drives used in potentially explosive atmospheres. They are assessed and approved as components of category II according to EU directive 2014/34/EU and thus suitable for the use in potentially explosive atmospheres of zone 2G.


Please read through our information included in the respective type examination certificate and the operating and assembly instructions at www.ktr.com.



MINEX®-S

Magnetic couplings

Conversion kits and customised subassemblies

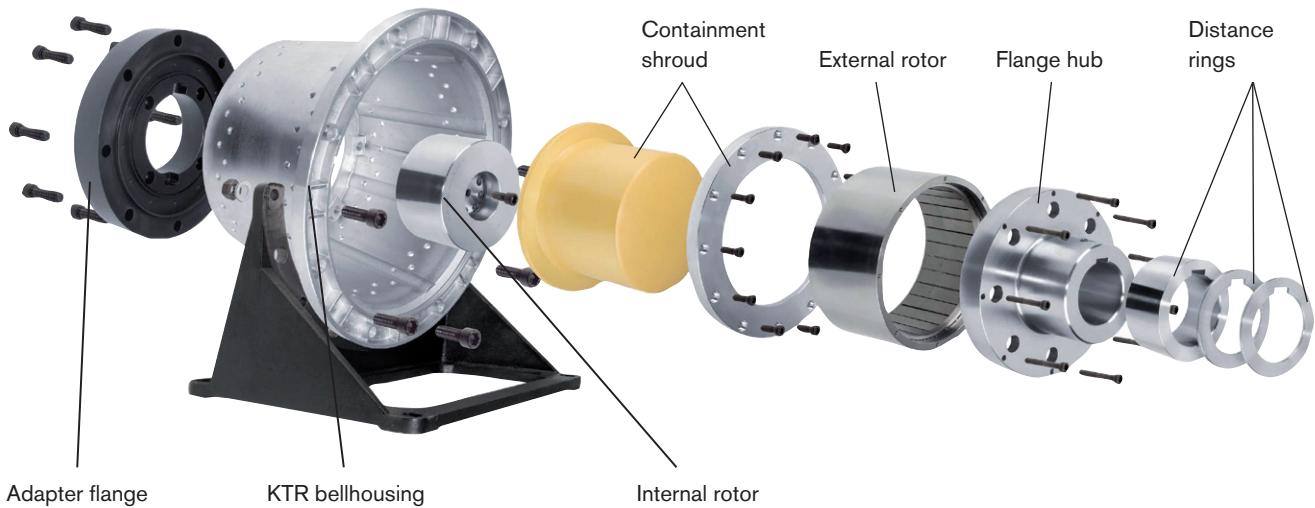

On request KTR provides customised special solutions in combination with KTR hydraulic components, allowing to easily retrofit existing systems by MINEX®-S.

Conversion kits for PUR foaming processes

When conveying and proportioning the media polyol and isocyanate in the processing plants for PUR, ambient air has to be prevented from penetrating into the process, since otherwise adverse reactions may be generated.

For a reliable sealing of such drives KTR provides standard conversion kits, among others for axial piston pumps type REXROTH A2VK and ROTARY POWER C series offering the following benefits:

- Maintenance-free operation
- Downtimes are considerably reduced
- No more problems with sealing
- Better efficiency and process reliability

The subassemblies are available for all motor-pump-combinations and in various materials.



Maintenance-free sealing of proportioning pumps for polyol and isocyanate in high-pressure reaction moulding machines

Pump data		Motor data (4 poles, n=1500 rpm)			Coupling data		
Pump	Type	Engine	Power [kW]	Torque TN	Size	Max. torque TK max	Bellhousing
REXROTH A2VK	A2VK-12	132 S	5.5	35 Nm	SB 110/16	60 Nm	PL 300/13/...
		132 M	7.5	48 Nm	SC 110/16	95 Nm	
		160 M	11	70 Nm	SC 135/20	145 Nm	
	A2VK-28	160 M	11	70 Nm	SC 135/20	145 Nm	PL 350/7/...
		160 L	15	96 Nm	SD 135/20	200 Nm	
		180 M	18.5	118 Nm	SD 135/20	200 Nm	
	A2VK-55	160 L	15	96 Nm	SC 165/24	210 Nm	PL 350/7/...
		180 M	18.5	118 Nm	SC 165/24	210 Nm	
		180 L	22	144 Nm	SD 165/24	280 Nm	
	A2VK-107	200 L	30	196 Nm	SE 165/24	280 Nm	PL400/5/...
		225 S/M	37/45	240/292 Nm	SE 165/24	370 Nm	PL450/3/...
		225 S/M	37/45	240/292 Nm	SE 165/24	370 Nm	PL400/5/...
ROTARY POWER C-Range	C 01	100L	2.2	14 Nm	SB 75/10	24 Nm	PK 250/13/...
	C 04	132 M	7.5	48 Nm	SC 110/16	95 Nm	PL300/13/...
	C 07	132 S	5.5	35 Nm	SB 110/16	60 Nm	PL300/13/...
		132 M	7.5	48 Nm	SC 110/16	95 Nm	PL300/13/...
	C20	160 L	15	96 Nm	SD 135/20	200 Nm	PL 350/7/...
		180 M	18.5	118 Nm	SD 135/20	200 Nm	PL 350/7/...

MINEX®-S

Magnetic couplings

Other types



Disk coupling

With this type the magnets are arranged opposite each other in axial direction. Thus this type is able to transmit the torque through plane walls. Furthermore it provides the following benefits:

- Short dimensions
- Drive of applications in closed liquid containers.
- Torque setting via air gap

Applications: Pumps, agitators, compressors, fans, swivel drives





Hysteresis coupling MINEX®-H

Different from the MINEX®-S magnetic coupling this type switches to slipping operation once the maximum transmittable torque has been achieved, while it continues to transmit T_{max} as a holding torque.

- wear-free torque limitation
- maintenance-free & load-holding
- very good repeatability of torque
- applicable as a coupling or brake

Applications: roller conveyors, winder drives, capping machines, etc.

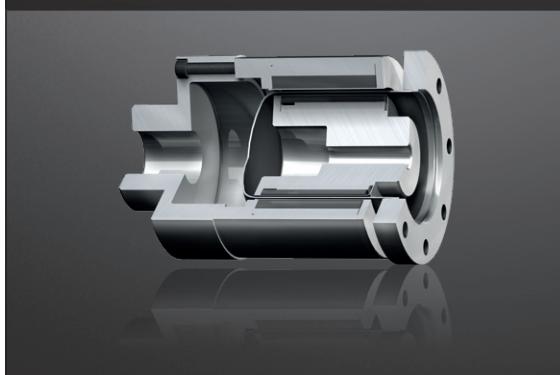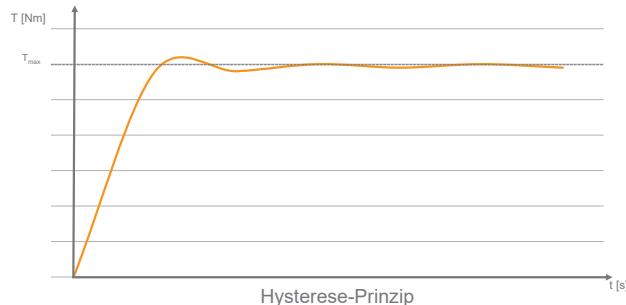

MINEX®-S fully made of stainless steel

If requested, KTR supplies MINEX®-S fully made of stainless steel. The magnets of the external rotor are encapsulated just like with the internal rotor.

Applications: offshore, marine, etc.






Customised special solutions

If requested, KTR supplies MINEX®-S in combination with the plain bearing required for the driven shaft.

MINEX®-H

Magnetic couplings

Hysteresis coupling

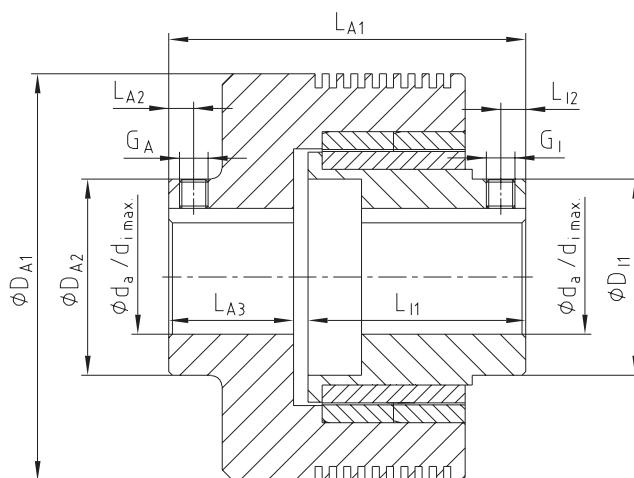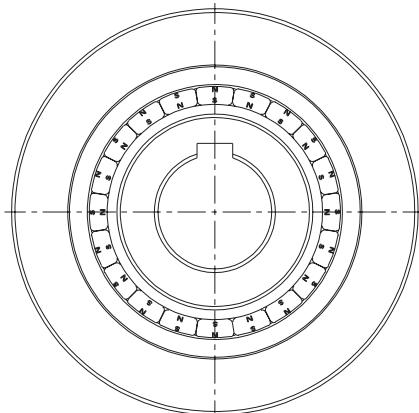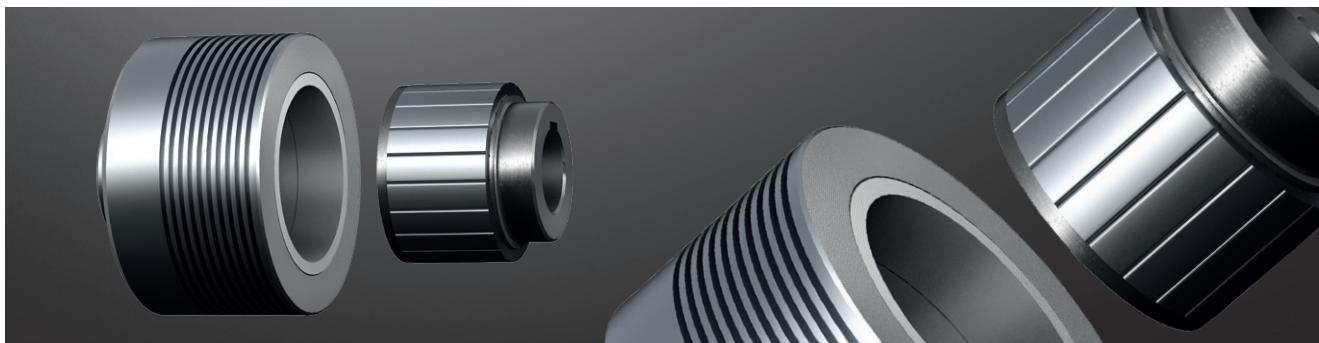

Technical data

Size	Overload torque T _{max.} 20 °C [Nm]	Finish bore d _a /d _i max. [mm]	Dimensions [mm]								Allowed power loss P _V perm. 20 °C [W]	Max. speed n _{max.} [rpm]	Max. temperature t _{max.} [°C]		
			D _{A1}	D _{A2}	L _{A1}	L _{A2}	L _{A3}	D _{I1}	L _{I1}	L _{I2}					
HA 48/12	1.2	16	82	35	80	7	35	35	41	7	M4	M4	80	1800	120
HB 48/12	2.4	16	82	35	100	7	35	35	61	7	M4	M4	88	1800	120
HA 60/16	2	22	94	45	80	7	35	45	41	7	M5	M5	87	1800	120
HB 60/16	4	22	94	45	100	7	35	45	61	7	M5	M5	96	1800	120
HA 71/20	3	32	114	55	80	7	35	55	41	7	M8	M8	98	1800	120
HB 71/20	6	32	114	55	100	7	35	55	61	7	M8	M8	110	1800	120

Technical selection:

$$P_V = \frac{T_{\max.} 20^\circ C * n_{\text{Slip}}}{9.55} \quad * Z \leq P_V \text{ perm. } 20^\circ C$$

$$Z = \frac{t_{\text{Slip}}}{t_{\text{Cycle}}}$$

P_V = Power loss

T_{max. 20 °C} = Transmittable torque [Nm]

P_V all. 20 °C = Allowed power loss [Nm]

n_{Slip} = Slip speed [1/min]

Z = Cycle factor (continuous slip operation Z=1)

t_{Slip} = Slip time [s]

t_{Cycle} = Cycle time [s]

Ordering example:

MINEX® HB 60/16	d _i Ø18 mm	d _a Ø20 mm
Coupling size	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	

Torque curve for overload

The MINEX®-H transfers the torque contactlessly by means of magnetic forces and serves as a wear-free torque limiter in case of overload.

Function standard mode:


The torque is transmitted from the drive to the output element contactlessly by means of magnetic forces. The speed is transmitted synchronously as long as the operating torque is below the selection torque (slip torque).



Function overload mode:

As soon as the operating torque exceeds the selection torque, the coupling slips and a relative speed is set between the drive and output side. During this, the hysteresis material is continuously reversed and heats up. The selection torque is almost constant in an overload. As the relative speed increases, the slip torque increases due to the eddy current effect.

Torque curve for overload

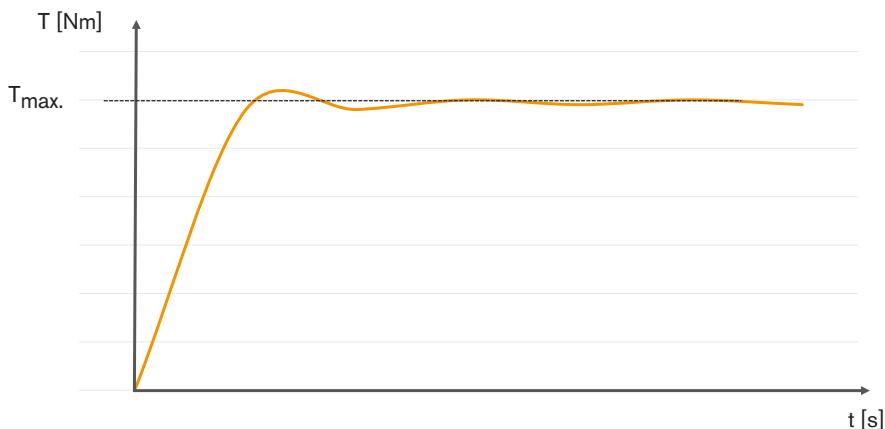

Characteristics:

- Contactless torque transmission by means of magnetic forces
- Wear-free torque limitation
- Maintenance-free
- Load-holding
- Very good repeatability of torque
- Applicable as a coupling or brake

Examples of application:



Filling systems



Film winder



Materials handling



Medical technology



Unwinding and winding equipment



Torque limiters

Types and operating description	282
Selection of torque limiters	283

RUFLEX®

Design and operation	284
Standard	285
With sprocket	286
Max. type	287
With torsionally flexible ROTEX®	288
With torsionally stiff BoWex®	289

SYNTEX®

Design and operation	302
Operating principles	303
Flange type	304
With sprocket	306
With toothed belt pulley	308
With backlash-free ROTEX® GS	309

KTR-SI

Design and operation	290
Operating principles	293
KTR-SI flange type	294
KTR-SI with torsionally flexible ROTEX®	295
KTR-SI FRE flange type	296
KTR-SI FRE with torsionally flexible ROTEX®	297
KTR-SI FRE flange type	298
KTR-SI FRE special types	299
KTR-SI FRA flange type FT	300
KTR-SI FRA with torsionally flexible POLY-NORM®	301

SYNTEX®-NC / KTR-SI Compact

Design and operation	310
Operating principle	311

SYNTEX®-NC

Hub type	312
With backlash-free ROTEX® GS	313
With torsionally stiff TOOLFLEX® S	314

KTR-SI Compact

Flange type	315
With backlash-free ROTEX® GS	316
Special types	317

RUFLEX®

KTR-SI

KTR-SI FRA

SYNTEX®

SYNTEX®-NC

KTR-SI Compact



TORQUE LIMITERS

TYPES AND OPERATING DESCRIPTION

Properties of torque limiters

									
Product	RUFLEX®	KTR-SI	KTR-SI FRE	KTR-SI FRA	SYNTEX®	SYNTEX®-NC	KTR-SI Compact		
Type	Torque limiter	Overload system	Overload system	Overload system	Backlash-free overload system				
Torque limitation									
Friction (load-retaining)	●								
Ratchet coupling		●	●	●	●	●	●		
Synchronous ratching SK/SR (load-separating)		●			●	●	●		
Ratching DK (load-separating)		●			●	●	●		
Idle rotation FR/FRE/FRA (load-separating)		●	●	●					
Fail-safe SGR (no mechanical separation)		●							
Properties									
Backlash-free					●	●	●		
High repeatability		●	●	●	●	●	●		
Quick separation with overload						●	●		
Signal by limit switch/sensor		●	●	●	●	●	●		
Torque setting while in place	●	●	●	●	●	●	●		
Torque range T_{KN} [Nm]									
min. - max.	0.5 - 12,000	2.5 - 8,200	1,000 - 60,000 (and above)	5 - 3,000	6 - 400	2 - 550	3 - 3,100		
Max. bore [mm]									
	140	100	200 (and above)	80	50	60	80		
Shaft-hub-connection									
Positive locking	●	●	●	●	●	●	●		
Frictionally engaged			●		●	●	●		
Speed n_{max.} [rpm]									
	10,000	6,000	3,300	3,600	1,500	3,500	4,000		
Special features									
	High power density, low price	Hardened surfaces, solid design	Modular design, for high torques	Re-engagement by reversing the direction of rotation	For tailor-made solutions, low cost, ideally suitable for bigger quantities	High power density, light-weight design	Hardened surfaces, solid design		
Applications									
	Slowly rotating drives such as sprocket or toothed belt drives, conveyors, rotary feeders, ...	Rugged drive situations, e. g. crushers, ...	Shredders, extruders, steel mills, test benches	Shredders, extruders, materials handling, ...	Customised design, packaging machines, linear drives, ...	Dynamic drives, packaging machines, machine tools, linear drives, ...	Packaging machines, special purpose machines, conveyor technology, ...		

● ≈ Standard

TORQUE LIMITERS

TYPES AND OPERATING DESCRIPTION

Product finder of torque limiters

Product	RUFLEX®	KTR-SI	KTR-SI FRE	KTR-SI FRA	SYNTEX®	SYNTEX®-NC	KTR-SI Compact			
Type	Torque limiter	Overload system	Overload system	Overload system	Backlash-free overload system					
Types (extract)										
Combined with:										
» Sprocket/toothed belt pulley/flange	●	●	●	●	●	●	●			
» ROTEX® torsionally flexible jaw coupling	●	●	●							
» BoWex® torsionally stiff curved-tooth gear coupling®	●									
» TOOLFLEX® torsionally stiff metal bellow-type coupling						●				
» ROTEX® GS backlash-free jaw coupling					●	●	●			
» POLY-NORM® torsionally flexible jaw coupling				●						
» RADEX®-N torsionally stiff steel laminae coupling	○	○	○							
» RADEX®-NC torsionally stiff servo laminae coupling						○				
» GEARex® all-steel gear coupling			○							
Integrated ball bearing			●			●	●			

●≈ Standard
○≈ On request

Information on selection of torque limiters

To make sure that the torque limiter is not released with process-related torque peaks, the switching torque of the coupling should at least be 30 % above the maximum operating torque (see diagramme).

Torque limiters and overload systems that re-engage automatically should be used with reduced speed only after having applied higher release torques. Frequent or continuous slipping or ratcheting increases the wear on the torque limiter.

After the torque limiter separated driving from driven side in case of overload, it may take some time before the drive stops due to large inertias in the drive train. This may generate higher wear on the torque limiter and the overload system re-engaging automatically. That is why we recommend to use the overload system KTR-SI as an idle rotation type (page 290 et seqq.) for drives with larger inertias or higher speeds.


We basically recommend electronic monitoring of the torque limiters to disconnect the drive immediately in case of overload.

We will be pleased to assist you with technical questions about the selection of torque limiters.

For that purpose we dispose of state-of-the-art simulation and calculation programs. Here the principle applies: The more detailed the data provided, the more accurate the calculation results.

Unless otherwise specified, our feather keyways are designed acc. to DIN 6885 Bl.1 [JS9]. The shaft-hub-connection needs to be inspected by the customer.

A smooth operation is only ensured if the overload torque set exceeds the maximum operating torque of the machine (see diagramme).

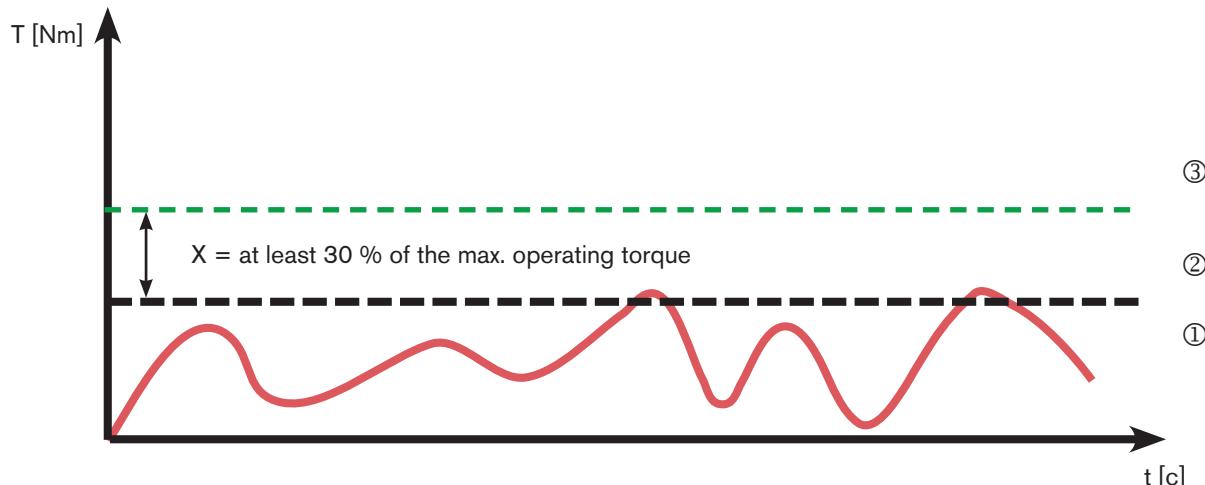

- ① Torque curve of the machine
- ② Max. operating torque arising on the machine
- ③ Torque set on the coupling

RUFLEX®

Torque limiters

Design and operation

- Load-retaining overload protection up to 12.000 Nm (standard)
- Available with various drive components (e. g. sprocket) and combinations (e. g. ROTEX®)
- Asbestos-free and rust-proof friction lining for dry running (ATEX available on request 
- High wear capacity, long service life
- High-quality slide bush with dry lubricant
- Torque setting while in place



- Protection of the nut by locking in 12 different positions
- Easy assembly and torque setting
- Coupling components made of steel, large safety reserves
- Corrosion protection by zinc-coated and passivated surfaces
- Rust-proof and acid-proof type on request
- High power density due to high-quality disk springs and friction linings

The RUFLEX® modular system provides solutions for your drive, too.

The combination with the proven KTR couplings and the integration of customised drive components (e. g. sprockets) allows for an overload protection optimally adapted to the respective application.

Various disk spring layerings and high-quality friction linings ensure high power density even with only small mounting space.


RUFLEX® consists of the following components:



List of components:


- | | | | |
|---|-----------------------|----|----------------------------------|
| 1 | Hub | 6 | Friction lining |
| 2 | Pressure ring | 7 | Slide bush |
| 3 | Setting nut | 8 | Setscrew |
| 4 | Torque setting screws | 9 | Lock washer |
| 5 | Disk spring | 10 | Drive component (e. g. sprocket) |

Disk spring layerings:

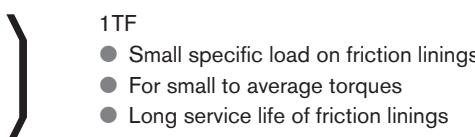


1TFD

- Small specific load on friction linings
- Torques like with type 1TF
- Only small decrease of torque even with a longer period of friction
- Precision torque adjustment due to double spring excursion

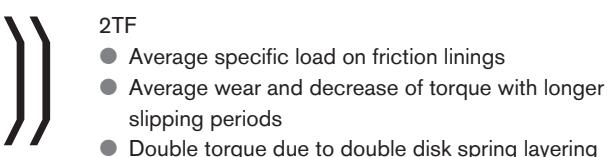



2TFD

- Average specific load on friction linings
- Torques like with type 2TF
- Only small decrease of torque even with a longer period of friction
- Precision torque adjustment due to double spring excursion

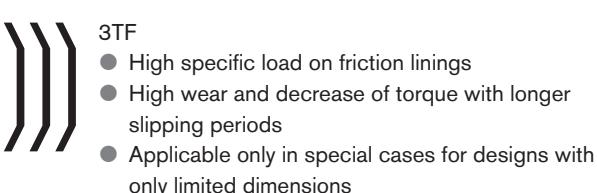


Torque limiters


Standard width of drive component

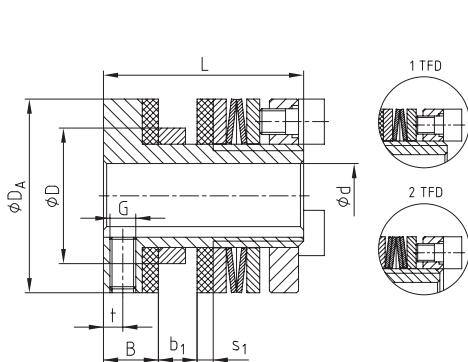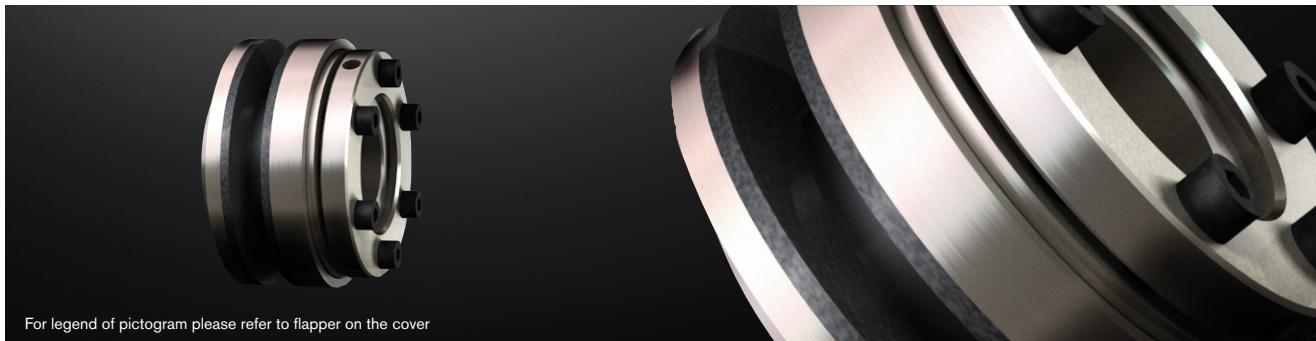

Size 00

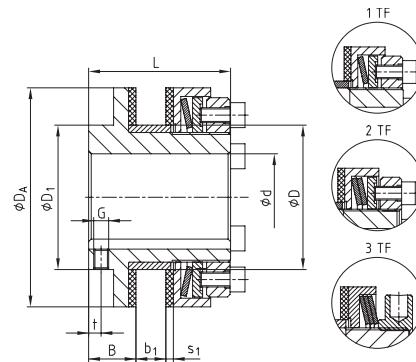

Size 0 - 5


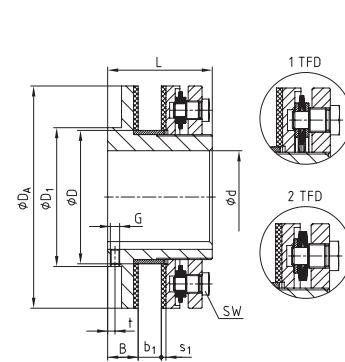


Size 6 - 9

Size	Max. speed ⁴⁾ [rpm]	Torques [Nm]			Dimensions [mm]										
					Bore d	D ²⁾	D ₁	D _A	B	Drive component		s ₁	L	Setscrew	
		1TF	2TF	3TF ³⁾						Min.	Max.			t	G
00	10000	(0.5) ⁵⁾ 1-3	2-5	—	—	10	21	—	30	8.5	2	6	2.5	31	3 M4
0	8500	2-10	4-20	—	—	19 (20) ¹⁾	35	45	45	8.5	2	6	2.5	33	3 M4
01	6600	5-35	10-70	—	—	22	40	40	58	16	3	8	3	45	4 M5
1	5600	20-75	40-150	130-200	—	25	44	45	68	17	3	10	3	52	5 M5
2	4300	25-140	50-280	250-400	—	35	58	58	88	19	4	12	3	57	5 M6
3	3300	50-300	100-600	550-800	—	45	72	75	115	21	5	15	4	68	5 M6
4	2700	90-600	180-1200	1100-1600	—	55	85	90	140	23	6	18	4	78	5 M8
5	2200	400-800	800-1600	1400-2100	—	65	98	102	170	29	8	20	5	92	8 M8
6	1900	300-1200	600-2400	—	38	80	116	120	200	31	8	23	5	102	8 M8
7	1600	600-2200	1200-4400	—	45	100	144	150	240	33	8	25	5	113	8 M10
8	1300	900-3400	1800-6800	—	58	120	170	180	285	35	8	25	5	115	8 M10
9	1000	2500-6000	6000-12000	—	65	140	237	225	350	53	16	28	6	162	11 M12

¹⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)²⁾ Bore tolerance (drive component): F8 with size 00 - 4, H8 with size 5 - 9³⁾ With clamping setting nut to be used on types limited in dimensions only⁴⁾ See comments on page 283⁵⁾ With special disk spring

On request:





- With clamping setting nut for size 0 - 5 (standard with 3TF)
- For radial torque setting

- With taper bush (hub type 4.5)
- Frictionally engaged shaft-hub-connection

Ordering example:

RUFLEX® 1	2TF	b ₁ 10	d Ø20
Type/size	Disk spring layering	Width of drive component b ₁	Finish bore

With sprocket

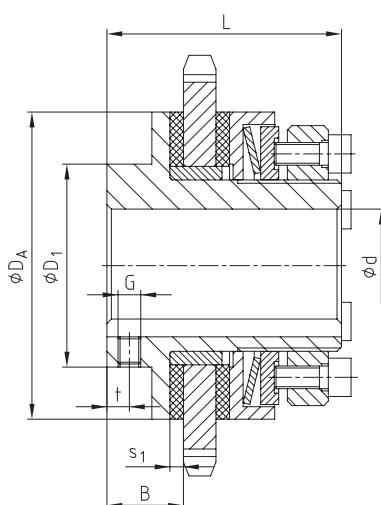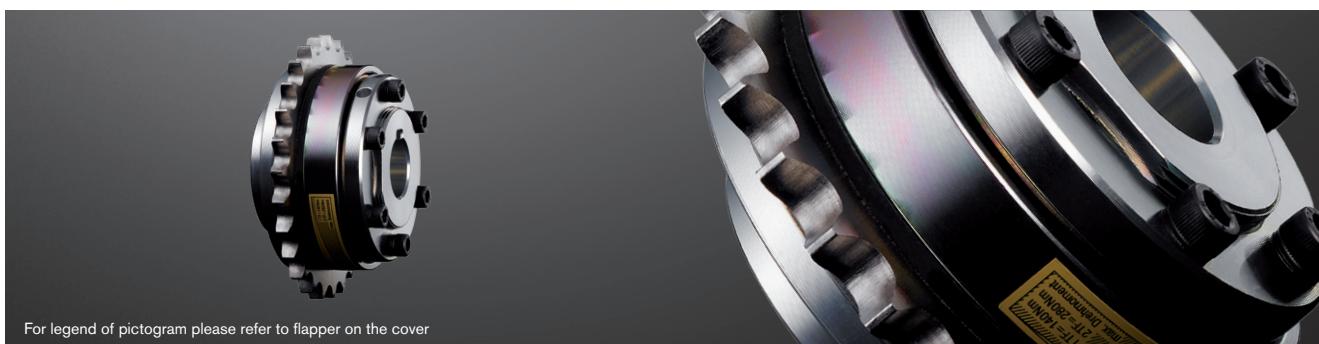


Technical data – dimensions

Size ⁴⁾	Max. speed ³⁾ [rpm]	Torques [Nm]			Max. bore d	Dimensions [mm]					Standard sprocket ²⁾	
		1TF	2TF	3TF ¹⁾		D1	DA	B	s1	L	Setscrew	
		t	G									
01	6600	5-35	10-70	—	22	40	58	16	3	45	4	M5
1	5600	20-75	40-150	130-200	25	45	68	17	3	52	5	M5
2	4300	25-140	50-280	250-400	35	58	88	19	3	57	5	M6
3	3300	50-300	100-600	550-800	45	75	115	21	4	68	5	M6
4	2700	90-600	180-1200	1100-1600	55	90	140	23	4	78	5	M8
												16 B-1 ($\frac{3}{8} \times \frac{7}{32}$) z = 21

¹⁾ With clamping setting nut to be used on types limited in dimensions only²⁾ Review minimum number of teeth required / Other sprockets available on request.³⁾ See comments on page 283⁴⁾ Other sizes on request

Special type:

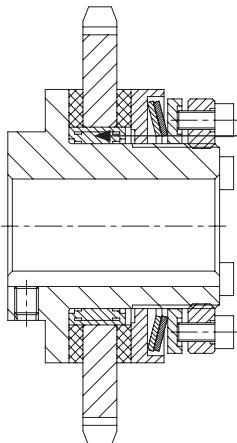



- If requested, available with needle bearing instead of slide bush
- For high radial load on the sprocket
- For high speeds or long slipping periods

Ordering example:

RUFLEX® 1	2TF	d Ø20	08 B -1 ($\frac{1}{2} \times \frac{5}{16}$), z = 29	100 Nm
Type/size	Disk spring lay- ering	Finish bore	Sprocket	Torque set


Torque limiters

Max. type

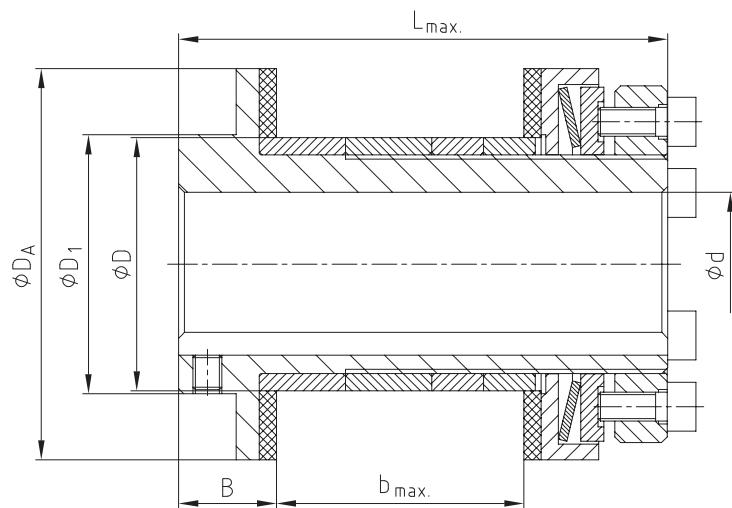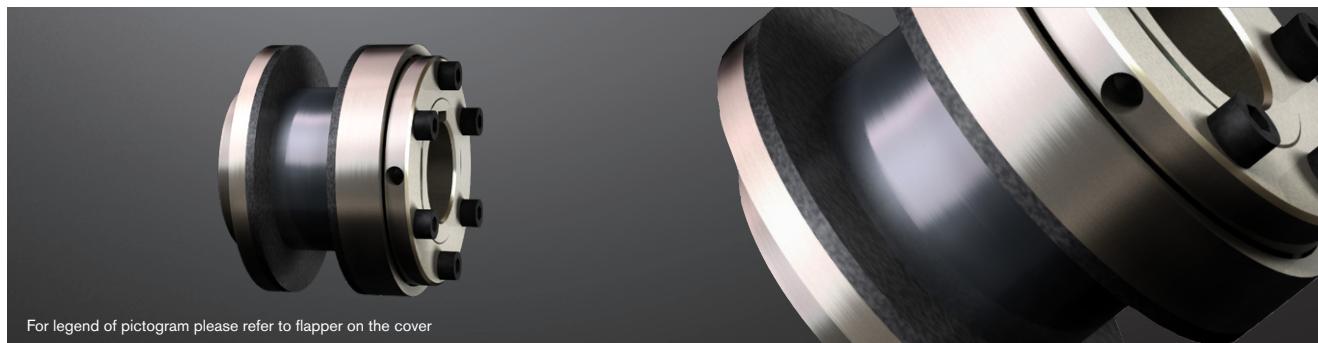

Technical data – dimensions

Size	Max. speed ³⁾ [rpm]	Torques [Nm]			Max. bore d	Dimensions [mm]					
		1TF	2TF	3TF ²⁾		D ₁	D _A	B	Max. b	D ¹⁾	Max. L
01	6600	5-35	10-70	–	22	40	58	16	33	40	70
1	5600	20-75	40-150	130-200	25	45	68	17	43	44	85
2	4300	25-140	50-280	250-400	35	58	88	19	54	58	100
3	3300	50-300	100-600	550-800	45	75	115	21	62	72	115
4	2700	90-600	180-1200	1100-1600	55	90	140	23	91.5	85	154

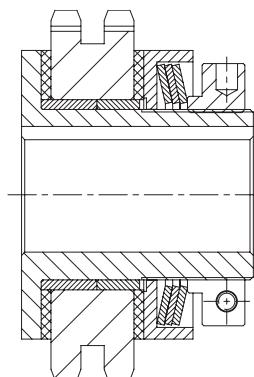¹⁾ Bore tolerance (drive component): F8²⁾ With clamping setting nut to be used on types limited in dimensions only³⁾ See comments on page 283



Example:

- RUFLEX® max. with sprocket assembled
- Available as a complete subassembly with torque preset

Ordering example:

RUFLEX® max. 1	2TF	b 35	d Ø20
Type/size	Disk spring layering	Width of drive component b	Finish bore

With torsionally flexible ROTEX®

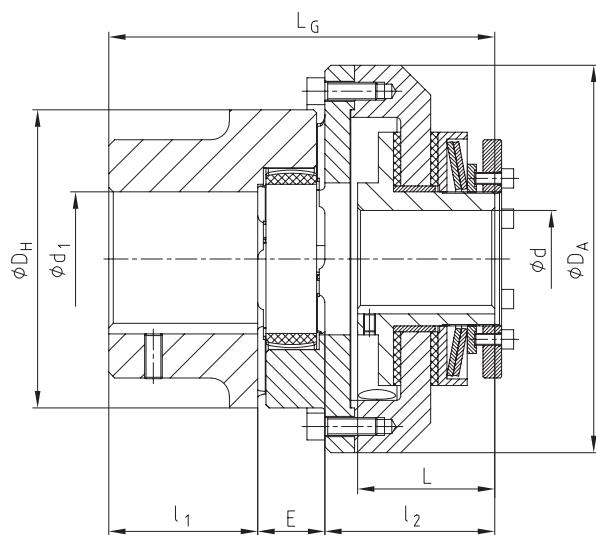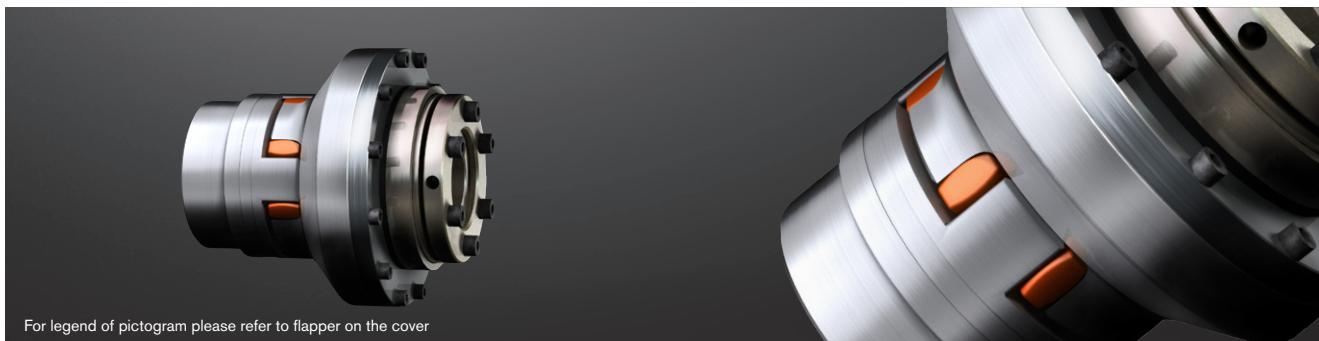

Technical data – dimensions


RUFLEX® size	ROTEX® size	RUFLEX® Torques [Nm]			ROTEX® ³⁾ Torques [Nm]			Dimensions [mm]									
					98 Shore A		Bore d		Max. bore		D _H	D _A	I ₁	I ₂	E	L	L _G
		1TF	2TF	3TF ²⁾	T _{KN}	T _{K max}	Pilot bore	Max.	d ₁								
00	14	(0.5) ⁴⁾ 1-3	2-5	–	12.5	25	–	10	16	30	44	11	35	13	31	59.5	
0	19	2-10	4-20	–	17	34	–	19 (20) ¹⁾	25	40	63	25	37	16	33	78	
01	24	5-35	10-70	–	60	120	–	22	35	55	80	30	50	18	45	98	
1	28	20-75	40-150	130-200	160	320	–	25	40	65	98	35	58	20	52	113	
2	38	25-140	50-280	250-400	325	650	–	35	48	80	120	45	64	24	57	133	
3	48	50-300	100-600	550-800	525	1050	–	45	62	105	162	56	82	28	68	166	
4	75	90-600	180-1200	1100-1600	1920	3840	–	55	95	160	185	85	80	40	78	205	
5	90	400-800	800-1600	1400-2100	3600	7200	–	65	110	200	260	100	114	45	92	259	
6	100	300-1200	600-2400	–	4950	9900	38	80	115	225	285	110	130	50	102	290	
7	110	600-2200	1200-4400	–	7200	14400	45	100	125	255	330	120	142	55	113	317	
8	140	900-3400	1800-6800	–	12800	25600	58	120	160	320	410	155	152	65	115	372	
9	160	2500-6000	6000-12000	–	19200	38400	65	140	185	370	460	175	199	75	161	449	

¹⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)²⁾ With clamping setting nut to be used on types limited in dimensions only³⁾ See selection of ROTEX® couplings on page 14 et seqq.⁴⁾ With special disk spring

Ordering example:	RUFLEX® 1	2TF	d Ø20	ROTEX® 28	98 ShA	d ₁ Ø25	100 Nm
Type/size	Disk spring layering	ROTEX® bore	Type/size	Spider	ROTEX® bore	Torque set	

Torque limiters

With torsionally stiff BoWex®

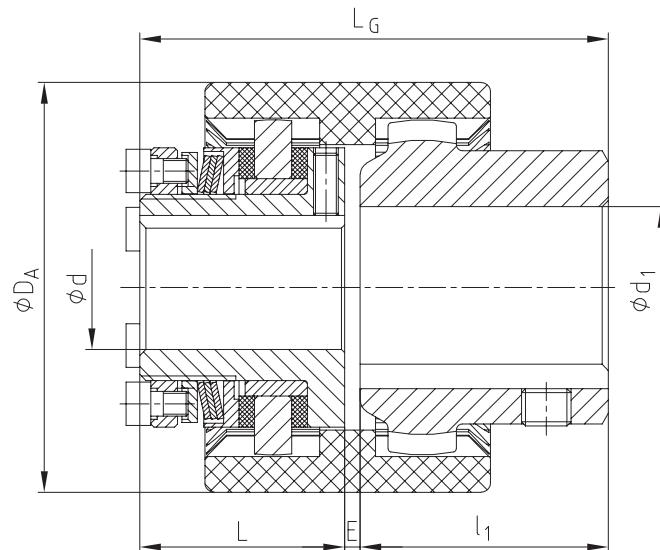

Technical data – dimensions

RUFLEX® size	BoWex® size	RUFLEX® Torques [Nm]			BoWex® ³⁾ Torques [Nm]		Dimensions [mm]						
		1TF	2TF	3TF ²⁾	T _{KN}	T _{K max}	Max. bore		D _A	I ₁	L	E	L _G
00	19	(0.5) ⁴⁾ 1-3	2-5	–	16	32	10	19	48	25.0	31	2.5	58.5
0	28	2-10	4-20	–	45	90	19 (20) ¹⁾	28	66	40.0	33	2.5	75.5
01	38	5-35	10-70	–	80	160	22	38	83	35.5	45	1.0	81.5
1	48	20-75	40-150	130-200	140	280	25	48	95	45.5	52	1.0	98.5
2	65	25-140	50-280	250-400	380	760	35	65	132	64.0	57	1.0	122

¹⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)²⁾ With clamping setting nut to be used on types limited in dimensions only³⁾ See selection of BoWex® couplings on page 14 et seqq.⁴⁾ With special disk spring

Ordering example:


RUFLEX® 1	1TF	d Ø20	BoWex® 48	d ₁ Ø25	50 Nm
Type/size	Disk spring layering	RUFLEX® bore	Type/size	BoWex® bore	Torque set

KTR-SI

Overload systems

Design and operation

- Overload protection up to 8,200 Nm
- Available as a ratchet, synchronous, idle rotation and fail-safe design with the same dimensions
- Reduction of torque peaks
- High response accuracy, even after a long operating period
- Disconnection of the drive with overload by retrieving limit switch
- Automatically operative (DK, SR, SGR)

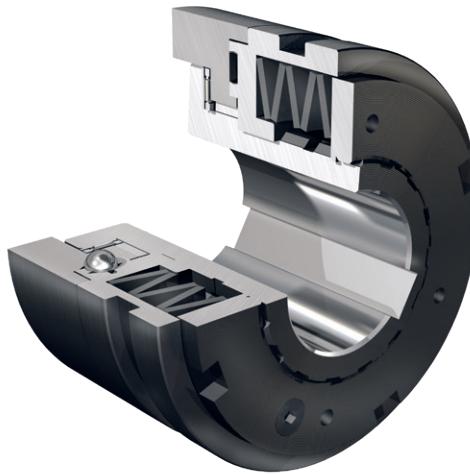


- Available in various types (e. g. with needle bearing) and combinations (e. g. with torsionally flexible ROTEX®)
- Easy assembly and torque setting
- Maintenance-free
- Insensitive to oil and grease
- Long service life due to high-quality materials

In case of overload the ratchet components (balls or rollers) leave their indentations, and a relative motion between the driving and driven side is generated. Damages caused by overload are reliably prevented in this way. The shift ring (3) makes an axial motion to the engagement travel „H“ activating the limit switch or proximity initiator. The signal can be used for controlling or disconnecting the drive. For restarting we would recommend to bypass the limit switch or proximity switch electrically for a short time.

Component Description

- 1 Hub
- 2 Flange ring
- 3 Shifting ring
- 4 Setting nut
- 5 Disk spring
- 6 Ball bearing cage
- 7 Slide bush
- 8 Axial disk
- 9 Axial needle bearing
- 10 Setscrew
- 11 Lock washer

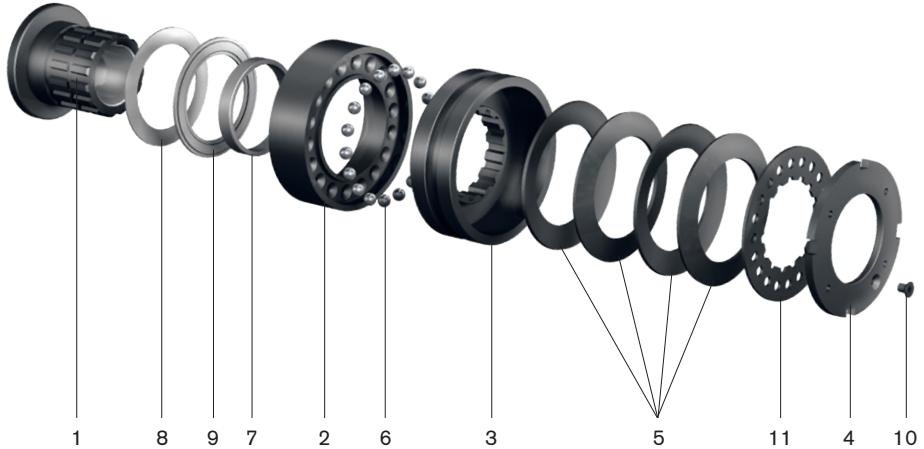

No signal with normal operation




Engaged



Limit switch

Signal with overload

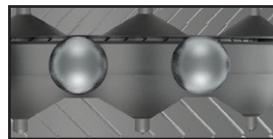

Disengaged




Limit switch

KTR-SI FRE

Idle rotation overload system

Design and operation

- Setting range up to 60,000 Nm (higher torques available on request)
- Idle rotation overload system (load-separating)
- High repeatability

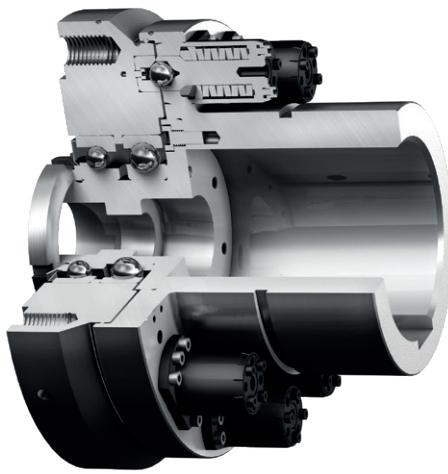

- Flange type to connect toothed belt pulleys or sprockets
- Combination with ROTEX®, GEARex® or RADEX®-N as a shaft-to-shaft connection
- The intelligent further development of shear pin couplings and hydraulic clamping sets

The core of the overload system is formed by the idle rotation elements. They uncouple the driving and driven side in case of overload while protecting the drive train from damages. After eliminating the overload, the idle rotation segments are manually re-engaged so that the drive is released again. In order to set the coupling to the requested release torque, a defined pre-stress is generated on the disk springs in each idle rotation element via the setting nut. The number of idle rotation elements varies depending on the release torque specified. If requested, the coupling can be preset by the manufacturer. It is also possible to adapt the coupling while in place.

Component Description

- 1 Hub
- 2 Bearing flange
- 3 Cap screw
- 4 Angular ball bearing
- 5 O-ring
- 6 KTR-SI FRE connection flange
- 7 Groove ball bearing
- 8 NILOS ring
- 9 Supporting disk
- 10 Safety plate
- 11 Groove nut
- 12 Adjusting washer
- 13 Idle rotation element
- 14 Setscrew

RUFLEx®

KTR-SI

SYNTEx®

SYNTEx®-NC

Torque
limiters

KTR-SI Compact

Idle rotation overload system with automatic re-engagement when reversing the direction of rotation

Design and operation

- Overload protection up to 3,000 Nm
- Idle rotation overload system (load-separating)
- Re-engagement by reversing the direction of rotation, thus optimally suitable for positions difficult to accesss



- Flange type to connect toothed belt pulleys or sprockets
- Combination with torsionally flexible POLY-NORM® as a shaft-to-shaft connection

Component Description

- 1 Connection flange
- 2 Slide bearing
- 3 Axial disk
- 4 Hub
- 5 Axial bearing
- 6 Bearing flange
- 7 Flange ring
- 8 Balls
- 9 Shifting ring
- 10 Disk springs
- 11 Pressure ring
- 12 Lock washer
- 13 Setting nut




KTR-SI / KTR-SI FRE / KTR-SI FRA

Overload systems

RUFLEX®

Operating principles


1. Idle rotation design FR/FRE/FRA

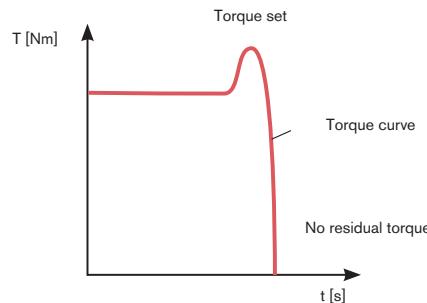

Operating principle of KTR-SI idle rotation couplings:

When achieving the torque set, the coupling rotates. Subject to the idle rotation mechanism driving and driven side remain separated. The resulting flywheel mass can slow down in idle state. After eliminating the overload, the coupling can be re-engaged. The re-engagement is effected manually or via a device respectively automatically.


Re-engagement of FR

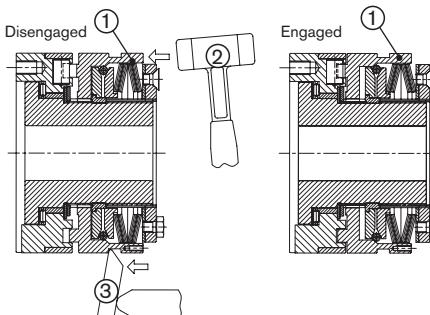

Re-engagement of the idle rotation coupling:

Re-engagement is generated by axial pressure on the shifting ring (1). Dependent on the existing resources, accessibility etc., re-engagement can be made in different ways: By several blows of a plastic hammer (2) axially on the shifting ring (see above), via assembly levers (3) or a pneumatic or hydraulic engagement device (automated engagement procedure).

Re-engagement of FRE

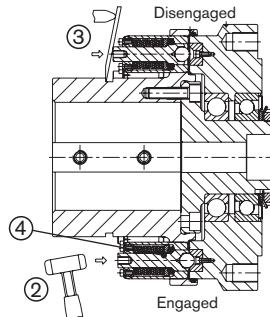


Re-engagement of idle rotation elements:

After eliminating the overload, driving and driven side are aligned to each other. By means of a plastic hammer (2) or a tyre lever (3) the idle rotation elements (4) are manually re-engaged. Re-engagement can be heard loudly. The overload coupling is ready for use again.

Re-engagement of FRA


After eliminating the overload the KTR-SI FRA can be re-engaged by reversing the direction of rotation with slow speed (>50 rpm).

2. Ratchet design DK




Any engagement after an overload. After eliminating the overload, the balls engage automatically with the next following ball indentation.

3. Synchronous design SR



Synchronous engagement after an overload. After eliminating the overload, the balls re-engage automatically with the disk springs after a rotation of 360°. Driving and driven side are always placed in the same position to each other. Other degrees of re-engagement, for example 180°, are also possible.

4. Fail-safe design SGR



The fail-safe design is purely intended for torque measurement without any ratchet operation. In case of overload a signal is generated by a limit switch along with mechanical separation of driving and driven side = ratching is not possible.

KTR-SI

SYNTEX®


KTR-SI Compact

Torque
limiters


KTR-SI

Overload systems


Flange type

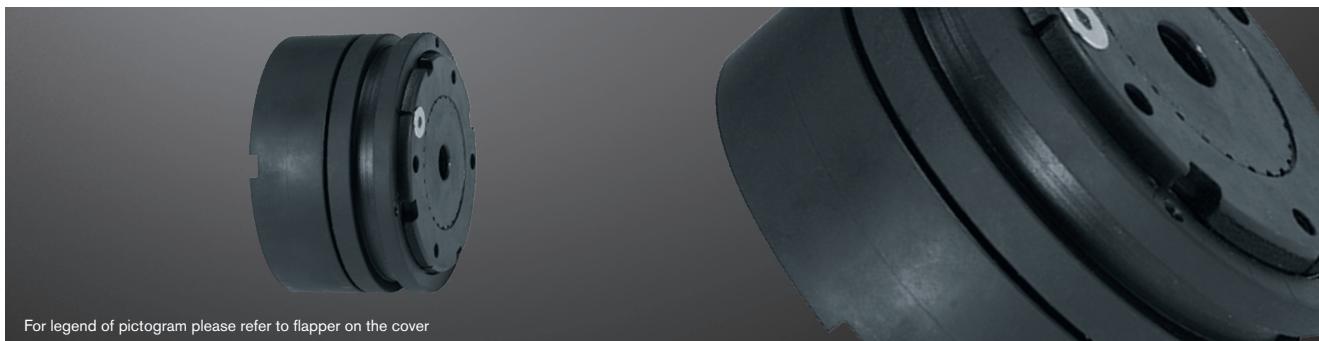


Type FT

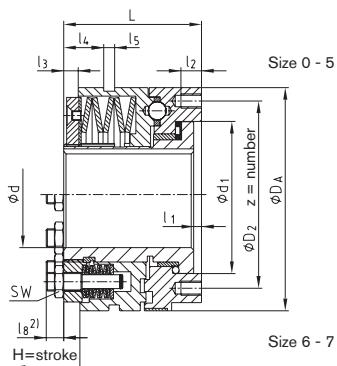

Type KT

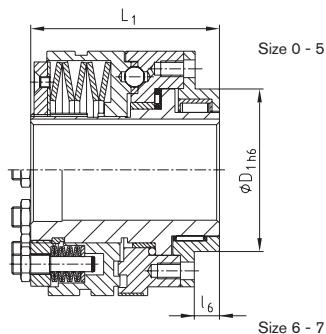

Type LT

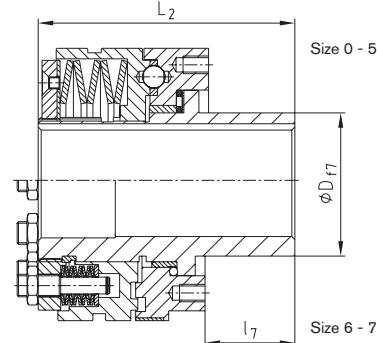

Technical data

Size	Torques [Nm]												Weight with max. bore [kg]	
	Type DK				Type SR and SGR				Type FR					
	T1	T2	T3	T4	T1	T2	T3	T4	T1	T2	T3	n _{max.} ^{a)} [rpm]		
0	2.5-5	5-20	—	20-40	5-10	10-40	—	—	5-10	10-20	20-40	6000	0.41	
1	6-12	12-25	25-55	55-100	12-25	25-50	50-100	—	12-25	25-50	50-100	5000	1.30	
2	12-25	25-50	50-120	120-200	25-50	50-100	100-200	—	25-50	50-100	100-200	4000	2.27	
3	25-50	50-100	100-250	200-450	50-100	100-200	200-450	—	50-100	100-200	200-450	3500	3.88	
4	50-100	100-200	200-500	500-1000	100-200	200-400	400-800	800-2000	100-200	200-400	400-800	3000	8.34	
5	85-250	230-600	300-1000	600-2000	170-450	350-900	600-1800	1200-3400	170-450	350-900	600-1800	2300	13.51	
6	180-480	360-960	720-1950	1600-3300	300-750	600-1500	1200-3000	2900-5800	—	—	—	—	21	
7	250-520	500-1050	1000-2100	2000-3600	550-1100	1100-2200	2200-4400	3000-8200	—	—	—	—	37	

Dimensions [mm]

Size	Dimensions [mm]															H=stroke						
	Bore d		d ₁	D	D ₁	D ₂	D _A	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	l ₇	L	L ₁	L ₂	z	DK			
	Pilot bore	Max.															SR	SGR	FR			
0	7	20	41.0	28	38	48	55	4.0	6.5	3.0	7.5	9	8	27.5	38.5	51.0	66.0	6xM5	1.4	1.2	0.6	1.6
1	10	25	60.0	38	50	70	82	4.0	8.0	6.0	11.5	9	10	33.0	52.0	70.0	85.0	6xM5	2.3	1.8	0.8	2.3
2	14	35	78.0	52	60	89	100	5.0	10.0	5.0	12.0	9	12	39.0	61.0	78.0	100.0	6xM6	2.4	2.0	1.1	3.0
3	18	45	90.5	65	80	105	120	5.0	12.0	8.5	21.0	10	12	47.0	78.0	96.0	125.0	6xM8	2.7	2.2	1.2	3.5
4	24	55	105.0	78	100	125	146	6.5	15.0	11.0	27.0	9	16	52.5	100.0	124.5	152.5	6xM10 ¹⁾	3.7	2.5	1.2	3.8
5	30	65 (70) ⁴⁾	120.5	90	120	155	176	6.5	17.0	12.0	33.0	9	18	57.5	113.5	140.0	171.0	6xM12 ¹⁾	4.6	3.0	1.6	4.5
6 ²⁾	40	80	136.0	108	130	160	200	7.0	20.0	14.0	39.0	9	20	64.0	119.0	150.0	183.0	6xM12 ¹⁾	5.0	3.5	2.5	—
7 ²⁾	50	100 (110) ⁴⁾	168.0	135	160	200	240	8.0	25.0	15.0	46.0	9	25	72.0	141.0	175.0	213.0	6xM16 ¹⁾	5.5	4.0	2.7	—

¹⁾ Type T4 SR and SGR: tightening torques according to 12.9

²⁾ Size 6: dimension l₈ = 15 mm, size 7: dimension l₈ = 21 mm

³⁾ See comments on page 283

⁴⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)




Ordering example:

KTR-SI 2	FR	FT	T2	d Ø20	40 Nm
Type/size	Type (DK/SR/SGR/FR)	Type	Disk spring layering	Bore	Torque set

KTR-SI

Overload systems

With torsionally flexible ROTEX®

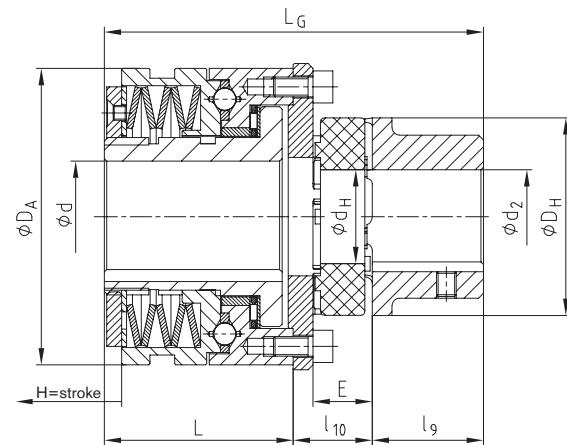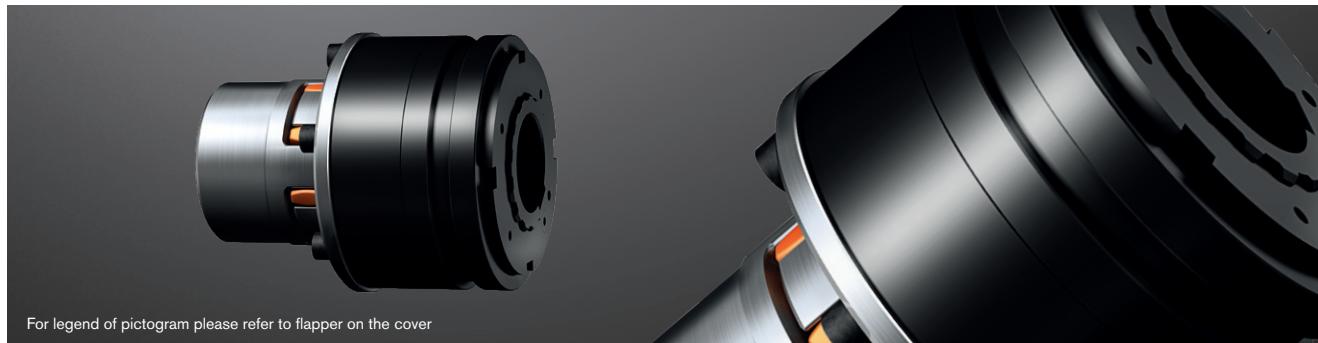

KTR-SI size	Technical data														
	Type DK				Torques [Nm]				Type SR and SGR				Type FR		
	T1	T2	T3	T4	T1	T2	T3	T4	T1	T2	T3		T1	T2	T3
0	2.5-5	5-20	-	20-40	5-10	10-40	-	-	5-10	10-20	20-40				
1	6-12	12-25	25-55	55-100	12-25	25-50	50-100	-	12-25	25-50	50-100				
2	12-25	25-50	50-120	120-200	25-50	50-100	100-200	-	25-50	50-100	100-200				
3	25-50	50-100	100-250	200-450	50-100	100-200	200-450	-	50-100	100-200	200-450				
4	50-100	100-200	200-500	500-1000	100-200	200-400	400-800	800-2000	100-200	200-400	400-800				
5	85-250	230-600	300-1000	600-2000	170-450	350-900	600-1800	1200-3400	170-450	350-900	600-1800				
6	180-480	360-960	720-1950	1600-3300	300-750	600-1500	1200-3000	2900-5800	-	-	-				
7	250-520	500-1050	1000-2100	2000-3600	550-1100	1100-2200	2200-4400	3000-8200	-	-	-				

KTR-SI size	ROTEX® size	Technical data – dimensions														
		ROTEX® ¹⁾		Max. bore		Dimensions [mm]								H=stroke		
		T _{KN}	T _{K max}	d	d ₂	d _H	D _H	D _A	l ₉	l ₁₀	E	L	L _G	DK	SR	FR
0	19	17	34	20	25	18	40	55	25	22	16	38.5	85.5	1.4	1.2	1.6
	28	160	320		40	30	65		35	28.5	20		102			
1	24	60	120	25	35	27	55	82	30	24	18	52	106	2.3	1.8	2.3
	38	325	650		48	38	80		45	32.5	24		129.5			
2	28	160	320	35	40	30	65	100	35	28	20	61	124	2.4	2.0	3.0
	48	525	1050		62	51	105		56	38	28		155			
3	38	325	650	45	48	38	80	120	45	32	24	78	155	2.7	2.2	3.5
	55	685	1370		74	60	120		65	43	30		186			
4	48	525	1050	55	62	51	105	146	56	38	28	100	194	3.7	2.5	3.8
	75	1920	3840		95	80	160		85	56.5	40		241.5			
5	55	685	1370	65	70	60	120	176	65	44	30	113.5	222.5	4.6	3.0	4.5
	90	3600	7200		(70) ²⁾	110	100	200	100	62	45	275.5				
6	100	4950	9900	80	115	113	225	200	110	72	50	119	301	5.0	3.5	-
7	110	7200	14400	100 (110) ²⁾	125	127	255	240	120	78	55	141	339	5.5	4.0	-

¹⁾ See selection of ROTEX® couplings on page 14 et seqq.

²⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)

Ordering example:

KTR-SI 2	DK	T2	d Ø20	ROTEX® 28	98 ShA	d ₂ Ø25	40 Nm
Type/size	Type	Disk spring layering	KTR-SI bore	Type/size	Spider	ROTEX® bore	Torque set

RUFLEX®

SYNTEX®

SYNTEX®-NC


Torque limiters

KTR-SI Compact

KTR-SI FRE

Idle rotation overload system

Flange type

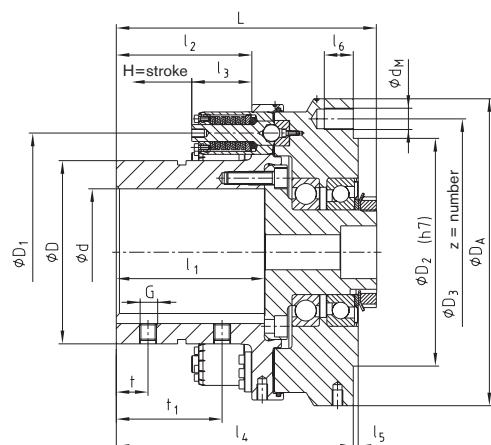

		Torques [Nm]							
Size	Type of element	3 idle rotation elements		6 idle rotation elements		9 idle rotation elements			
		Min.	Max.	Min.	Max.	Min.	Max.		
9	1T1	800	2600	—	—	—	—		
	1T2	1000	4000	2000	8000	—	—		
	1T3	2400	5500	4800	11000	—	—		
12	1T2	1300	5000	2600	10000	3900	15000		
	1T3	2900	6700	5800	13400	8700	20100		
15	1T2	1700	6000	3400	12000	5100	18000		
	1T3	3500	8200	7000	16400	10500	24600		
	2T2	5000	15000	10000	30000	15000	45000		
20	2T3	13100	20000	26300	40000	39400	60000		

Technical data – dimensions																								
Size ¹⁾	Max. bore	Dimensions [mm]																	Max. permissible forces on the flange connection ²⁾ [kN]	Speed ³⁾ [rpm]	Weight with max. bore [kg]			
		d	D	D ₁	D ₂	D ₃	D _A	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	G	t	t ₁	L	dM	z	pitch	H=stroke	Radial	Axial	
9	90	135	185	200	225	260	120	110	56.7	197	2.5	17.5	M12	25	75	213.5	12	12	12x30°	5.2	18	13	3300	38
12	120	173	225	215	252	290	140	128	56.7	224	4.5	27.5	M16	30	100	246	20	15	20x18°	5.2	26	18	2300	57
15	150	215	270	245	282	324	170	160	56.7	258	4.5	27.5	M20	40	120	281	20	15	20x18°	5.2	30	20	2050	81
20	200	285	370	330	375	460	220	200	89.4	341	5	33.0	M20	50	150	366	24	18	24x15°	8.9	50	40	1550	211

¹⁾ Other sizes on request

²⁾ Larger forces on request

³⁾ Higher speeds on request, see comments on page 283

Special type:



- KTR-SI FRE with sprocket
- Available as a complete subassembly with torque preset



Ordering example:

KTR-SI FRE 12	1T2	9	d Ø85	7500 Nm
Type/size	Type of element	Number of idle rotation elements	KTR-SI FRE bore	Torque set

KTR-SI FRE

Idle rotation overload system

With torsionally flexible ROTEX®

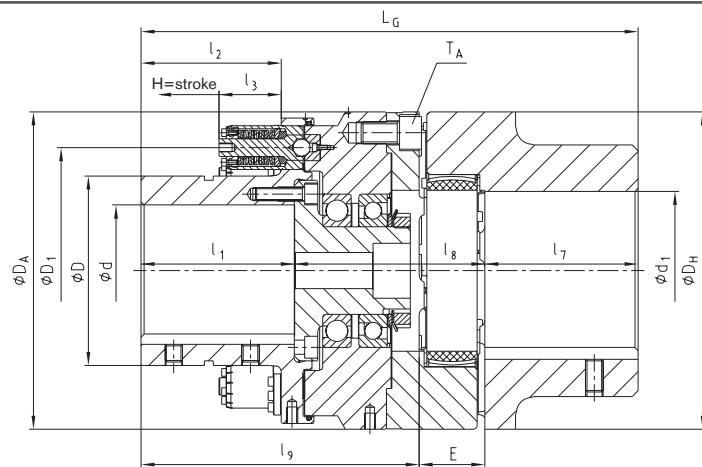

Size	Type of element	3 idle rotation elements		6 idle rotation elements		9 idle rotation elements	
		Min.	Max.	Min.	Max.	Min.	Max.
9	1T1	800	2600	—	—	—	—
	1T2	1000	4000	2000	8000	—	—
	1T3	2400	5500	4800	11000	—	—
12	1T2	1300	5000	2600	10000	3900	15000
	1T3	2900	6700	5800	13400	8700	20100
15	1T2	1700	6000	3400	12000	5100	18000
	1T3	3500	8200	7000	16400	10500	24600
20	2T2	5000	15000	10000	30000	15000	45000
	2T3	13100	20000	26300	40000	39400	60000

Size ¹⁾	Technical data – dimensions													T _A [Nm]	Speed ²⁾ [rpm]	Weight with max. bore [kg]		
	Size	ROTEX®		Max. bore		Dimensions [mm]												
		T _{KN}	T _{K max}	d	d ₁	D	D ₁	D _H	D _A	I ₁	I ₂	I ₃	I ₇	I ₈	I ₉	E	L _G	H=stroke
9	90	4500	9000	90	110	135	185	200	260	120	110	56.7	100	133	217	45	362	5.2
12	125	12500	25000	120	145	173	225	290	290	146	130	56.7	140	165	254	60	454	5.2
15	140	16000	32000	150	160	215	270	320	324	170	160	56.7	155	176	292	65	512	5.2
20	180	35000	70000	200	200	285	370	420	460	220	200	88.4	195	227	381	85	661	8.9

¹⁾ Other sizes on request

²⁾ Higher speeds on request, see comments on page 283

³⁾ See selection of ROTEX® couplings on page 14 et seqq.

Special type:

- KTR-SI FRE with torsionally flexible pin & bush coupling REVOLEX® KX-D and limitation of axial backlash
- KTR-SI FRE with torsionally stiff all-steel gear coupling GEARex® and integrated brake disk
- KTR-SI FRE with torsionally stiff laminae coupling RADEX®-N and integrated brake disk




Ordering example:

KTR-SI FRE 12	1T3	9	d Ø85	ROTEX® 125	98 ShA	d ₁ Ø85	12000 Nm
Type/size	Type of element	Number of idle rotation elements	KTR-SI FRE bore	Type/size	Spider	ROTEX® bore	Torque set

KTR-SI FRE

Idle rotation overload system

Customised type (on request)

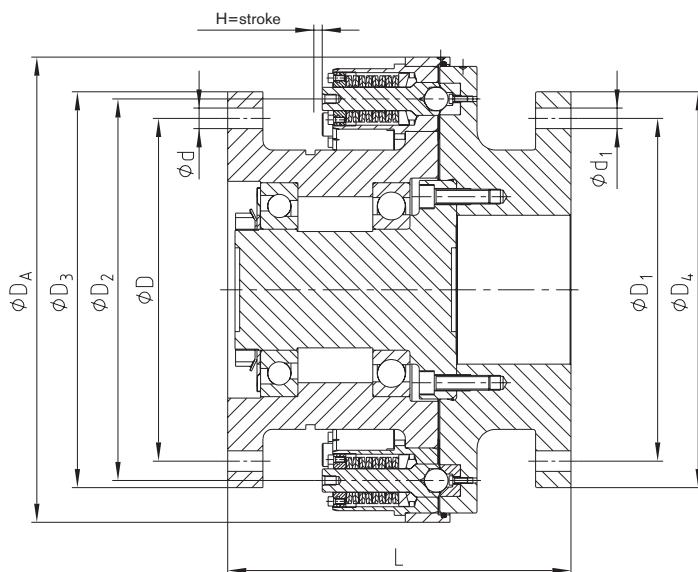


Torques [Nm]									
Size	Type of element	3 idle rotation elements		6 idle rotation elements		9 idle rotation elements		12 idle rotation elements	
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
00-1	1T1	1200	3800	2400	7600	3600	11400	—	—
	1T2	1700	6000	3400	12000	5100	18000	—	—
	1T3	3500	8200	7000	16400	10500	24600	—	—
00-2	2T1	—	—	6800	17200	10200	25800	13600	34400
	2T2	—	—	11700	31900	17550	47850	23400	63800
	2T3	—	—	21200	43000	32400	64500	42400	86000
00-3	3T1	—	—	23000	78000	34500	117000	46000	156000
	3T2	—	—	47000	108000	70500	162000	94000	216000

Technical data – dimensions																									
Size	GEARex®		RADEX®-N			Max. bore			Dimensions [mm]																
	Size	Torque [Nm]		Size	Torque [Nm]		d ₂ , d ₃	d ₄	d ₅	d ₁ , d ₁ '	D ₁ , D ₁ '	D ₂	D ₃ , D ₄	D ₅	D ₆	D _A	I ₁ , I ₂	I ₃	I ₄	E	E ₁	L	L _G	L _{G1}	H=stroke
		T _{KN}	T _{Kmax.}		T _{KN}	T _{Kmax.}				customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	customised	
00-1	35	17000	34000	136	17500	35000	133	135	140	270	280	300	324	105	135	126	256	466	8	5.2	723	74	8.9	—	
00-2	55	65000	130000	208	70000	140000	210	200	250	410	425.5	425.5	500	175	200	245	373	723	74	8.9	—	—	—	—	
00-3	85	225000	450000	288	200000	400000	325	290	350	540	585	567	655	292	280	335	416	1000	E ⁺	13.6	—	—	—	—	

Ordering example:	KTR-SI FRE 00-2	T2	6	Ø350	Ø400	349	25000 Nm
Type/size	Type of element	Number of idle rotation elements	Flange diameter ØD ₃	Flange diameter ØD ₄	Total length L	Torque set	


Other types and combinations available on request.

Type 00 with GEARex®

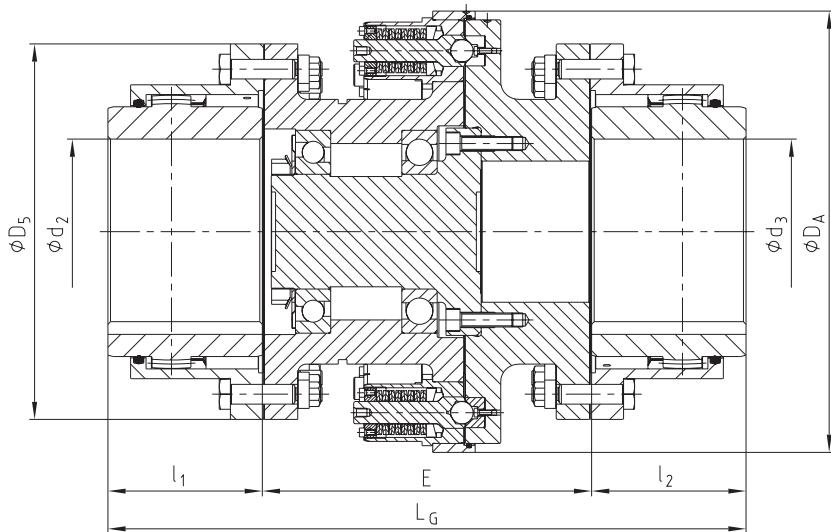

KTR-SI

Type 00 with RADEX®-N

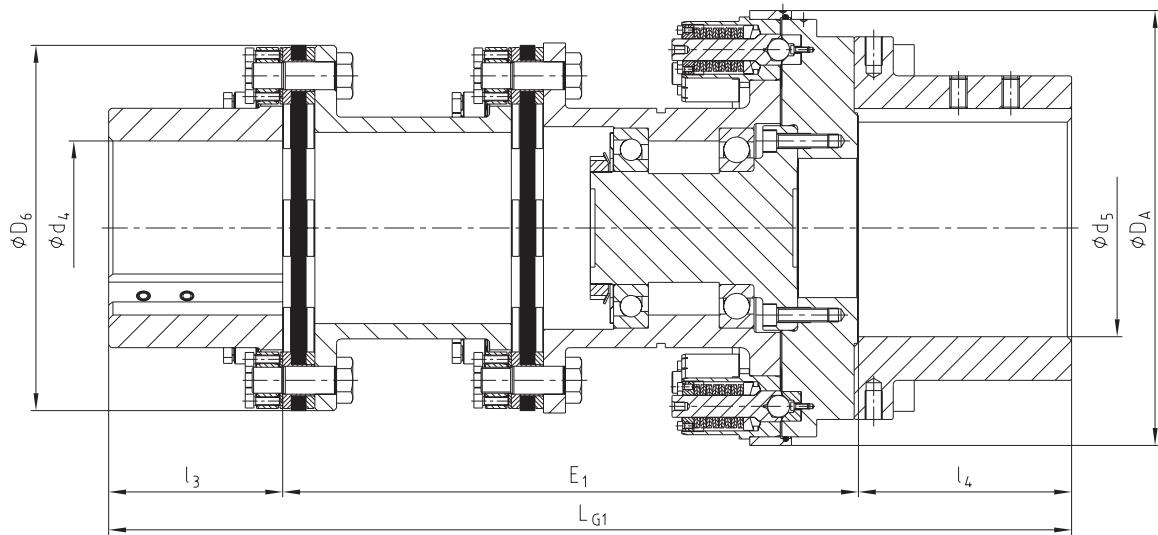

SYNTEX®

SYNTEX®-NC



Torque
limiters

KTR-SI Compact

KTR-SI FRA

Idle rotation overload system with automatic re-engagement when reversing the direction of rotation

Flange type FT

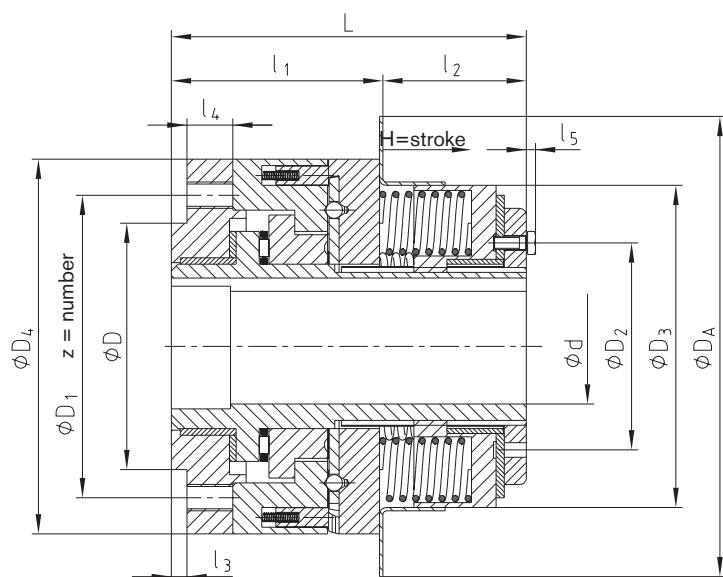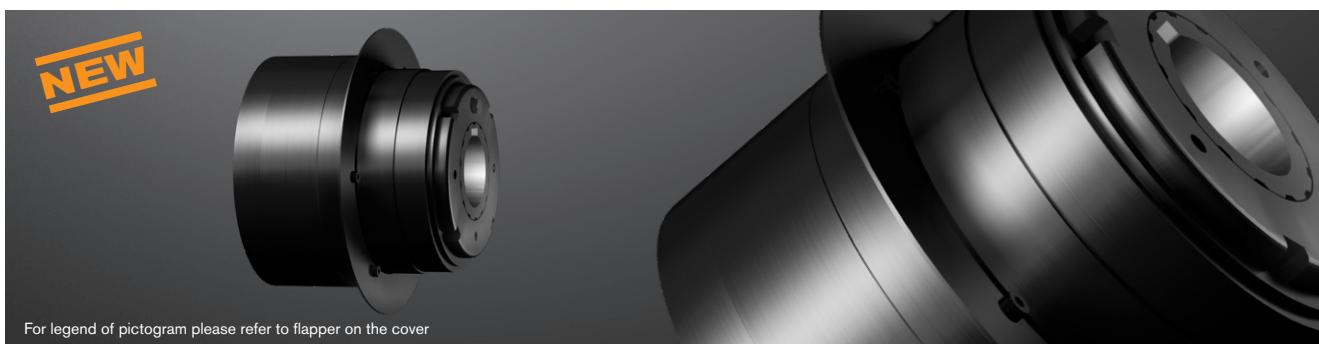

Torques [Nm]												
Size	T1			T2			T3			T4		
2	5-20			15-70			40-135			80-260		
3	24-104			57-360			110-540			245-730		
4	45-210			145-435			340-960			465-1320		
5	90-415			240-640			490-1880			1060-3000		

Size	Technical data – dimensions															Speed ¹⁾ [rpm]	Weight with max. bore [kg]	
	Bore d		Dimensions [mm]															
	Pilot bore	Max.	D _{j7}	D ₁	D ₂	D ₃	D ₄	D _A	l ₁	l ₂	l ₃	l ₄	l ₅	L	z	H=stroke		
2	22	35	75	92	70	98	114	140	63	45	4.7	14	-	108	6xM8	2.8	3600	5
3	22	45	95	114	77	131	149	184	69	42	4.7	15	3.5	111	7xM10	3.5	3600	10
4	25	55	122	144	88	147	166	203	75	46	4.7	15	4.0	121	8xM12	3.5	2000	13
5	30	80	155	184	152	196	223	279	94	70	6.3	23	2.3	164	8xM16	4.4	2000	32

¹⁾ See comments on page 283




Ordering example:

KTR-SI FRA 3	FT	T3	d Ø35	300 Nm
Type/size	Type	Torque setting range	KTR-SI FRE bore	Torque set

KTR-SI FRA

Idle rotation overload system with automatic re-engagement when reversing the direction of rotation

With torsionally flexible POLY-NORM®

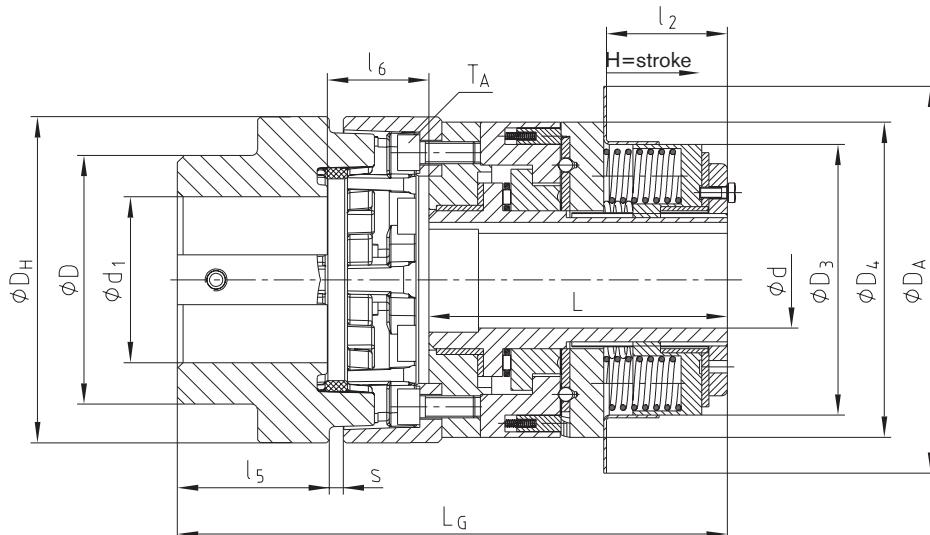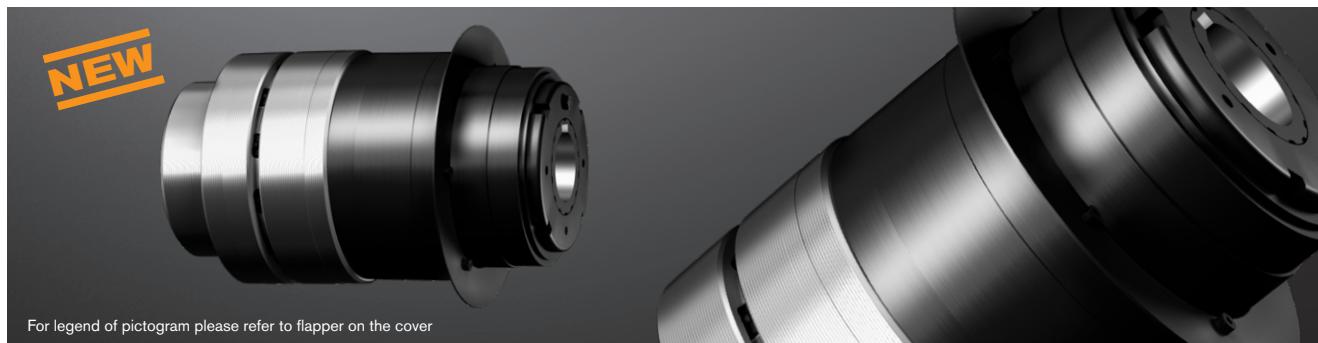

Torques [Nm]															
KTR-SI FRA size	T1			T2			T3			T4					
2	5-20			15-70			40-135			80-260					
3	24-104			57-360			110-540			245-730					
4	45-210			145-435			340-960			465-1320					
5	90-415			240-640			490-1880			1060-3000					

Technical data – dimensions																					
KTR-SI FRA size	POLY-NORM®			Max. bore		Dimensions [mm]										TA [Nm]	Speed ¹⁾ [rpm]	Weight with max. bore [kg]			
	Size	Torque [Nm]		d	d ₁	D	D ₃	D ₄	D _H	D _A	l ₁	l ₂	l ₅	l ₆	s	L _G	L				
		T _{KN}	T _{K max}																		
2	55	300	600	35	60	90	98	114	118	140	108	45	55	27	5	189.3	108	2.8	23	3600	9
3	75	850	1700	45	70	123	131	149	158	184	111	42	75	33.8	5	218.8	111	3.5	46	3600	18
4	85	1350	2700	55	80	139	147	166	182	203	121	46	85	52.6	5	257.6	121	3.5	79	2000	25
5	100	3900	7800	80	90	165	196	223	224	279	164	70	100	63.2	6	326.2	164	4.4	195	2000	51

¹⁾ See comments on page 283

Ordering example:


KTR-SI FRA 3	T3	d Ø35	POLY-NORM® 75	AR	d ₁ Ø45	300 Nm
Type/size	Torque setting range	KTR-SI FRA bore	Type/size	Type	POLY-NORM® bore	Torque set

SYNTEX®


Backlash-free overload systems

Design and operation

- Backlash-free, torsionally rigid overload protection up to 400 Nm, suitable for reversing operation
- Disconnection of the drive in case of overload
- Reduction of torque peaks
- High response accuracy, even after a long operating period
- Easy integration of customer components
- Compact design, low mass moment of inertia
- Variable due to modular system
- Special disk springs available for special applications

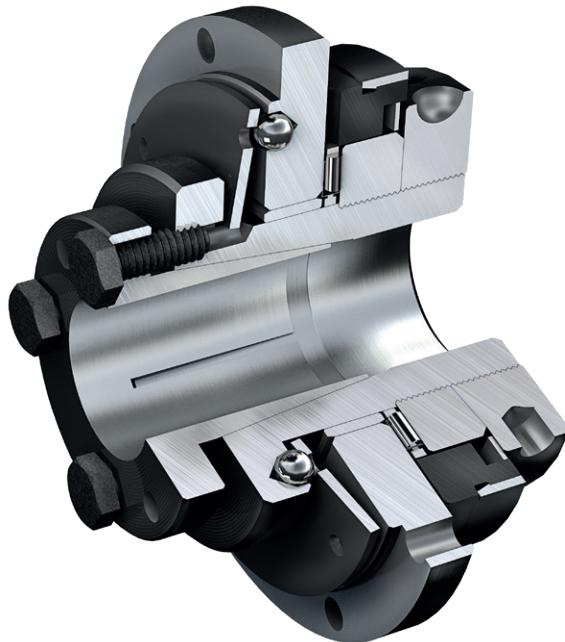

- Low-cost protection even for simple drives
- Easy assembly and torque setting
- Maintenance-free
- Insensitive to oil and grease
- Long service life due to small internal loads
- Backlash-free shaft-hub-connections
- Any or synchronous re-engagement
- Automatically ready for operation again

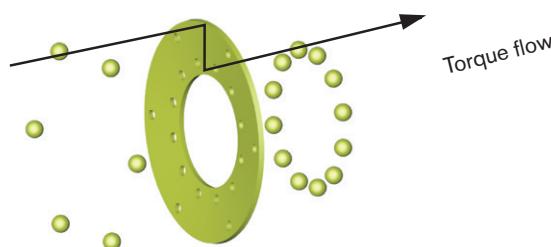

SYNTEX® is an overload system with positive locking operation. The punched disk spring is a component serving for transmitting the torque.

SYNTEX®
Overload system with mounting flange



SYNTEX®
Overload system with sprocket




SYNTEX®
Overload system with ROTEX® GS



Operating principles


Ratchet design DK

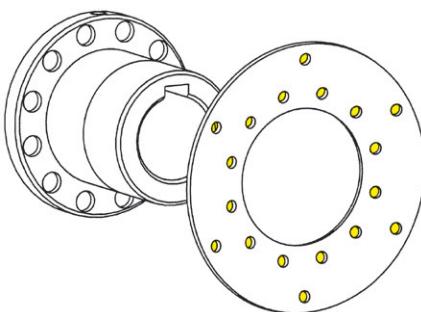

If the torque set is exceeded, a relative movement is generated between the driving and driven side. The transmittable torque is reduced to a low residual figure.

The balls leave the indentations of the disk spring. After eliminating the overload, the balls engage automatically with the next following ball indentation of the disk spring.


Synchronous design SK

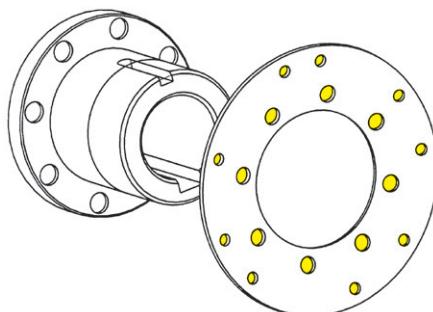

If the torque set is exceeded, a relative movement is generated between the driving and driven side. The transmittable torque is reduced to a low residual figure.

The balls leave the indentations of the disk spring. After eliminating the overload, the balls re-engage automatically with the disk springs after a rotation of 360° subject to their special pitch. Driving and driven side are always in the same position to each other (other degrees of re-engagement, for example 180°, are also possible).

Signal by limit switch or sensor in case of overload

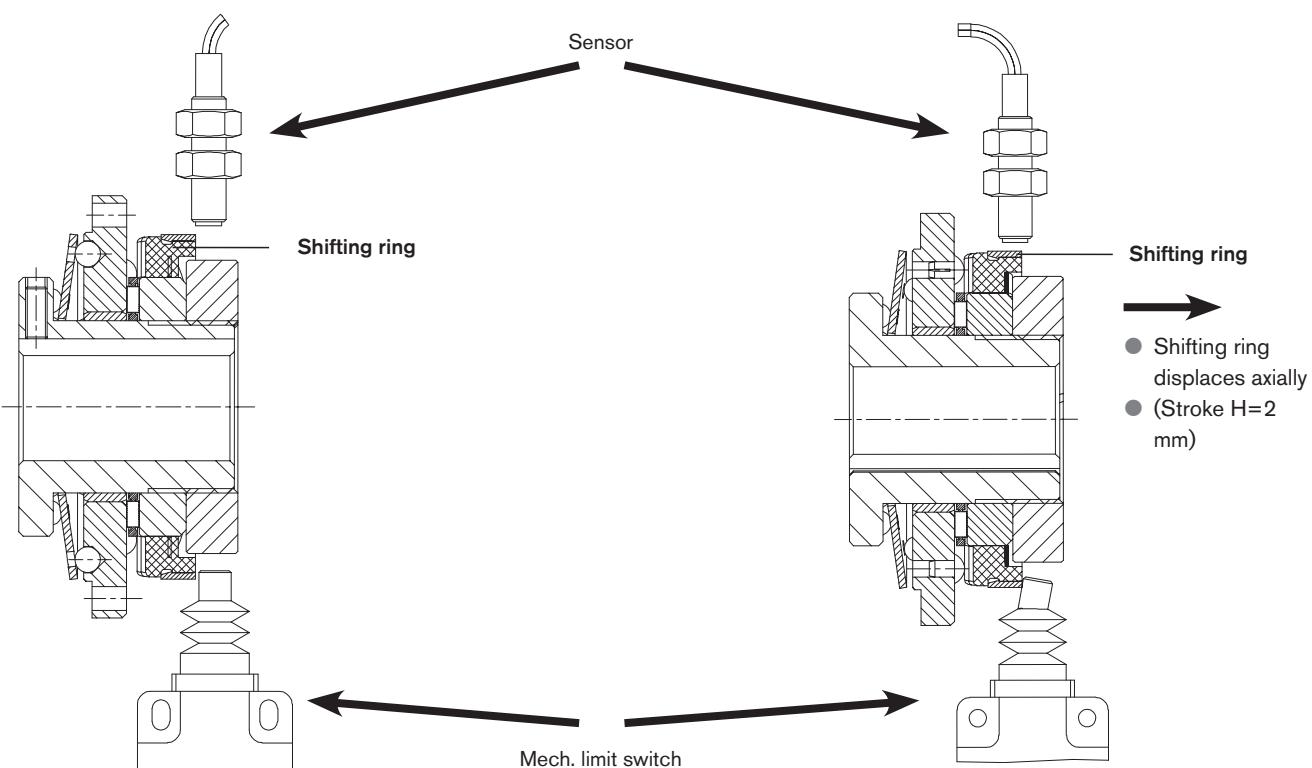

Normal operation:

No signal by sensor or mechanical limit switch.


In case of overload:

The axial motion of the shifting ring activates the sensor resp. mechanical limit switch. The resulting signal can be used for control operation (e.g. motor stop).

SYNTEX®

Backlash-free overload systems

Flange type

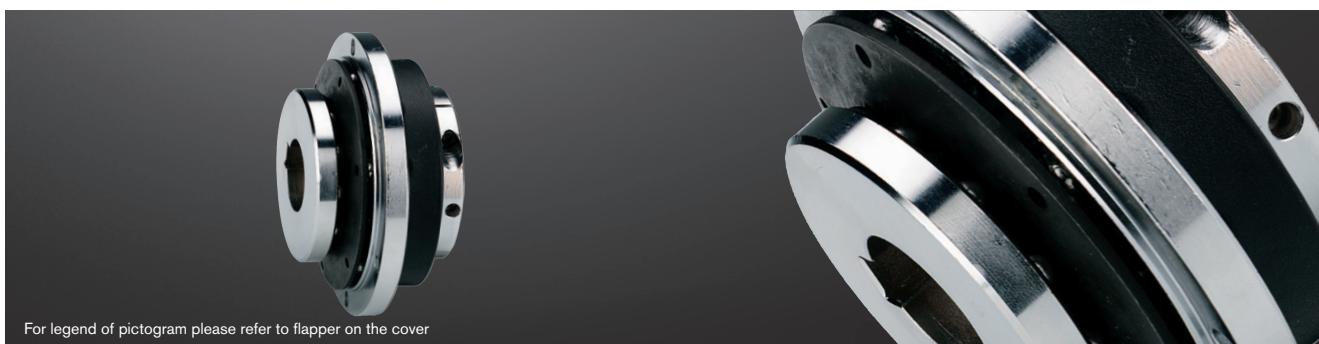


Size	Torques [Nm]								Technical data – dimensions												
	Ratchet design DK		Synchronous design SK		Max. speed ¹⁾ [rpm]	Max. bore	Dimensions [mm]														
	DK1	DK2	SK1	SK2			D	D1	D2	D3	D4	DA	l1	l2	l3	l4	l5	dL	L	z	H=stroke
	20	6-20	15-30	10-20	20-65	1500	20	48	54	61.5	65	71	80	8	2	16	6	35	4.5	45	8
25	20-60	45-90	25-65	40-100	1500	25	60	68	80	81	89	98	8	2	17	8	39	5.5	50	8	2
35	25-80	75-150	30-100	70-180	1000	35	75	78	91	102	110	120	10	2	21	10	42	5.5	60	12	2
50	60-180	175-300	80-280	160-400	1000	50	105	108	121	142	152	162	12	2	25	13	56	6.6	70	12	2

Size	Dimensions – Hub type 4.5								Tightening torque TA [Nm]	
	Dimensions [mm]									
	d ₁ max.	l ₆	l ₇	l ₈	l ₁	s	Clamping screws			
20	20	9	3.5	23	54	3	4 x M5	8.5		
25	25	11	4.0	28	61	4	4 x M6	14		
35	35	10	4.0	31	70	4	4 x M6	14		
50	50	12	4.0	37	82	6	4 x M6	14		

Transmittable friction torques T _R [Nm] (fitting tolerance H7/h6) of hub type 4.5																						
Size	Ø12	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø23	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50
20	45	62	71	81	92	103	115	127														
25		72	83	95	107	120	133	148	179	196	213	231										
35									127	139	152	165	207	237	270	323						
50																	238	281	311	343	394	
																	448	486				

¹⁾ See comments on page 283

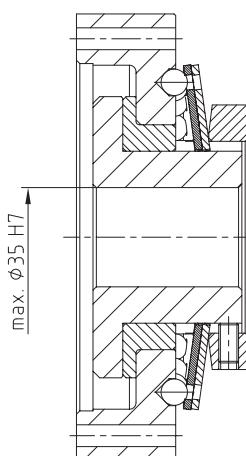


Special type:

- SYNTEX® 35 spec. with integrated flange
- Performance range up to 360 Nm
- Adjustment of flange to ambient components possible

Ordering example:	SYNTEX® 25	d Ø20	DK1	1.0	45 Nm
Type/size	Bore	Type (DK/SK)	Hub type	Torque set	


Hub type 1.0

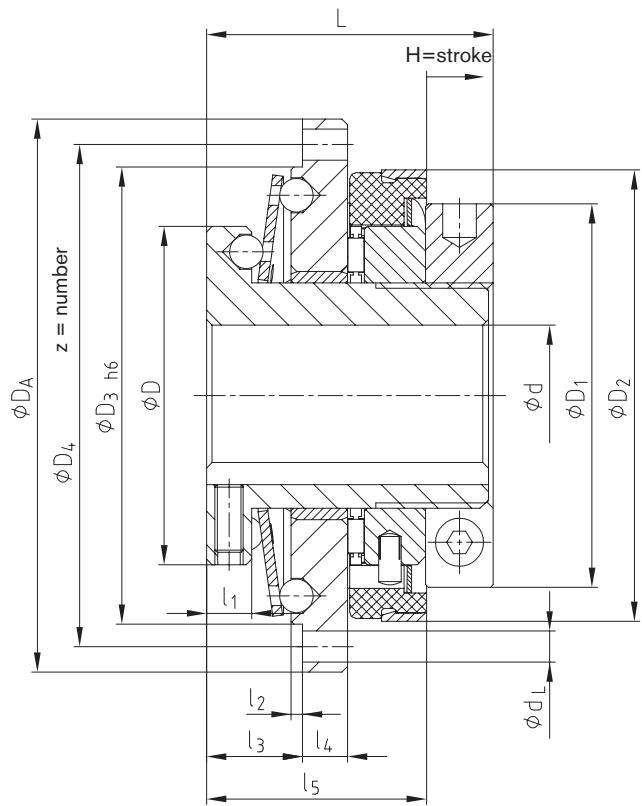

KTR-SI

SYNTEX®

Hub type 4.5

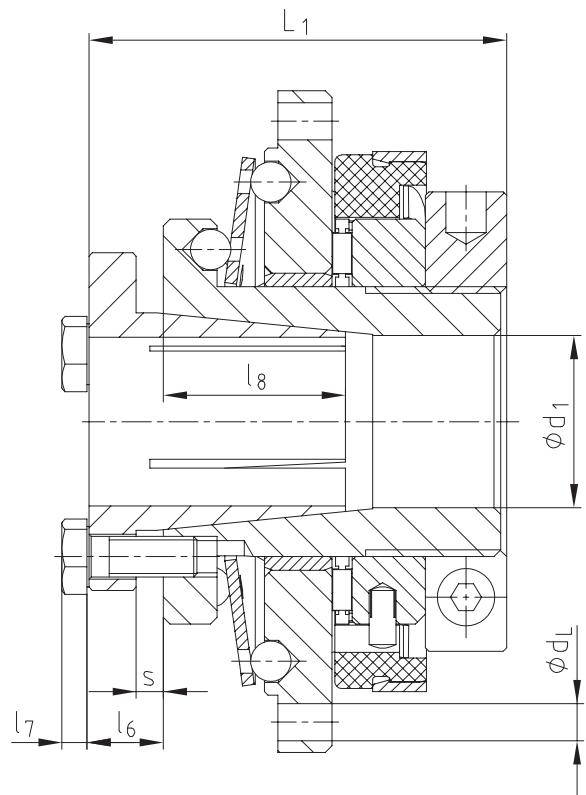

SYNTEX®-NC

Torque limiters

KTR-SI Compact


With sprocket



Size	Torque [Nm]				Max. speed ²⁾ [rpm]	Dimensions [mm]												
	Ratchet design DK		Synchronous design SK			Max. bore d	Standard sprocket ¹⁾			D	D ₁	D ₂	l ₁	l ₃	l ₅	L	H=stroke	
	DK1	DK2	SK1	SK2			06 B-1 ($\frac{3}{8} \times \frac{7}{32}$) z = 25	48	54	61.5	8	14	33	45	2			
20	6-20	15-30	10-20	20-65	1500	20	08 B-1 ($\frac{1}{2} \times \frac{5}{16}$) z = 24	60	68	80	8	15	37	50	2			
25	20-60	45-90	25-65	40-100	1500	25	08 B-1 ($\frac{1}{2} \times \frac{5}{16}$) z = 29	75	78	91	10	19	41	60	2			
35	25-80	75-150	30-100	70-180	1000	35	12 B-1 ($\frac{3}{4} \times \frac{7}{16}$) z = 27	105	108	121	12	23	52	70	2			
50	60-180	175-300	80-280	160-400	1000	50												

Size	Dimensions – Hub type 4.5							Tightening torque T _A [Nm]
	d ₁ max.	l ₆	l ₇	l ₈	L ₁	s	Clamping screws	
20	20	9	3.5	23	54	3	4 x M5	8.5
25	25	11	4.0	28	61	4	4 x M6	14
35	35	10	4.0	31	70	4	4 x M6	14
50	50	12	4.0	37	82	6	4 x M6	14

Transmittable friction torques T _R [Nm] (fitting tolerance H7/h6) of hub type 4.5																						
Size	Ø12	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø23	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50
20	45	62	71	81	92	103	115	127														
25		72	83	95	107	120	133	148	179	196	213	231										
35									127	139	152	165	207	237	270	323						
50																	238	281	311	343	394	448
																						486

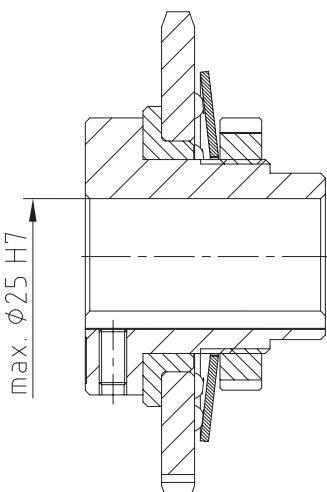¹⁾ z = min. number of teeth required / Other sprockets available on request²⁾ See comments on page 283

Special type:


- Standard SYNTEx® with integrated toothed belt pulley or sprocket
- Available ready for assembly with the torque set
- Reduction of components by integration of components
- Available both as a ratchet and synchronous design
- Torque setting possible while in place
- Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9]
- Also available with a frictionally engaged shaft-hub-connection (hub type 4.5)

Ordering example:

SYNTEX® 25	DK1	1.0	d Ø20	08 B-1 ($\frac{1}{2} \times \frac{5}{16}$), z = 29	45 Nm
Type/size	Type (DK/SK)	Hub type	Bore	Sprocket	Torque set

SYNTEX® 25	DK1	1.0	d Ø20	08 B-1 ($\frac{1}{2} \times \frac{5}{16}$), z = 29	45 Nm
Type/size	Type (DK/SK)	Hub type	Bore	Sprocket	Torque set


Hub type 1.0

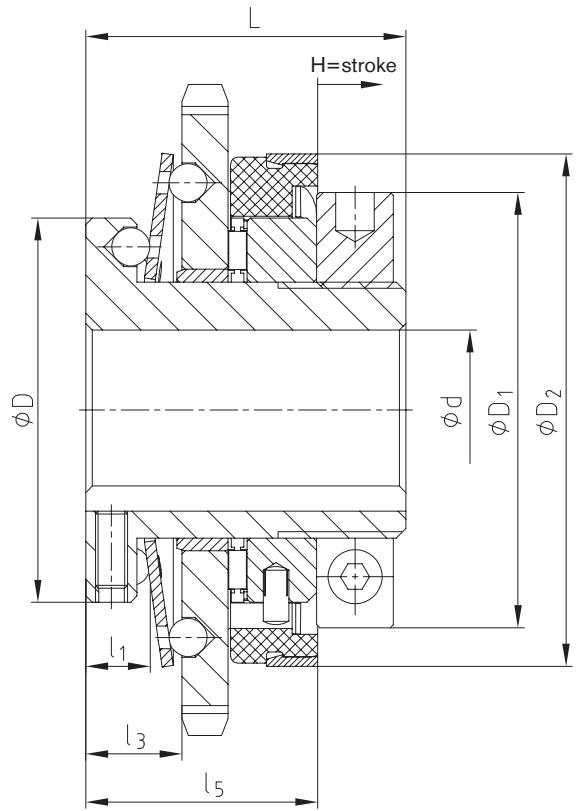

KTR-SI

SYNTEX®

Hub type 4.5

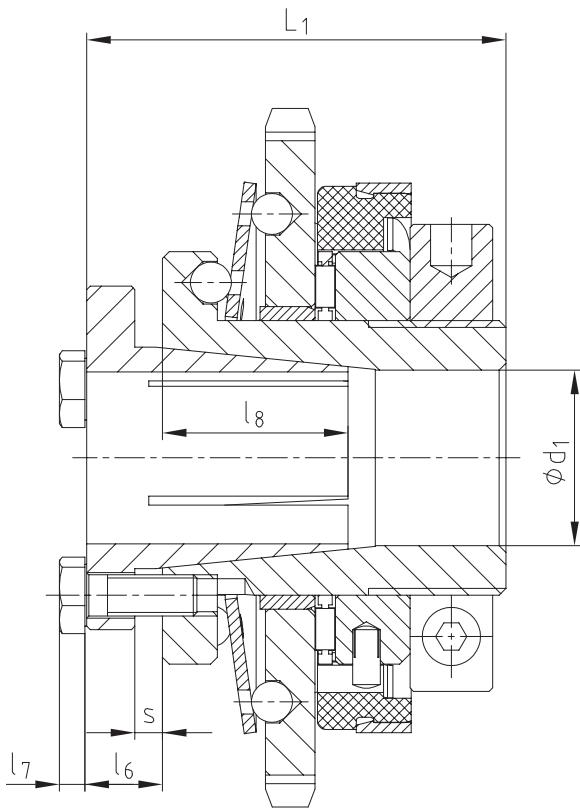


SYNTEX®-NC


Torque limiters

KTR-SI Compact


With toothed belt pulley

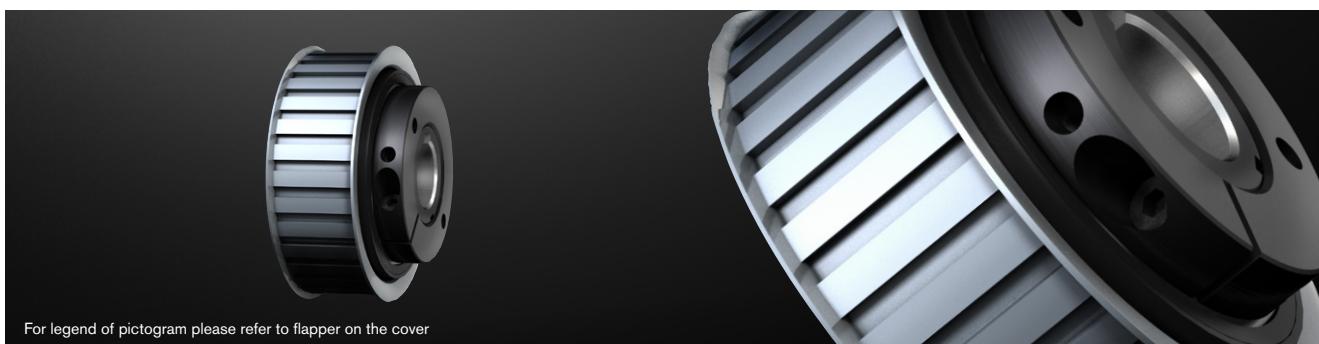

Hub type 1.0

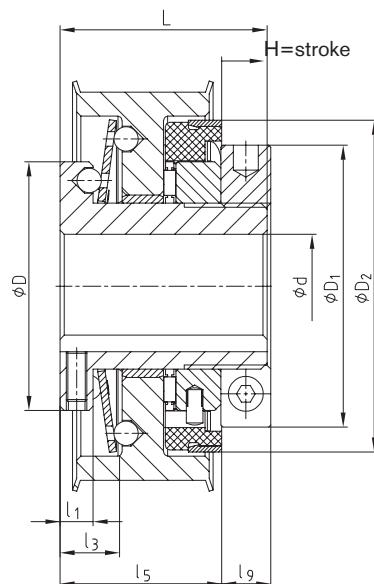

Hub type 4.5

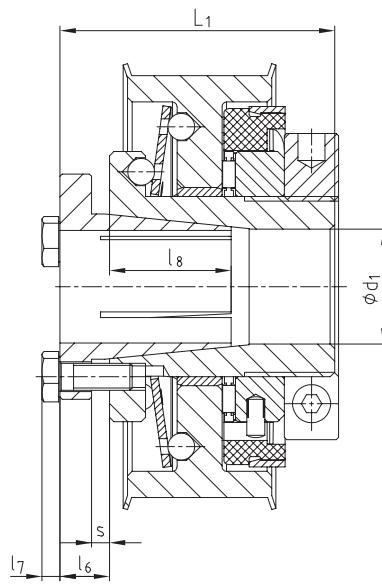

Technical data – dimensions

Size	Torques [Nm]				Max. speed ²⁾ [rpm]	Dimensions [mm]												
	Ratchet design DK		Synchronous design SK			Max. bore		Toothed belt pulley		D	D1	D2	I1	I3	I5	L	H=stroke	
	DK1	DK2	SK1	SK2		d	T10 ¹⁾	AT10 ¹⁾										
20	6-20	15-30	10-20	20-65	1500	20	T10, z = 24	AT10, z = 24	48	54	61.5	8	14	35	45	2		
25	20-60	45-90	25-65	40-100	1500	25	T10, z = 30	AT10, z = 30	60	68	80	8	15	39	50	2		
35	25-80	75-150	30-100	70-180	1000	35	T10, z = 36	AT10, z = 36	75	78	91	10	19	42	60	2		
50	60-180	175-300	80-280	160-400	1000	50	T10, z = 48 ³⁾	AT10, z = 48 ³⁾	105	108	121	12	23	56	70	2		

Dimensions – Hub type 4.5

Size	Max. bore		Dimensions [mm]							Tightening torque T _A [Nm]
	d ₁	l ₆	l ₇	l ₈	l ₉	L ₁	s	Clamping screws		
20	20	9	3.5	23	10	54	3	4 x M5		8.5
25	25	11	4.0	28	11	61	4	4 x M6		14
35	35	10	4.0	31	13	70	4	4 x M6		14
50	50	12	4.0	37	14	82	6	4 x M6		14

Transmittable friction torques T_R [Nm] (fitting tolerance H7/h6) of hub type 4.5

Size	Ø12	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø23	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50
20	45	62	71	81	92	103	115	127														
25		72	83	95	107	120	133	148	179	196	213	231										
35									127	139	152	165	207	237	270	323						
50																	238	281	311	343	394	448

¹⁾ z = min. number of teeth required / Other sizes available on request²⁾ See comments on page 283³⁾ Without flanged wheel

Ordering example:

SYNTEX® 25	DK1	1.0	d Ø20	AT10, z = 24	32	45 Nm
Type/size	Type (DK/SK)	Hub type	Bore	Toothed belt pulley	Width of toothed belt pulley	Torque set

With backlash-free ROTEX® GS





Hub type 1.0

Hub type 1.0

Hub type 6.0

Hub type 4.5

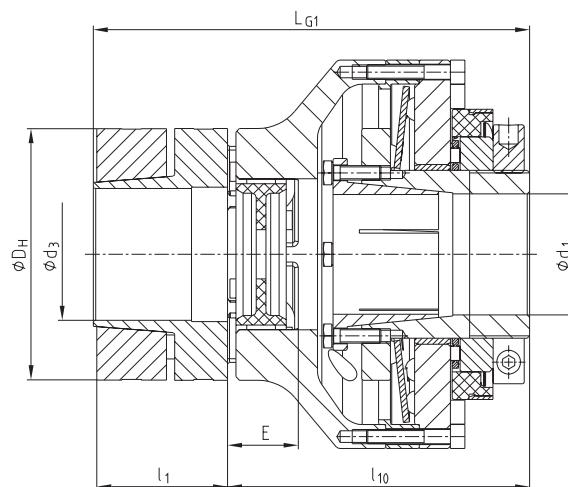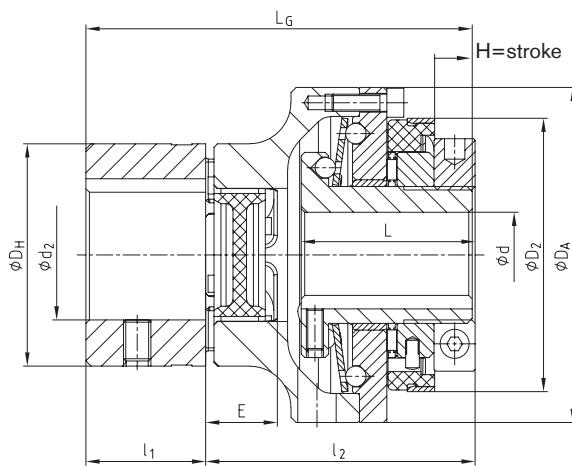

KTR-SI

SYNTEX®

SYNTEX®-NC

Torque limiters

Technical data – dimensions

SYNTEX® size	ROTEX® GS size	Torques [Nm]						Max. speed ²⁾ [rpm]	Dimensions [mm]											H=stroke			
		Ratchet design DK		Synchronous design SK		ROTEX® GS ¹⁾ 98 ShA-GS			Max. bore				D ₂	D _H	D _A	I ₁	I ₂	I ₁₀	E	L	L _G	I _{G1}	
		DK1	DK2	SK1	SK2	TKN	TK max		d	d ₁	d ₂	d ₃	61.5	55	80	30	70	83	18	45	100	113	2
20	24	6-20	15-30	10-20	20-65	60	120	1500	20	20	28	28 ³⁾	61.5	55	80	30	70	83	18	45	100	113	2
25	28	20-60	45-90	25-65	40-100	160	320	1500	25	25	38	38 ³⁾	80	65	98	35	78	91	20	50	113	126	2
35	38	25-80	75-150	30-100	70-180	325	650	1000	35	35	45	48 ³⁾	91	80	120	45	91	105.5	24	60	136	150.5	2
50	48	60-180	175-300	80-280	160-400	525	1050	1000	50	50	62	55 ³⁾	121	105	162	56	111	126	28	70	167	182	2

Transmittable friction torques T_R [Nm] (fitting tolerance H7/h6) of hub type 4.5

Size	Ø12	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø23	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50
20	45	62	71	81	92	103	115	127														
25		72	83	95	107	120	133	148	179	196	213	231										
35									127	139	152	165	207	237	270	323						
50																	238	281	311	343	394	448
																						486

¹⁾ See selection of ROTEX® GS couplings on page 22 et seqq.²⁾ See comments on page 283³⁾ For transmittable friction torques T_R [Nm] of ROTEX® GS hub type 2.8 or 6.0 refer to mounting instructions of ROTEX® GS

Ordering example:

SYNTEX® 25	DK1	1.0	d Ø20	ROTEX® GS 28	98 ShA-GS	1.0	d ₂ Ø25	50 Nm
Type/size	Type	Hub type	Bore	Type/size	Spider	Hub type	ROTEX® GS bore	Torque set


SYNTEX®-NC / KTR-SI Compact

Backlash-free overload systems

Design and operation

The design of the backlash-free overload systems SYNTEX®-NC and KTR-SI Compact is based on a spring-preloaded and positive-locking ball-ratchet-principle allowing for high repeatability and short response times. Moreover, an integrated groove ball bearing provides for the option of direct assembly of toothed belt pulleys, special flanges or other components. Main applications are latest machine tools, control and positioning technology as well as packaging machines and special purpose machinery.

Both systems make use of disk springs with a degressive spring characteristic curve the preset prestress of which drops during the disengaging process. As a result driving and driven end are reliably separated from each other within some milliseconds with the wear on the components being reduced to a minimum simultaneously.

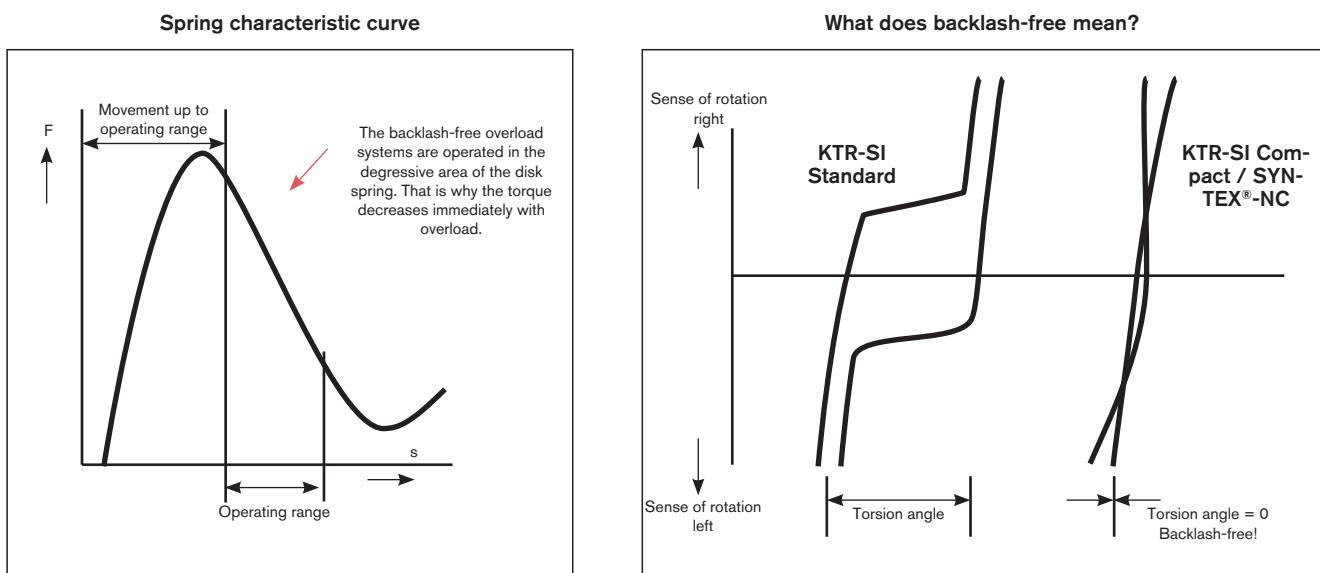


Ratchet design DK

Any engagement after an overload. After eliminating the overload, the balls engage automatically with the next following ball indentation.

Synchronous design SK

Synchronous engagement after an overload. After eliminating the overload, the balls re-engage automatically with the disk springs after a rotation of 360°. Driving and driven side are always placed in the same position to each other. Other degrees of re-engagement, for example 180°, are also possible.

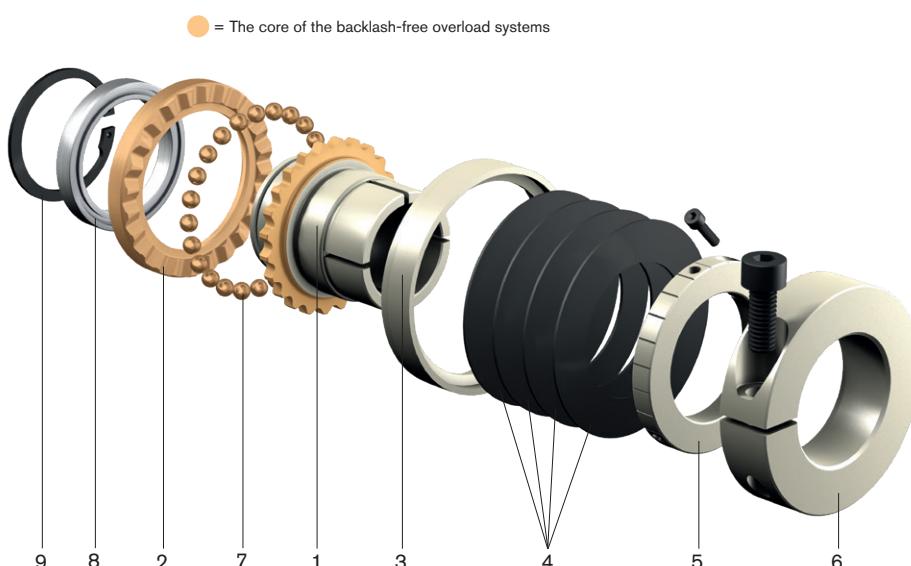

List of components:

1. Hub with keyway to DIN (type 1.0) or with clamping ring (type 6.1)
2. Flange ring
3. Shifting ring
4. Disk spring
5. Setting nut
6. Clamping ring
7. Balls
8. Groove ball bearing
9. Circlip


SYNTEX®-NC / KTR-SI Compact

Backlash-free overload systems

Operating principle

SYNTEX®-NC

- Overload protection up to 550 Nm
- Backlash-free torque transmission
- Light-weight design
- Degressive spring characteristic curve
- Low mass moment of inertia
- Large bore diameters
- Short response times
- High power density

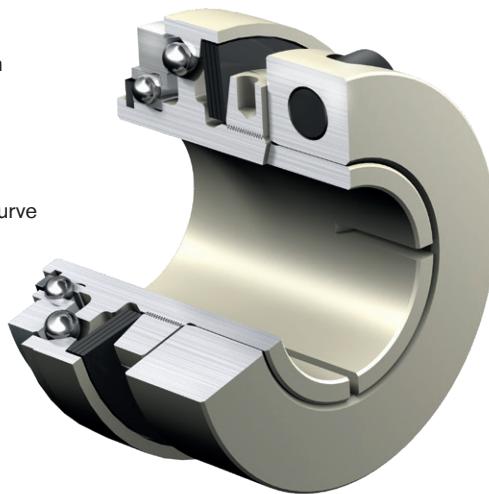

- Clamping ring design easy to assemble
- Available both as a ratchet (DK) and synchronous design (SK)
- Backlash-free shaft-hub-connection
- In combination with the backlash-free, torsionally flexible ROTEX® GS or backlash-free, torsionally stiff TOOLFLEX®
- Direct assembly of toothed belt pulleys, as an example, possible (integrated groove ball bearing)

RUFLEX®

KTR-SI

SYNTEX®

KTR-SI Compact

- Overload protection up to 3,100 Nm
- Backlash-free overload system with a degressive spring characteristic curve
- Solid design
- Accurate disengagement with high repeatability
- Accurate backlash-free torque transmission even in case of wear
- Shifting ring with setting scale for accurate torque setting



- Easy torque setting by torque scale on the coupling
- Connection flange with ball bearing
- Hardened ratchet surfaces for a long service life
- Backlash-free shaft-hub-connection via taper bush
- Can be used with the proven ROTEX® GS as a shaft-to-shaft connection

SYNTEX®-NC


Torque
limiters

KTR-SI Compact


SYNTEX®-NC

Backlash-free overload systems


Hub type

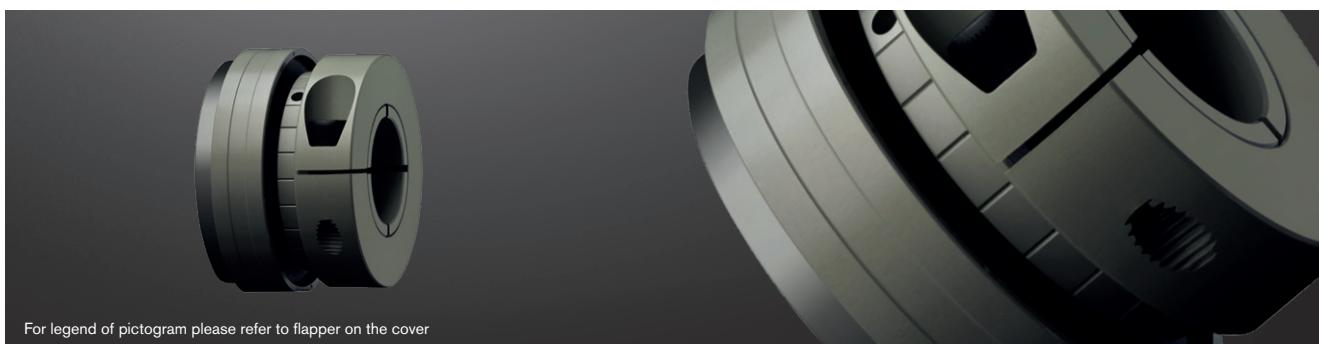

Hub type 1.0 (keyway acc. to DIN 6885)

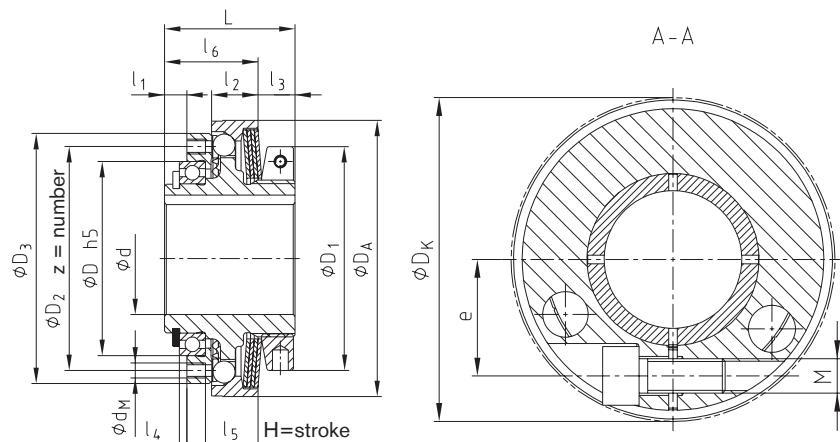

Hub type 6.1 (clamping ring)

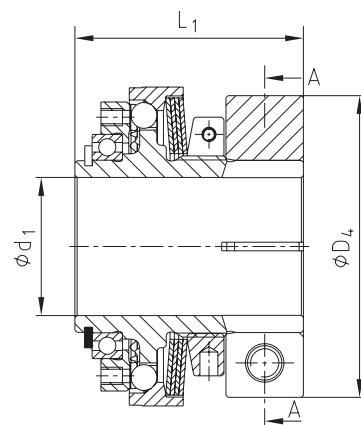

Technical data – dimensions

Size	Max. speed ³⁾ [rpm]	Torques [Nm]			Max. bore		Dimensions [mm]												
		T1	T2	T3	d	D _{h5}	D ₁	D ₂	D ₃	D _A	I ₁	I ₂	I ₃	I ₄	I ₅	I ₆	L	z x dM	H=stroke
15	3500	2-3.5	3.5-7	7-14	12	32	33	37	42	42	5.0	7.0	9.2	2	4	18.8	28	12xM3	0.8
25	3000	9-15	20-35	40-65	20 (22) ¹⁾	42	50	48	56	61	5.5	11.5	9.1	2	5	23.9	33	8xM4	1.2
32	3000	25-38	50-75	100-150	27 (30) ¹⁾	52	60	60	67	74	6	12.5	9.9	2	5	25.1	35	8xM4	1.5
42	2500	30-65	60-135	120-265	36 (38) ¹⁾	65	72	75	83	90	7	16	11.2	2	6	31.8	43	8xM5	1.5
60 ⁴⁾	2000	70-140	120-180	220-550	50	90	96	100	113	116	8	21	11.8	2	7	38.2	52	12xM6	1.8

Dimensions – Hub type 6.1

Size	Bore d1		Dimensions [mm]						Weight with max. bore [kg]			Mass moment of inertia ²⁾ J _{total} [kgm ²]	
	Pilot bore	Max.	D ₄	DK	L ₁	e	M	T _A [Nm]					
15	7.5	15	40	43	38	15	M4	1.7		0.124			0.029 x 10 ⁻³
25	9.5	25	55	-	45	21	M6	14		0.282			0.14 x 10 ⁻³
32	13.5	32	70	-	53	27	M8	34		0.471			0.35 x 10 ⁻³
42	18.5	42	86	91.2	63	33	M10	67		0.815			0.95 x 10 ⁻³
60 ⁴⁾	24	60	112	119.4	75	45	M12	115		3.04			5.9 x 10 ⁻³

Transmittable friction torques T_R [Nm] (fitting tolerance H7/h6) of hub type 6.1

Size	Ø8	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø36	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60
15	8	12	14	16	22	24																				
25	30	35	42	55	62	69	48	53	58	69	80	86														
32							74	83	104	114	125	148	116	125	153	172	192									
42										149	178	209	225	275	310	264	309	324	356	389	422					
60 ⁴⁾												247	310	356	405	485	513	571	633	394	452	514	558	675	803	

¹⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)

²⁾ With max. bore

³⁾ See comments on page 283


⁴⁾ Material steel

Ordering example:	SYNTEX®-NC 32	SK	6.1	T3	d ₁ Ø25	120
	Type/size	Type (DK/SK)	Hub type	Disk springs	Bore	Torque set

SYNTEX®-NC




Backlash-free overload systems

With backlash-free ROTEX® GS

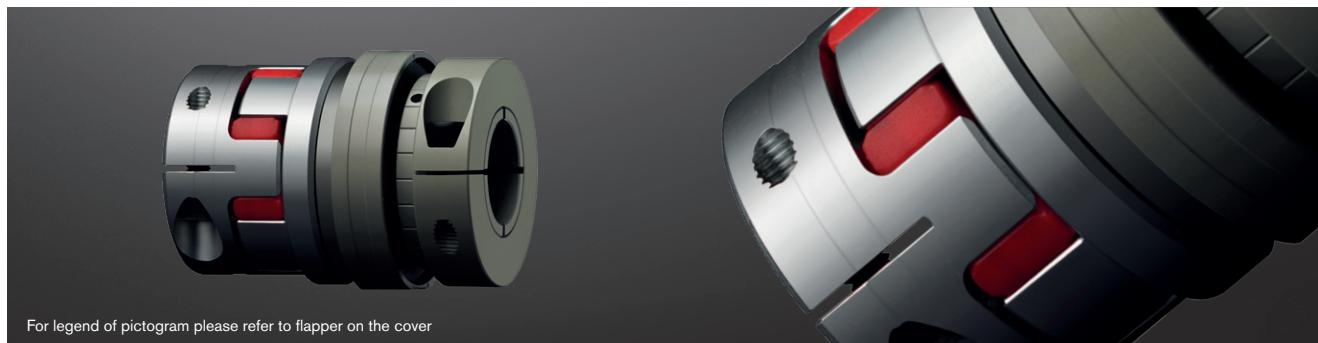


L_{G1} = Hub type 2.8 from size 60 6.0 light

L_{G2} = Hub type 2.5/2.6

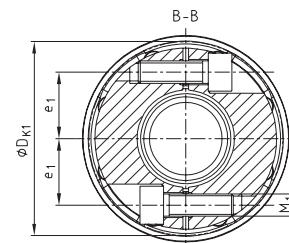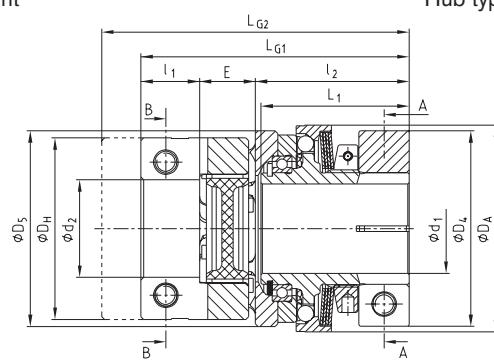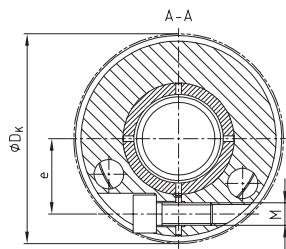


L_G = Hub type 2.9 from size 60 1.0

L_{G3} = Hub type 2.5/2.6

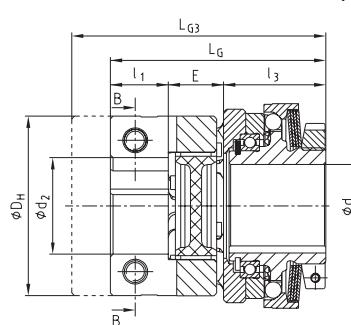

Hub type 1.0

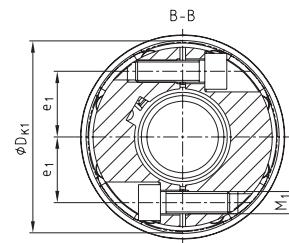

Size	ROTEX® GS size ¹⁾	Torques [Nm]			Max. speed ²⁾ [rpm]	Max. bore			Dimensions [mm]																			
		T1	T2	T3		d	d1	d2	D5	DH	DK	DK1	DA	I1	I2	I3	E	e	e1	L _G	L ₁	L _{G1}	L _{G2}	L _{G3}	M	T _A [Nm]	M1	T _{A1} [Nm]
15	19	2-3.5	3.5-7	7-14	3500	12	15	24 ³⁾	45	40	-	46.7	42	17	40	30	16	15	15.5	63	38	73	81	71	M4	1.7	M5	6
25	24	9-15	20-35	40-65	3000	20 (22) ⁴⁾	25	32 ³⁾	58	55	-	57.5	61	18	47.5	35.5	18	21	20	71.5	45	83.5	95.5	83.5	M6	14	M6	10
32	28	25-38	50-75	100-150	3000	27 (30) ⁴⁾	32	35 ³⁾	70	65	-	69	74	21	55	37	20	27	23.8	78	53	96	110	92	M8	34	M8	25
42	38	30-65	60-135	120-265	2500	36 (38) ⁴⁾	42	45 ³⁾	88	80	91.2	86	90	26	66	46	24	33	30.5	96	63	116	135	115	M10	67	M10	49
60 ⁵⁾	48	70-140	120-280	220-550	2000	50	60	55 ³⁾	113	105	1194	-	116	56	83	60	28	45	-	144	75	167	167	144	M12	115	M10	49

Transmittable friction torques T_R [Nm] (fitting tolerance H7/h6) of hub type 6.1

Size	Ø8	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø36	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	
15	8	12	14	16	22	24																					
25		30	35	42	55	62	69	48	53	58	69	80	86														
32						74	83	104	114	125	148	116	125	153	172	192											
42										149	178	209	225	275	310	264	309	324	356	389	422						
60 ⁵⁾												247	310	356	405	485	513	571	633	394	452	514	558	675	803		

¹⁾ See selection of ROTEX® GS couplings on page 22 et seqq.

²⁾ See comments on page 283

³⁾ For transmittable friction torques T_R [Nm] of ROTEX® GS hub type 2.8 or 6.0 refer to mounting instructions of ROTEX® GS

⁴⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)


⁵⁾ Material steel

Ordering example:	SYNTEX®-NC 32	SK	6.1	T3	d ₁ Ø25	28	2.8	d ₂ Ø20	120
Type/size	Type	Hub type	Disk springs	SYNTEX®-NC bore	ROTEX® GS size	Hub type	ROTEX® GS bore	Torque set	

SYNTEX®-NC

Backlash-free overload systems

With torsionally stiff TOOLFLEX® S

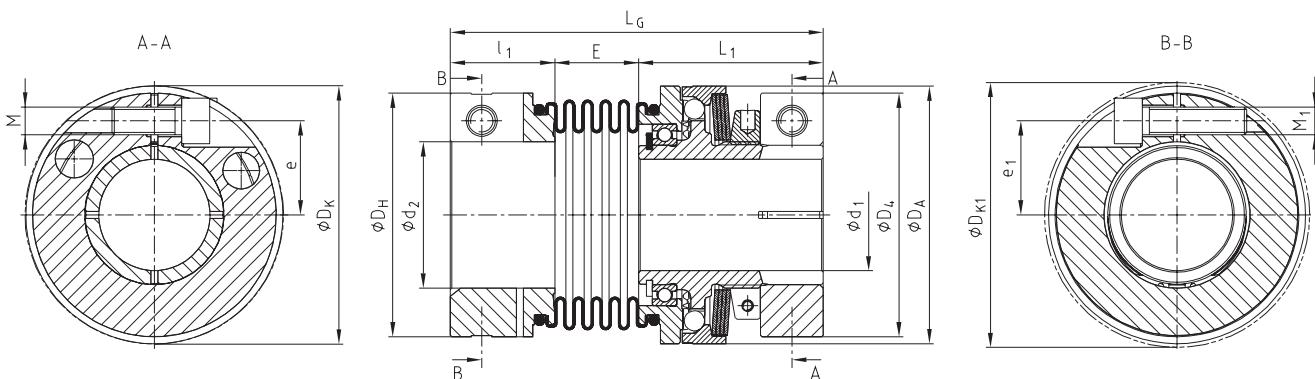

Size	TOOLFLEX® size ¹⁾	Torques [Nm]			Speed ²⁾ [rpm]	Max. bore		Dimensions [mm]														
		T1	T2	T3		d ₁	d ₂	D ₄	D _H	D _A	D _K	D _{K1}	I ₁	L ₁	E	e	e ₁	L _G	M	T _A [Nm]	M ₁	T _{A1} [Nm]
15	20	2-3.5	3.5-7	7-14	3500	15	20 ³⁾	40	40	52	43	43.5	21.5	38	16.5	15	14.5	76	M4	1.7	M5	6
25	38	9-15	20-35	40-65	3000	25	38 ³⁾	55	65	61	-	72.6	25.5	45	18	21	25	88	M6	14	M8	25
32	42	25-38	50-75	100-150	3000	32	42 ³⁾	70	70	74	-	76.1	30	53	24	27	27	107	M8	34	M8	25
42	45	30-65	60-135	120-265	2500	42	45 ³⁾	86	83	90	91.2	89	32	63	22.5	33	30	114	M10	67	M10	49
60 ⁴⁾	65	70-140	120-280	220-550	2000	60	65 ³⁾	112	125	140	119.4	127.1	45	84	36	45	45	165	M12	115	M14	185


Transmittable friction torques T _R [Nm] (fitting tolerance H7/h6) of hub type 6.1																										
Size	Ø8	Ø10	Ø11	Ø12	Ø14	Ø15	Ø16	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø36	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60
15	8	12	14	16	22	24																				
25		30	35	42	55	62	69	48	53	58	69	80	86													
32							74	83	104	114	125	148	116	125	153	172	192									
42										149	178	209	225	275	310	264	309	324	356	389	422					
60 ⁴⁾												247	310	356	405	485	513	571	633	394	452	514	558	675	803	

¹⁾ See selection of TOOLFLEX® couplings on page 22 et seqq.

²⁾ See comments on page 283

³⁾ For transmittable friction torques T_R [Nm] of TOOLFLEX® hub type 2.5 refer to mounting instructions of TOOLFLEX®

⁴⁾ Material steel

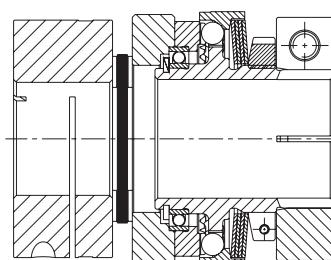

Special type:

- SYNTEX®-NC with RADEX®-NC

Ordering example:

SYNTEX®-NC 32	SK	6.1	T3	d ₁ Ø25	42-S	2.5	d ₂ Ø20	120
Type/size	Type	Hub type	Disk springs	SYNTEX®-NC bore	TOOLFLEX® size	Hub type	TOOLFLEX® bore	Torque set

KTR-SI Compact

Backlash-free overload systems

Flange type



RUFLEX®

KTR-SI


SYNTEX®

SYNTEX®-NC


Torque
limiters

Hub type 1.0

Size 01 - 3

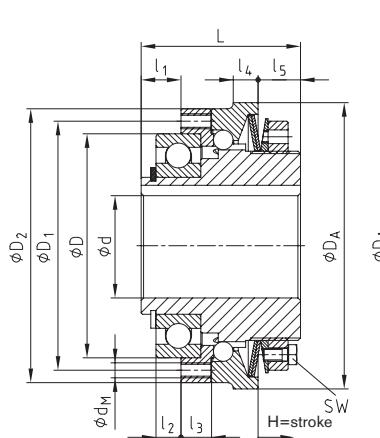


Size 4

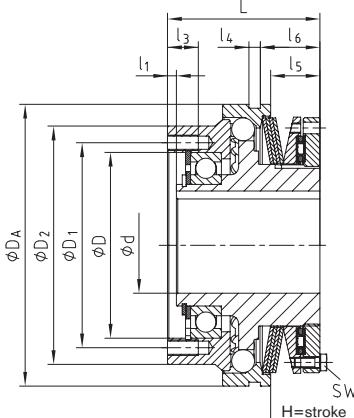


Hub type 4.5
with taper bush

Size 01 - 3

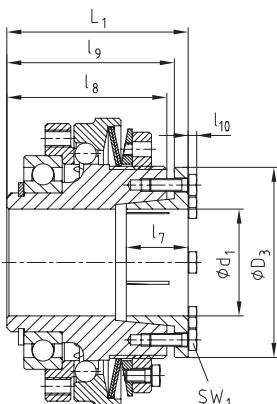

Size 4

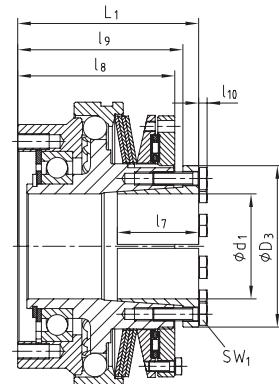

Technical data – dimensions

Size	Speed ¹⁾ [rpm]	Torque [Nm]			Dimensions [mm]														
		T1	T2	T3	Bore d	D _{h5}	D ₁	D ₂	D _A	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	L	d _M	SW	H= stroke
01	4000	3-14	6-28	13-56	8-20	47	56	65	70	8	5	7.5	7	12	-	40	8xM4	7	1.2
0	3000	9-35	18-70	40-140	10-25 (30) ³⁾	62	71	80	85	11	7	8.0	8	14	-	48	8xM5	7	1.5
1	2500	19-65	38-130	78-260	14-30 (35) ³⁾	75	85	95	100	14	9	10.5	9	16	-	59	8xM6	8	1.8
2	2000	35-110	80-220	160-440	18-40 (45) ³⁾	90	100	110	115	16	10	12	10	17	-	64	8xM6	10	2.0
3	1200	80-200	160-400	320-800	24-50	100	116	130	135	18	10	12	12	21	-	75	8xM8	10	2.2
4	400	230-730	460-1590	960-3100	40-75	145 ^{h7}	160	186	220	7	-	24	9	38.5	46.5	119	6xM12	13	3.5

Dimensions – Hub type 4.5

Size	Bore ²⁾ d ₁	Dimensions [mm]								T _A [Nm]
		D ₃	l ₇	l ₈	l ₉	l ₁₀	L ₁	SW ₁	T _A [Nm]	
01	10-20	40.5		26	40	42	2.8	47	7	3
	19-25	42.0								
0	15-20	40.5	26		46	48	2.8	53	7	4.6
	19-30	57	31			49	4.0	56	10	10
1	19-30	57	40		57	60	4.0		10	10
	32-40	64	31				3.5	67	8	5.9
2	32-50	73.5	29	63	66.5	4.0	73		10	10
	32-50	73.5	29		78.5			85		10
3	55-60	89	44		78.0	4.0		86		10
	60-80	123	62	119	126	7	138		16	35

¹⁾ See comments on page 283

²⁾ For transmittable friction torques T_R [Nm] of hub type 4.5 refer to assembly instructions


³⁾ The figure in brackets specifies the max. bore with keyway to DIN 6885 sheet 3 (low-rise design)

Ordering example:	KTR-SI Compact 2	DK	4.5	T2	d ₁ Ø40	150 Nm
Type/size	Type (DK/SK)	Hub type	Disk springs	Bore	Torque set	


KTR-SI Compact

Backlash-free overload systems

With backlash-free ROTEX® GS

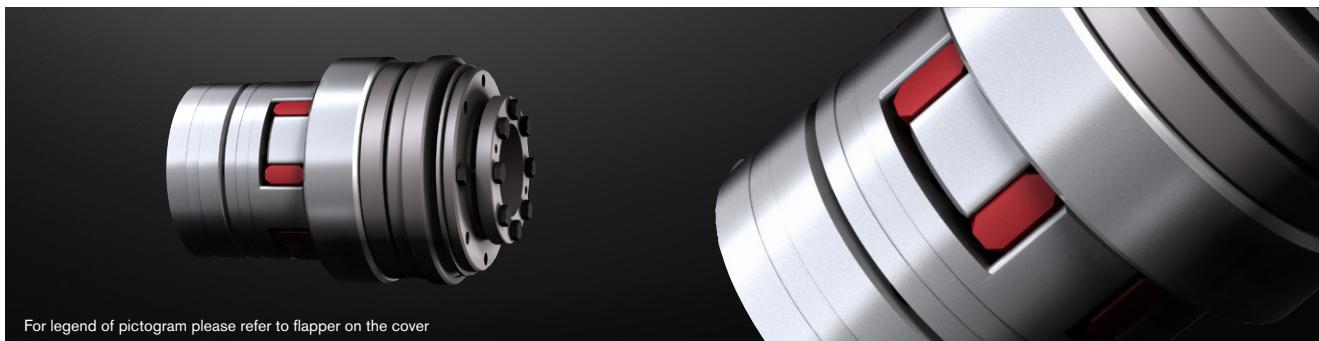


Hub type 1.0

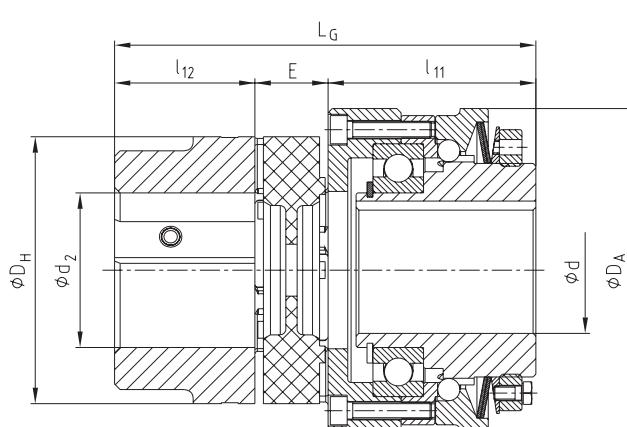

Hub type 1.0

Hub type 6.0

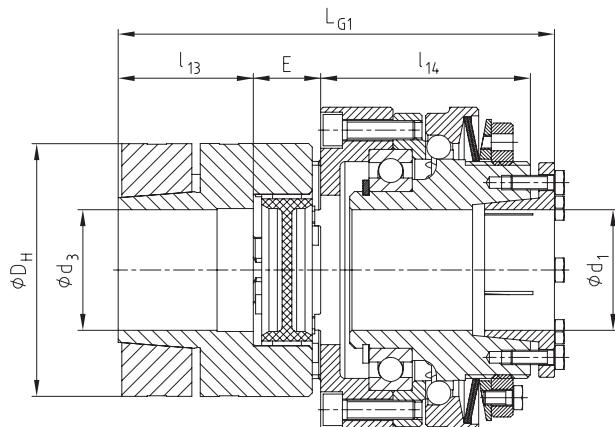

Hub type 4.5

Technical data – dimensions																		
Size	Max. speed ¹⁾ [rpm]	Torques [Nm]			ROTEX® GS size ²⁾	Max. bore			Dimensions [mm]									
		T1	T2	T3		d	d ₁	d ₂	d ₃	D _H	D _A	l ₁₁	l ₁₂	l ₁₃	l ₁₄	E	L _G	L _{G1}
01	4000	3-14	6-28	13-56	24	20	25	28	20	55	70	47	30	30	47	18	95	102
0	3000	9-35	18-70	40-140	28	25	30	38	38	65	85	56.5	35	35	54.5	20	111.5	119.5
1	2500	19-65	38-130	78-260	38	30	40	45	48	80	100	69	45	45	67	24	138	146
2	2000	35-110	80-220	160-440	42	40 (45) ³⁾	50	55	51	95	115	74	50	50	73	26	150	159
3	1200	80-210	160-400	320-800	48	50	60	62	55	105	135	87	56	56	87	28	171	182
4	400	230-730	460-1590	960-3100	75	75	80	80	80	160	220	158.5	85	85	139.5	40	283.5	302.5

¹⁾ See comments on page 283

²⁾ See selection of ROTEX® GS couplings on page 22 et seqq.


³⁾ The figure in brackets specifies the max. bore with keyway with DIN 6885 sheet 3 (low-rise design)

Ordering example:

KTR-SI Compact 1	DK	T2	4.5	d ₁ Ø25	6.0 / d ₃ Ø25	150 Nm
Type/size	Type (DK/SK)	Disk spring	KTR-SI hub type	KTR-SI bore	ROTEX® GS hub type/bore	Torque set

Special types

Other types and combinations available on request.

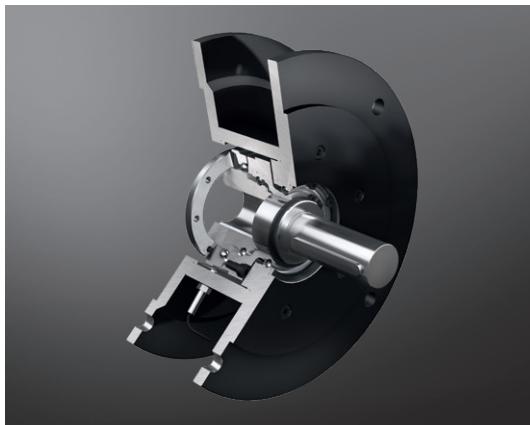

● KTR-SI Compact with IEC flange

RUFLEX®

KTR-SI

SYNTEX®

SYNTEX®-NC

Torque
limiters

KTR-SI Compact



Clamping elements and precision joints

CLAMPEX®

Types of clamping elements

Selection

Selection guide

Calculation of hubs

KTR 100

KTR 105

KTR 130 and KTR 131

KTR 150

KTR 200 and KTR 201

KTR 203 and KTR 206

KTR 225

KTR 250

KTR 400

KTR 603

KTR 620

KTR 700

KTR Clamping nuts

320 Large screw connections
322 for easy and quick assembly 354

324

325

326

KTR Precision joints

328 Series and selection criteria 356

330 Instructions for correct assembly 357

332 Selection and sizing 358

334 Type G and GD with plain bearing 360

336 Type H and HD with needle bearing 361

338 Type GA and HA plain and needle bearing 362

340 (extendable)

342 Type X and XD with plain bearing 363

344 made of stainless steel

348 Type GR and HR with quick locking 364

352 Accessories (protection bushings) 365

Internal clamping
elements



External clamping
elements



Shaft couplings



Precision joints



CLAMPEX® CLAMPING ELEMENTS

TYPES AND OPERATING DESCRIPTION

Properties of clamping elements

Type	Series	Shaft diameter [mm]	Transmittable torque T [Nm]	Centering of hub to shaft via the clamping element	Centering between hub and shaft required	Axial displacement of hub during assembly of clamping element	Details on page
Internal clamping elements	KTR 100	17 – 1,000	260 – 3,017,100		●		326 327
	KTR 105	5 – 50	5 – 1,900	●		●	328 329
	KTR 130	5 – 50	10 – 2,320	●		●	330 331
	KTR 131	5 – 35	10 – 836	●		●	330 331
	KTR 150	6 – 440	2 – 215,000		●	●*	332 333
	KTR 200	20 – 200	530 – 68,000	●		●	334 335
	KTR 201	20 – 200	320 – 48,800	●			334 335

* Depending on mounting position

CLAMPEX® CLAMPING ELEMENTS

TYPES AND OPERATING DESCRIPTION

Type	Series	Shaft diameter [mm]	Transmittable torque T [Nm]	Centering of hub to shaft via the clamping element	Centering between hub and shaft required	Axial displacement of hub during assembly of clamping element	Details on page
Internal clamping elements	KTR 203	18 – 400	370 – 487,000	●		●	336 337
	KTR 206	18 – 400	290 – 342,000	●			336 337
	KTR 225	14 – 50	287 – 1,796	●			338 339
	KTR 250	6 – 130	11 – 25,000	●			340 341
	KTR 400	24 – 600	700 – 1,640,000	●		●	342 343
External clamping elements	KTR 603	10 – 420	28 – 1,460,000	●			344 - 347
	KTR 620	13 – 700	70 – 7,394,000	●			348 - 351
Shaft couplings	KTR 700	10 – 100	62 – 8,350	●			352 353

CLAMPEX®

Clamping nuts

KTR Precision joints

Clamping sets

CLAMPEX®

Clamping elements

Guide for selection

1. Which properties of a clamping set are required?

- Shall shaft and hub be centered to each other by the clamping set?
- Is axial displacement of hub permissible during assembly of the clamping set?

For an explanation of the properties specified above see CLAMPEX® selection guide on page 324.

2. Which dimensions of clamping sets are required?

- Internal diameter of clamping set = shaft diameter
- External diameter of clamping set = diameter of hub bore
- Length of clamping set

For dimensions of clamping sets see catalogue on page 326 et seqq.

3. How much torque and/or axial force needs to be transmitted?

The following safety factors are recommended by KTR:

- ≥ 1.5 between the maximum torque of machine/axial force and the transmittable torque/axial force of clamping set.
- ≥ 2.0 between the rated torque of machine/axial force and the transmittable torque/axial force of clamping set.

4. Is the wall thickness of the hubs sufficient?

Calculation of wall thickness of the hubs is possible via the following methods:

- For formula for calculating the necessary outside diameter of hubs see page 323.
- For calculating the necessary outside diameter of hub via correction factor see page 325.

5. Other selection criteria

Please consult with KTR.

- The clamping set is to be mounted on a shaft with a feather keyway.
- Simultaneous transmission of torque and axial force.
- The clamping set is radially loaded.
- The clamping set is subject to bending.
- High circumferential speeds (from 30 m/s).
- High operating temperatures.
- Shaft with bore (hollow shaft).
- Clamping set in a corrosion-protected design.

Selection

Use in potentially explosive atmospheres

The power transmission of CLAMPEX® clamping elements is based on the principle of two taper rings twisted into each other. Axial force generated on the rings (by means of several screws) produces surface pressure inside the shaft and outside the hub which allows for frictionally engaged transmission of the torque. Considering all operating data (intended use), there is no potential source of ignition. That is why clamping elements do not come within the scope of directive 2014/34/EU.

Due to the aforementioned design of CLAMPEX® clamping elements a failure of components does not have to be anticipated. A risk only arises if friction heat is generated with slipping of a clamping connection (improper assembly/tightening torques).

Concentricity

The concentricity of the self-centering CLAMPEX® clamping elements is between 0.02 mm and 0.08 mm. This concentricity is not reproducible due to the slotted individual components of the clamping elements. As a result this figure merely serves for supporting with designing.

Table of screws

Dimension M	Preload force F _V and tightening torque T _A with μ _{total} = 0.14					
	Preload force F _V [N]			Tightening torque T _A [Nm]		
	8.8	10.9	12.9	8.8	10.9	12.9
M3	2210	3110	3730	1.34	1.89	2.25
M4	3900	5450	6550	2.9	4.1	4.9
M5	6350	8950	10700	6	8.5	10
M6	9000	12600	15100	10	14	17
M8	16500	23200	27900	25	35	41
M10	26200	36900	44300	49	69	83
M12	38300	54000	64500	86	120	145
M14	52500	74000	88500	135	190	230
M16	73000	102000	123000	210	295	355
M18	88000	124000	148000	290	405	485
M20	114000	160000	192000	410	580	690
M22	141000	199000	239000	550	780	930
M24	164000	230000	276000	710	1000	1200
M27	215000	302000	363000	1050	1500	1800
M30	262000	368000	442000	1450	2000	2400

Selection

Symbol	Definition or explanation
$\sigma_{N0,2}$	Yield point of hub material [N/mm ²]
$\sigma_{W0,2}$	Yield point of shaft material [N/mm ²]
C	Specific heat capacity C of hub type (see illustration on page 269)
d	Internal diameter of clamping element [mm]
d_{iW}	Internal diameter of hollow shaft [mm]
D	External diameter of clamping element [mm]
D_N	External diameter of hub required [mm]
T	Transmittable torque [Nm]
T_S	Peak torque to be transmitted [Nm]
T_A	Screw tightening torque [Nm]
B2/B3	Length of clamping element [mm]

Symbol	Definition or explanation
L/L ₁	Hub length [mm]
P _N	Surface pressure generated on the clamping element/hub [N/mm ²]
P _W	Surface pressure generated on the clamping element/shaft [N/mm ²]
C _W	$d_{iW}/d \rightarrow$ Ratio of internal diameter of hollow shaft/clamping element
C _N	D/D _N \rightarrow Ratio of external diameter of clamping element/hub
F _a	Axial force generated during operation [kN]
F _{ax}	Transmittable axial force [kN]
F _V	Preload force [N]
P _O	Setting force for clamping element [N]
P _S	Clamping force for clamping element [N]
P _A	$P_O + P_S =$ Total force for clamping element [N]

The transmission data are parameters found out by calculations. Subject to the friction coefficient variation which is subjected to physical properties, small deviations with the transmission figures may arise.

1. Fatigue strength and shape stability of components subjected to torsion and bending load

The stress concentration figures β_k for the clamping elements press fittings are worked out similarly to those of hydraulic fittings. Stress concentration factors on request.

2. Transmittable torque T

The transmittable torque T always has to be above the biggest torque peak T_S , which may arise on the joints. The torque peaks occurring with acceleration of electric motors as well as additional axial forces F_a have to be considered.

$$T \geq \sqrt{T_S [\text{Nm}]^2 + (F_a [\text{kN}] \cdot \frac{d [\text{mm}]}{2})^2}$$

3. Transmittable axial force F_{ax}

The maximum transmittable axial force F_{ax} specified in the tables has to be reduced accordingly with additional torque transmission.

$$F_{ax} [\text{kN}] = 2 \cdot \frac{T [\text{Nm}]}{d [\text{mm}]}$$

4. Calculation of external diameter of hub D_N

The external diameter of hub D_N required depends on the hub geometry, the yield point of the hub material and the surface pressure between clamping element and hub. In order to simplify the calculation, the table on page 325 specifies correction values which allow to calculate D_N.

Those external diameters of hubs which cannot be calculated based on the table are calculated via the following formula:

$$D_N \geq D \cdot \sqrt{\frac{\sigma_{N0,2} + P_N \cdot C}{\sigma_{N0,2} - P_N \cdot C}}$$

For clamping connections with hollow shafts the required internal diameter of the hollow shaft d_{iW} is calculated based on the following formula:

$$d_{iW} \leq d \cdot \sqrt{\frac{\sigma_{W0,2} - 2 \cdot P_W \cdot 0.8}{\sigma_{W0,2}}}$$

Selection of hub material with external clamping sets KTR 603 and KTR 620

The hub material should have a yield strength R_e of ≥ 350 N/mm². For applications with additional bending load, Q + T steel such as 42CrMo4 should be used.

Tangential stress on the internal diameter of hub

$$\sigma_{tiN} \approx P_N \cdot \frac{(1 + C_N^2)}{(1 - C_N^2)} \cdot C$$

Tangential stress on the internal diameter of shaft


$$\sigma_{tiW} \approx \frac{2 \cdot P_W}{(C_W^2 - 1)}$$

CLAMPEX®

Clamping elements

Selection guide


Selection guide for CLAMPEX® clamping elements

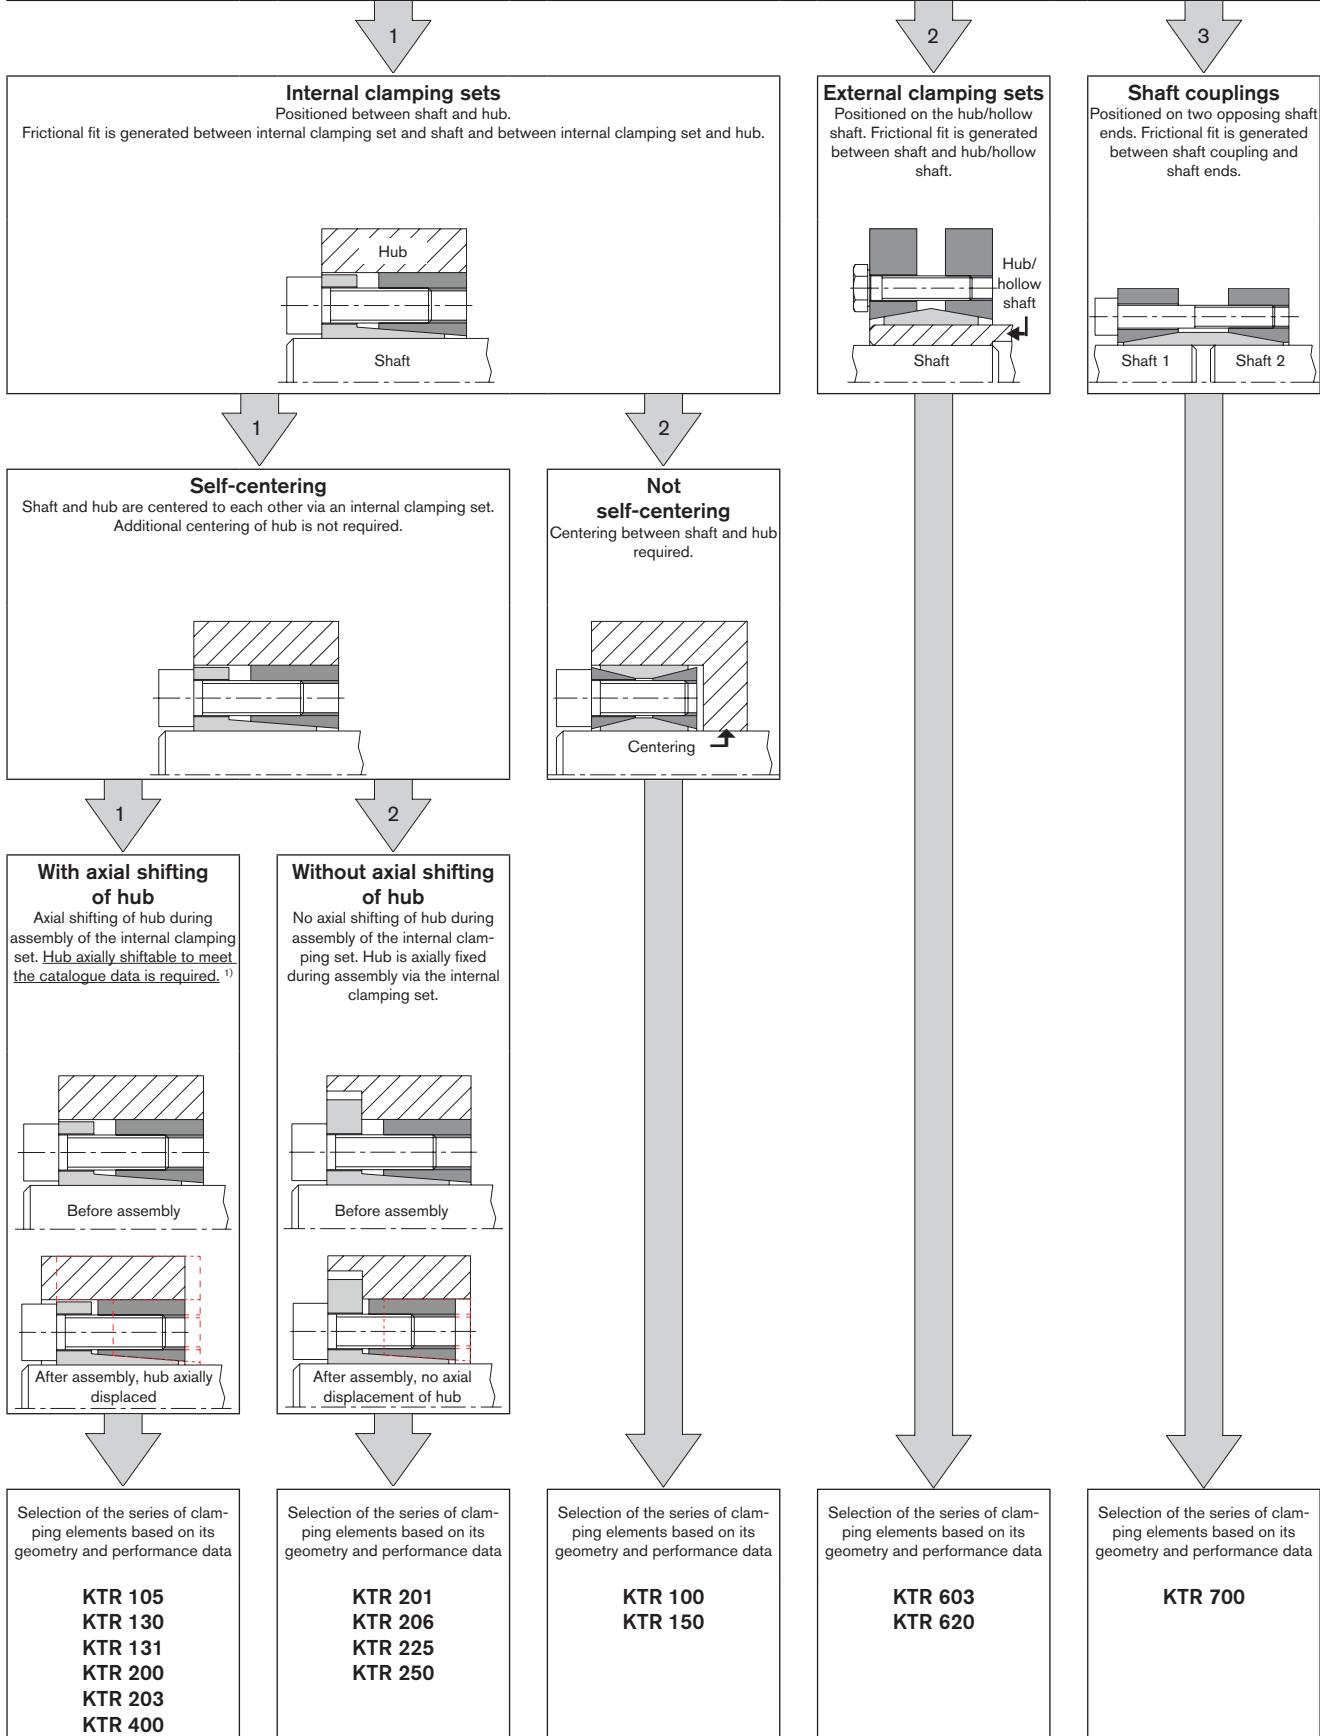

¹⁾ Does not apply for KTR 400

Calculation of hubs

Mounting conditions of clamping elements with specific heat capacity C of hub type

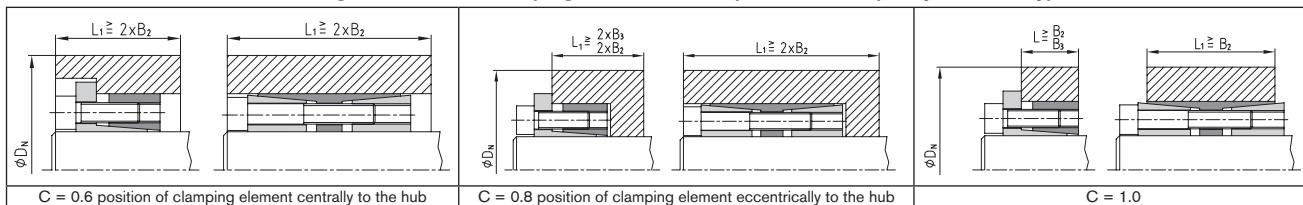

		Selection table for the calculation of the external diameter of hub D_N required (correction value x)										
Surface pressure between clamping element and hub		Average yield point of material $\sigma_0.2$ in N/mm ² (more accurate stiffness figures depending on diameter as specified by the manufacturer)										
		150	180	200	220	250	270	300	350	400	450	600
		Hub materials										
P_N [N/mm ²]	Specific heat capacity C of hub type	GJL 200	GJL 250 GE 200	GJL 300 GJMB-350	GE 240	GJS 400-15 GE 260 AW-2007	E295 C 35	GJS 500-7 GE 300 S355J2	GJS 600-3 C 45	GJS 700-2 C 60	Q & T steel	Q & T steel
65	$C = 0.6$	1.30	1.25	1.22	1.20	1.18	1.15	1.13	1.11	1.10	1.09	1.07
	$C = 0.8$	1.44	1.35	1.30	1.28	1.24	1.22	1.20	1.16	1.14	1.12	1.09
	$C = 1.0$	1.60	1.45	1.40	1.35	1.30	1.28	1.24	1.20	1.18	1.16	1.12
70	$C = 0.6$	1.34	1.26	1.24	1.22	1.18	1.16	1.15	1.12	1.11	1.10	1.07
	$C = 0.8$	1.48	1.38	1.34	1.30	1.25	1.23	1.20	1.18	1.15	1.13	1.10
	$C = 1.0$	1.65	1.50	1.45	1.40	1.34	1.30	1.26	1.22	1.20	1.17	1.13
75	$C = 0.6$	1.30	1.28	1.25	1.23	1.20	1.18	1.16	1.14	1.12	1.11	1.08
	$C = 0.8$	1.52	1.42	1.36	1.32	1.28	1.25	1.22	1.18	1.16	1.14	1.11
	$C = 1.0$	1.74	1.55	1.48	1.42	1.36	1.33	1.30	1.25	1.20	1.18	1.13
80	$C = 0.6$	1.39	1.31	1.28	1.25	1.21	1.20	1.18	1.15	1.13	1.11	1.08
	$C = 0.8$	1.58	1.45	1.39	1.35	1.30	1.27	1.24	1.20	1.18	1.15	1.11
	$C = 1.0$	1.81	1.61	1.53	1.46	1.39	1.36	1.31	1.26	1.22	1.20	1.14
85	$C = 0.6$	1.42	1.34	1.30	1.27	1.23	1.21	1.19	1.16	1.14	1.12	1.09
	$C = 0.8$	1.63	1.49	1.42	1.38	1.32	1.29	1.26	1.22	1.19	1.16	1.12
	$C = 1.0$	1.90	1.67	1.57	1.50	1.42	1.39	1.34	1.28	1.24	1.21	1.15
90	$C = 0.6$	1.46	1.36	1.32	1.28	1.25	1.22	1.20	1.17	1.15	1.13	1.09
	$C = 0.8$	1.69	1.53	1.46	1.40	1.34	1.31	1.28	1.23	1.20	1.18	1.13
	$C = 1.0$	2.00	1.73	1.62	1.54	1.46	1.41	1.36	1.30	1.26	1.22	1.16
95	$C = 0.6$	1.49	1.39	1.34	1.30	1.26	1.24	1.21	1.18	1.15	1.14	1.10
	$C = 0.8$	1.75	1.57	1.49	1.43	1.37	1.34	1.30	1.25	1.21	1.19	1.14
	$C = 1.0$	2.11	1.80	1.68	1.59	1.49	1.44	1.39	1.32	1.27	1.24	1.17
100	$C = 0.6$	1.53	1.41	1.36	1.32	1.28	1.25	1.22	1.19	1.16	1.14	1.11
	$C = 0.8$	1.81	1.61	1.53	1.46	1.39	1.36	1.31	1.26	1.22	1.20	1.14
	$C = 1.0$	2.24	1.87	1.73	1.63	1.53	1.48	1.41	1.34	1.29	1.25	1.18
105	$C = 0.6$	1.56	1.44	1.39	1.34	1.29	1.27	1.24	1.20	1.17	1.15	1.11
	$C = 0.8$	1.88	1.66	1.56	1.50	1.42	1.38	1.33	1.28	1.24	1.21	1.15
	$C = 1.0$	2.38	1.95	1.79	1.68	1.56	1.51	1.44	1.36	1.31	1.27	1.19
110	$C = 0.6$	1.60	1.47	1.41	1.36	1.31	1.28	1.25	1.21	1.18	1.16	1.12
	$C = 0.8$	1.96	1.71	1.60	1.53	1.44	1.40	1.35	1.29	1.25	1.22	1.16
	$C = 1.0$	2.55	2.04	1.86	1.73	1.60	1.54	1.47	1.38	1.33	1.28	1.20
115	$C = 0.6$	1.64	1.50	1.43	1.36	1.33	1.30	1.26	1.22	1.19	1.17	1.12
	$C = 0.8$	2.04	1.76	1.64	1.56	1.47	1.43	1.37	1.31	1.26	1.23	1.17
	$C = 1.0$	2.75	2.13	1.93	1.79	1.64	1.58	1.50	1.41	1.34	1.30	1.21
120	$C = 0.6$	1.69	1.53	1.46	1.40	1.34	1.31	1.28	1.23	1.20	1.18	1.13
	$C = 0.8$	2.13	1.81	1.69	1.60	1.50	1.45	1.39	1.33	1.28	1.24	1.18
	$C = 1.0$	3.00	2.24	2.00	1.84	1.69	1.61	1.53	1.43	1.36	1.31	1.22
125	$C = 0.6$	1.73	1.56	1.48	1.43	1.36	1.33	1.29	1.24	1.21	1.18	1.13
	$C = 0.8$	2.24	1.87	1.73	1.63	1.53	1.48	1.41	1.34	1.29	1.25	1.18
	$C = 1.0$	3.32	2.35	2.08	1.91	1.73	1.65	1.56	1.45	1.38	1.33	1.24
130	$C = 0.6$	1.78	1.59	1.51	1.45	1.38	1.35	1.30	1.25	1.22	1.19	1.14
	$C = 0.8$	2.35	1.93	1.78	1.67	1.56	1.50	1.44	1.36	1.30	1.27	1.19
	$C = 1.0$	3.74	2.49	2.17	1.97	1.78	1.69	1.59	1.48	1.40	1.35	1.25
135	$C = 0.6$	1.83	1.62	1.54	1.47	1.40	1.36	1.32	1.27	1.23	1.20	1.15
	$C = 0.8$	2.48	2.00	1.83	1.71	1.59	1.53	1.46	1.38	1.32	1.28	1.20
	$C = 1.0$	4.36	2.65	2.27	2.04	1.83	1.73	1.62	1.50	1.42	1.36	1.26
140	$C = 0.6$	1.88	1.66	1.56	1.50	1.42	1.38	1.33	1.28	1.24	1.21	1.15
	$C = 0.8$	2.63	2.07	1.88	1.75	1.62	1.55	1.48	1.39	1.33	1.29	1.21
	$C = 1.0$	5.39	2.83	2.38	2.12	1.88	1.78	1.66	1.53	1.44	1.38	1.27
145	$C = 0.6$	1.94	1.69	1.59	1.52	1.44	1.40	1.35	1.29	1.25	1.22	1.16
	$C = 0.8$	2.80	2.15	1.94	1.80	1.65	1.58	1.50	1.41	1.35	1.30	1.22
	$C = 1.0$	7.68	3.05	2.50	2.21	1.94	1.82	1.69	1.55	1.46	1.40	1.28
150	$C = 0.6$	2.00	1.73	1.62	1.54	1.46	1.41	1.36	1.30	1.26	1.23	1.16
	$C = 0.8$	3.00	2.24	2.0	1.84	1.69	1.61	1.53	1.43	1.36	1.31	1.23
	$C = 1.0$	-	3.32	2.65	2.30	2.00	1.87	1.73	1.58	1.48	1.41	1.29
155	$C = 0.6$	2.06	1.77	1.65	1.57	1.48	1.43	1.38	1.31	1.27	1.24	1.17
	$C = 0.8$	3.25	2.33	2.06	1.89	1.72	1.65	1.55	1.45	1.38	1.33	1.23
	$C = 1.0$	-	3.66	2.80	2.40	2.06	1.92	1.77	1.61	1.51	1.43	1.30
160	$C = 0.6$	2.13	1.81	1.69	1.60	1.50	1.45	1.39	1.33	1.28	1.24	1.18
	$C = 0.8$	3.55	2.43	2.13	1.94	1.76	1.67	1.58	1.47	1.39	1.34	1.24
	$C = 1.0$	-	4.12	3.00	2.52	2.13	1.98	1.81	1.64	1.53	1.45	1.31
165	$C = 0.6$	2.21	1.86	1.72	1.62	1.52	1.47	1.41	1.34	1.29	1.25	1.18
	$C = 0.8$	3.96	2.55	2.21	2.00	1.80	1.71	1.60	1.49	1.41	1.35	1.25
	$C = 1.0$	-	4.80	3.23	2.65	2.21	2.04	1.86	1.67	1.55	1.47	1.33

CLAMPEX®




KTR Precision joints

Clamping sets



CLAMPEX® KTR 100

Clamping elements

Not self-centering, suitable for large shaft and hub tolerances

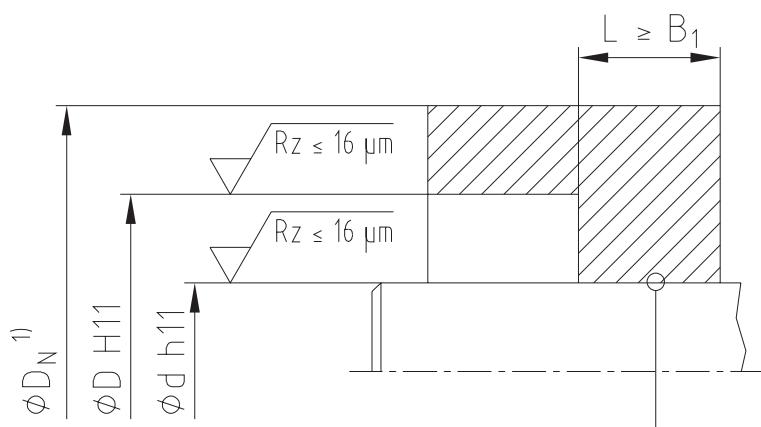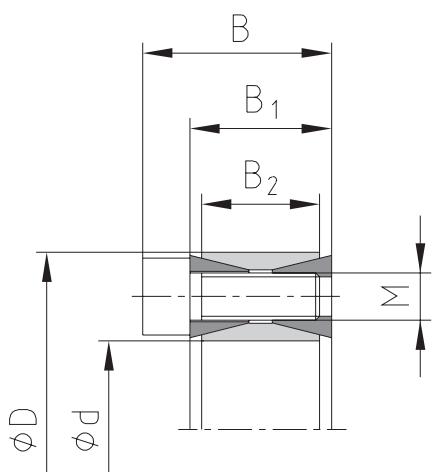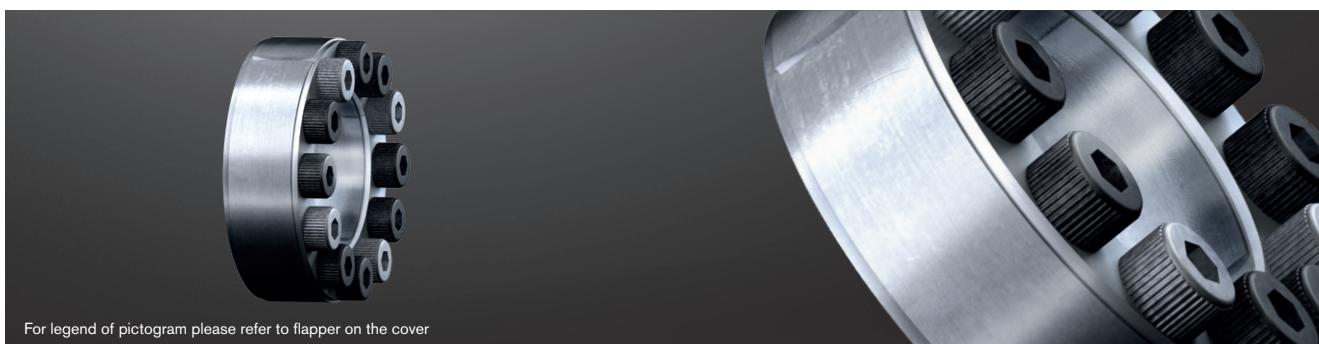

Example of application of hub type

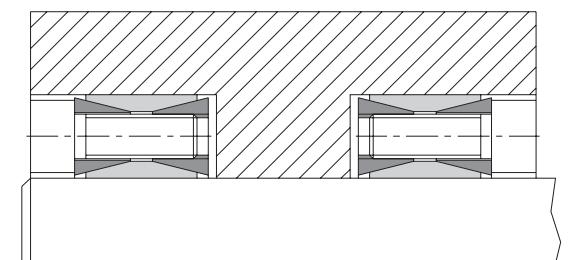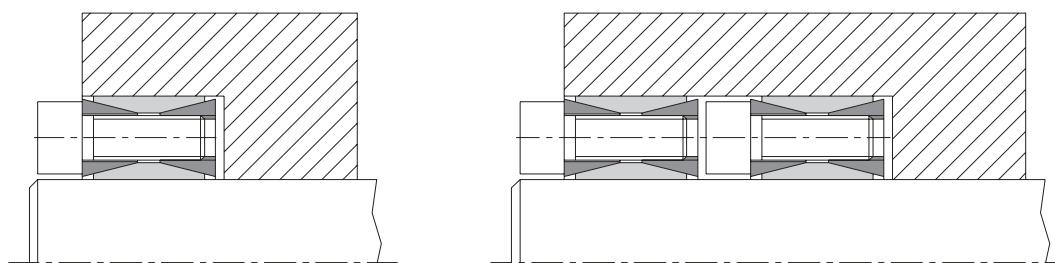

- Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T , F_{ax} , P_W and P_N decreasing proportionately.





Ordering example:	KTR 100	50	x	80
Series	Size of internal diameter d			Size of external diameter D

CLAMPEX® – KTR 100													
d x D [mm]	Dimensions [mm]			Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme
	B	B ₁	B ₂	M	Length	z = number	T _A [Nm] ¹⁾	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]		
17 x 47	26	20	17	M6	18	8	16	260	31	281	102	0.2	
18 x 47	26	20	17	M6	18	8	16	280	31	270	103	0.2	
19 x 47	26	20	17	M6	18	8	16	290	31	251	101	0.2	●
20 x 47	26	20	17	M6	18	8	16	310	31	242	103	0.2	●
22 x 47	26	20	17	M6	18	8	16	340	31	219	103	0.2	●
24 x 50	26	20	17	M6	18	8	16	370	31	200	96	0.3	●
25 x 50	26	20	17	M6	18	8	16	390	31	195	97	0.3	●
28 x 55	26	20	17	M6	18	12	16	650	46	259	132	0.3	●
30 x 55	26	20	17	M6	18	12	16	700	47	243	132	0.3	●
32 x 60	26	20	17	M6	18	12	16	750	47	229	122	0.3	●
35 x 60	26	20	17	M6	18	12	16	820	47	209	122	0.3	●
38 x 65	26	20	17	M6	18	15	16	1100	58	238	139	0.4	●
40 x 65	26	20	17	M6	18	15	16	1170	59	228	140	0.3	●
42 x 75	32	24	20	M8	22	12	40	1670	80	251	141	0.6	●
45 x 75	32	24	20	M8	22	12	40	1790	80	234	141	0.5	●
48 x 80	32	24	20	M8	22	12	40	1900	79	219	131	0.6	●
50 x 80	32	24	20	M8	22	12	40	1990	80	211	132	0.6	●
55 x 85	32	24	20	M8	22	15	40	2740	100	240	155	0.6	●
60 x 90	32	24	20	M8	22	15	40	2990	100	220	147	0.7	●
65 x 95	32	24	20	M8	22	15	40	3240	100	203	139	0.8	●
70 x 110	38	28	24	M10	25	15	78	5550	159	250	159	1.3	●
75 x 115	38	28	24	M10	25	15	78	5950	159	234	152	1.2	●
80 x 120	38	28	24	M10	25	15	78	6350	159	219	146	1.4	●
85 x 125	38	28	24	M10	25	15	78	6740	159	206	140	1.4	●
90 x 130	38	28	24	M10	25	15	78	7140	159	195	135	1.5	●
95 x 135	38	28	24	M10	25	18	78	9000	189	220	155	1.6	●
100 x 145	44	32	26	M12	30	15	135	11600	232	237	163	2.2	●
110 x 155	44	32	26	M12	30	15	135	12750	232	215	153	2.3	●
120 x 165	44	32	26	M12	30	16	135	14800	247	210	153	2.4	●
130 x 180	50	38	34	M12	30	20	135	20150	310	186	134	3.5	●
140 x 190	50	38	34	M12	30	22	135	23850	341	190	140	3.8	●
150 x 200	50	38	34	M12	30	24	135	27850	371	193	145	4.0	●
160 x 210	50	38	34	M12	30	26	135	32200	403	196	150	4.4	●
170 x 225	58	44	38	M14	45	22	215	40300	474	195	147	5.7	●
180 x 235	58	44	38	M14	45	24	215	46600	518	201	154	6.0	●
190 x 250	66	52	46	M14	45	28	215	57300	603	183	139	8.0	●
200 x 260	66	52	46	M14	45	30	215	71000	710	205	157	8.2	●
220 x 285	72	56	50	M16	50	26	335	93200	847	204	158	11.0	●
240 x 305	72	56	50	M16	50	30	335	117300	978	216	170	12.2	
260 x 325	72	56	50	M16	50	34	335	144000	1108	226	181	13.2	
280 x 355	84	66	60	M18	60	32	465	177700	1269	200	158	19.2	
300 x 375	84	66	60	M18	60	36	465	214100	1427	210	168	20.5	
320 x 405	98	78	72	M20	70	36	660	295800	1849	213	168	29.6	
340 x 425	98	78	72	M20	70	36	660	314300	1849	200	160	31.1	
360 x 455	112	90	84	M22	80	36	900	413300	2296	201	159	42.2	
380 x 475	112	90	84	M22	80	36	900	436300	2296	191	153	44.0	
400 x 495	112	90	84	M22	80	36	900	459300	2297	181	147	46.0	
420 x 515	112	90	84	M22	80	40	900	535800	2551	192	156	50.0	
440 x 545	130	102	96	M24	90	40	1130	647600	2944	185	149	64.6	
460 x 565	130	102	96	M24	90	40	1130	677000	2943	177	144	67.4	
480 x 585	130	102	96	M24	90	42	1130	741800	3091	178	146	71.0	
500 x 605	130	102	96	M24	90	44	1130	809500	3238	179	148	72.6	
520 x 630	130	102	96	M24	90	45	1130	861000	3312	176	145	80	
540 x 650	130	102	96	M24	90	45	1130	894000	3311	169	141	82	
560 x 670	130	102	96	M24	90	48	1130	989000	3532	174	146	85	
580 x 690	130	102	96	M24	90	50	1130	1067000	3679	175	147	88	
600 x 710	130	102	96	M24	90	50	1130	1103800	3679	169	143	91	
620 x 730	130	102	96	M24	90	52	1130	1186200	3826	171	145	93	
640 x 750	130	102	96	M24	90	54	1130	1271600	3974	172	146	96	
660 x 770	130	102	96	M24	90	56	1130	1359900	4121	173	148	99	
680 x 790	130	102	96	M24	90	56	1130	1401100	4121	167	144	102	
700 x 810	130	102	96	M24	90	60	1130	1545400	4415	174	151	104	
720 x 830	130	102	96	M24	90	60	1130	1589500	4415	169	147	107	
740 x 850	130	102	96	M24	90	62	1130	1688100	4562	170	148	110	
760 x 870	130	102	96	M24	90	64	1130	1789700	4710	171	150	113	
780 x 890	130	102	96	M24	90	65	1130	1865500	4783	169	149	116	
800 x 910	130	102	96	M24	90	66	1130	1942700	4857	168	147	118	
820 x 930	130	102	96	M24	90	68	1130	2051600	5004	169	149	121	
840 x 950	130	102	96	M24	90	70	1130	2163500	5151	169	150	124	
860 x 970	130	102	96	M24	90	72	1130	2278300	5298	170	151	127	
880 x 990	130	102	96	M24	90	74	1130	2396000	5445	171	152	129	
900 x 1010	130	102	96	M24	90	75	1130	2483600	5519	169	151	132	
920 x 1030	130	102	96	M24	90	76	1130	2572600	5593	168	150	135	
940 x 1050	130	102	96	M24	90	78	1130	2697700	5740	169	151	138	
960 x 1070	130	102	96	M24	90	80	1130	2825800	5887	169	152	140	
980 x 1090	130	102	96	M24	90	81	1130	2920700	5961	168	151	143	
1000 x 1110	130	102	96	M24	90	82	1130	3017100	6034	167	150	146	

CLAMPEX® KTR 105


Clamping elements

Self-centering clamping element in a compact design

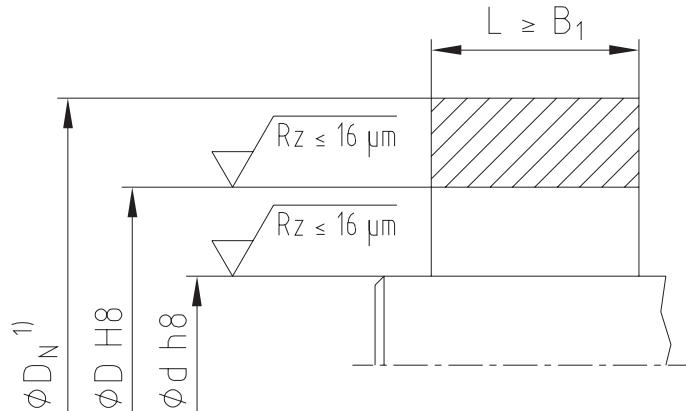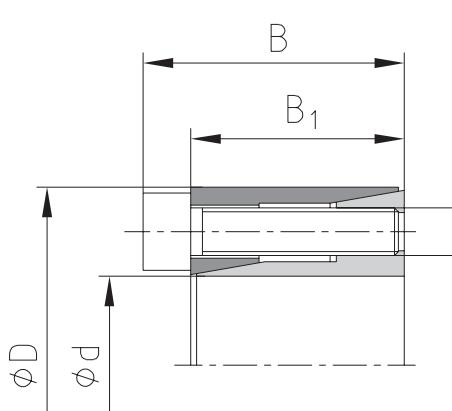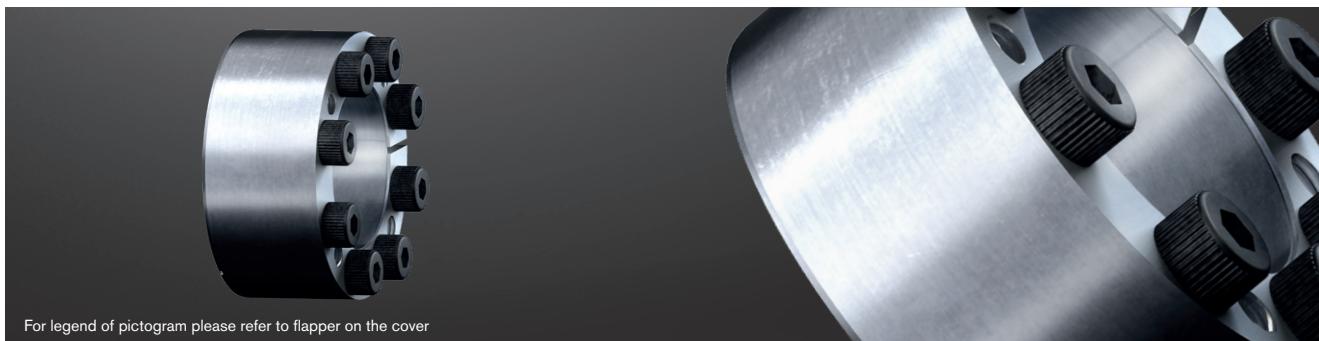

¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

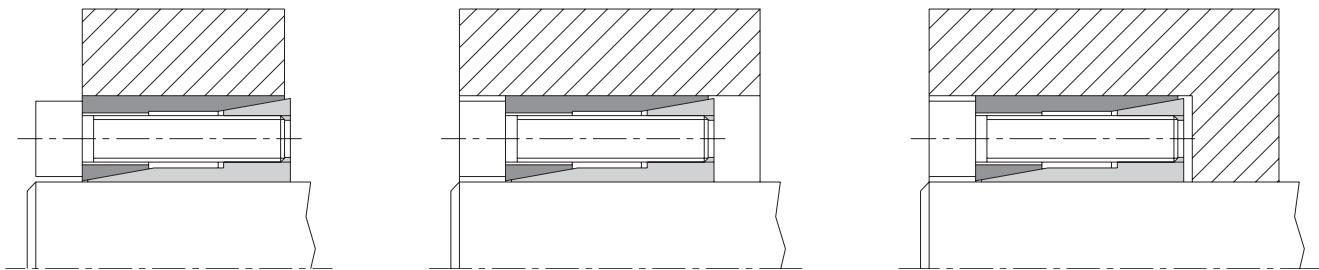

Ordering example:

KTR 105	8	x	18
Series	Size of internal diameter d		Size of external diameter D

CLAMPEX® – KTR 105

d x D [mm]	Dimensions [mm]		Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme
	B	B1	M	Length	z = number	T _A [Nm] ¹⁾	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]		
5 x 16	13.5	11	M2.5	10	3	1.2	5	2	177	55	0.01	●
6 x 16	13.5	11	M2.5	10	3	1.2	6	2	147	55	0.01	●
6.35 x 16	13.5	11	M2.5	10	3	1.2	6	2	132	52	0.01	●
7 x 17	13.5	11	M2.5	10	3	1.2	8	2	144	59	0.01	●
8 x 18	13.5	11	M2.5	10	3	1.2	10	3	138	61	0.02	●
9 x 20	15.5	13	M2.5	12	4	1.2	15	3	140	63	0.02	●
9.53 x 20	15.5	13	M2.5	12	4	1.2	15	3	125	60	0.02	
10 x 20	15.5	13	M2.5	12	4	1.2	15	3	114	57	0.02	●
11 x 22	15.5	13	M2.5	12	4	1.2	18	3	113	56	0.02	●
12 x 22	15.5	13	M2.5	12	4	1.2	20	3	105	57	0.02	●
14 x 26	20	17	M3	16	4	2.1	35	5	105	57	0.04	●
15 x 28	20	17	M3	16	4	2.1	40	5	94	51	0.04	●
16 x 32	21	17	M4	16	4	4.9	70	9	132	66	0.07	●
17 x 35	25	21	M4	20	4	4.9	75	9	125	61	0.09	●
18 x 35	25	21	M4	20	4	4.9	80	9	119	61	0.09	●
19 x 35	25	21	M4	20	4	4.9	85	9	114	62	0.08	●
20 x 38	26	21	M5	20	4	9.7	150	15	153	81	0.1	●
22 x 40	26	21	M5	20	4	9.7	160	15	135	74	0.1	●
24 x 47	32	26	M6	25	4	16.5	250	21	154	78	0.2	●
25 x 47	32	26	M6	25	4	16.5	260	21	147	78	0.2	●
28 x 50	32	26	M6	25	6	16.5	440	31	198	111	0.2	●
30 x 55	32	26	M6	25	6	16.5	470	31	185	101	0.3	●
32 x 55	32	26	M6	25	6	16.5	500	31	173	100	0.25	●
35 x 60	37	31	M6	30	8	16.5	730	42	166	97	0.35	●
38 x 65	37	31	M6	30	8	16.5	800	42	155	90	0.4	●
40 x 65	37	31	M6	30	8	16.5	840	42	147	90	0.4	●
42 x 75	44	36	M8	35	6	40	911	43	125	70	0.7	●
45 x 75	44	36	M8	35	8	40	1300	58	155	93	0.6	●
48 x 80	44	36	M8	35	8	40	1824	76	191	115	0.7	
50 x 80	44	36	M8	35	8	40	1900	76	183	115	0.7	●



● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, F_{ax}, P_W and P_N decreasing proportionately.


CLAMPEX® KTR 130 and KTR 131

Clamping elements

Self-centering clamping elements with a central clamping nut for easy assembly/disassembly

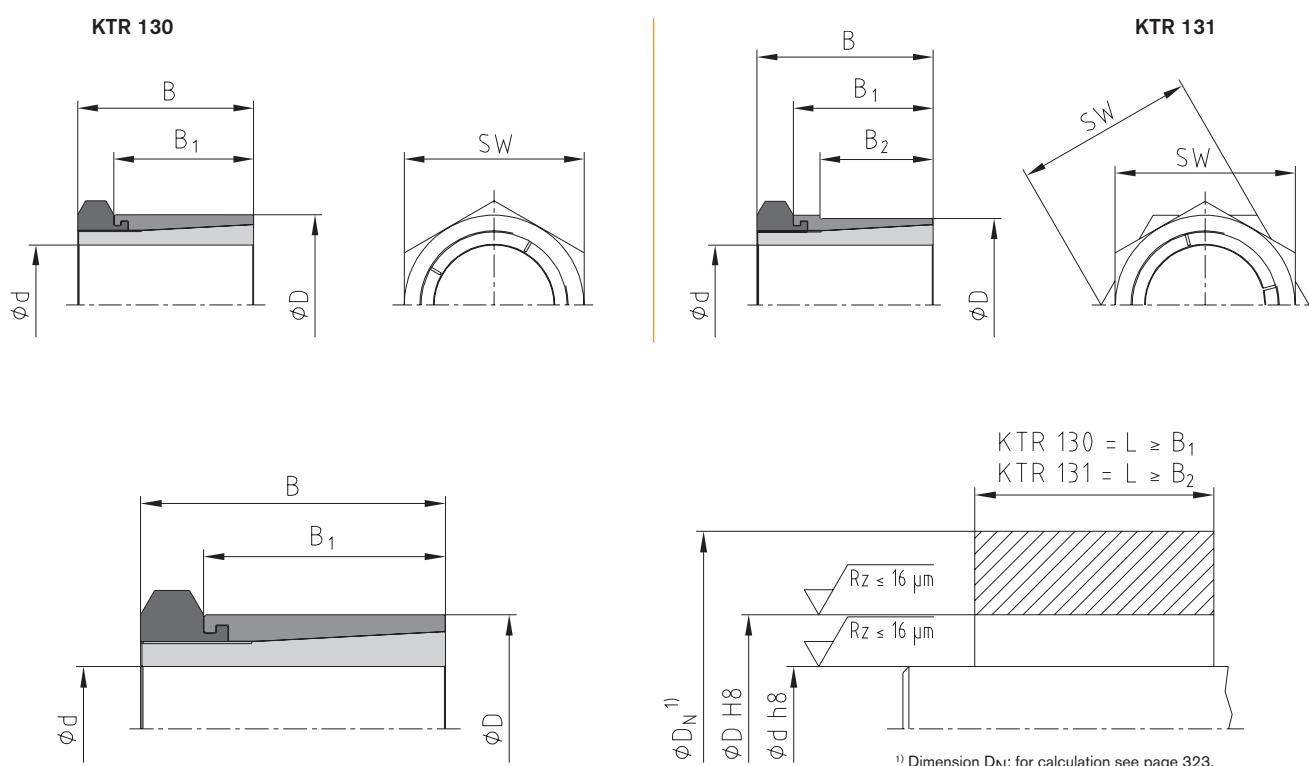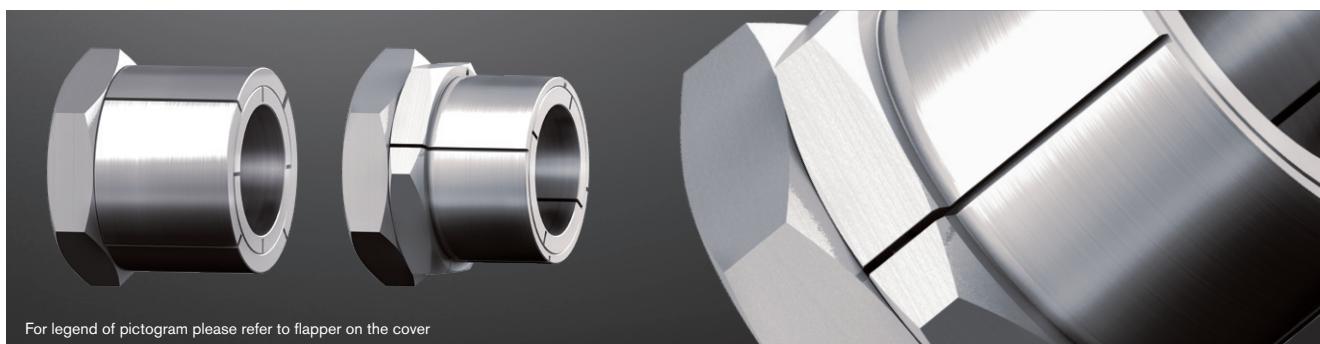

Example of application of hub type

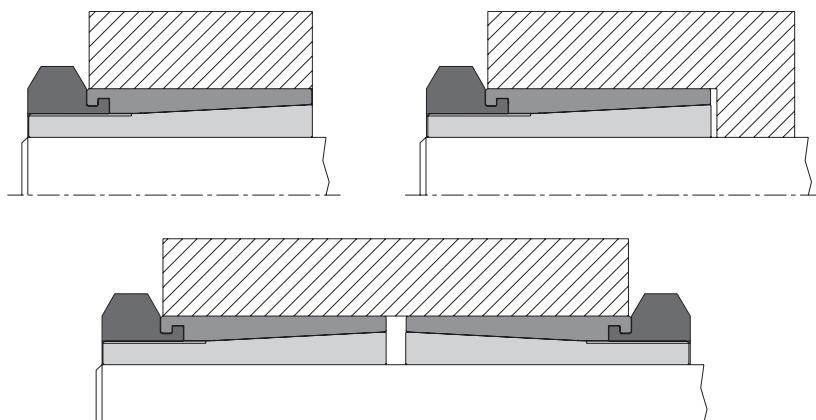

Ordering example:	KTR 130	18	x	35
Series	Size of internal diameter d			Size of external diameter D

CLAMPEX® – KTR 130										
d x D [mm]	Dimensions [mm]		Hexagon nut		Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme
	B	B ₁	Width across flats SW	T _A [Nm] ¹⁾	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]		
5 x 14	19	15	14	10	10.1	4.0	264	96	0.02	●
6 x 14	19	15	14	10	12.1	4.0	220	96	0.02	●
8 x 16	22	17	17	17	23.4	5.8	179	91	0.02	●
9 x 20	24	19	22	35	43.2	9.7	248	112	0.04	●
10 x 20	24	19	22	35	48.6	9.7	223	112	0.05	●
12 x 22	24	19	22	44	65.3	10.9	206	117	0.05	●
14 x 26	28	22	27	65	93.0	13.3	178	99	0.08	●
15 x 26	28	22	27	65	99.0	13.3	166	99	0.08	●
16 x 26	28	22	27	65	106	13.3	156	99	0.07	●
18 x 35	36	27	36	161	223	24.8	224	125	0.2	●
19 x 35	36	27	36	161	235	24.8	212	125	0.2	●
20 x 35	36	27	36	161	248	24.8	201	125	0.2	●
22 x 42	41	30	46	250	349	31.8	197	110	0.3	●
24 x 42	41	30	46	250	381	31.8	180	110	0.3	●
25 x 42	41	30	46	250	397	31.8	173	110	0.3	●
30 x 47	44	33	50	355	605	40.4	162	110	0.4	●
32 x 55	51	38	55	490	764	47.8	166	102	0.6	
35 x 55	51	38	55	490	836	47.8	151	102	0.6	●
40 x 62	58	43	65	800	1329	66.5	152	98	0.8	●
45 x 65	63	48	65	900	1605	71.0	142	98	0.9	●
48 x 75	73	58	75	1290	2227	92.0	121	77	1.5	
50 x 75	73	58	75	1290	2320	92.0	116	77	1.4	●

● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, F_{ax}, P_W and P_N decreasing proportionately.

CLAMPEX® – KTR 131											
d x D [mm]	Dimensions [mm]			Hexagon nut/counter hexagon nut		Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme
	B	B ₁	B ₂	Width across flats SW	T _A [Nm] ¹⁾	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]		
5 x 12	19	15	9	14	10	10.1	4.0	264	119	0.02	●
6 x 12	19	15	9	14	10	12.1	4.0	220	119	0.02	●
8 x 14	22	17	11	17	17	23.4	5.8	179	121	0.02	●
10 x 18	24	19	12	22	35	48.6	9.7	221	127	0.04	●
12 x 20	24	19	12	22	44	65.3	10.9	206	128	0.04	●
14 x 24	28	22	15	27	65	93.0	13.3	178	107	0.08	●
15 x 24	28	22	15	27	65	99.0	13.3	166	107	0.07	●
16 x 24	28	22	15	27	65	106	13.3	156	107	0.07	●
18 x 30	36	27	17	36	161	223	24.8	224	145	0.2	●
19 x 30	36	27	17	36	161	235	24.8	212	145	0.2	●
20 x 30	36	27	17	36	161	248	24.8	201	145	0.15	●
22 x 38	41	30	20	46	250	349	31.8	197	122	0.35	●
24 x 38	41	30	20	46	250	381	31.8	180	122	0.3	●
25 x 38	41	30	20	46	250	397	31.8	173	122	0.3	●
30 x 42	44	33	23	50	355	605	40.4	162	123	0.35	●
32 x 50	51	38	28	55	490	764	47.8	166	112	0.55	●
35 x 50	51	38	28	55	490	836	47.8	151	112	0.5	●





● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, F_{ax}, P_W and P_N decreasing proportionately.

CLAMPEX® KTR 150

Clamping elements

Not self-centering clamping element with minimum dimensions

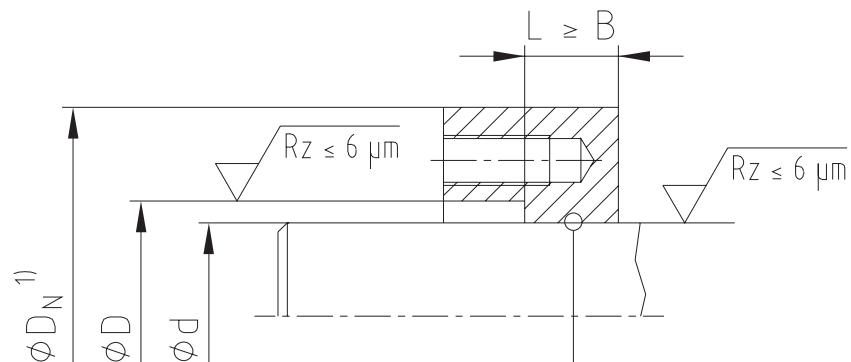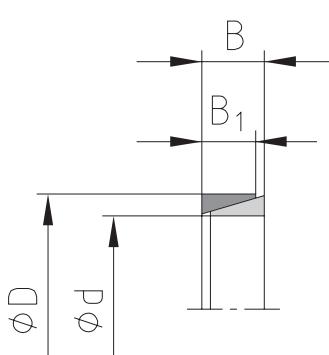

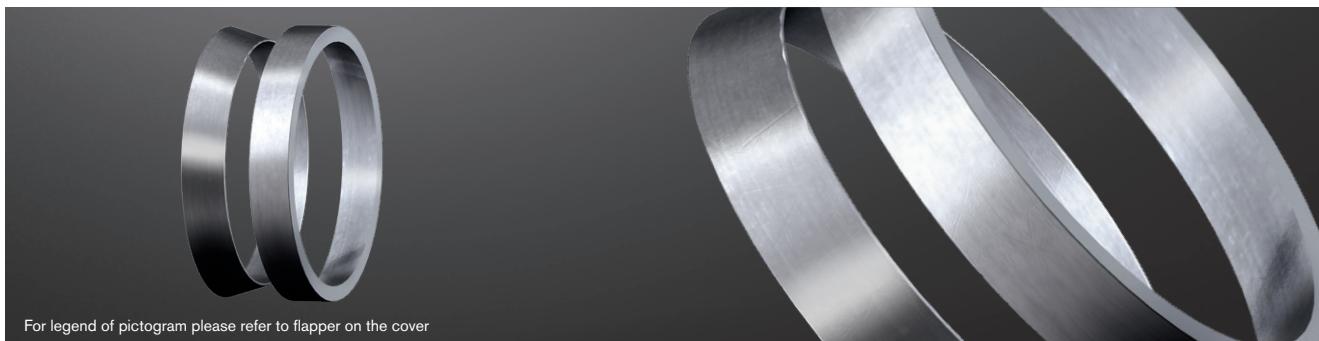


Tolerances for d and D

$d \leq 38 \text{ mm} = d \text{ h6/D H7}$

$d > 38 \text{ mm} = d \text{ h8/D H8}$

Example of application of hub type

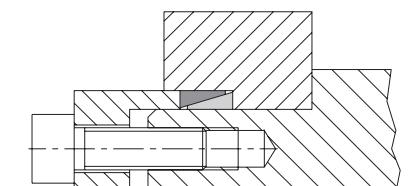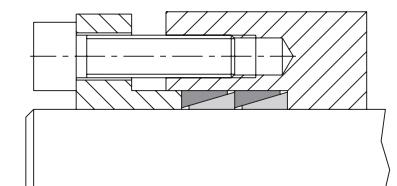
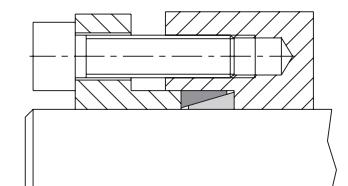


Up to four clamping elements can be installed in a series.

The torques rise as follows:

1 clamping element	$T = T_{\text{catalogue}} \times 1.00$
2 clamping elements	$T = T_{\text{catalogue}} \times 1.55$
3 clamping elements	$T = T_{\text{catalogue}} \times 1.85$
4 clamping elements	$T = T_{\text{catalogue}} \times 2.02$

Pressure flanges

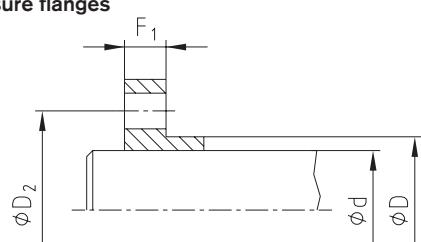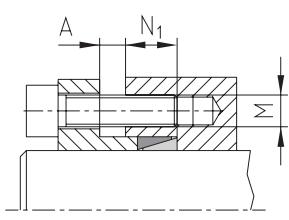

Dimensions of pressure flanges recommended:

$N_1 [\text{mm}] \geq 1.5 \bullet B$

$D_2 [\text{mm}] = D + 12 + M$

$F_1 [\text{mm}] = M \bullet 1.3$ (with screws 8.8)

$F_1 [\text{mm}] = M \bullet 1.8$ (with screws 10.9/12.9)

Ordering example:

KTR 150	60	x	68	
Series	Size of internal diameter d			Size of external diameter D

CLAMPEX® – KTR 150

d x D [mm]	Dimensions [mm]		Distance dimension A [mm]				Clamping force required for clamping screws $\mu_{\text{total}}=0.14$			Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme		
	B	B1	Clamping elements				P _O [kN]	P _S [kN]	$P_A = P_O + P_S$ [kN]	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]				
			1	2	3	4											
6 x 9	4.5	3.7	3	3	3	4	0	3	3	2	0.6	80	53	0.0015	●		
7 x 10	4.5	3.7	3	3	3	4	0	5	5	4	1	117	82	0.0014	●		
8 x 11	4.5	3.7	3	3	3	4	0	6	6	5	1	112	81	0.0015	●		
9 x 12	4.5	3.7	3	3	3	4	8	8	16	8	1	142	106	0.0017	●		
10 x 13	4.5	3.7	3	3	3	4	7	9	16	10	2	143	110	0.0018	●		
12 x 15	4.5	3.7	3	3	3	4	7	8	15	11	1	110	88	0.0022	●		
13 x 16	4.5	3.7	3	3	3	4	6	10	16	13	2	110	90	0.0023	●		
14 x 18	6.3	5.3	3	4	4	5	11	15	26	22	3	112	87	0.0049	●		
15 x 19	6.3	5.3	3	4	4	5	11	15	26	25	3	111	88	0.0053	●		
16 x 20	6.3	5.3	3	4	4	5	10	15	25	26	3	102	81	0.0055	●		
17 x 21	6.3	5.3	3	4	4	5	10	16	26	30	3	104	84	0.0058	●		
18 x 22	6.3	5.3	3	4	4	5	9	17	26	33	3	102	83	0.0061	●		
19 x 24	6.3	5.3	3	4	4	5	13	19	32	40	4	111	88	0.0078	●		
20 x 25	6.3	5.3	3	4	4	5	12	20	32	44	4	110	88	0.0082	●		
22 x 26	6.3	5.3	3	4	4	5	9	21	30	50	4	103	87	0.0072	●		
24 x 28	6.3	5.3	3	4	4	5	8	26	34	68	5	118	101	0.0079	●		
25 x 30	6.3	5.3	3	4	4	5	10	27	37	75	6	120	100	0.01	●		
28 x 32	6.3	5.3	3	4	4	5	7	30	37	90	6	115	101	0.009	●		
30 x 35	6.3	5.3	3	4	4	5	8	31	39	100	6	111	95	0.012	●		
32 x 36	6.3	5.3	3	4	4	5	8	34	42	120	7	117	104	0.01	●		
35 x 40	7	6.0	3	4	4	5	13	42	55	160	9	115	101	0.02	●		
36 x 42	7	6.0	4	5	5	6	15	43	58	170	9	116	99	0.02	●		
38 x 44	7	6.0	4	5	5	6	14	46	60	190	10	116	100	0.02	●		
40 x 45	8	6.6	4	5	5	6	14	53	67	230	11	116	103	0.02	●		
42 x 48	8	6.6	4	5	5	6	16	57	73	260	12	118	104	0.03	●		
45 x 52	10	8.6	4	5	5	6	26	80	106	390	17	119	103	0.05	●		
48 x 55	10	8.6	4	5	5	6	25	82	107	430	17	115	100	0.05	●		
50 x 57	10	8.6	4	5	5	6	24	86	110	470	18	116	102	0.05	●		
55 x 62	10	8.6	4	5	5	6	22	97	119	580	21	118	105	0.05	●		
56 x 64	12	10.4	4	5	5	6	29	122	151	740	26	120	105	0.07			
60 x 68	12	10.4	4	5	6	7	27	129	156	840	28	119	105	0.07	●		
63 x 71	12	10.4	4	5	6	7	26	134	160	920	29	118	105	0.08	●		
65 x 73	12	10.4	4	5	6	7	25	142	167	1000	30	121	108	0.08	●		
70 x 79	14	12.2	4	5	6	7	31	171	202	1300	37	115	102	0.11	●		
71 x 80	14	12.2	4	5	6	7	31	181	212	1400	39	121	107	0.11			
75 x 84	14	12.2	4	5	6	7	34	184	218	1500	40	116	104	0.12	●		
80 x 91	17	15.0	5	6	7	8	48	241	289	2100	52	116	102	0.12	●		
85 x 96	17	15.0	5	6	7	8	45	260	305	2400	56	117	104	0.2	●		
90 x 101	17	15.0	5	6	7	8	43	276	319	2700	60	118	105	0.2	●		
95 x 106	17	15.0	5	6	8	9	41	290	331	3000	63	118	105	0.22	●		
100 x 114	21	18.7	5	6	8	9	61	386	447	4200	84	119	105	0.4	●		
110 x 124	21	18.7	5	6	8	9	65	393	458	4700	85	110	98	0.4	●		
120 x 134	21	18.7	5	6	8	9	60	391	451	5100	85	100	90	0.5	●		
130 x 148	28	25.3	6	7	9	11	96	573	669	8100	124	101	88	0.85	●		
140 x 158	28	25.3	6	7	9	11	89	618	707	9400	134	101	89	0.91	●		
150 x 168	28	25.3	6	7	9	11	84	674	758	11000	146	103	92	0.97			
160 x 178	28	25.3	6	7	9	11	79	833	912	14500	181	119	107	1.02			
170 x 191	33	30.0	7	8	10	12	118	1054	1172	19500	229	119	106	1.5			
180 x 201	33	30.0	7	8	10	12	112	1082	1194	21200	235	116	104	1.6			
190 x 211	33	30.0	7	9	10	12	106	1166	1272	24100	253	118	106	1.7			
200 x 224	38	34.5	7	9	11	13	133	1425	1558	31000	310	119	106	2.3			
210 x 234	38	34.5	7	9	11	13	127	1532	1659	35000	333	122	110	2.5			
220 x 244	38	34.5	7	9	11	13	122	1587	1709	38000	345	121	109	2.5			
230 x 257	43	39.5	7	9	12	14	165	1579	1744	39500	343	100	90	3.4			
240 x 267	43	39.5	7	9	12	14	158	1801	1959	47000	391	110	99	3.5			
250 x 280	48	44.0	8	10	13	16	188	1912	2100	52000	416	100	90	4.7			
260 x 290	48	44.0	8	10	13	16	181	1997	2178	56500	434	101	90	4.8			
270 x 300	48	44.0	8	10	13	16	174	2077	2251	61000	451	101	91	4.9			
280 x 313	53	49.0	9	11	14	17	205	2381	2586	72500	517	100	90	6.3			
290 x 323	53	49.0	9	11	14	17	221	2457	2678	77500	534	100	90	6.5			
300 x 333	53	49.0	9	11	14	17	214	2544	2758	83000	553	100	90	6.7			
320 x 360	65	59.0	10	15	20	25	291	3275	3566	114000	712	100	89	10.9			
340 x 380	65	59.0	10	15	20	25	275	3474	3749	128500	755	100	89	11.5			
360 x 400	65	59.0	10	15	20	25	261	3677	3938	144000	800	100	90	12.2			
380 x 420	65	59.0	10	15	20	25	269	3870	4139	160000	842	100	90	12.8			
400 x 440	65	59.0	10	15	20	25	256	4091	4347	178000	890	100	91	13.5			
420 x 460	65	59.0	10	15	20	25	244	4290	4534	196000	933	100	91	14.1			
440 x 480	65	59.0	10	15	20	25	234	4492	4726	215000	977	100	92	14.7			

● Sizes of clamping elements available from stock.


Other sizes on request.

P_A = Total force
 P_O = Setting force
 P_S = Clamping force


CLAMPEX® KTR 200 and KTR 201

Clamping elements

Self-centering clamping elements with a wide range of applications

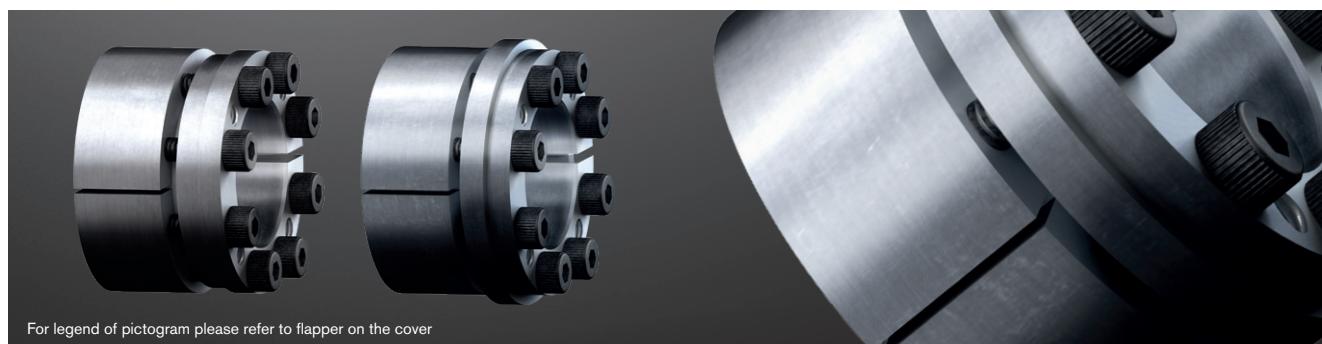


KTR 200

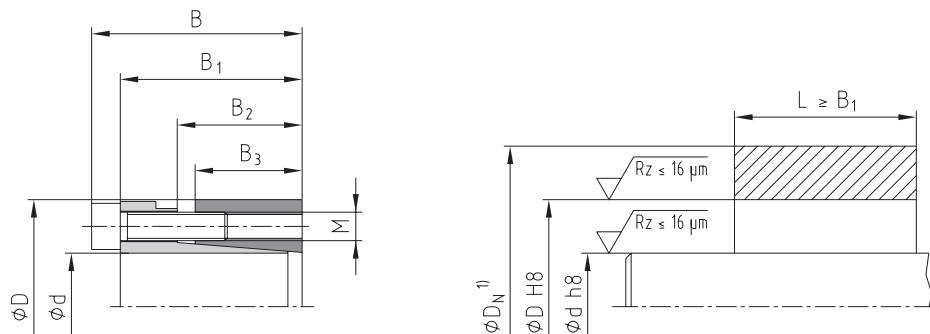


¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

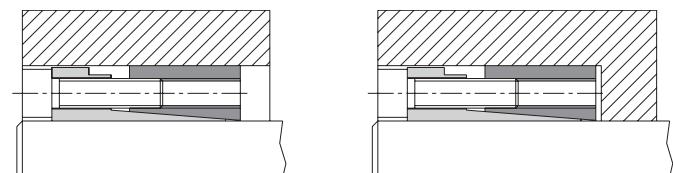


KTR 201

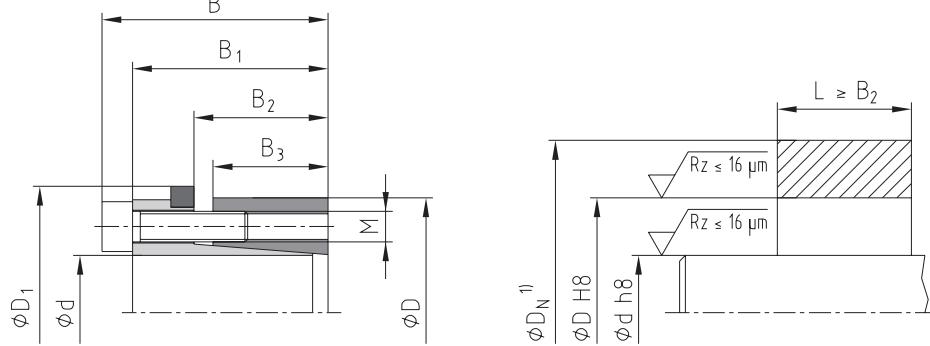

¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

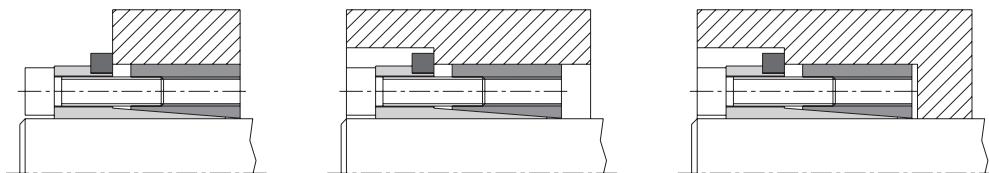

Ordering example:

KTR 200	40	x	65
Series	Size of internal diameter d		Size of external diameter D

CLAMPEX® – KTR 200 and KTR 201

d x D [mm]	Clamping screws DIN EN ISO 4762 - 12.9 μtotal=0.14										KTR 200				KTR 201									
	Dimensions [mm]					M	Length	z = number	TA [Nm] ¹⁾		T [Nm]	Fax [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]	Weight [-kg]	Stock programme	Transmittable torque or axial force		Surface pressure between clamping element		T [Nm]	Fax [kN]	Weight [-kg]	Stock programme
	B	B ₁	B ₂	B ₃	D ₁				KTR 200	KTR 201														
20 x 47	48	42	31	26	53	M6	25	6	17	17	530	53	270	115	0.4	●	320	32	163	69	0.4	●		
22 x 47	48	42	31	26	53	M6	25	6	17	17	580	53	245	114	0.4	●	360	33	152	71	0.4	●		
24 x 50	48	42	31	26	56	M6	25	6	17	17	630	53	223	107	0.4	●	390	33	138	66	0.4	●		
25 x 50	48	42	31	26	56	M6	25	6	17	17	660	53	215	108	0.4	●	400	32	131	65	0.4	●		
28 x 55	48	42	31	26	61	M6	25	6	17	17	740	53	193	98	0.5	●	450	32	117	60	0.5	●		
30 x 55	48	42	31	26	61	M6	25	6	17	17	790	53	179	98	0.5	●	490	33	111	61	0.5	●		
32 x 60	48	42	31	26	66	M6	25	8	17	17	1150	72	229	122	0.6	●	690	43	137	73	0.6	●		
35 x 60	48	42	31	26	66	M6	25	8	17	17	1300	74	217	126	0.5	●	750	43	125	73	0.5	●		
38 x 65	48	42	31	26	71	M6	25	8	17	17	1300	68	184	107	0.6	●	820	43	116	68	0.6	●		
40 x 65	48	42	31	26	71	M6	25	8	17	17	1400	70	179	110	0.6	●	860	43	110	67	0.6	●		
42 x 75	59	51	35	30	81	M8	30	6	41	41	2000	95	200	112	1.0	●	1300	62	130	73	1.0	●		
45 x 75	59	51	35	30	81	M8	30	6	41	41	2200	98	192	115	1.0	●	1400	62	122	73	1.0	●		
48 x 80	59	51	35	30	86	M8	30	8	41	41	3200	133	246	147	1.1	●	1900	79	146	87	1.1	●		
50 x 80	59	51	35	30	86	M8	30	8	41	41	3300	132	233	146	1.1	●	2000	80	141	88	1.1	●		
55 x 85	59	51	35	30	91	M8	30	8	41	41	3600	131	210	136	1.2	●	2200	80	129	83	1.2	●		
60 x 90	59	51	35	30	96	M8	30	8	41	41	3900	130	192	128	1.2	●	2400	80	118	79	1.2	●		
65 x 95	59	51	35	30	101	M8	30	8	41	41	4300	132	180	123	1.3	●	2600	80	109	74	1.3	●		
70 x 110	71	61	46	40	119	M10	30	8	83	83	7500	214	203	129	2.2	●	4600	131	125	79	2.3	●		
75 x 115	71	61	46	40	124	M10	30	8	83	83	8000	213	189	123	2.3	●	5000	133	118	77	2.4	●		
80 x 120	71	61	46	40	129	M10	30	8	83	83	8500	213	176	117	2.4	●	5200	130	108	72	2.6	●		
85 x 125	71	61	46	40	134	M10	30	10	83	83	11400	268	209	142	2.6	●	7000	165	128	87	2.7	●		
90 x 130	71	61	46	40	139	M10	30	10	83	83	12000	267	196	136	2.7	●	7400	164	121	84	2.8	●		
95 x 135	71	61	46	40	144	M10	30	10	83	83	12600	265	185	130	2.8	●	7800	164	115	81	2.9	●		
100 x 145	80	68	52	45	155	M12	35	8	145	145	15000	300	177	122	3.9	●	9800	196	116	80	4.1	●		
110 x 155	80	68	52	45	165	M12	35	8	145	145	16500	300	161	114	4.2	●	10700	195	104	74	4.4	●		
120 x 165	80	68	52	45	175	M12	35	10	145	145	22500	375	184	134	4.5	●	14600	243	120	87	4.7	●		
130 x 180	80	68	52	45	188	M12	35	12	145	145	29000	446	202	146	5.5		19000	292	133	96	5.7			
140 x 190	90	76	58	50	199	M14	40	10	210	230	32000	457	173	128	6.6		23000	329	125	92	6.9			
150 x 200	90	76	58	50	209	M14	40	12	210	230	41000	547	193	145	6.9	●	30000	400	141	106	7.2			
160 x 210	90	76	58	50	219	M14	40	12	210	230	44000	550	182	139	7.4		32000	400	133	101	7.8			
170 x 225	90	76	58	50	234	M14	40	14	210	230	54500	641	200	151	8.6		39000	459	143	108	9.0			
180 x 235	90	76	58	50	244	M14	40	14	210	230	57500	639	188	144	9.1		41000	456	134	103	9.5			
190 x 250	90	76	58	50	259	M14	40	15	210	230	65000	684	191	145	10.6		46400	488	136	104	11.1			
200 x 260	90	76	58	50	269	M14	40	15	210	230	68000	680	180	139	11.2		48800	488	129	100	11.7			


● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, Fax, P_W and P_N decreasing proportionately.



CLAMPEX® KTR 203 and KTR 206

Clamping elements

Self-centering clamping elements as a compact alternative to KTR 200/201

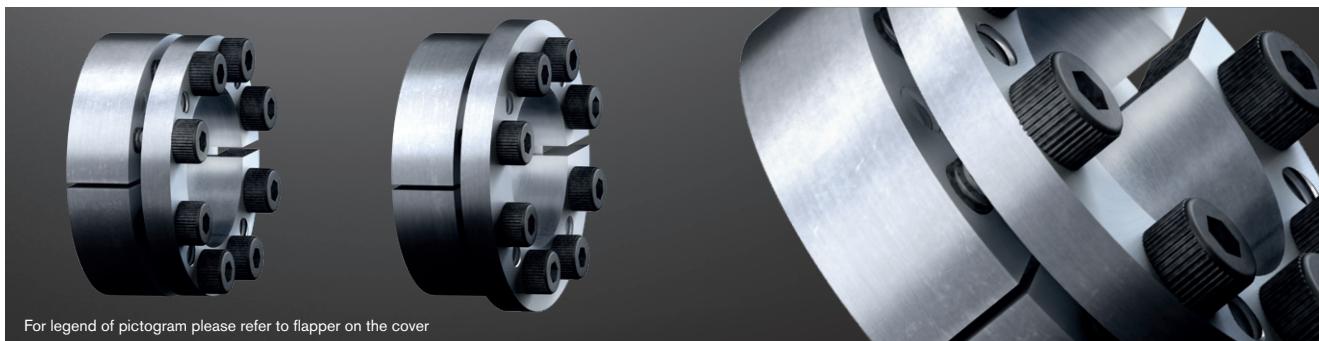


KTR 203

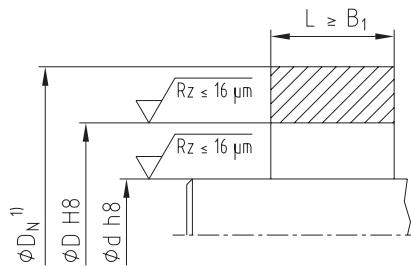
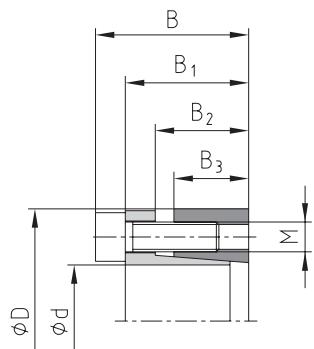


¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

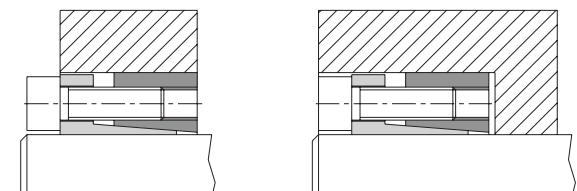


KTR 206

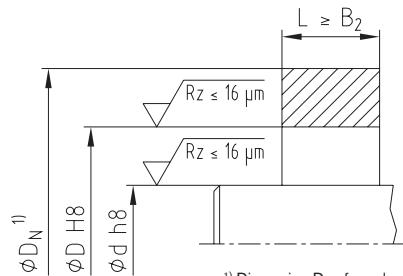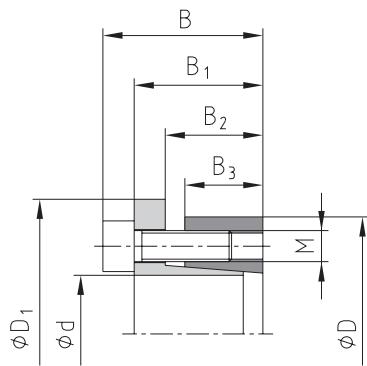

¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

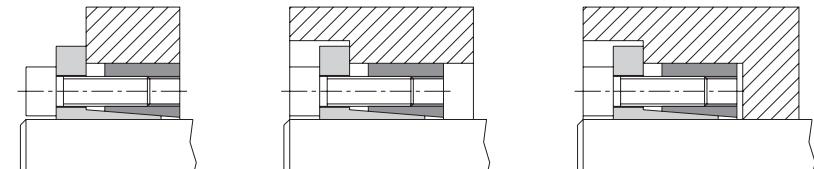

Ordering example:


KTR 203	40	x	65
Series	Size of internal diameter d		Size of external diameter D

CLAMPEX® – KTR 203 and KTR 206																						
d x D [mm]	Dimensions [mm]					Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$						KTR 203				KTR 206				Stock programme		
	B	B ₁	B ₂	B ₃	D ₁	M	Length	z = num- ber	T _A [Nm] ¹⁾		T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]	Weight [~kg]	Transmittable torque or axial force	Surface pressure between clamping element	Transmittable torque or axial force	Surface pressure between clamping element	Weight [~kg]		
									KTR 203	KTR 206												
18 x 47	34	28	22	17	53	M6	20	6	14	17	370	41	356	136	0.3		290	32	279	107	0.3	
19 x 47	34	28	22	17	53	M6	20	6	14	17	390	41	337	136	0.3		300	32	259	105	0.3	
20 x 47	34	28	22	17	53	M6	20	6	14	17	410	41	320	136	0.3	●	320	32	250	106	0.3	●
22 x 47	34	28	22	17	53	M6	20	6	14	17	450	41	290	136	0.3	●	350	32	226	106	0.3	●
24 x 50	34	28	22	17	56	M6	20	6	14	17	490	41	265	127	0.3	●	390	33	211	101	0.3	●
25 x 50	34	28	22	17	56	M6	20	6	14	17	510	41	255	127	0.3	●	400	32	200	100	0.3	●
28 x 55	34	28	22	17	61.4	M6	20	6	14	17	570	41	227	116	0.3	●	450	32	179	91	0.4	●
30 x 55	34	28	22	17	61.4	M6	20	6	14	17	610	41	212	115	0.3	●	490	33	170	93	0.3	●
32 x 60	34	28	22	17.5	67	M6	20	8	14	17	880	55	261	139	0.4	●	700	44	207	111	0.3	●
35 x 60	34	28	22	17.5	67	M6	20	8	14	17	960	55	238	139	0.3	●	760	43	188	110	0.4	●
38 x 65	34	28	22	17.5	72	M6	20	8	14	17	1000	53	210	123	0.4	●	820	43	172	101	0.5	●
40 x 65	34	28	22	17.5	72	M6	20	8	14	17	1100	55	208	128	0.4	●	870	44	165	101	0.4	●
42 x 75	41	33	25	20	84	M8	25	8	35	41	2200	105	331	185	0.6	●	1700	81	256	143	0.7	●
45 x 75	41	33	25	20	84	M8	25	8	35	41	2400	107	314	189	0.6	●	1800	80	236	141	0.7	●
48 x 80	41	33.5	24	20	89	M8	25	8	35	41	2500	104	288	173	0.7		1900	79	219	131	0.8	●
50 x 80	41	33.5	24	20	89	M8	25	8	35	41	2600	104	276	172	0.7	●	2000	80	212	133	0.8	●
55 x 85	41	33.5	24	20	94	M8	25	8	35	41	2900	105	254	165	0.7	●	2200	80	193	125	0.9	●
60 x 90	41	33.5	24	20	99	M8	25	8	35	41	3100	103	228	152	0.8	●	2400	80	177	118	0.9	●
65 x 95	41	33.5	24	20	104	M8	25	8	35	41	3400	105	213	146	0.8	●	2600	80	163	112	0.9	●
70 x 110	50	40	29	24	119	M10	30	8	70	83	6000	171	271	172	1.5	●	4600	131	208	132	1.6	●
75 x 115	50	40	29	24	124	M10	30	8	70	83	6400	171	252	164	1.6	●	5000	133	196	128	1.7	●
80 x 120	50	40	29	24	129	M10	30	8	70	83	6800	170	235	157	1.7	●	5300	133	183	122	1.9	●
85 x 125	50	40	29	24	134	M10	30	10	70	83	9000	212	275	187	1.8	●	7000	165	214	146	2.0	●
90 x 130	50	40	29	24	139	M10	30	10	70	83	9600	213	262	181	1.9	●	7400	164	202	140	2.0	●
95 x 135	50	40	29	24	144	M10	30	10	70	83	10200	215	250	176	2.0		7800	164	191	134	2.3	
100 x 145	56	44	31	25.5	154	M12	30	8	115	145	12000	240	250	172	2.6	●	9700	194	202	139	2.8	●
110 x 155	56	44	31	25.5	164	M12	30	8	115	145	13000	236	224	159	2.8		10700	195	184	131	3.1	●
120 x 165	56	44	31	26	174	M12	30	9	115	145	16000	267	227	165	3.6		13100	218	186	135	3.2	●
130 x 180	64	52	39	34	189	M12	30	12	115	145	23000	354	212	153	4.4		19000	292	175	127	4.6	●
140 x 190	68	54	39	34	199	M14	40	9	185	230	25000	357	199	147	4.9		20500	293	163	120	5.0	
150 x 200	68	54	39	34	209	M14	40	10	185	230	30000	400	208	156	5.2		24500	327	170	127	5.2	
160 x 210	68	54	39	34	219	M14	40	12	185	230	38800	485	236	180	5.6		31300	391	191	145	5.6	
170 x 225	78	64	49	44	234	M14	40	12	185	230	41300	486	172	130	6.9		33200	391	139	105	6.5	
180 x 235	78	64	49	44	244	M14	40	12	185	230	43700	486	163	125	8.5		35000	389	130	100	8.5	
190 x 250	78	64	49	43.5	259	M14	40	15	185	230	57700	607	195	148	9.0		46500	489	157	119	9.0	
200 x 260	78	64	49	43.5	269	M14	40	15	185	230	60700	607	185	142	9.6		49000	490	149	115	9.6	
220 x 285	88	72	57	50	294	M16	40	12	290	360	77300	703	169	131	13.4		57100	519	125	97	14.0	
240 x 305	88	72	57	50	314	M16	40	15	290	360	105400	878	194	153	14.5		77800	648	143	113	15.1	
260 x 325	88	72	57	50	334	M16	40	18	290	360	137000	1054	215	172	16.1		101200	778	159	127	16.2	
280 x 355	102	84	66	60	364	M18	50	16	400	480	160300	1145	181	143	23.4		113300	809	128	101	25.6	
300 x 375	102	84	66	60	384	M18	50	18	400	480	193200	1288	190	152	25.3		136500	910	134	107	25.5	
320 x 405	121	101	81	74	414	M20	50	18	580	690	269300	1683	189	149	36.9		191000	1194	134	108	37.9	
340 x 425	121	101	81	74	434	M20	50	21	580	690	333800	1964	207	166	39.0		237000	1394	147	118	38.3	
360 x 455	138	116	93	86	464	M22	60	18	780	930	375700	2087	179	141	54.0		264000	1467	126	99	53.3	
380 x 475	138	116	93	86	484	M22	60	21	780	930	462700	2435	198	158	56.2		325000	1711	139	111	57.6	
400 x 495	138	116	93	86	504	M22	60	21	780	930	487000	2435	188	152	58.9		342000	1710	132	107	60.3	


CLAMPEX® KTR 225

Clamping elements


Self-centering, combination of a hub Ø with various shaft Ø

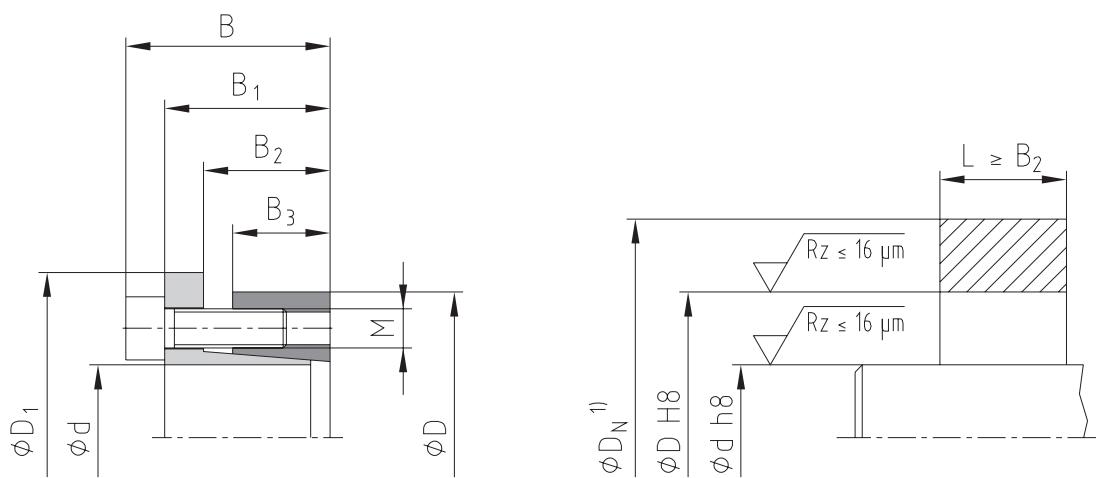

Example of application of hub type

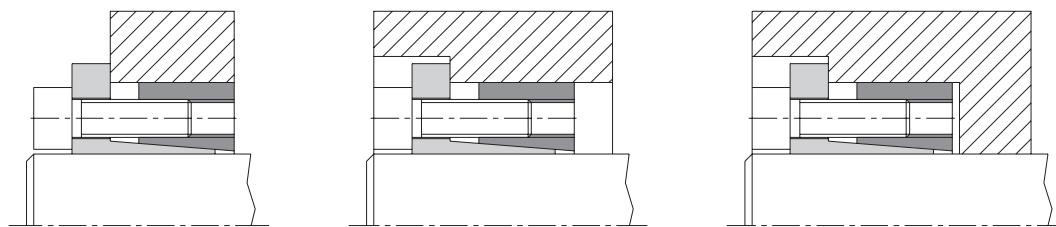

To fasten one size of hubs on different shaft diameters

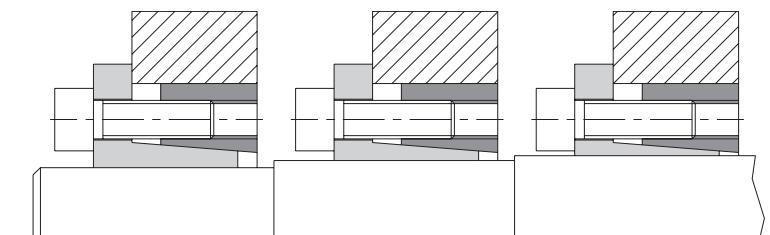

Ordering example:	KTR 225	28	x	65
Series	Size of internal diameter d		Size of external diameter D	

CLAMPEX® – KTR 225															
d x D [mm]	Dimensions [mm]					Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Surface pressure between clamping element		Weight [-kg]	Stock programme
	B	B ₁	B ₂	B ₃	D ₁	M	Length	z = number	T _A ¹⁾ [Nm]	T [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/ mm ²]		
14 x 55	38	30	22	17	62	M8	25	4	41	287	41	457	116	0.5	
16 x 55	38	30	22	17	62	M8	25	4	41	329	41	401	117	0.5	●
18 x 55	38	30	22	17	62	M8	25	4	41	370	41	356	117	0.5	●
19 x 55	38	30	22	17	62	M8	25	4	41	390	41	337	116	0.5	●
20 x 55	38	30	22	17	62	M8	25	4	41	410	41	320	116	0.5	●
22 x 55	38	30	22	17	62	M8	25	4	41	451	41	291	116	0.5	●
24 x 55	38	30	22	17	62	M8	25	4	41	492	41	267	116	0.4	●
25 x 55	38	30	22	17	62	M8	25	4	41	513	41	256	116	0.4	●
28 x 55	38	30	22	17	62	M8	25	4	41	575	41	229	117	0.4	●
30 x 55	38	30	22	17	62	M8	25	4	41	616	41	214	117	0.4	●
24 x 65	38	30	22	17	72	M8	25	5	41	616	51	334	123	0.7	●
25 x 65	38	30	22	17	72	M8	25	5	41	641	51	320	123	0.7	●
28 x 65	38	30	22	17	72	M8	25	5	41	718	51	286	123	0.6	●
30 x 65	38	30	22	17	72	M8	25	5	41	770	51	267	123	0.6	●
32 x 65	38	30	22	17	72	M8	25	5	41	821	51	250	123	0.6	●
35 x 65	38	30	22	17	72	M8	25	5	41	898	51	229	123	0.5	●
38 x 65	38	30	22	17	72	M8	25	5	41	975	51	211	123	0.5	●
40 x 65	38	30	22	17	72	M8	25	5	41	1026	51	200	123	0.5	●
30 x 80	41	33	25	20	88	M8	25	7	41	1077	72	317	119	1.1	
32 x 80	41	33	25	20	88	M8	25	7	41	1150	72	298	119	1.1	
35 x 80	41	33	25	20	88	M8	25	7	41	1257	72	272	119	1.0	
38 x 80	41	33	25	20	88	M8	25	7	41	1364	72	251	119	1.0	
40 x 80	41	33	25	20	88	M8	25	7	41	1436	72	238	119	0.9	●
42 x 80	41	33	25	20	88	M8	25	7	41	1509	72	227	119	0.9	
45 x 80	41	33	25	20	88	M8	25	7	41	1616	72	212	119	0.9	
48 x 80	41	33	25	20	88	M8	25	7	41	1723	72	198	119	0.8	
50 x 80	41	33	25	20	88	M8	25	7	41	1796	72	191	119	0.8	●




● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, F_{ax}, P_W and P_N decreasing proportionately.

CLAMPEX® KTR 250


Clamping elements

Self-centering clamping element, particularly suitable for thin-walled hubs

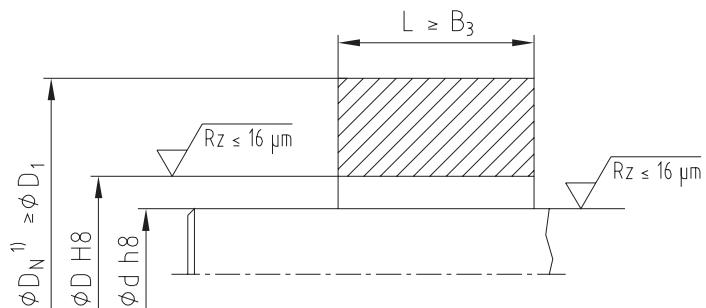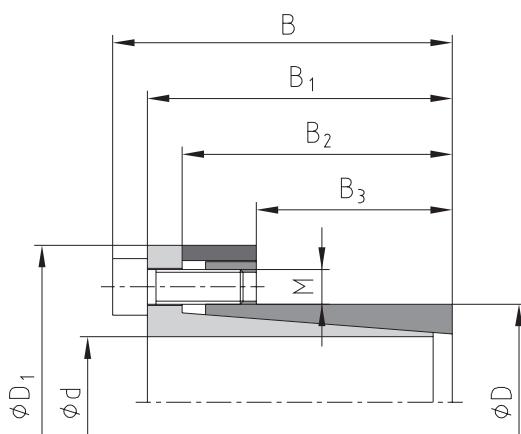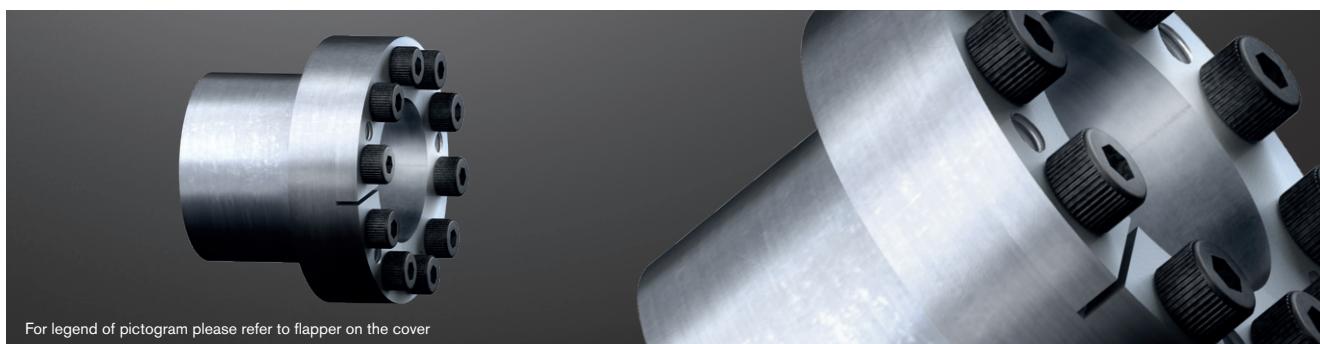

¹⁾ Dimension D_N : for calculation see page 323.

Example of application of hub type

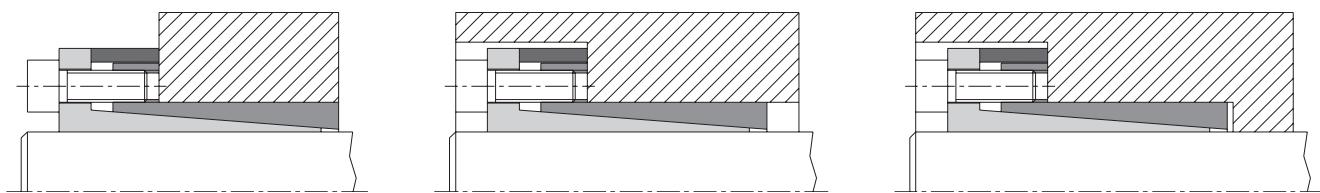

Ordering example:	KTR 250	28	x	39
Series	Size of internal diameter d		Size of external diameter D	

CLAMPEX® – KTR 250

d x D [mm]	Dimensions [mm]					Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{Total}}=0.14$				Transmittable torque or axial force		Surface pressure between clamping element		Weight [~kg]	Stock programme
	B	B ₁	B ₂	B ₃	D ₁	M	Length	z = number	T _A [Nm] ¹⁾	T [Nm]	F _{Ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/ mm ²]		
6 x 14	24.5	21.5	18.5	10	25	M3	10	4	2.6	11	4	162	69	0.05	●
8 x 15	29	25	21.5	11.5	27	M4	10	3	5.6	26	7	187	100	0.05	●
9 x 16	30	26	22.5	14	28	M4	10	4	5.6	37	8	173	97	0.06	●
10 x 16	30	26	22.5	14	29	M4	10	4	5.6	42	8	159	99	0.16	●
11 x 18	30	26	22.5	13.5	32	M4	10	4	5.6	50	9	162	99	0.18	●
12 x 18	30	26	22.5	13.5	32	M4	10	4	5.6	55	9	150	100	0.18	●
14 x 23	30	26	22.5	14	38	M4	10	6	5.6	100	14	193	118	0.20	●
15 x 24	42	36	28.5	16	44	M6	18	4	15	145	19	214	134	0.2	●
16 x 24	42	36	28.5	16	44	M6	18	4	15	155	19	201	134	0.3	●
17 x 25	42	36	28.5	16	45	M6	18	4	15	162	19	186	126	0.2	
17 x 26	44	38	31	18	47	M6	18	4	17	180	21	184	120	0.2	
18 x 26	44	38	31	18	47	M6	18	4	17	200	22	182	126	0.2	●
19 x 27	44	38	31	18	48	M6	18	4	17	210	22	171	121	0.3	●
20 x 28	44	38	31	18	49	M6	18	4	17	220	22	162	116	0.2	●
22 x 32	51	45	38	25	54	M6	18	4	17	250	23	110	75	0.3	●
24 x 34	51	45	38	25	56	M6	18	4	17	270	23	99	70	0.3	●
25 x 34	51	45	38	25	56	M6	18	4	17	280	22	95	70	0.3	●
28 x 39	51	45	38	25	61	M6	18	6	17	480	34	130	93	0.4	
30 x 41	51	45	38	25	62	M6	18	6	17	510	34	120	88	0.4	
32 x 43	51	45	38	25	65	M6	18	8	17	730	46	151	113	0.5	
35 x 47	56	50	43	30	69	M6	18	8	17	800	46	115	86	0.5	●
38 x 50	56	50	43	30	72	M6	18	8	17	860	45	105	80	0.6	
40 x 53	56	50	43	30	75	M6	18	8	17	900	45	99	75	0.6	
42 x 55	65	57	49	32	78	M8	22	8	41	1800	86	169	129	0.9	●
45 x 59	73	65	57	40	85	M8	22	8	41	1900	84	124	95	1.0	●
48 x 62	78	70	62	45	87	M8	22	8	41	2000	83	102	79	1.0	●
50 x 65	78	70	62	45	92	M8	22	10	41	2600	104	123	94	1.3	●
55 x 71	83	75	67	50	98	M8	22	10	41	2900	105	102	79	1.5	●
60 x 77	83	75	67	50	104	M8	22	10	41	3100	103	91	71	1.7	●
65 x 84	83	75	67	50	111	M8	22	10	41	3400	105	85	66	1.9	●
70 x 90	101	91	80	60	119	M10	25	10	83	5800	166	105	81	2.9	●
75 x 95	101	91	80	60	126	M10	25	10	83	6200	165	97	77	2.3	●
80 x 100	106	96	85	65	131	M10	25	12	83	8000	200	102	82	3.3	
85 x 106	106	96	85	65	137	M10	25	12	83	8500	200	96	77	3.6	●
90 x 112	106	96	85	65	143	M10	25	15	83	11200	249	113	91	3.9	
95 x 120	106	96	85	65	153	M10	25	15	83	11800	248	107	84	4.5	
100 x 125	114	102	89	65	162	M12	30	12	145	14600	292	119	95	5.5	●
110 x 140	140	128	114	90	180	M12	30	12	145	16000	291	78	61	8.0	
120 x 155	140	128	114	90	198	M12	30	12	145	17400	290	71	55	10.5	
130 x 165	140	128	114	90	208	M12	30	16	145	25000	385	87	69	11.9	





● Sizes of clamping elements available from stock.

¹⁾ These are the maximum screw tightening torques. They can be reduced by a maximum of 40 % of the above-mentioned figures with T, F_{Ax}, P_W and P_N decreasing proportionately.

CLAMPEX® KTR 400


Clamping elements

Self-centering clamping element with highest transmission performance

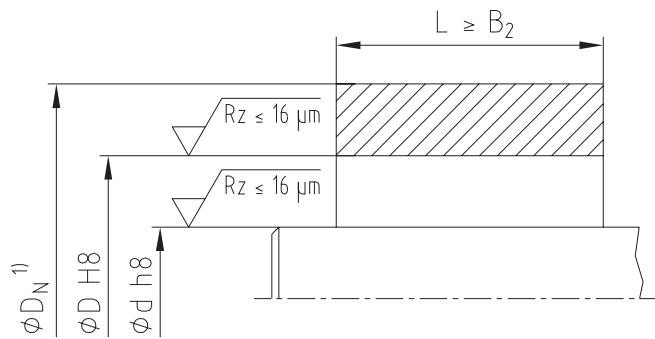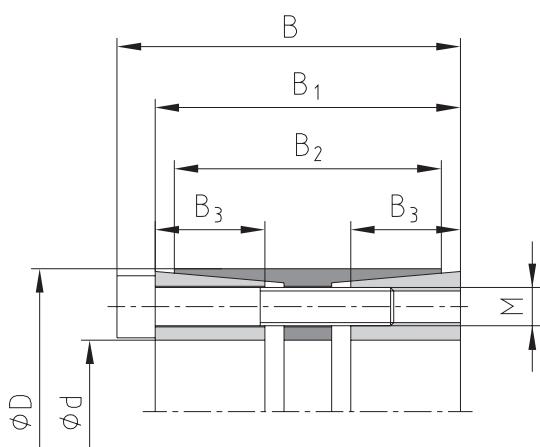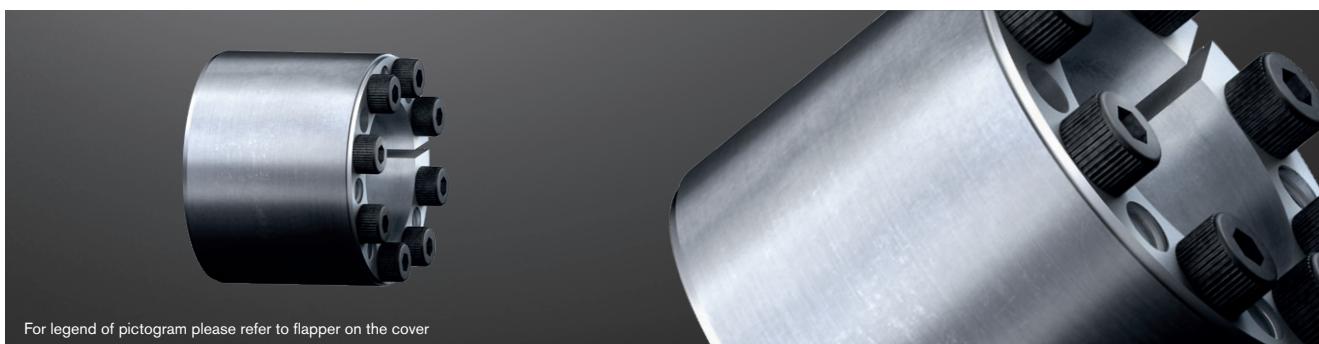

¹⁾ Dimension D_N: for calculation see page 323.

Example of application of hub type

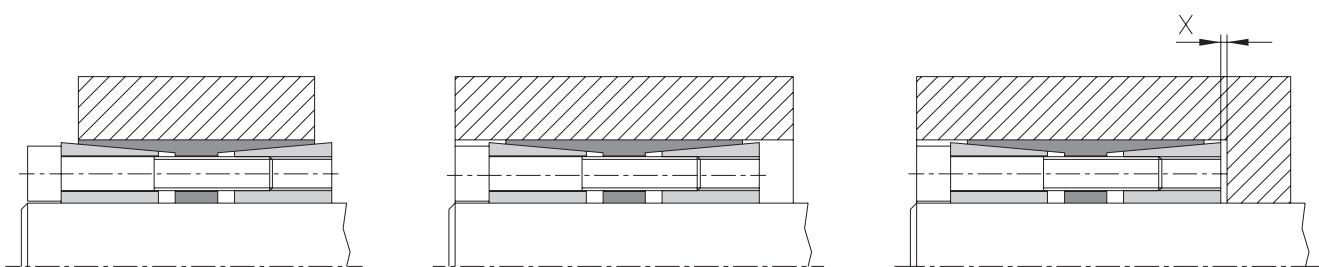

Formula to calculate space x for disassembly:

$$x = \frac{B_1 - B_2}{2}$$


Ordering example:	KTR 400	100	x	145
Series	Size of internal diameter d		Size of external diameter D	

d x D ¹⁾ [mm]		Dimensions [mm]				Standard applications in industry					Applications with components subjected to bending and torsion stress					Weight [~g]	Stock programme						
		Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Surface pressure between clamp- ping element			Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Trans- mittable bending moment						
		B	B ₁	B ₂	B ₃	M	z = num- ber	Length	T _A ²⁾ [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]	M	z = num- ber	Length	T _A [Nm]	F _{ax} [kN]	Shaft P _W [N/mm ²]	Hub P _N [N/mm ²]				
24 x 50	51	45	41	16	M6	6	35	17	700	58	202	92	M6	6	35	14	460	38	420	230	93	0.5	●
25 x 50	51	45	41	16	M6	6	35	17	730	58	194	92	M6	6	35	14	470	38	430	222	94	0.5	●
28 x 55	51	45	41	16	M6	8	35	17	1100	79	233	112	M6	8	35	14	740	53	490	257	110	0.5	●
30 x 55	51	45	41	16	M6	8	35	17	1180	79	217	112	M6	8	35	14	790	53	520	243	112	0.5	●
32 x 60	51	45	41	16	M6	8	35	17	1270	79	206	103	M6	8	35	14	830	52	560	230	104	0.8	●
35 x 60	51	45	41	16	M6	8	35	17	1390	79	188	104	M6	8	35	14	890	51	610	214	106	0.7	●
38 x 65	51	45	41	16	M6	10	35	17	1880	99	216	119	M6	10	35	14	1250	66	660	240	119	1.1	●
40 x 65	51	45	41	16	M6	10	35	17	1980	99	205	119	M6	10	35	14	1300	65	700	230	120	1.1	●
40 x 75	51	45	41	16	M8	8	35	41	2850	143	296	149	M8	8	35	35	2030	102	700	320	142	1.1	●
42 x 75	51	45	41	16	M8	8	35	41	3000	143	282	149	M8	8	35	35	2120	101	730	307	142	1.2	●
45 x 75	51	45	41	16	M8	8	35	41	3250	144	266	151	M8	8	35	35	2260	100	780	289	145	1.1	●
48 x 80	70	62	58	23	M8	8	55	41	3450	144	173	98	M8	8	55	35	2160	90	1700	202	101	1.5	●
50 x 80	70	62	58	23	M8	8	55	41	3600	144	166	98	M8	8	55	35	2220	89	1770	196	102	1.4	●
55 x 85	70	62	58	23	M8	8	55	41	3950	144	151	92	M8	8	55	35	2350	85	1950	182	98	1.5	●
60 x 90	70	62	58	23	M8	10	55	41	5400	180	173	109	M8	10	55	35	3380	113	2130	202	113	1.6	●
65 x 95	70	62	58	23	M8	10	55	41	5850	180	160	103	M8	10	55	35	3560	110	2310	190	109	1.7	●
70 x 110	86	76	70	28	M10	10	60	83	10200	291	197	118	M10	10	60	69	6620	189	3650	222	120	3.1	●
75 x 115	86	76	70	28	M10	10	60	83	10950	292	184	113	M10	10	60	69	6970	186	3920	210	117	3.3	●
80 x 120	86	76	70	28	M10	12	60	83	14000	350	207	130	M10	12	60	69	9210	230	4180	231	131	3.5	●
85 x 125	86	76	70	28	M10	12	60	83	15000	353	197	126	M10	12	60	69	9710	228	4440	220	129	3.6	●
90 x 130	86	76	70	28	M10	12	60	83	15800	351	185	121	M10	12	60	69	10000	222	4700	210	124	3.8	●
95 x 135	86	76	70	28	M10	12	60	83	16800	354	176	117	M10	12	60	69	10500	221	4960	201	122	4.0	●
100 x 145	110	98	92	35	M12	12	80	145	26000	520	197	121	M12	12	80	120	16850	337	8580	219	124	6.1	●
110 x 155	110	98	92	35	M12	12	80	145	28600	520	179	114	M12	12	80	120	18000	327	9440	203	118	6.6	●
120 x 165	110	98	92	35	M12	14	80	145	36300	605	191	124	M12	14	80	120	23350	389	10300	214	128	7.1	●
130 x 180	128	114	108	41	M14	12	90	230	46000	708	176	114	M14	12	90	190	29950	461	15300	201	119	10.0	●
140 x 190	128	114	108	41	M14	14	90	230	57800	826	191	126	M14	14	90	190	37200	531	16500	214	129	10.6	●
150 x 200	128	114	108	41	M14	16	90	230	70800	944	204	136	M14	16	90	190	46400	619	17700	226	139	11.2	●
160 x 210	128	114	108	41	M14	16	90	230	75500	944	191	130	M14	16	90	190	48600	608	18800	214	133	11.9	●
170 x 225	162	146	136	52	M16	14	110	355	95900	1128	169	114	M16	14	110	295	59100	695	32000	196	119	17.6	●
180 x 235	162	146	136	52	M16	15	110	355	108800	1209	171	117	M16	15	110	295	67500	750	33900	198	122	18.5	●
190 x 250	162	146	136	52	M16	16	110	355	122500	1289	173	117	M16	16	110	295	76100	801	35800	199	122	21.4	●
200 x 260	162	146	136	52	M16	16	110	355	128900	1289	164	113	M16	16	110	295	78600	786	37700	192	118	22.4	●
220 x 285	162	146	136	52	M16	18	110	355	171800	1562	181	120	M16	18	110	295	105000	955	41400	195	126	26.6	●
240 x 305	162	146	136	52	M16	20	110	355	208000	1733	184	125	M16	20	110	295	128000	1067	45200	198	130	28.7	●
260 x 325	166	150	134	55	M16	21	110	355	237000	1823	169	117	M16	21	110	295	142000	1092	51000	187	123	31.2	
280 x 355	197	177	165	66	M20	18	130	690	340000	2429	174	119	M20	18	130	580	208000	1486	81300	192	125	46.8	
300 x 375	197	177	165	66	M20	20	130	690	405000	2700	181	125	M20	20	130	580	252000	1680	87100	198	130	69.7	
320 x 405	197	177	165	66	M20	21	130	690	453000	2831	178	121	M20	21	130	580	280000	1750	92900	196	127	60.5	
340 x 425	197	177	165	66	M20	22	130	690	504900	2970	176	121	M20	22	130	580	311000	1829	98700	193	127	63.9	
360 x 455	224	203	190	76	M22	21	150	930	626000	3478	169	115	M22	21	150	780	381000	2117	138500	189	121	86.8	
380 x 475	224	203	190	76	M22	22	150	930	692000	3642	167	115	M22	22	150	780	420000	2211	146000	188	122	91.0	
400 x 495	224	203	190	76	M22	24	150	930	795000	3975	173	121	M22	24	150	780	489000	2445	154000	194	127	95.3	
420 x 515	224	203	190	76	M22	24	150	930	835000	3976	165	116	M22	24	150	780	505000	2405	161500	186	123	100	
440 x 535	224	203	190	76	M22	24	150	930	875000	3977	158	112	M22	24	150	780	517000	2350	169000	178	120	105	
460 x 555	224	203	190	76	M22	24	150	930	914000	3974	151	108	M22	24	150	780	530000	2304	177000	172	117	109	
480 x 575	224	203	190	76	M22	28	150	930	1113000	4638	169	121	M22	28	150	780	678000	2825	184500	189	128	114	
500 x 595	224	203	190	76	M22	28	150	930	1160000	4640	162	117	M22	28	150	780	692000	2768	192000	182	125	119	
520 x 615	224	203	190	76	M22	30	150	930	1292000	4969	167	122	M22	30									

CLAMPEX® KTR 603

Clamping elements

Three-part external clamping set for applications on hollow shafts

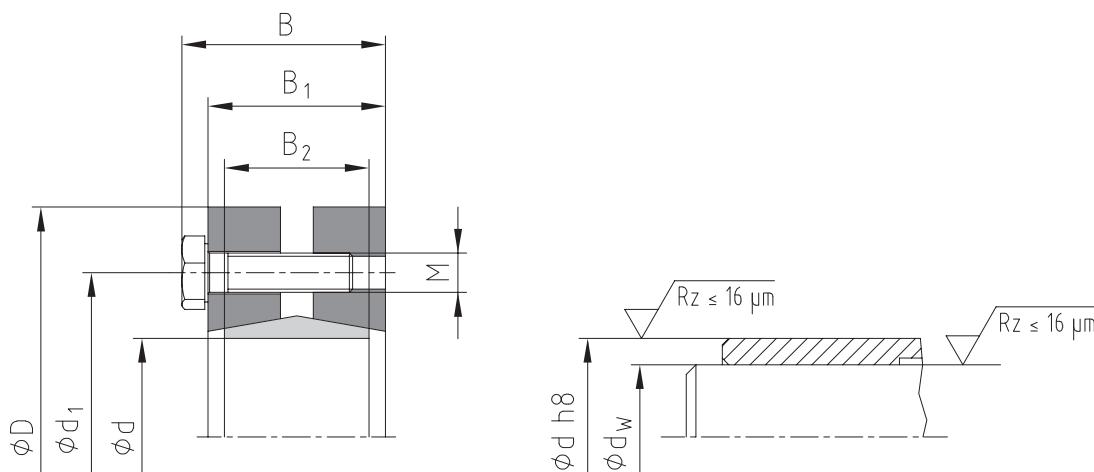

Tolerances for d_w

For d_w from 10 to 30 mm H6 / j6


For d_w from 31 to 50 mm H6 / h6

For d_w from 51 to 80 mm H6 / g6

For d_w from 81 to 500 mm H7 / g6

Bigger tolerances are generally possible! Please contact us!

Example of application of hub type

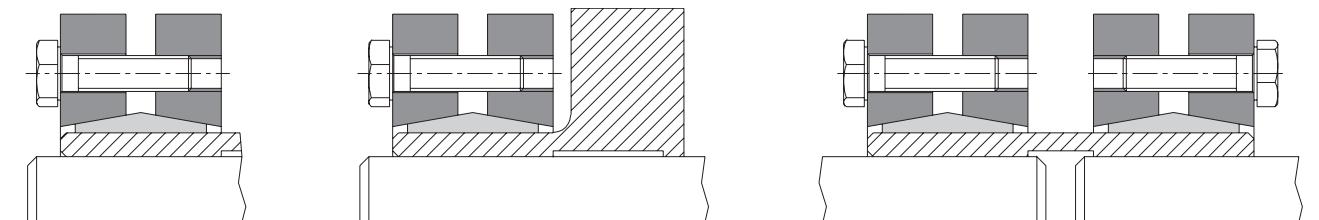

Ordering example:

KTR 603	44	x	80
Series	Size of internal diameter d		Size of external diameter D


CLAMPEX® – KTR 603														
d x D [mm]	Shaft diameter d _w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4014 - 10.9 $\mu_{\text{total}}=0.10$				Surface pressure of clamping element/hollow shaft	Weight [-kg]	Stock programme
		T [Nm]	F _{ax} [kN]	B	B ₁	B ₂	d ₁	M	Length	z = number	T _A [Nm]	P _H [N/mm ²]		
14 x 38	10	28	6											
	11	38	7	14.5	11	9	24	M5	10	4	3.5	388	0.1	●
	12	50	8											
16 x 41	12	50	8											
	13	70	11	18.5	15	11	26	M5	14	5	4	310	0.2	●
	14	90	13											
24 x 50	19	180	19											
	20	210	21	22.5	19	14	36	M5	18	6	5	286	0.2	●
	21	250	24											
30 x 60	24	310	26											
	25	340	27	24.5	21	16	44	M5	18	6	6	233	0.3	●
	26	380	29											
36 x 72	28	460	33											
	30	590	39	27	23	18	52	M6	20	5	12	307	0.4	●
	31	630	41											
44 x 80	32	630	39											
	35	780	45	29	25	20	61	M6	22	7	12	317	0.6	●
	36	860	48											
50 x 90	38	940	49											
	40	1100	55	31	27	22	70	M6	22	8	12	289	0.8	●
	42	1300	62											
55 x 100	42	1200	57											
	45	1500	67	34	30	23	75	M6	25	8	12	252	1.1	●
	48	1900	79											
62 x 110	48	1800	75											
	50	2200	88	34	30	23	86	M6	25	10	12	279	1.3	●
	52	2400	92											
68 x 115	50	2000	80											
	55	2500	91	34	30	23	86	M6	25	10	12	255	1.4	●
	60	3100	103											
75 x 138	55	2500	91											
	60	3200	107	37.5	32	25	100	M8	30	7	30	273	1.8	●
	65	3900	120											
80 x 145	60	3200	107											
	65	3900	120	37.5	32	25	100	M8	30	7	30	256	2.6	●
	70	4600	131											
85 x 155	65	4800	148											
	70	6100	174	44.5	39	30	114	M8	35	10	30	285	3.9	
	75	7400	197											
90 x 155	65	4700	145											
	70	6000	171	44.5	39	30	114	M8	35	10	30	217	3.8	●
	75	7200	192											
100 x 170	70	6900	197											
	75	7500	200	49.5	44	34	124	M8	35	12	30	227	4.7	●
	80	9000	225											
110 x 185	75	7200	192											
	80	9000	225	56.5	50	39	136	M10	40	9	59	215	6.0	●
	85	11000	259											
115 x 188	80	8500	213											
	85	10000	235	56.5	50	39	141	M10	40	9	59	209	5.0	
	90	12000	267											
120 x 215	80	10500	263											
	85	13200	311	58.5	52	42	160	M10	40	12	59	271	5.9	
	90	14400	320											
125 x 215	85	11000	259											
	90	13000	289	58.5	52	42	160	M10	40	12	59	222	8.5	●
	95	15000	316											
130 x 215	90	13700	304											
	95	15800	333	58.5	52	42	160	M10	40	12	59	227	9.0	
	100	18200	364											
140 x 230	95	15000	316											
	100	17000	340	67.5	60	46	175	M12	45	10	100	209	11	
	105	20000	381											

● Sizes of clamping elements available from stock.
Other sizes on request.

CLAMPEX® KTR 603

Clamping elements

Three-part external clamping set for applications on hollow shafts

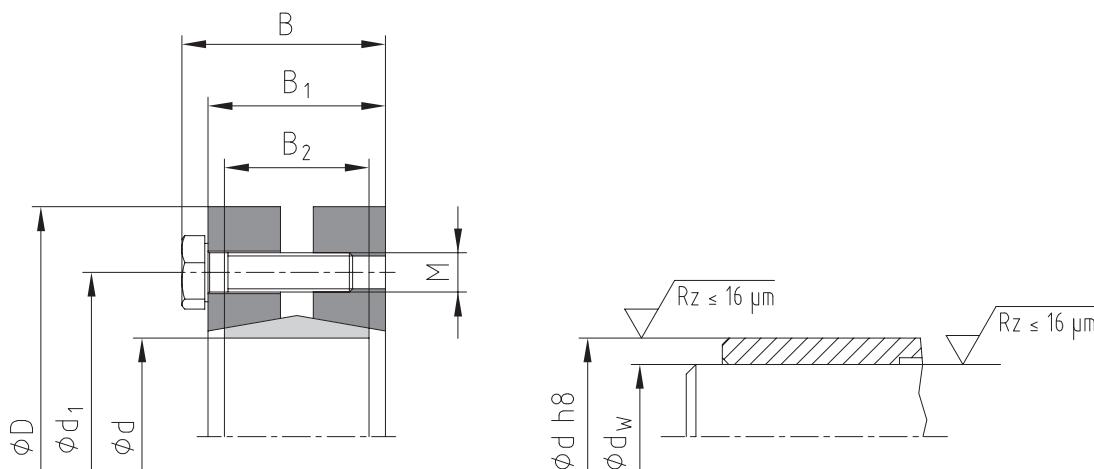

CLAMPEX® – KTR 603

d x D [mm]	Shaft diameter d_w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4014 - 10.9 $\mu_{\text{total}}=0.10$					Surface pressure of clamping element/hollow shaft	Weight [~kg]	Stock programme
		T [Nm]	F _{ax} [kN]	B	B ₁	B ₂	d ₁	M	Length	z = number	T _A [Nm]	P _H [N/mm ²]			
155 x 265	105	20000	381					M12	50	12	100	212		15	
	110	23000	418	71.5	64	50	192								
	115	26000	452												
160x 265	110	22500	409					M12	50	12	100	204		14	
	115	25500	443	71.5	64	50	192								
	120	28600	477												
165 x 290	115	36000	626					M16	60	8	250	269		24	
	120	39000	650	81	71	56	210								
	125	44000	704												
170 x 290	120	31700	528					M16	60	8	250	216		24	
	125	35800	573	81	71	56	210								
	130	40000	615												
175 x 300	125	40000	640					M16	60	8	250	253		16	
	130	44000	677	81	71	56	220								
	135	49000	726												
180 x 300	130	36800	566					M16	60	8	250	211		16	
	135	42000	622	81	71	56	220								
	140	46000	657												
185 x 330	135	55000	815					M16	65	10	250	231		35	
	140	60000	857	96	86	71	236								
	145	65000	897												
190 x 330	140	53300	761					M16	65	10	250	201		35	
	145	58500	807	96	86	71	236								
	150	63500	847												
195 x 350	140	66000	943					M16	65	12	250	259		38	
	150	76000	1013	96	86	71	246								
	155	82000	1058												
200 x 350	150	73700	983					M16	65	12	250	240		41	
	155	79800	1030	96	86	71	246								
	160	85800	1073												
220 x 370	160	95000	1188					M16	80	15	250	216		54	
	165	102000	1236	114	104	88	270								
	170	110000	1294												
240 x 405	170	120000	1412					M20	80	12	490	239		67	
	180	140000	1556	121.5	109	92	295								
	190	160000	1684												
250 x 405	180	160000	1778					M20	85	14	490	263		64	
	190	180000	1895	120.5	108	92	295								
	200	200000	2000												
260 x 430	190	165000	1737					M20	90	14	490	225		82	
	200	185000	1850	132.5	120	103	321								
	210	204000	1943												

● Sizes of clamping elements available from stock.
Other sizes on request.

CLAMPEX® – KTR 603




d x D [mm]	Shaft diameter d _w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4014 - 10.9 $\mu_{\text{total}}=0.10$				Surface pressure of clamping element/hollow shaft	Weight [-kg]	Stock programme
		T [Nm]	F _{ax} [kN]	B	B ₁	B ₂	d ₁	M	Length	z = number	T _A [Nm]			
280 x 460	210	216000	2057											
	220	245000	2227	146.5	134	114	346	M20	100	16	490	217	102	
	230	270000	2348											
300 x 485	230	274000	2383											
	240	296000	2467	154.5	142	122	364	M20	100	18	490	209	118	
	245	316000	2580											
320 x 520	240	311000	2592											
	250	340000	2720	154.5	142	122	386	M20	100	20	490	219	131	
	260	375000	2885											
330 x 520	250	352000	2816											
	260	385000	2962	154.5	142	122	386	M20	100	22	490	224	126.1	
	270	420000	3111											
340 x 570	250	389000	3112											
	260	422000	3246	168.5	156	134	408	M20	110	24	490	227	186	
	270	459000	3400											
350 x 580	270	443000	3281											
	280	480000	3429	174.5	162	140	432	M20	110	24	490	212	195	
	285	500000	3509											
360 x 590	280	462000	3300											
	290	500000	3448	174.5	162	140	432	M20	110	24	490	204	204	
	300	530000	3533											
380 x 645	290	570000	3931											
	300	610000	4067	183	168	144	458	M24	120	20	840	224	239	
	310	660000	4258											
390 x 660	300	625000	4167											
	310	670000	4323	183	168	144	468	M24	120	21	840	229	260	
	320	720000	4500											
400 x 680	315	671000	4260											
	320	695000	4344	183	168	144	480	M24	120	21	840	222	280	
	330	745000	4515											
420 x 690	330	782000	4739											
	340	841000	4947	203	188	164	504	M24	130	24	840	211	316	
	350	902000	5154											
440 x 750	340	805000	4735											
	350	861000	4920	217	202	177	527	M24	140	24	840	190	408	
	360	920000	5111											
460 x 770	360	1000000	5556											
	370	1073000	5800	217	202	177	547	M24	140	28	840	210	420	
	380	1141000	6005											
480 x 800	380	1175000	6184											
	390	1250000	6410	228	213	188	570	M24	140	30	840	206	505	
	400	1312000	6560											
500 x 850	400	1314000	6570											
	410	1382000	6741	230	213	188	590	M27	150	24	1250	205	575	
500 x 850	420	1460000	6952											

● Sizes of clamping elements available from stock.
Other sizes on request.

CLAMPEX® KTR 620

Clamping elements

Two-part external clamping set for applications on hollow shafts

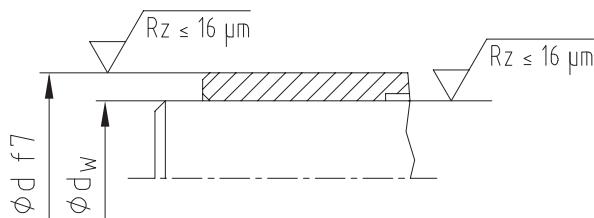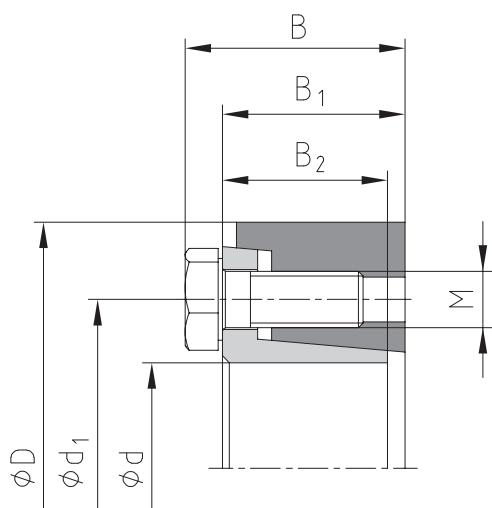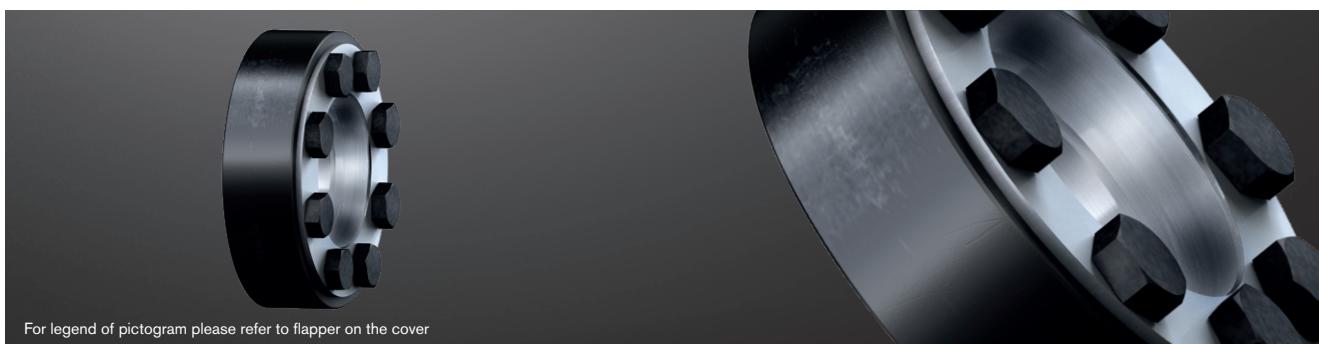


Tolerances for d_w

$$d_w \leq \emptyset 160 = h6/H7$$

$$d_w > \emptyset 160 = g6/H7$$

Bigger tolerances are generally possible! Please contact us!

Example of application of hub type

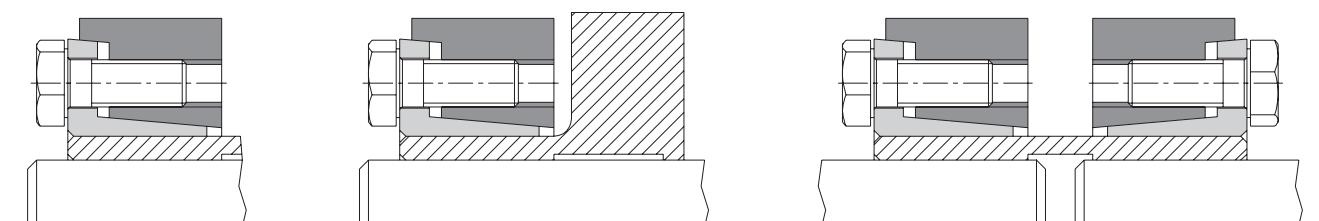

Ordering example:	KTR 620	55	x	100
Series	Size of internal diameter d			Size of external diameter D

CLAMPEX® – KTR 620														
d x D [mm]	Shaft diameter d _w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4017 - 12.9 ¹⁾ $\mu_{\text{total}}=0.10$				Surface pressure of clamping element/hollow shaft	Weight [~Lg]	Stock programme
		T [Nm]	F _{ax} [kN]	B	B ₁	B ₂	d ₁	M	Length	z = number	T _A [Nm]	P _H [N/mm ²]		
16 x 41	13	70	11	19.5	15.3	13.5	28	M6	12	3	13	254	0.1	
	14	90	13											
18 x 44	15	80	11	19.5	15.3	13.5	30	M6	12	4	13	222	0.1	
	16	110	14											
20 x 47	17	150	18	19.5	15.3	13.5	32	M6	12	4	13	274	0.1	●
	18	175	19											
24 x 50	19	165	17											
	20	215	22	22	18.22	16	36	M6	16	5	13	243	0.2	●
26 x 51.5	22	280	25											
	24	330	28											
30 x 60	24	370	31											
	25	420	34	24	20.26	18	44	M6	16	6	13	255	0.3	●
36 x 72	26	465	36											
	27	480	36											
38 x 72	30	650	43	27.5	22.1	20	52	M8	20	5	30	250	0.5	●
	33	835	51											
40 x 80	34	830	49	29.5	24.22	22	61	M8	20	6	30	209	0.6	●
	35	770	44	29.5	24.22	22	61	M8	20	6	30	192	0.6	●
44 x 80	37	880	48											
	38	1130	59											
50 x 90	40	1260	63	31.5	26.1	23.5	68	M8	20	8	30	212	0.8	●
	42	1400	67											
55 x 100	42	1300	62											
	45	1600	71	34.5	29	26	72	M8	20	8	30	195	1.1	●
60 x 110	48	1900	79											
	48	1700	71											
62 x 110	50	1950	78	34.5	29.25	26	80	M8	20	9	30	191	1.3	●
	52	2160	83											
68 x 115	48	1700	71											
	55	2500	91	35	29.4	26	86	M8	20	9	30	206	1.3	●
75 x 138	50	1900	76											
	60	2700	98											
75 x 138	60	3400	113	37.5	30.7	27	100	M10	25	10	60	211	2.3	●
	65	4100	126											
80 x 141	60	3300	110											
	65	4100	126	37.5	31.1	27	104	M10	25	10	60	215	2.3	●
85 x 155	70	4950	141											
	75	7300	195											
90 x 155	65	5500	169											
	70	6600	189	44.5	38.2	34	114	M10	25	11	60	223	3.2	●
95 x 170	70	7900	211											
	75	6200	177											
100 x 170	75	7400	197	50	43.45	39	124	M10	30	14	60	182	4.3	
	80	8600	215											
105 x 185	80	10500	263											
	85	11800	278	56.5	49.1	43.5	136	M12	35	12	100	208	5.8	
110 x 185	90	13700	304											
	80	10500	263											
115 x 197	85	11800	278	56.5	49.1	43.5	136	M12	35	12	100	202	5.8	●
	90	14100	313	60.5	53	48	147	M12	35	14	100	189	6.9	
120 x 197	85	12500	294											
	90	14100	313	60.5	53	48	147	M12	35	14	100	189	6.9	
	95	16000	337											



● Sizes of clamping elements available from stock.

¹⁾ DIN EN ISO 4017-10.9 for size 16 x 41 to 20 x 47

CLAMPEX® KTR 620

Clamping elements

Two-part external clamping set for applications on hollow shafts

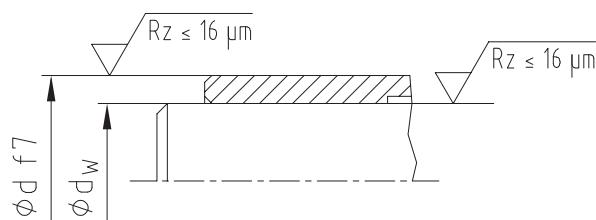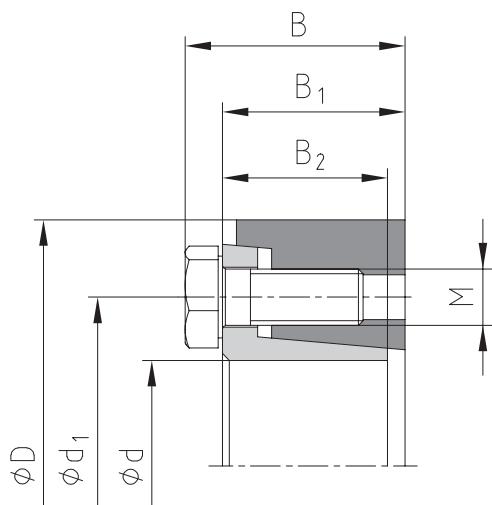

CLAMPEX® – KTR 620

d x D [mm]	Shaft diameter d_w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4017 - 12.9 $\mu_{\text{total}}=0.10$				Surface pressure of clamping ele- ment/hollow shaft	Weight [-kg]	Stock programme
		T [Nm]	F_{ax} [kN]	B	B ₁	B ₂	d_1	M	Length	z = number	T_A [Nm]	P_H [N/mm ²]		
125 x 215	90	14500	322	61	53.4	48	158	M12	35	14	100	196	8.7	●
	95	16600	349											
	100	18800	376											
130 x 215	95	17000	358	61	53.4	48	158	M12	35	14	100	187	9.4	
	100	18400	368											
	110	22000	400											
130 x 230	95	18400	387	66.5	57.5	51	165	M14	40	12	160	213	10.8	●
	100	20800	416											
	110	26200	476											
135x 230	95	18400	387	66.5	57.5	51	165	M14	40	12	160	209	10.8	
	100	20800	416											
	110	26200	476											
140 x 230	100	19900	398	67	57.8	51	172	M14	40	12	160	207	10.3	
	105	22200	423											
	115	27800	483											
150 x 263	110	27000	491	71	62.2	55	186	M14	40	14	160	202	15.2	
	120	32000	533											
	125	36200	579											
155 x 263	110	27000	491	71	62.2	55	186	M14	40	14	160	199	15.2	
	120	32000	533											
	125	36200	579											
160 x 290	120	39000	650	78.5	68.5	61	198	M16	45	12	250	215	21.5	
	130	48000	738											
	135	51000	756											
165 x 290	120	39000	650	78.5	68.5	61	198	M16	45	12	250	212	21.5	
	130	48000	738											
	135	51000	756											
170 x 300	130	46500	715	79	68.9	61	208	M16	50	14	250	212	22.5	
	140	53000	757											
	145	59000	814											
175 x 300	130	46500	715	79	68.9	61	208	M16	50	14	250	209	22.5	●
	140	53000	757											
	145	59000	814											
180 x 320	140	66000	943	95	85	77.5	222	M16	50	16	250	210	32.7	
	150	76000	1013											
	155	83000	1071											
185 x 320	140	66000	943	95	85	77.5	222	M16	50	16	250	207	32.7	
	150	76000	1013											
	155	83000	1071											
190 x 340	150	82000	1093	98	87.7	77.5	238	M16	50	16	250	225	36.3	
	160	91000	1138											
	165	102000	1236											
195 x 340	150	82000	1093	98	87.7	77.5	238	M16	50	16	250	222	36.3	
	160	91000	1138											
	165	102000	1236											
200 x 340	150	82000	1093	98	87.7	77.5	238	M16	50	16	250	219	36.3	
	160	91000	1138											
	165	102000	1236											

● Sizes of clamping elements available from stock.

CLAMPEX® – KTR 620

d x D [mm]	Shaft diameter d _w [mm]	Transmittable torque or axial force		Dimensions [mm]				Clamping screws DIN EN ISO 4017 - 12.9 ²⁾ $\mu_{\text{total}}=0.10$				Surface pressure of clamping ele- ment/hollow shaft		Weight [kg]	Stock programme	
		T [Nm]	F _{ax} [kN]	B	B ₁	B ₂	d ₁	M	Length	z = number	T _A [Nm]	P _H [N/mm ²]				
220 x 370	160	105000	1313													
	170	122000	1435	120	107.55	96.5	268	M20	60	15	480	205		53		
	180	138000	1533													
240 x 405	170	125000	1471													
	180	145000	1611	123.5	111.1	98	288	M20	60	16	480	214		66		
	200	182000	1820													
260 x 430	190	165000	1737													
	200	190000	1900	138	125.3	110.5	312	M20	60	16	480	202		82		
	220	238000	2164													
280 x 460	210	220000	2095													
	220	245000	2227	152.5	140	121	334	M20	60	18	480	193		103		
	240	300000	2500													
300 x 485	220	297000	2700													
	230	330000	2870	159	139.8	124	360	M24	70	16	840	205		120		
	250	399000	3192													
320 x 520	240	331000	2758													
	250	365000	2920	160.5	141.6	124	380	M24	70	18	840	190		138		
	270	437000	3237													
340 x 570	250	429000	3432													
	260	469000	3608	177.5	158.4	139	402	M24	70	18	840	195		189		
	280	556000	3971													
360 x 590	270	545000	4037													
	280	592000	4229	182	163	143	424	M24	70	20	840	216		207		
	290	694000	4786													
390 x 650	290	704000	4855													
	300	760000	5067	191	169.2	148	454	M27	70	18	1250	216		249		
	320	879000	5494													
420 x 670	320	827000	5169													
	330	876000	5309	208.4	186.4	166	486	M27	70	20	1250	184		285		
	350	1000000	5714													
440 x 710	340	1117000	6571													
	350	1190000	6800	220	198	179	506	M27	70	21	1250	222		343		
	370	1345000	7270													
460 x 750	360	1306000	7256													
	370	1386000	7492	223	201	179	534	M27	70	21	1250	230		387		
	390	1554000	7969													
470 x 705	370	950000	5135													
	380	1000000	5263	241.6	219.6	200	538	M27	70	21	1250	151		340		
	400	1150000	5750													
480 x 770	380	1557000	8195													
	390	1648000	8451	247	223	201	552	M30	100	21	1650	223		449		
	410	1818000	8868													
500 x 820	400	1653000	8265													
	410	1725000	8415	241	217	198	572	M30	100	24	1650	214		515		
	430	1915000	8907													
530 x 850	430	2048000	9526													
	440	2154000	9791	262.3	238.3	216	606.5	M30	100	24	1650	208		585		
	460	2374000	10322													
560 x 885	450	2306000	10249													
	460	2419000	10517	266	242	220	632	M30	100	24	1650	212		636		
	480	2654000	11058													
590 x 950	470	2735000	11638													
	480	2863000	11929	281.5	257.5	236	664	M30	100	28	1650	211		805		
	500	3128000	12512													
620 x 960	500	3150000	12600													
	520	3396000	13062	307	283	258	706	M30	100	28	1650	201		853		
	540	3689000	13663													
660 x 1020	530	3636000	13721													
	550	3942000	14335	319	293	267	748	M33	130	28	2250	199		993		
	570	4261000	14951													
700 x 1085	560	4189000	14961													
	580	4520000	15586	318.5	292.5	263	788	M33	130	28	2250	187		1112		
	600	4863000	16210													
750 x 1100	600	5281000	17603													
	620	5672000	18297	346	320	280	850	M33	130	32	2250	202		1111		
	650	6287000	19345													
800 x 1230	640	6091000	19034													
	660	6511000	19730	359	333	296	900	M33	130	32	2250	202		1589		
	700	7394000	21126													



● Sizes of clamping elements available from stock.

²⁾ DIN EN ISO 4014-12.9 for size 660 x 1020 to 800 x 1230



CLAMPEX® KTR 700

Clamping elements

Rigid shaft coupling to connect two shaft ends

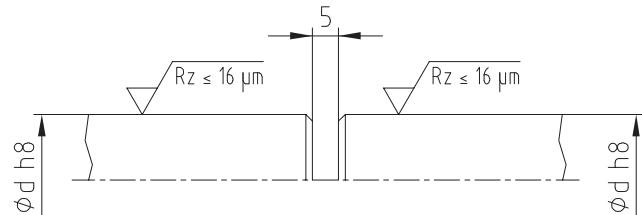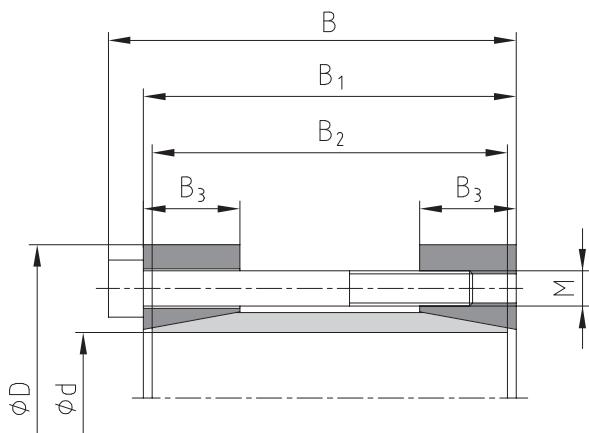

Example of application

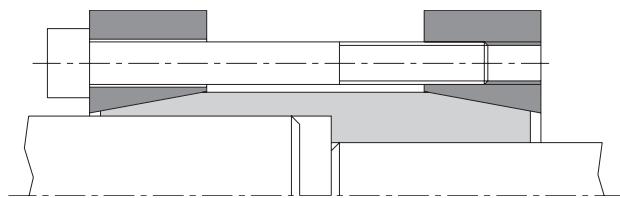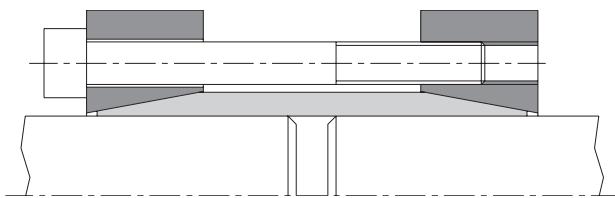

Type on request

Ordering example:



KTR 700	35	x	75
Series	Size of internal diameter d		Size of external diameter D

CLAMPEX® – KTR 700													
d x D [mm]	Dimensions [mm]				Clamping screws DIN EN ISO 4762 - 12.9 $\mu_{\text{total}}=0.14$				Transmittable torque or axial force		Surface pressure of clamping element/ shaft	Weight [-kg]	Stock programme
	B	B ₁	B ₂	B ₃	M	Length	z = number	T _A [Nm]	T [Nm]	F _{ax} [kN]	P _W [N/mm ²]		
10 x 35	42	38	36	15	M4	30	6	5.5	62	12	219	0.2	
11 x 35	42	38	36	15	M4	30	6	5.5	66	12	193	0.2	
12 x 35	42	38	36	15	M4	30	6	5.5	72	12	177	0.2	
14 x 35	42	38	36	15	M4	30	6	5	76	11	137	0.2	
15 x 45	56	50	47	15	M6	45	4	17	160	21	252	0.4	
16 x 45	56	50	47	15	M6	45	4	17	170	21	235	0.4	
17 x 45	56	50	47	15	M6	45	4	17	180	21	220	0.4	●
18 x 50	56	50	47	15	M6	45	4	17	190	21	207	0.5	
19 x 50	56	50	47	15	M6	45	4	17	200	21	196	0.4	
20 x 50	56	50	47	15	M6	45	4	17	220	22	195	0.4	●
22 x 55	66	60	57	18	M6	55	6	17	360	33	219	0.5	
24 x 55	66	60	57	18	M6	55	6	17	390	33	200	0.6	
25 x 55	66	60	57	18	M6	55	6	17	400	32	189	0.6	●
28 x 60	66	60	57	18	M6	55	6	17	390	28	147	0.8	
30 x 60	66	60	57	18	M6	55	6	17	420	28	138	0.7	●
32 x 75	83	75	72	20	M8	70	4	41	610	38	158	0.1	
35 x 75	83	75	72	20	M8	70	4	41	670	38	145	1.3	●
38 x 75	83	75	72	20	M8	70	4	41	730	38	134	1.2	
40 x 75	83	75	72	20	M8	70	4	41	760	38	126	1.2	●
42 x 85	93	85	81	22	M8	80	6	41	1170	56	160	1.8	
45 x 85	93	85	81	22	M8	80	6	41	1260	56	150	1.7	
48 x 90	93	85	81	22	M8	80	6	41	1360	57	142	1.9	
50 x 90	93	85	81	22	M8	80	6	41	1400	56	135	1.8	●
55 x 95	93	85	81	22	M8	80	8	41	2000	73	159	2.0	
60 x 100	93	85	81	22	M8	80	8	41	2260	75	151	2.2	●
65 x 105	93	85	81	22	M8	80	8	41	2500	77	143	2.6	
70 x 115	110	100	96	35	M10	80	8	83	3300	94	102	4.1	
75 x 120	110	100	96	35	M10	80	8	83	3500	93	94	4.3	
80 x 125	110	100	96	35	M10	80	7	75	3900	98	92	4.5	
90 x 136	110	100	96	35	M10	80	8	75	5100	113	95	5.2	
100 x 158	132	120	116	40	M12	100	8	130	8350	167	111	6.0	

● Sizes of clamping elements available from stock.

KTR Clamping nuts



Large screw connections for easy and quick assembly

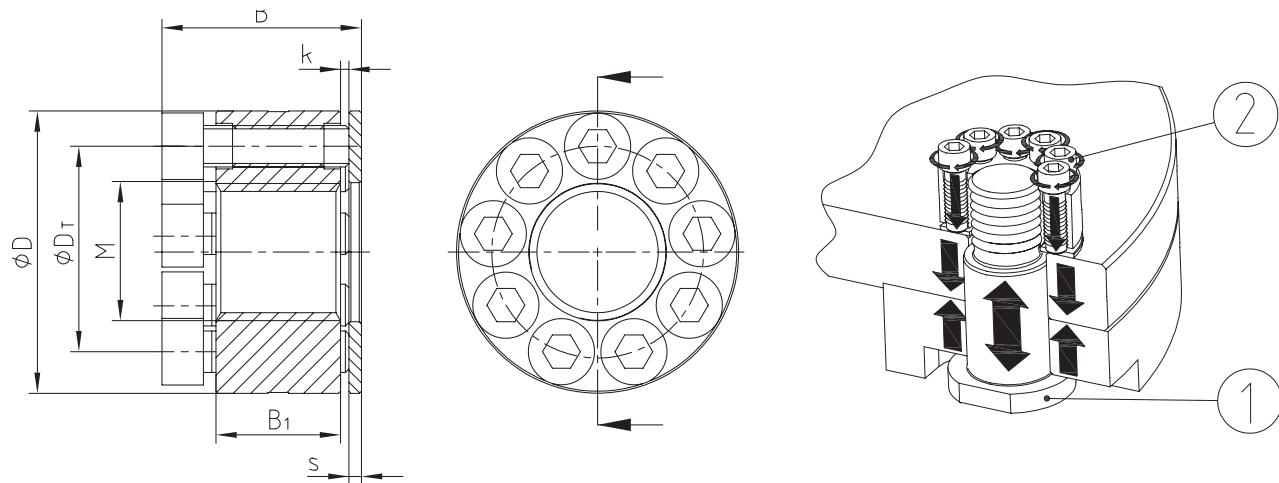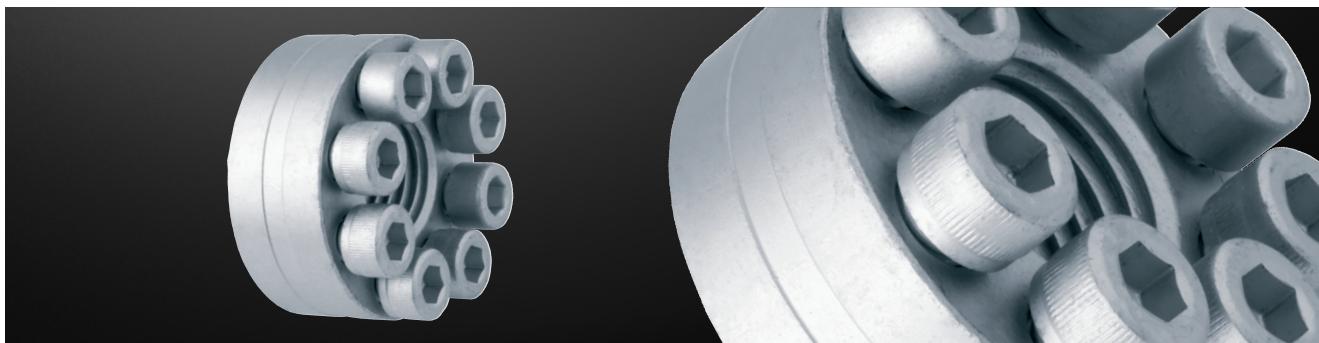

KTR Clamping nuts												
Size	Dimensions [mm]						Pressure screw pos. 2		Property class 8.8, screw pos. 1		Property class 10.9, screw pos. 1	
	D	D _T	B	B ₁	s	k	DIN EN ISO 4762	z = number	Tightening torque * [Nm]	Preload force [N]	Tightening torque * [Nm]	Preload force [N]
M24 x 3.0	52	39	36.0	20	3.0	1 - 2	M8	8	21	174000	30	249000
M27 x 3.0	57	42	41.0	25	3.0	1 - 2	M8	9	24	224000	30	280000
M30 x 3.5	65	48	43.0	25	3.0	1 - 2	M10	8	41	274000	60	401000
M33 x 3.5	68	51	48.0	30	3.0	1 - 2	M10	9	45	338000	60	451000
M36 x 4.0	80	58	50.0	30	3.0	1 - 2	M12	8	71	396000	105	586000
M42 x 4.5	86	64	55.0	35	3.0	1 - 2	M12	10	78	544000	105	732000
M48 x 5.0	90	72	60.0	40	3.0	1 - 2	M12	11	94	721000	105	806000
M52 x 5.0	100	79	66.5	42	4.5	1 - 2	M12	13	95	862000	105	952000
M56 x 5.5	108	83	75.5	45	4.5	1 - 2	M16	9	210	1001000	250	1192000
M60 x 5.5	112	86	80.5	48	4.5	1 - 2	M16	10	215	1139000	250	1325000
M64 x 6.0	120	92	84.0	52	8.0	1 - 2	M16	11	225	1311000	250	1457000
M72 x 6.0	142	107	98.0	58	8.0	1 - 2	M20	10	400	1696000	490	2077000
M80 x 6.0	164	122	103.0	64	8.0	1 - 2	M20	12	420	2137000	490	2493000


* each screw pos. 2

Ordering example:	KTR clamping nut	M33 x 3.5
	Description	Size

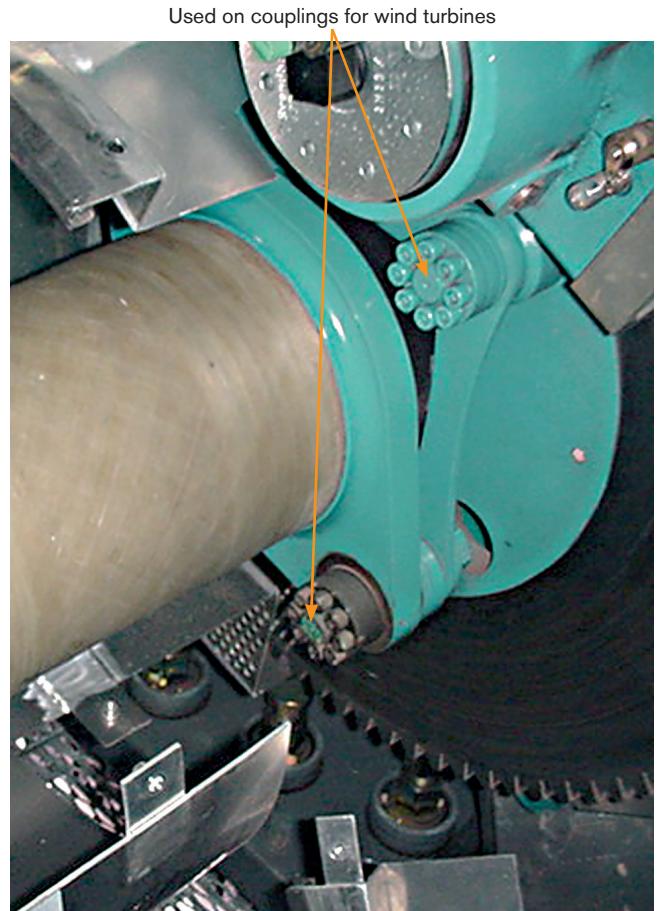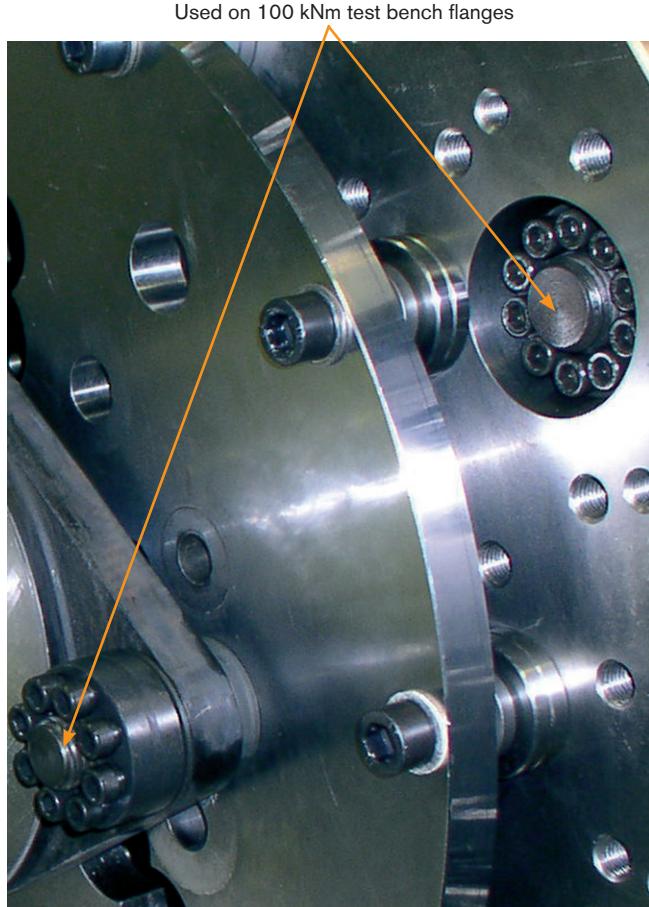

Clamping nuts

Available as a complete unit including
dowel screw

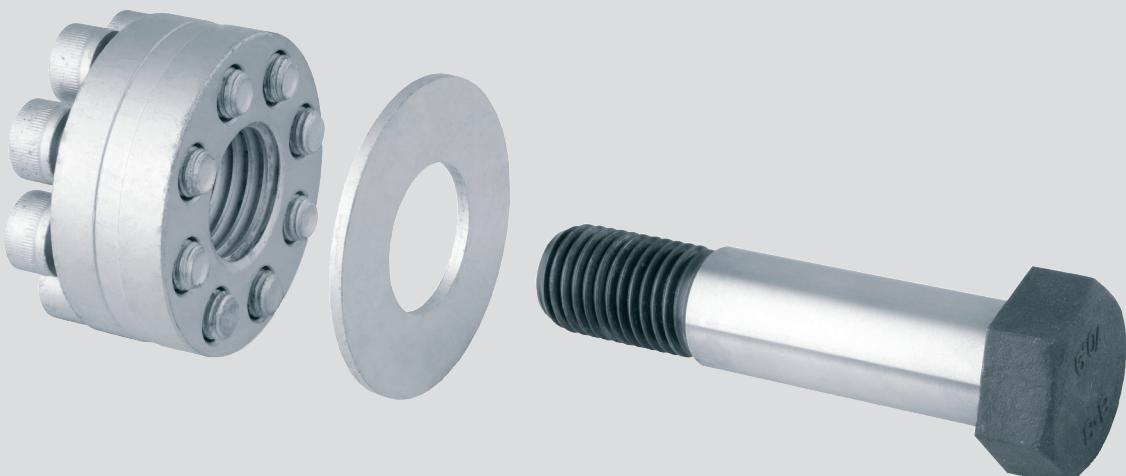

KTR Precision joints

Clamping sets

Precision joints with plain and needle bearing series G and H according to DIN 808

Series G is provided with plain bearings, series H with needle bearings. Series H requires neither lubrication nor maintenance, since its bearings are permanently lubricated.

For low-speed applications (max. 1,000 rpm) precision joints with plain bearings (series G) are recommended. They are able to absorb shock loads, irregular rotation and relatively high torques. With high speeds, relatively low torques, reversing operation or big diffraction angles precision joints with needle bearings (series H) should be preferred. Considering the diffraction angle they can be used up to a speed of 4,000 rpm.

The maximum diffraction angle is 45° for single joints and 90° for double joints.

Joints made of stainless steel series X according to DIN 808

Joints series X are fully made of stainless steel 1.4301. The maximum diffraction angle is 45° for single joints and 90° for double joints. The maximum permissible speed for series X is 300 rpm.

Selection criteria

The permissible torque transmission of a joint over a more or less long period considering constant and shock-free load mainly depends on the number of revolutions per minute and the diffraction angle.

The diagrammes on pages 358 - 359 were created based on such criteria.

The figures in the diagramme shall be considered as reference values referring to single joints only. With the selection of a double joint it must be made sure that it is able to transmit a torque falling below that of a single joint of the same size by about 10 %. Every application has got special properties, e. g. shock loads, change of direction of rotation, mass moment of inertia, start/stop operation, start-up characteristics etc. that have to be considered with the selection of the joint.

Instructions for correct assembly

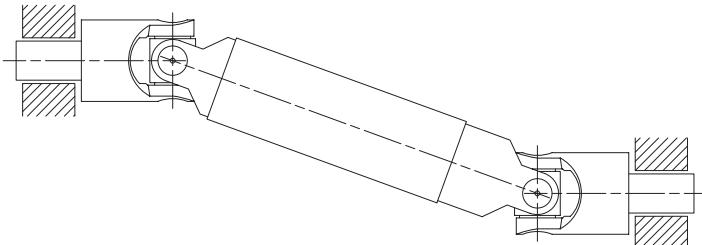


Illustration 1

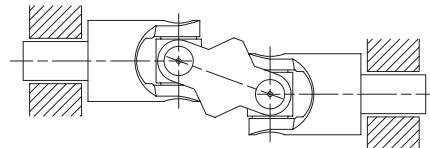


Illustration 2

In order to obtain consistent rotation between driving and driven shaft two single joints or one double joint have to be used. The bearing of the two shafts to be combined should be positioned as close as possible to the joints (see illustration 1 and 2).

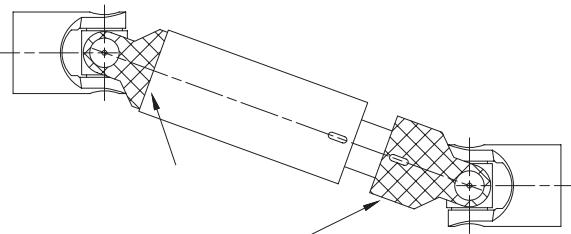


Illustration 3 (correct)

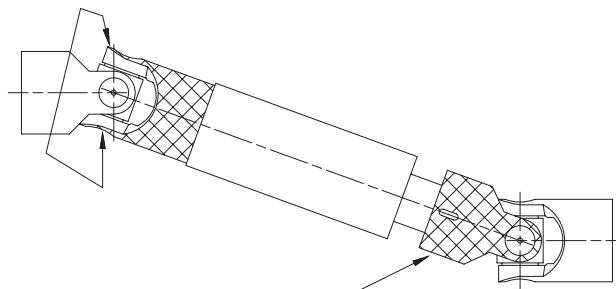


Illustration 4 (not correct)

When using two opposing single joints the identical fork position has to be observed. When using extendable joints it must be made sure that the markings applied are flush (see illustration 3 and 4).


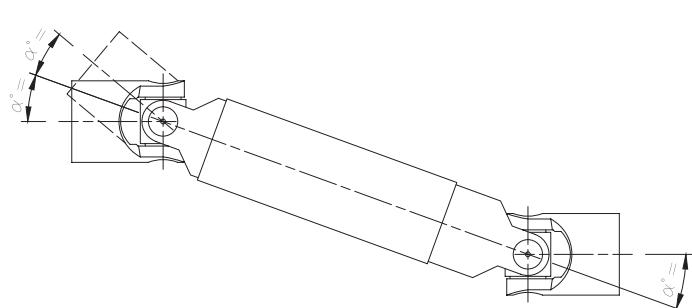


Illustration 5 (correct)

The diffraction angles α° must be identical (see illustration 5). The shafts may only be arranged in parallel or symmetrically to one another.

Selection and sizing according to DIN 808 with plain/needle bearing

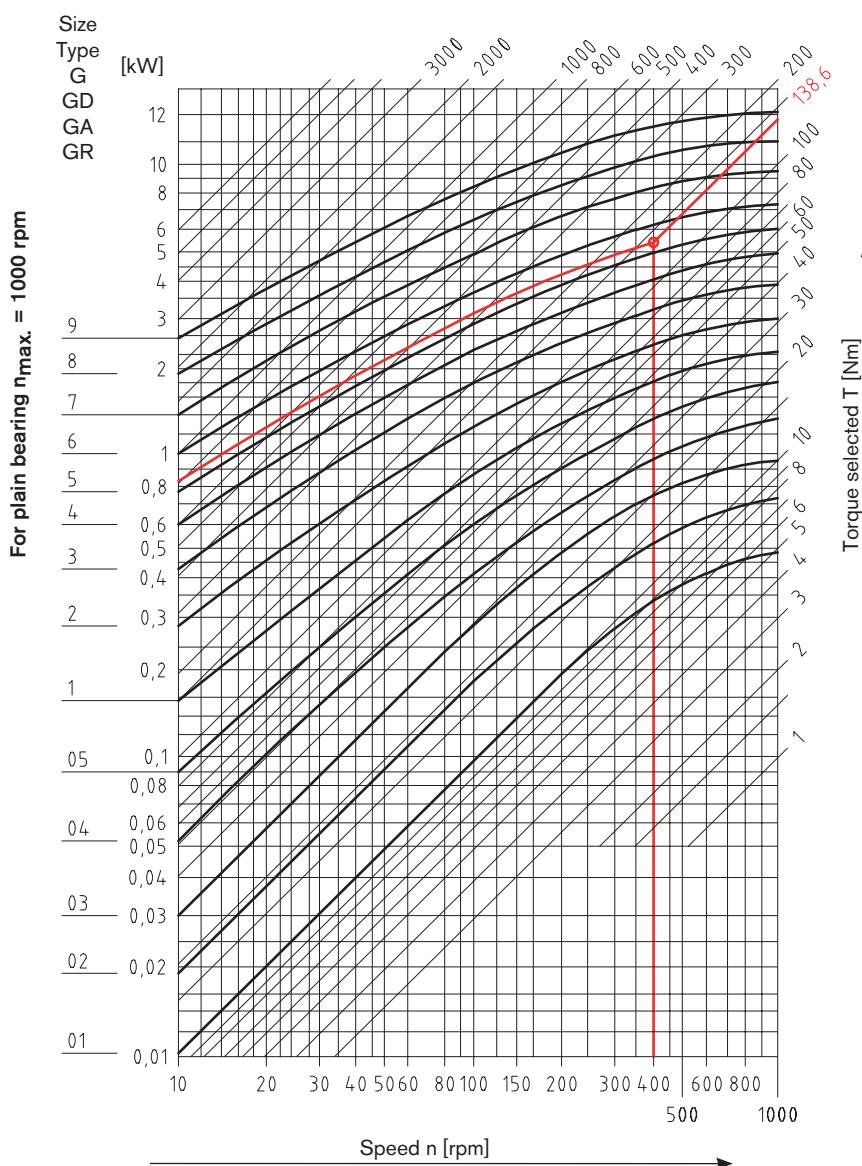

Selection of type G, GD, GA, GR (max. 1000 rpm)¹⁾

The selection of precision joints with plain bearing is based on the driving torque considering a correction factor which depends on the diffraction angle α and the operating speed.

For extendable joints the overall length and the speed need to be additionally considered for sizing (please consult with KTR).

$$\text{Driving torque } M_t [\text{Nm}] = 9550 \cdot \frac{\text{Power} [\text{kW}]}{\text{Speed} [\text{rpm}]}$$

$$\text{Torque selected } T [\text{Nm}] = \text{driving torque} \cdot \text{correction factor}$$

Additional review:

$${}^1) \text{Diffraction angle } [\text{°}] \cdot \text{speed} [\text{rpm}] \leq 40,000$$

Diffraction angle $[\alpha]$	5°	10°	15°	20°	25°	30°	35°	40°	45°
Correction factor	0.8	1.00	1.25	1.5	1.8	2.2	2.6	3.3	4.0

Details given:


Driving torque M_t 63 Nm

Diffraction angle 30° → Correction factor for diffraction angle 2.2

Operating speed 400 rpm

$$\text{Torque selected } T [\text{Nm}] = 63 \text{ Nm} \cdot 2.2 \rightarrow 138.6 \text{ Nm}$$

Selection based on table: joint size 6

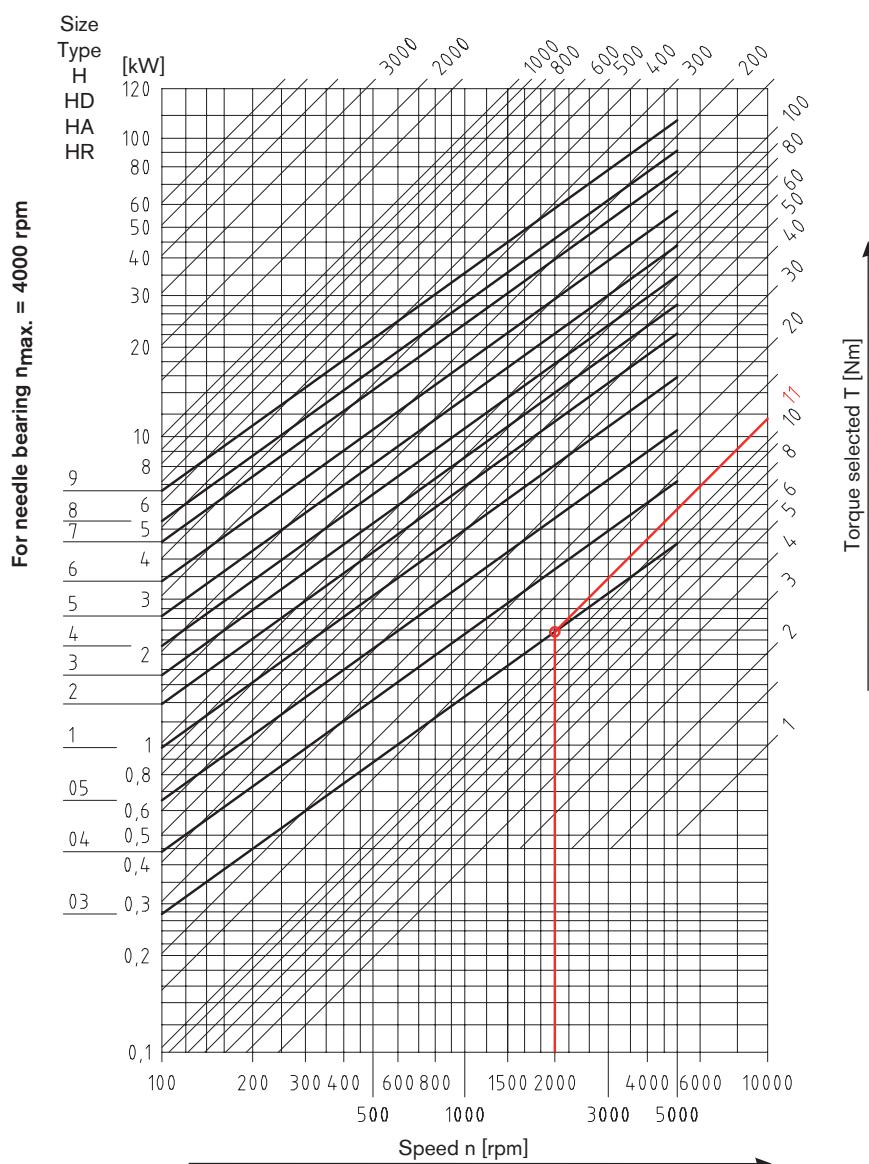

Selection of type H, HD, HA, HR (max. 4000 rpm)¹⁾

The selection of precision joints with needle bearing is based on the driving torque considering a correction factor which depends on the diffraction angle α and the operating speed.

For extendable joints the overall length and the speed need to be additionally considered for sizing (please consult with KTR).

$$\text{Driving torque } M_t [\text{Nm}] = 9550 \cdot \frac{\text{Power} [\text{kW}]}{\text{Speed} [\text{rpm}]}$$

$$\text{Torque selected } T [\text{Nm}] = \text{driving torque} \cdot \text{correction factor}$$

Additional review:

$${}^1) \text{Diffraction angle } [{}^\circ] \cdot \text{speed} [\text{rpm}] \leq 40,000$$

Diffraction angle [α]	5°	10°	15°	20°	25°	30°	35°	40°	45°
Correction factor	0.8	1.00	1.1	1.25	1.4	2.0	2.5	3.3	4.0

Details given:

Driving torque M_t 8.8 Nm

Diffraction angle 20° → Correction factor for diffraction angle 1.25

Operating speed 2000 rpm

$$\text{Torque selected } T [\text{Nm}] = 8.8 \text{ Nm} \cdot 1.25 \rightarrow 11 \text{ Nm}$$


Selection based on table: joint size 03

KTR Precision joints type G and GD


According to DIN 808 with plain bearing




Precision single joint G

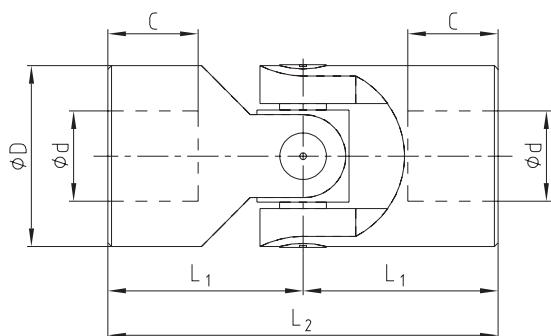

Precision double joint GD

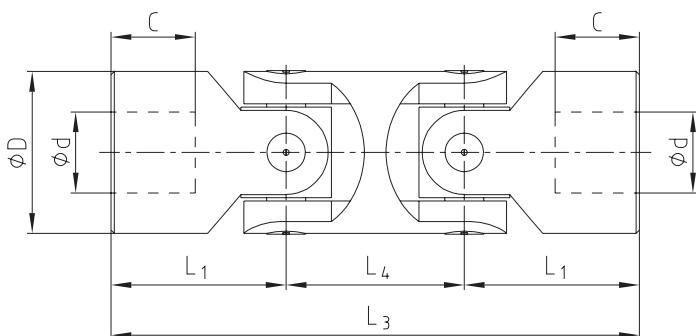

Finish bores:

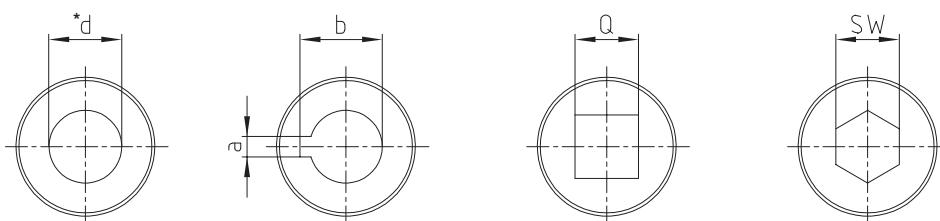

* Standard type of bore, unless requested/ordered otherwise

Types and size				Type G and GD											Weight [kg]	
Size G	DIN designation G	Size GD	DIN designation GD	d (H7)	D	L ₂	L ₁	C	L ₄	L ₃	a (JS9)	b	Q (H10)	SW (H10)	G	GD
01 G	E6 x 16-G	01 GD	D6 x 16-G	6	16	34	17	8	22	56	2	7.0	6	6	0.05	0.08
02 G	E8 x 16-G	02 GD	D8 x 16-G	8	16	40	20	11	22	62	2	9.0	8	8	0.05	0.08
03 G	E10 x 22-G	03 GD	D10 x 22-G	10	22	48	24	12	26	74	3	11.4	10	10	0.10	0.15
04 G	E12 x 25-G	04 GD	D12 x 25-G	12	25	56	28	13	30	86	4	13.8	12	12	0.16	0.25
05 G	E14 x 28-G	05 GD	D14 x 28-G	14	28	60	30	14	36	96	5	16.3	14	14	0.20	0.40
1 G	E16 x 32-G	1 GD	D16 x 32-G	16	32	68	34	16	37	105	5	18.3	16	16	0.30	0.45
2 G	E18 x 36-G	2 GD	D18 x 36-G	18	36	74	37	17	40	114	6	20.8	18	18	0.45	0.70
3 G	E20 x 42-G	3 GD	D20 x 42-G	20	42	82	41	18	47	129	6	22.8	20	20	0.60	1.00
4 G	E22 x 45-G	4 GD	D22 x 45-G	22	45	95	47.5	22	50	145	6	24.8	22	22	0.95	1.55
5 G	E25 x 50-G	5 GD	D25 x 50-G	25	50	108	54	26	55	163	8	28.3	25	25	1.20	2.00
6 G	E30 x 58-G	6 GD	D30 x 58-G	30	58	122	61	29	68	190	8	33.3	30	30	1.85	2.90
6 G1	E32 x 58-G	6 GD1	D32 x 58-G	32	58	130	65	33	68	198	10	35.3	30	30	2.00	3.00
7 G	E35 x 70-G	7 GD	D35 x 70-G	35	70	140	70	33	72	212	10	38.3	-	-	3.15	4.75
8 G	E40 x 80-G	8 GD	D40 x 80-G	40	80	160	80	38	85	245	12	43.3	-	-	4.60	7.20
9 G	E50 x 95-G	9 GD	D50 x 95-G	50	95	190	95	46	100	290	14	53.8	-	-	7.60	12.0

Ordering example:


04 G	Ø12	Ø12 keyway to DIN
Size and type of joint	Finish bore (H7)	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)

KTR Precision joints type H and HD


According to DIN 808 with needle bearing




Precision single joint type H

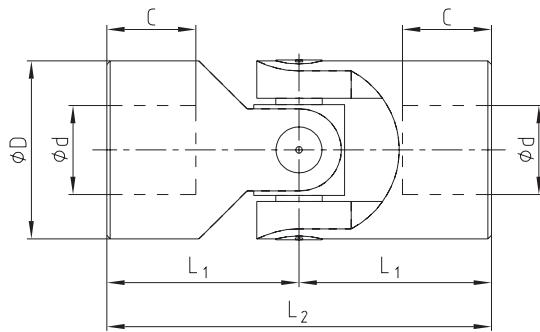

Precision double joint type HD

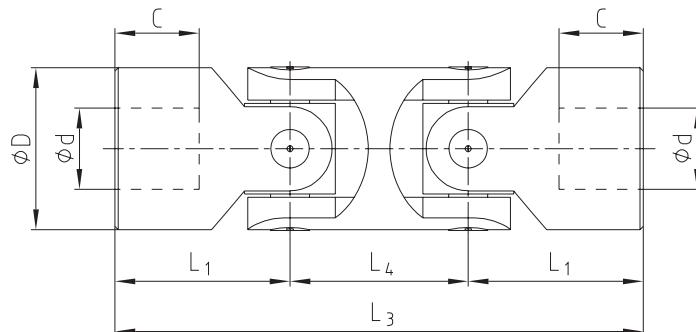

Finish bores:

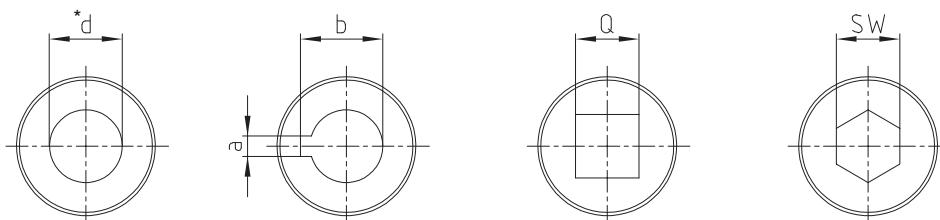

* Standard type of bore, unless requested/ordered otherwise



Types and size				Type H and HD											Weight [kg]	
Size H	DIN designation H	Size HD	DIN designation HD	d (H7)	D	L2	L1	C	L4	L3	a (JS9)	b	Q (H10)	SW (H10)	H	HD
03 H	E10 x 22-W	03 HD	D10 x 22-W	10	22	48	24	12	26	74	3	11.4	10	10	0.10	0.15
04 H	E12 x 25-W	04 HD	D12 x 25-W	12	25	56	28	13	30	86	4	13.8	12	12	0.16	0.25
05 H	E14 x 28-W	05 HD	D14 x 28-W	14	28	60	30	14	36	96	5	16.3	14	14	0.20	0.40
1 H	E16 x 32-W	1 HD	D16 x 32-W	16	32	68	34	16	37	105	5	18.3	16	16	0.30	0.45
2 H	E18 x 36-W	2 HD	D18 x 36-W	18	36	74	37	17	40	114	6	20.8	18	18	0.45	0.70
3 H	E20 x 42-W	3 HD	D20 x 42-W	20	42	82	41	18	47	129	6	22.8	20	20	0.60	1.00
4 H	E22 x 45-W	4 HD	D22 x 45-W	22	45	95	47.5	22	50	145	6	24.8	22	22	0.95	1.55
5 H	E25 x 50-W	5 HD	D25 x 50-W	25	50	108	54	26	55	163	8	28.3	25	25	1.20	2.00
6 H	E30 x 58-W	6 HD	D30 x 58-W	30	58	122	61	29	68	190	8	33.3	30	30	1.85	2.90
6 H1	E32 x 58-W	6 HD1	D32 x 58-W	32	58	130	65	33	68	198	10	35.3	30	30	2.00	3.00
7 H	E35 x 70-W	7 HD	D35 x 70-W	35	70	140	70	33	72	212	10	38.3	-	-	3.15	4.75
8 H	E40 x 80-W	8 HD	D40 x 80-W	40	80	160	80	38	85	245	12	43.3	-	-	4.60	7.20
9 H	E50 x 95-W	9 HD	D50 x 95-W	50	95	190	95	46	100	290	14	53.8	-	-	7.60	12.0

Ordering example:

1 H	Ø16	Ø16 keyway to DIN
Size and type of joint	Finish bore (H7)	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)


KTR Precision joints type GA and HA

According to DIN 808 with plain and needle bearing (extendable)

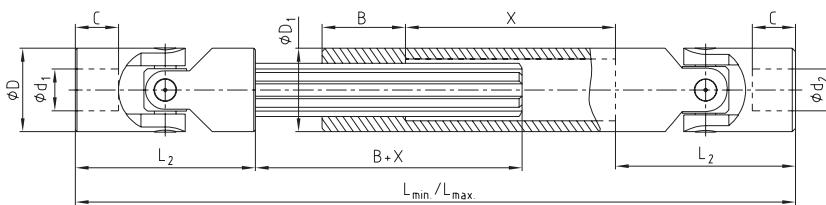

Size	Preferred lengths									
	Dimensions [mm]									
	L _{min.} / L _{max.}									
03	140	160	180	200	220	250	280	300	350	400
	170	200	240	330						
04	160	180	200	220	250	280	300	350	400	450
	190	225	270	300	355	420	450	550	650	
05	170	180	200	220	250	280	300	350	400	450
	200	220	260	300	350	420	450	550	650	
1	190	210	240	250	275	300	380	400	500	630
	220	250	320	350	390	430	590			
2	230	250	270	290	300	400	500	620		
	280	320	370	400	415					
3	250	270	290	320	380	420	500			
	300	340	380	440	560	640	800			
4	250	270	290	330	350	470				
	280	320	350	430	470	710				
5	295	310	350	380	420	460	500			
	345	375	450	500	590	660	745			
6	330	350	370	400	450	500	540			
	380	420	455	510	620	720	795			

Finish bores:

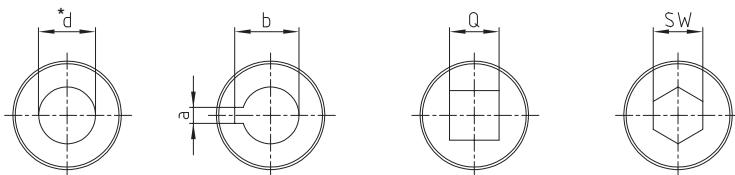

* Standard type of bore, unless requested/ordered otherwise

Type GA with plain bearing n _{max.} = 1000 rpm and type HA with needle bearing n _{max.} = 4000 rpm													
Size		Dimensions [mm]											
GA	HA	d ₁ , d ₂ (H7)	D	L ₂	C	L _{min.} / L _{max.} / X	B	a (JS9)	b	Q (H10)	SW (H10)	Spline shaft	D ₁
01 GA	-	6	16	34	8	←	→	25	2	7.0	6	6	SW8 16
02 GA	-	8	16	40	11	←	→	25	2	9.0	8	8	SW8 16
03 GA	03 HA	10	22	48	12	←	→	30	3	11.4	10	10	11 x 14 Z6 22
04 GA	04 HA	12	25	56	13	←	→	40	4	13.8	12	12	13 x 16 Z6 26
05 GA	05 HA	14	28	60	14	←	→	40	5	16.3	14	14	13 x 16 Z6 29
1 GA	1 HA	16	32	68	16	← As specified by the customer L _{min.} / L _{max.}	→	40	5	18.3	16	16	16 x 20 Z6 32
2 GA	2 HA	18	36	74	17		→	40	6	20.8	18	18	18 x 22 Z6 37
3 GA	3 HA	20	42	82	18	←	→	45	6	22.8	20	20	21 x 25 Z6 42
4 GA	4 HA	22	45	95	22	←	→	45	6	24.8	22	22	23 x 28 Z6 47
5 GA	5 HA	25	50	108	26	←	→	45	8	28.3	25	25	26 x 32 Z6 52
6 GA	6 HA	30	58	122	29	←	→	50	8	33.3	30	30	32 x 38 Z8 58
7 GA	7 HA	35	70	140	33	←	→	70	10	38.3	-	-	36 x 42 Z8 70
8 GA	8 HA	40	80	160	38	←	→	80	12	43.3	-	-	42 x 48 Z8 80
9 GA	9 HA	50	95	190	46	←	→	90	14	53.8	-	-	46 x 54 Z8 95

Calculation of mounting lengths L and X (stroke)

$$\text{Stroke } X \geq \frac{L_{\max.} - 2 \cdot L_2 - B}{2}$$

$$L_{\min.} \geq \frac{L_{\max.} + 2 \cdot L_2 + B}{2}$$

$$\text{Minimum size } L_{\min.} = L_2 + B + X + L_2$$


Ordering example:	3 GA	d ₁ = Ø20	d ₂ = Ø20 keyway to DIN	550/650
	Size and type of joint	Finish bore (H7)	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)	Mounting length L _{min.} /L _{max.}

KTR Precision joints type X and XD


According to DIN 808 with plain bearing made of stainless steel 1.4301




Precision single joint X

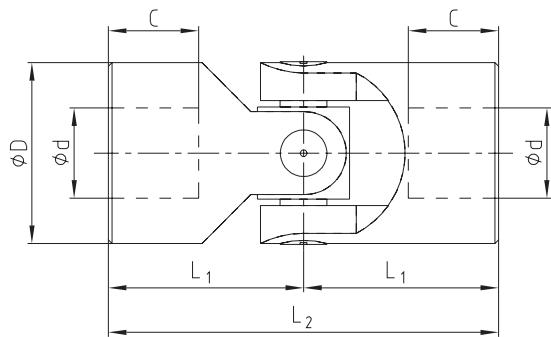

Precision double joint XD

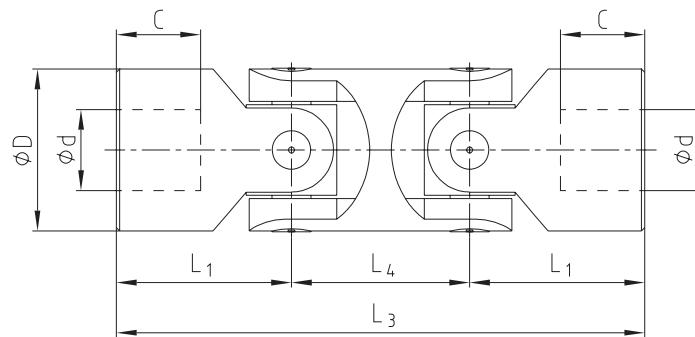

Finish bores:

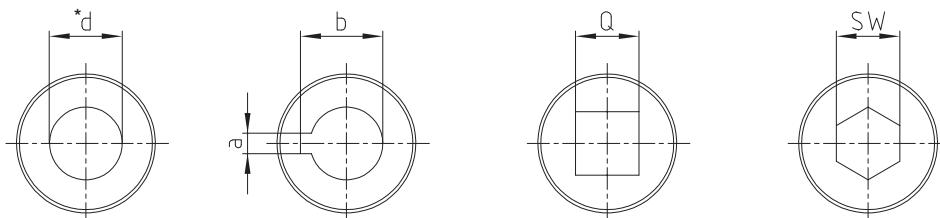

* Standard type of bore, unless requested/ordered otherwise




Type X and XD				Dimensions [mm]										Weight [kg]		
Size X	DIN designation X	Size XD	DIN designation XD	d (H7)	D	L2	L1	C	L4	L3	a (JS9)	b	Q (H10)	SW (H10)	X	XD
01 X	E6 x 16-G	01 XD	D6 x 16-G	6	16	34	17	8	22	56	2	7.0	6	6	0.05	0.08
02 X	E8 x 16-G	02 XD	D8 x 16-G	8	16	40	20	11	22	62	2	9.0	8	8	0.05	0.08
03 X	E10 x 22-G	03 XD	D10 x 22-G	10	22	48	24	12	26	74	3	11.4	10	10	0.10	0.15
04 X	E12 x 25-G	04 XD	D12 x 25-G	12	25	56	28	13	30	86	4	13.8	12	12	0.16	0.25
05 X	E14 x 28-G	05 XD	D14 x 28-G	14	28	60	30	14	36	96	5	16.3	14	14	0.20	0.40
1 X	E16 x 32-G	1 XD	D16 x 32-G	16	32	68	34	16	37	105	5	18.3	16	16	0.30	0.45
3 X	E20 x 42-G	3 XD	D20 x 42-G	20	42	82	41	18	47	129	6	22.8	20	20	0.60	1.00
5 X	E25 x 50-G	5 XD	D25 x 50-G	25	50	108	54	26	55	163	8	28.3	25	25	1.20	2.00
6 X	E30 x 58-G	6 XD	D30 x 58-G	30	58	122	61	29	68	190	8	33.3	30	30	1.85	2.90

Ordering example:

04 X	Ø12	Ø12 keyway to DIN
Size and type of joint	Finish bore (H7)	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)

KTR Precision joints type GR and HR

Plain and needle bearing with quick locking

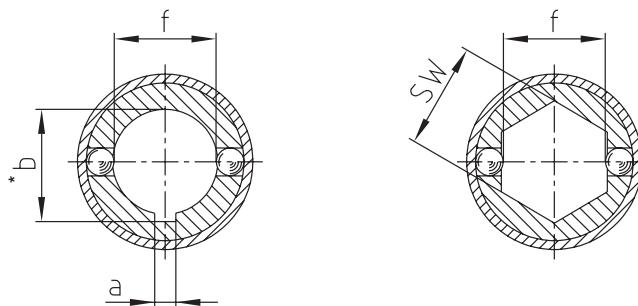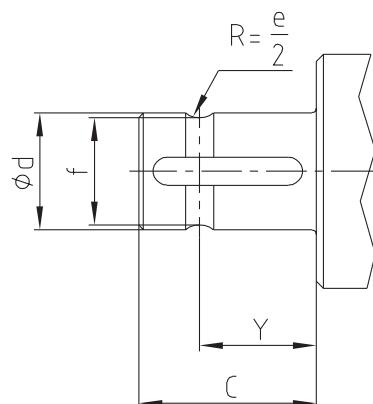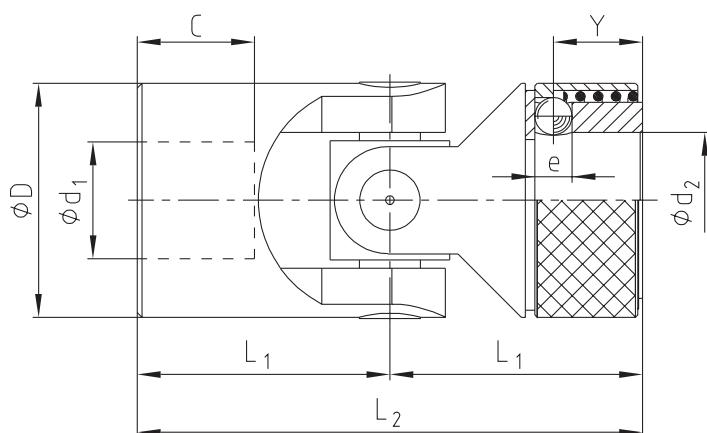


* Standard type of bore, unless requested/ordered otherwise

Type GR with plain bearing $n_{\text{max.}} = 1000 \text{ rpm}$ and type HR with needle bearing $n_{\text{max.}} = 4000 \text{ rpm}$

Size		Dimensions [mm]										Weight [kg]	
GR	HR	d_1, d_2 (H7)	D	L_2	L_1	C	Y	e	f	a (JS9)	b	SW (H10)	
02 GR	-	8	16	52	26	14	9.5	3.5	6.3	2	9.0	8	0.05
03 GR	03 HR	10	22	62	31	17	11.5	4.0	8.7	3	11.0	10	0.12
04 GR	04 HR	12	25	74	37	21	13.5	4.0	11.0	4	13.3	12	0.19
05 GR	05 HR	14	25	74	37	21	13.5	4.0	13.0	5	15.3	14	0.17
1 GR	1 HR	16	32	86	43	24	14.0	6.35	14.8	5	18.3	16	0.34
2 GR	2 HR	18	36	96	48	28	19.0	8.0	16.0	6	20.8	18	0.48
3 GR	3 HR	20	42	108	54	31	19.0	8.0	18.0	6	22.8	20	0.76
4 GR	4 HR	22	45	120	60	34	20.5	10.0	20.0	6	24.8	22	0.97
5 GR	5 HR	25	50	132	66	38	20.5	10.0	23.0	8	28.3	25	1.3
6 GR	6 HR	30	58	166	83	49	25.0	10.0	28.0	8	33.3	30	2.13

Ordering example:	03 HR	$d_1 = \emptyset 10$	$d_2 = \emptyset 10$ keyway to DIN
	Size and type of joint	Finish bore (H7)	Finish bore (H7), feather keyway acc. to DIN 6885 sheet 1 (JS9)

Protection bushings

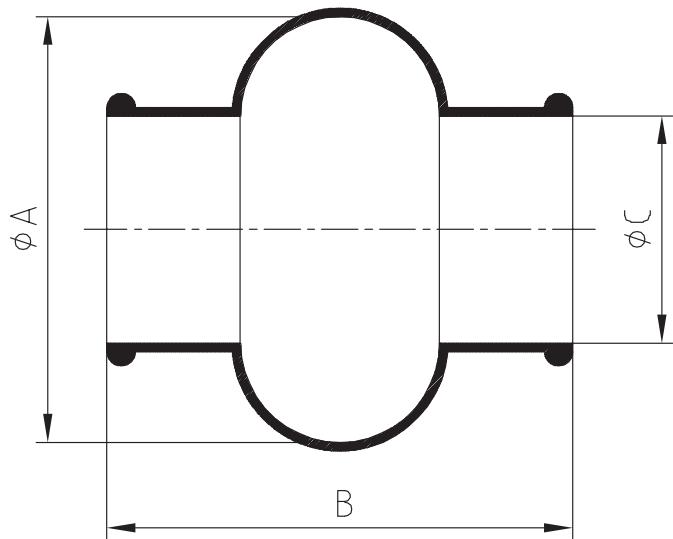

CLAMPEK®

Clamping nuts

Protection bushings				
Size	Precision joints	A	B	C
M 01	01 G, 01 X	28	34	15
M 02	02 G, 02 X, 02 GR	32	40	16.5
M 03	03 G, 03 H, 03 GA, 03 HA, 03 X, 03 GR, 03 HR	40	45	20.5
M 04	04 G, 04 H, 04 GA, 04 HA, 04 X, 04 GR, 04 HR	48	50	24.5
M 05	05 G, 05 H, 05 GA, 05 HA, 05 GR, 05 HR	52	56	27.5
M 1	1 G, 1 H, 1 GA, 1 HA, 1 X, 1 GR, 1 HR	56	65	30.5
M 2	2 G, 2 H, 2 GA, 2 HA, 2 GR, 2 HR	66	72	35.5
M 3	3 G, 3 H, 3 GA, 3 HA, 3 X, 3 GR, 3 HR	75	82	40.0
M 4	4 G, 4 H, 4 GA, 4 HA, 4 GR, 4 HR	84	95	45.0
M 5	5 G, 5 H, 5 GA, 5 HA, 5 X, 5 GR, 5 HR	92	108	50.0
M 6	6 G, 6 H, 6 G1, 6 H1, 6 GA, 6 HA, 6 X, 6 GR, 6 HR	100	122	56.0

KTR Precision joints
Clamping sets



Torque measuring technology

Torque measuring shafts	
Types and operating description	368

DATAFLEX®

Type 16/10, 16/30, 16/50	370
Type 32/100, 32/300, 32/500	372
Type 42/1000	374
Type 70/3000, 70/5000	376
Type 110/10000, 110/20000	378
Connection accessories	379

DATAFLEX® 16



DATAFLEX® 32



DATAFLEX® 42



DATAFLEX® 70



DATAFLEX® 110



TORQUE MEASURING TECHNOLOGY TYPES AND OPERATING DESCRIPTION

Properties of torque measuring shafts

DATAFLEX® 16, 32, 42, 70, 110 – Dual-range measuring shaft providing for high precision with each revolution



The KTR torque sensors type DATAFLEX® 16 to DATAFLEX® 110 cover a torque range from 10 Nm to 20,000 Nm.

The torque is measured using the approved technology of wire strain gauges DMS while processing contactlessly with a resolution of 24 bits. Thus, the inaccuracy of torque measuring is reduced to less than 0.1 % of the measuring range. By integrating a high-resolution speed sensor the new series combines four measurements in one: Measuring the torque, speed, rotation angle and rotation direction is part of the standard equipment. A new feature is the option to switch the measuring range of each measuring shaft to one fifth of the rated torque. This option allows to measure smaller torques precisely without changing the design.

Customised solutions and special designs



In addition to KTR precision measuring shafts KTR manufactures and calibrates customised measuring shafts for measuring ranges up to 500 kNm. In this context key parameters such as measuring range, size, length and coupling type can be adjusted to the specifications. The torque is measured contactlessly so that bearings are not required.

Apart from customised torque sensors KTR provides special solutions with couplings equipped with torque measuring technology so that the design does not have to be modified.

Couplings adjusted to any application




Matching with all series of DATAFLEX® we recommend to use the servo lamine coupling RADEX®-NC and the steel lamine coupling RADEX®-N. Together they form a compact solution which is easy to integrate while having a high stiffness. Basically it is also possible to use backlash-free, plug-in types of couplings such as ROTEX® GS or to fit an overload coupling.

TORQUE MEASURING TECHNOLOGY

TYPES AND OPERATING DESCRIPTION

Product finder of torque measuring shafts

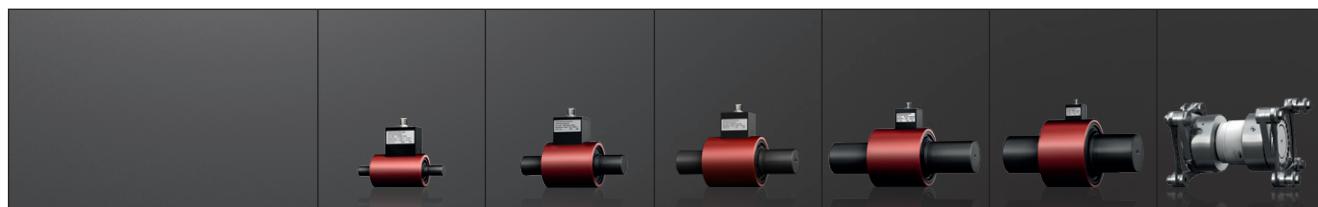

Product	DATAFLEX® 16	DATAFLEX® 32	DATAFLEX® 42	DATAFLEX® 70	DATAFLEX® 110	customised
Maintenance-free	●	●	●	●	●	●
For rotating applications	●	●	●	●	●	●
Dual-range measuring shaft	●	●	●	●	●	—
Measuring range 1 T _{KN} [Nm]	10, 30, 50	100, 300, 500	1000	3000, 5000	10000, 20000	20000 - 500000
Measuring range 2 T _{KN2} [Nm]	2, 6, 10	20, 60, 100	200	600, 1000	2000, 4000	—
Inaccuracy (% of T _{KN} /T _{KN2})	< 0.1 / 0.2	< 0.1 / 0.2	< 0.1 / 0.2	< 0.1 / 0.2	< 0.1 / 0.2	< 0.2
Torque output	-10 ... 10 V	-10 ... 10 V	-10 ... 10 V	-10 ... 10 V	-10 ... 10 V	-10 ... 10 V, 4 ... 20 mA
Speed output						
Square-wave signal [pulses/rev.]	2 x 360	2 x 720	2 x 720	2 x 450	2 x 720	—
DC - direct voltage signal [0 ... 10V]	●	●	●	●	●	—
Direction signal	●	●	●	●	●	—
Maximum speed [rpm]	10,000	7,500	6,500	4,000	3,000	miscellaneous
Coupling recommended	RADEX®-NC 21, 26	RADEX®-NC 36 RADEX®-N 60	RADEX®-N 80	RADEX®-N 90, 115	as specified	as specified
Connection housing DF2	●	●	●	●	●	—

DATAFLEX®

Connection housing DF2 - All inclusive



The connection housing DF2 can easily be combined with all DATAFLEX® torque measuring shafts disposing of a retainer for top hat rail assembly as well as terminal screws for an easy connection of external devices.

The following features save the purchase of expensive measuring amplifiers and converters:

- The torque output can be filtered over 5 steps so that short torque peaks in the display can be reduced.
- The pulsed outputs of the speed signals can be configured both for 5 V (TTL) and 24 V (HTL) controls. This makes the outputs compatible with data logging boards and SPS controls.
- In parallel with the pulse signal an integrated frequency voltage converter supplies a DC voltage from 0 – 10 V proportionally to the speed, the scaling of which can be individually adapted. This makes an expensive counter superfluous so that the signal can either be processed as a voltage or displayed.
- A direction signal indicates the rotational direction of the drive (with DATAFLEX® 16, 32, 42, 70 and 110).

DATAFLEX® 16/10, 16/30, 16/50 DUAL-RANGE TORQUE SENSOR

For torques up to 50 Nm



General properties					
DATAFLEX® type	Measuring range 1 T _{KN} [Nm]	Measuring range 2 T _{KN2} [Nm]	Supply voltage [V]	Current consumption [mA]	Operating temperature range [°C]
16/10	-10 ... +10	-2 ... +2			
16/30	-30 ... +30	-6 ... +6	24 ±4	<100	0 ... 55
16/50	-50 ... +50	-10 ... +10			

Technical data of torque signal				Technical data of speed signal					
DATAFLEX® type	Inaccuracy (% of T _{KN} /T _{KN2}) ^{1), 2), 3)}	Output voltage [V]	Band width [kHz]	Influence of temperature ¹⁾ [%/10 °C]	Resolution [pulses/rev.]	Number of channels	Square-wave signal ⁴⁾ [Vss]	Direct voltage signal ⁴⁾ [V]	Direction signal ⁴⁾ [V]
16/10									
16/30	<0.1/0.2	-10 ... 10	2	0.05	360	2, 90° offset	5/24	0 ... 10, scalable	5/24
16/50									

Mechanical data of torque measuring shaft										
DATAFLEX® type	Static load limit ¹⁾ T _K max [%]	Breaking load T _K break ¹⁾ [%]	Max. bending torque [Nm]	Max. radial force [N]	Max. axial force [kN]	Weight [kg]	Torsion spring stiffness C _T [Nm/rad]	Torsion angle with T _{KN} [°]	Mass moment of inertia [kgmm ²]	Max. speed ⁵⁾ [rpm]
16/10			1.07	12	1.1		910	0.63		
16/30	150	300	3.2	37	2.3	0.7	2840	0.61	22.6	10000
16/50			5.3	61	3.1		4100	0.7		

Mechanical data of combination of DATAFLEX® 16 and RADEX®-NC									
DATAFLEX® type	Coupling			Mechanical data of combination					
	RADEX®-NC size	Clamping screw M		Mass moment of inertia [kgmm ²]	Torsion spring stiffness C _T [Nm/rad]	Weight [kg]	Max. speed ⁵⁾ [rpm]		
		M	T _A [Nm]						
16/10	21	M6	10	323	870				
16/30					2500	1.30			7500
16/50	26	M8	25	800	3600	1.80			

¹⁾ Referring to T_{KN}

²⁾ Referring to T_{KN2}


³⁾ Error in linearity incl. hysteresis

⁴⁾ See page 335: with connection housing DF2


⁵⁾ With high speeds please use coupling hubs that are balanced

Ordering example:	DATAFLEX® 16/30	DF2	2 m, 5 m and 10 m	RADEX®-NC 21 EK Ø16/20-Ø16/30
Type of measuring shaft with measuring range	Connection housing (is required)	Connection cable	If any accessories are requested: coupling type, finish bores D/DW	


Components

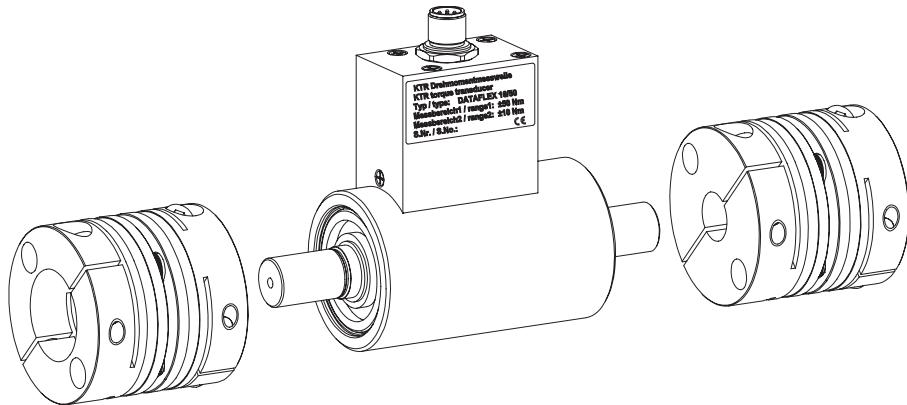

DATAFLEX® 16

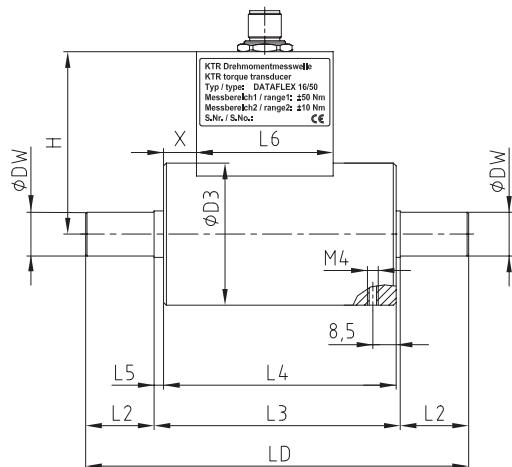

Combination of DATAFLEX® 16 with RADEX®-NC

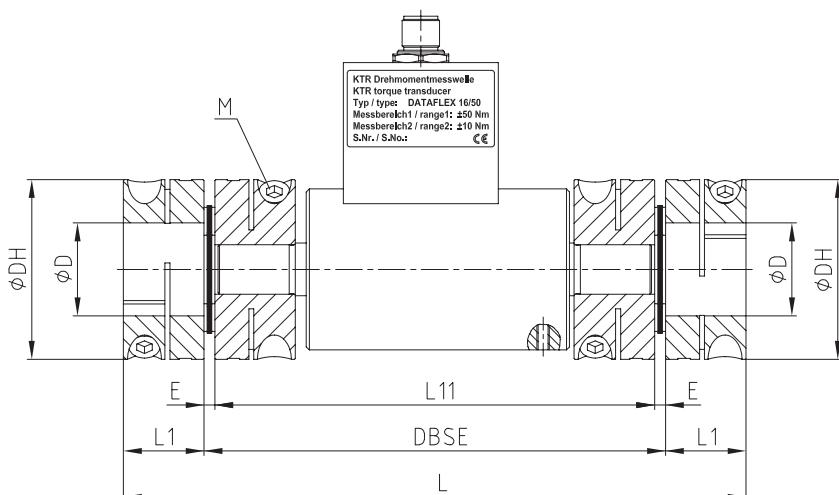

Dimensions [mm] of torque measuring shaft and coupling combination with RADEX®-NC HT

DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X	RADEX®-NC size	DH	D _{max}	DBSE	L	L1	L11	E
16/10											21	58	30	149	201	26	142	3.5
16/30	16	52	140	25	90	85	3.5	50	67	12								
16/50											26	69	38	166	232	33	156	5.0

DATAFLEX® 32/100, 32/300, 32/500 DUAL-RANGE TORQUE SENSOR

For torques up to 500 Nm



General properties													
DATAFLEX® type	Measuring range 1 T _{KN} [Nm]		Measuring range 2 T _{KN2} [Nm]		Supply voltage [V]		Current consumption [mA]		Operating temperature range [°C]				
32/100	-100 ... +100		-20 ... +20		24 ±4		<100		0 ... 55				
32/300	-300 ... +300		-60 ... +60										
32/500	-500 ... +500		-100 ... +100										
Technical data of torque signal					Technical data of speed signal								
DATAFLEX® type	Inaccuracy (% of T _{KN} / T _{KN2}) ^{1), 2), 3)}	Output voltage [V]	Band width [kHz]	Influence of temperature ¹⁾ [%/10 °C]	Resolution [pulses/rev.]	Number of channels	Square-wave signal ⁴⁾ [V _{ss}]	Direct voltage signal ⁴⁾ [V]	Direction signal ⁴⁾ [V]				
32/100	<0.1 / 0.2	-10 ... 10	2	0.05	720	2, 90° offset	5/24	0 ... 10, scalable	5/24				
32/300													
32/500													
Mechanical data of torque measuring shaft													
DATAFLEX® type	Static load limit ¹⁾ T _K max [%]	Breaking load TK break ¹⁾ [%]	Max. bending torque [Nm]	Max. radial force [N]	Max. axial force [kN]	Weight [kg]	Torsion spring stiffness C _T [Nm/rad]	Torsion angle with T _{KN} [°]	Mass moment of inertia [kgmm ²]	Max. speed ⁵⁾ [rpm]			
32/100			11	110	5.0		18000	0.32	219				
32/300	150	300	32	320	10.4	1.9	46000	0.37	221	7500			
32/500			53	530	14.6		60000	0.48	224				
Mechanical data of combination of DATAFLEX® 32 and RADEX®-NC													
DATAFLEX® type	Coupling			Mechanical data of combination									
	RADEX®-NC/ RADEX®-N size	Setscrew/clamping screw			Mass moment of inertia [kgmm ²]	Torsion spring stiffness C _T [Nm/rad]	Weight [kg]	Max. speed ⁵⁾ [rpm]					
		G	T	T _A [Nm]									
32/100	RADEX®-NC 36	M10	–	49	1097	15800	3.80	7500					
32/300	RADEX®-N 60	M8	20	10	17900	40000	11.65	6700					
32/500						49000	11.70						

¹⁾ Referring to T_{KN}


²⁾ Referring to T_{KN2}

³⁾ Error in linearity incl. hysteresis

⁴⁾ See page 335: with connection housing DF2


⁵⁾ With high speeds please use coupling hubs that are balanced

DATAFLEX® 32

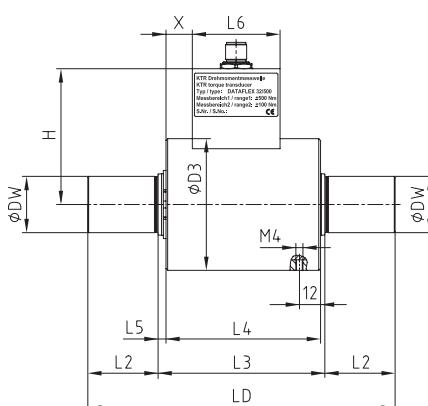


Ordering example:	DATAFLEX® 32/300	DF2	2 m, 5 m and 10 m	RADEX®-N 60 NN Ø32/50 keyway to DIN Ø32/60 keyway to DIN
Type of measuring shaft with measuring range	Connection housing (is required)	Connection cable	If any accessories are requested: coupling type, finish bores D/DW	


Components

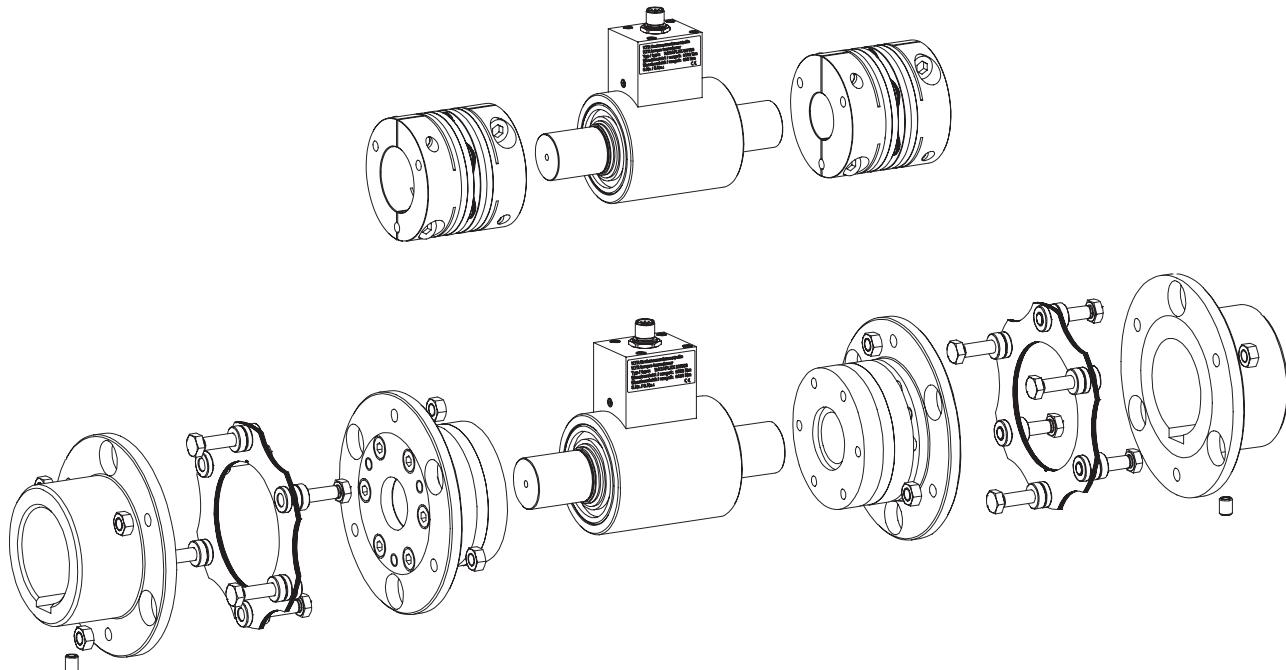

Combination of DATAFLEX® 32 with RADEX®-NC

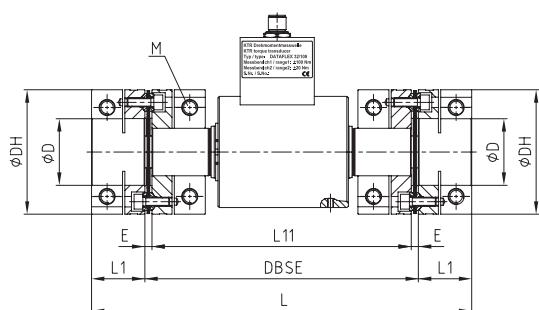

Combination of DATAFLEX® 32 with RADEX®-N

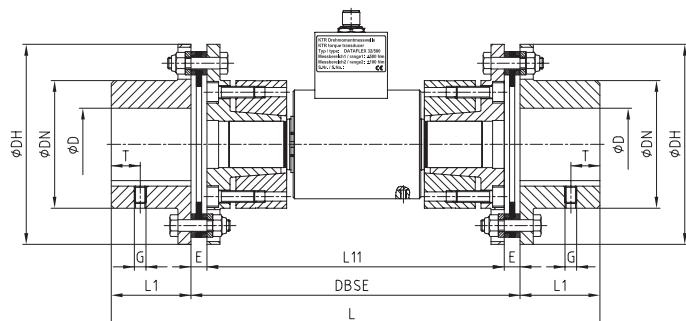

Dimensions [mm] of torque measuring shaft and coupling combination with RADEX®-NC size

DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X	RADEX®-NC size	DH	D _{max}	DBSE	L	L1	L11	E
32/100	32	75	175	40	95	88	4.5	50	77.3	15	36	84	45	184.6	256.6	36	175	4.8

Dimensions [mm] of torque measuring shaft and coupling combination with RADEX®-N size

DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X	RADEX®-N size	DH	DN	D _{max}	DBSE	L	L1	L11	E
32/300	32	75	175	40	95	88	4.5	50	77.3	15	60	138	88	60	227	337	55	205	11
32/500																			

DATAFLEX® 42/1000

DUAL-RANGE TORQUE SENSOR

For torques up to 1000 Nm



General properties								
DATAFLEX® type	Measuring range 1 T _{KN} [Nm]	Measuring range 2 T _{KN2} [Nm]	Supply voltage [V]		Current consumption [mA]		Operating temperature range [°C]	
42/1000	-1000 ... +1000	-200 ... +200	24 ±4		<100		0 ... 55	
Technical data of torque signal					Technical data of speed signal			
DATAFLEX® type	Inaccuracy (% of T _{KN} /T _{KN2}) ^{1), 2), 3)}	Output voltage [V]	Band width [kHz]	Influence of temperature ¹⁾ [%/10 °C]	Resolution [pulses/rev.]	Number of channels	Square-wave signal ⁴⁾ [V _{ss}]	Direct voltage signal ⁴⁾ [V]
42/1000	<0.1 / 0.2	-10 ... 10	2	0.05	720	2, 90° offset	5 / 24	0 ... 10, scalable
Technical data of speed signal								

Mechanical data of torque measuring shaft										
DATAFLEX® type	Static load limit ¹⁾ T _K max [%]	Breaking load T _K break ¹⁾ [%]	Max. bending torque [Nm]	Max. radial force [N]	Max. axial force [kN]	Weight [kg]	Torsion spring stiffness C _T [Nm/rad]	Torsion angle with T _{KN} [°]	Mass moment of inertia [kgmm ²]	
42/1000	150	300	107	780	24	3.43	132000	0.43	710	6500

Mechanical data of combination of DATAFLEX® 42 and RADEX®-N									
DATAFLEX® type	Coupling			Mechanical data of combination					
	RADEX®-N size	Setscrew		Mass moment of inertia [kgmm ²]	Torsion spring stiffness C _T [Nm/rad]	Weight [kg]		Max. speed ⁵⁾ [rpm]	
		G	T	T _A [Nm]					
42/1000	80	M10	20	17	61000	107000	23.1	5100	

¹⁾ Referring to T_{KN}

²⁾ Referring to T_{KN2}


³⁾ Error in linearity incl. hysteresis

⁴⁾ See page 335: with connection housing DF2


⁵⁾ With high speeds please use coupling hubs that are balanced

Ordering example:	DATAFLEX® 42/1000	DF2	2 m, 5 m and 10 m	RADEX®-N 80 NN Ø42/50 keyway to DIN Ø42/60 keyway to DIN
Type of measuring shaft with measuring range	Connection housing (is required)	Connection cable	If any accessories are requested: coupling type, finish bores D/DW	


Components

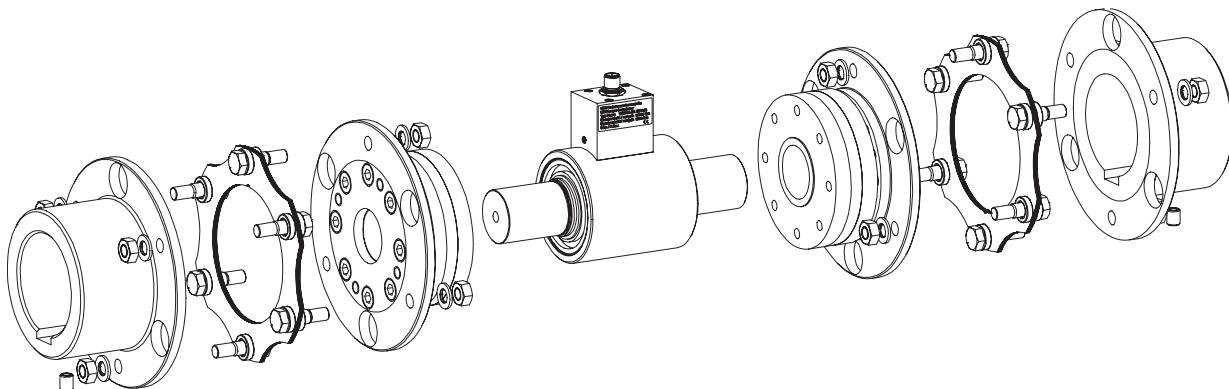

DATAFLEX® 42

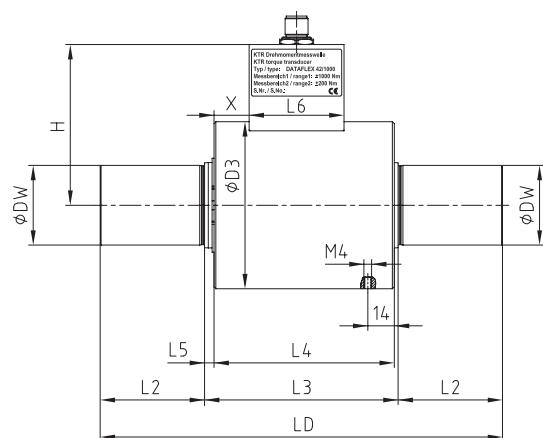

Combination of DATAFLEX® 42 with RADEX®-N

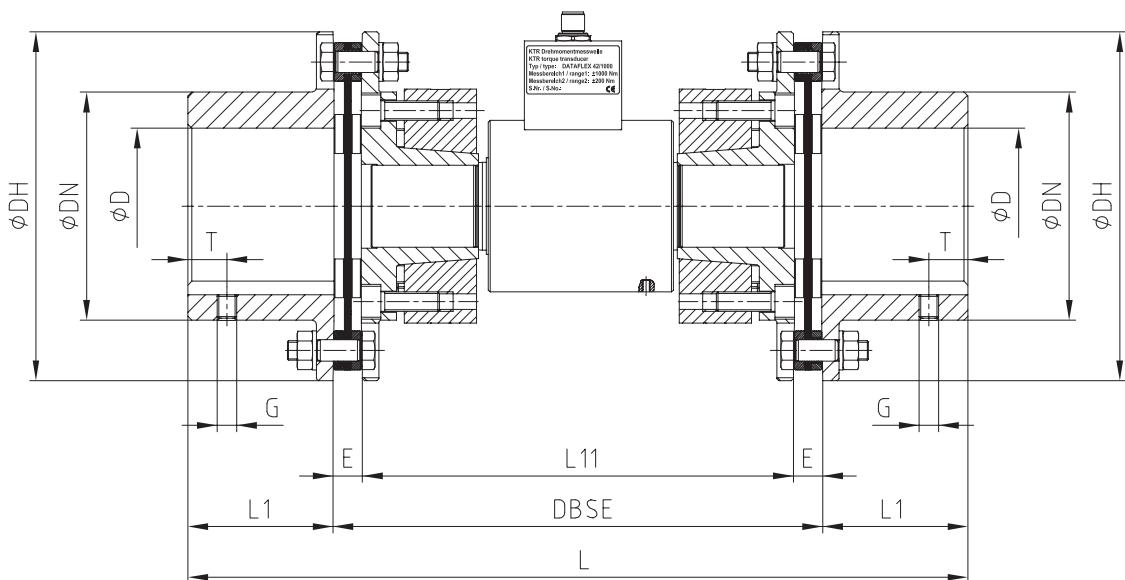

Dimensions [mm] of torque measuring shaft and coupling combination

DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X	RADEX®-N size	DH	DN	D _{max}	DBSE	L	L1	L11	E
42/1000	42	88	212	55	102	95	5	50	84.7	18.5	80	179	117	80	250	400	75	222	14

DATAFLEX® 70/3000, 70/5000 DUAL-RANGE TORQUE SENSOR

For torques up to 5000 Nm



General properties					
DATAFLEX® type	Measuring range 1 TKN [Nm]	Measuring range 2 TKN2 [Nm]	Supply voltage [V]	Current consumption [mA]	Operating temperature range [°C]
70/3000	-3000 ... +3000	-600 ... +600	24 ±4	<100	0 ... 55
70/5000	-5000 ... +5000	-1000 ... +1000			

DATAFLEX® type	Technical data of torque signal				Technical data of speed signal				
	Inaccuracy (% of TKN/ TKN2) ^{1), 2), 3)}	Output voltage [V]	Band width [kHz]	Influence of temperature ¹⁾ [%/10 °C]	Resolution [pulses/rev.]	Number of channels	Square-wave signal ⁴⁾ [Vss]	Direct voltage signal ⁴⁾ [V]	Direction signal ⁴⁾ [V]
70/3000	< 0.1 / 0.2	-10 ... 10	2	0.05	450	2, 90° offset	5/24	0 ... 10, scalable	5/24
70/5000									

Mechanical data of torque measuring shaft											
DATAFLEX® type	Static load limit ¹⁾ TK max [%]	Breaking load TK break ¹⁾ [%]	Max. bending torque [Nm]	Max. radial force [N]	Max. axial force [kN]	Weight [kg]	Torsion spring stiffness C _T [Nm/rad]	Torsion angle with TKN [°]	Mass moment of inertia [kgmm ²]	Max. speed ⁵⁾ [rpm]	
70/3000	150	300	320	1700	48	12.30	395000	0.44	7200	4000	
70/5000			520	2800	66	12.45	500000	0.57	7300		

Mechanical data of combination of DATAFLEX® 70 and RADEX®-N									
DATAFLEX® type	Coupling				Mechanical data of combination				
	RADEX®-N size	Setscrew			Mass moment of inertia [kgmm ²]	Torsion spring stiffness C _T [Nm/rad]	Weight [kg]	Max. speed ⁵⁾ [rpm]	
		G	T	T _A [Nm]					
70/3000	90	M12	25	40	155200	283000	44.7	4000	
70/5000	115		30		470000	389000	77.6	3400	

¹⁾ Referring to TKN

²⁾ Referring to TKN2


³⁾ Error in linearity incl. hysteresis

⁴⁾ See page 335: with connection housing DF2


⁵⁾ With high speeds please use coupling hubs that are balanced

Ordering example:	DATAFLEX® 70/5000	DF2	2 m, 5 m and 10 m	RADEX®-N 115 NN Ø65/60 keyway to DIN Ø65/70 keyway to DIN
Type of measuring shaft with measuring range	Connection housing (is required)	Connection cable	If any accessories are requested: coupling type, finish bores D/DW	


Components

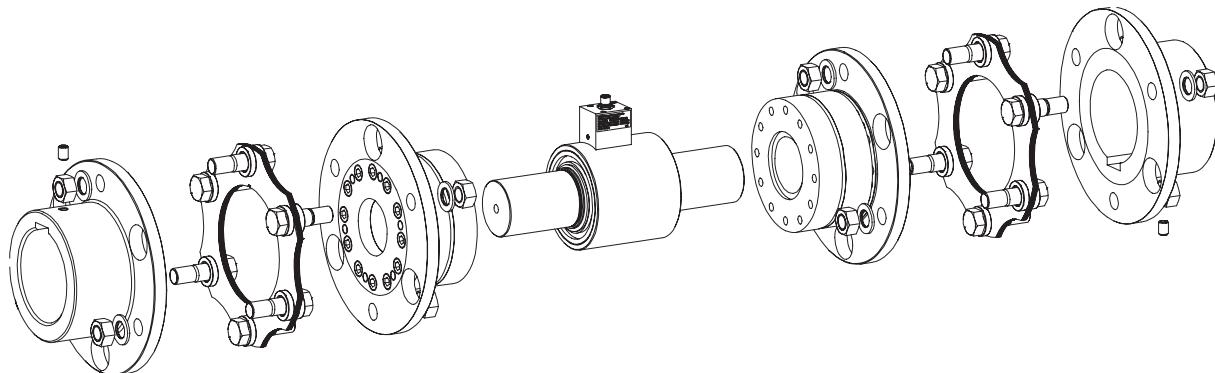

DATAFLEX® 70

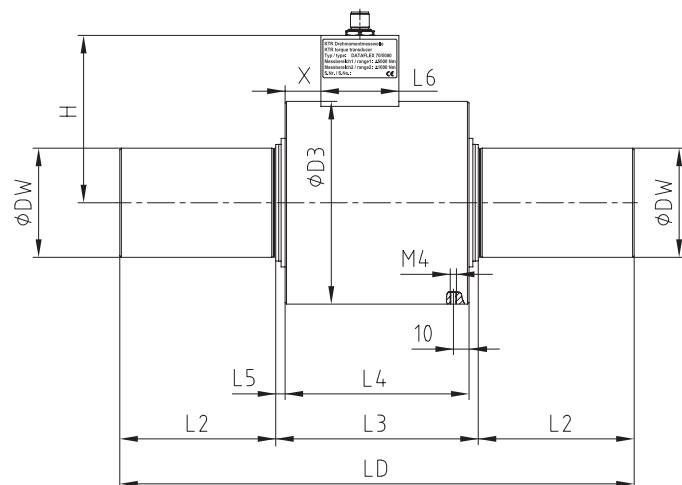

Combination of DATAFLEX® 70 with RADEX®-N

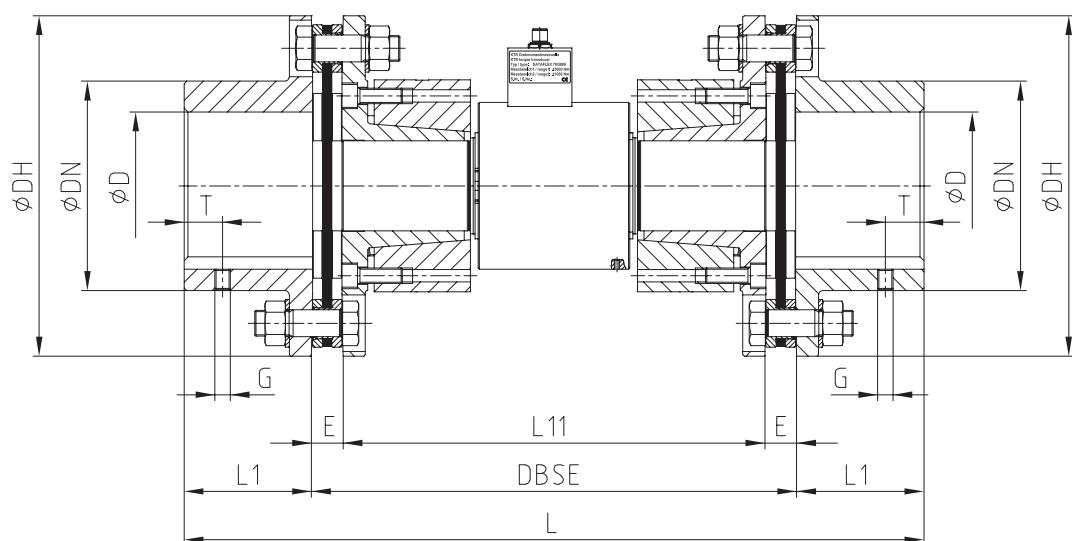

DATAFLEX®

Dimensions [mm] of torque measuring shaft and coupling combination


DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X	RADEX®-N size	DH	DN	D _{max}	DBSE	L	L1	L11	E
70/3000	70	130	330	100	130	118	6	50	107.35	23	90	210	132	90	360	520	80	330	15
70/5000											115	265	163	115	376	576	100		23

DATAFLEX® 110/10000, 110/20000 DUAL-RANGE TORQUE SENSOR

For torques up to 20000 Nm



DATAFLEX® 110

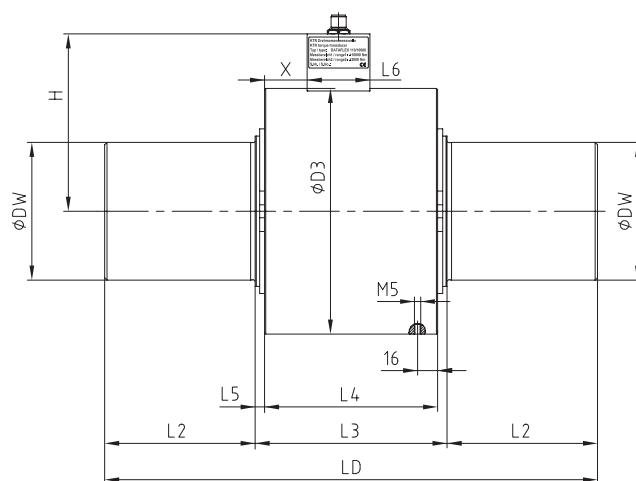

General properties

DATAFLEX® type	Measuring range 1 T _{KN} [Nm]	Measuring range 2 T _{KN2} [Nm]	Supply voltage [V]	Current consumption [mA]	Operating temperature range [°C]
110/10000	- 10000 ... + 10000	- 2000 ... + 2000	24 ±4	<100	0 ... 55
110/20000	- 20000 ... + 20000	- 4000 ... + 4000			

Technical data of torque signal

Technical data of speed signal

DATAFLEX® type	Inaccuracy (% of T _{KN} /T _{KN2}) ^{1), 2), 3)}	Output voltage [V]	Band width [kHz]	Influence of temperature ¹⁾ [%/10 °C]	Resolution [pulses/rev.]	Number of channels	Square-wave signal ⁴⁾ [V _{ss}]	Direct voltage signal ⁴⁾ [V]	Direction signal ⁴⁾ [V]
110/10000	< 0.1 / 0.2	-10 ... +10	2	0.05	720	2, 90° offset	5/24	0 ... 10, scalable	5/24
110/20000									

Mechanical data of torque measuring shaft

DATAFLEX® type	Static load limit ¹⁾ T _K max [%]	Breaking load T _K break ¹⁾ [%]	Max. bending torque [Nm]	Max. radial force [N]	Max. axial force [kN]	Weight [kg]	Torsion spring stiffness C _T [Nm/rad]	Torsion angle with T _{KN} [°]	Mass moment of inertia [kgmm ²]	Max. speed ⁵⁾ [rpm]
110/10000	150	300	1033	4700	106	35.72	2270000	0.25	0.0562	3000
110/20000			2037	9300	166	36.20	3550000	0.32	0.0569	

Dimensions [mm] of torque measuring shaft

DATAFLEX® type	DW	D3	LD	L2	L3	L4	L5	L6	H	X
110/10000	110	196	393	120	153	138	7.5	50	141.4	34
110/20000										

¹⁾ Referring to T_{KN}

²⁾ Referring to T_{KN2}

³⁾ Error in linearity incl. hysteresis



⁴⁾ See page 335: with connection housing DF2

⁵⁾ With high speeds please use coupling hubs that are balanced

Ordering example:	DATAFLEX® 110/10000	DF2	2 m, 5 m and 10 m
	Type of measuring shaft with measuring range	Connection housing (is required)	Connection cable

DATAFLEX® CONNECTION ACCESSORIES OF TORQUE MEASURING SHAFTS

Connection housing DF2 and connection cable

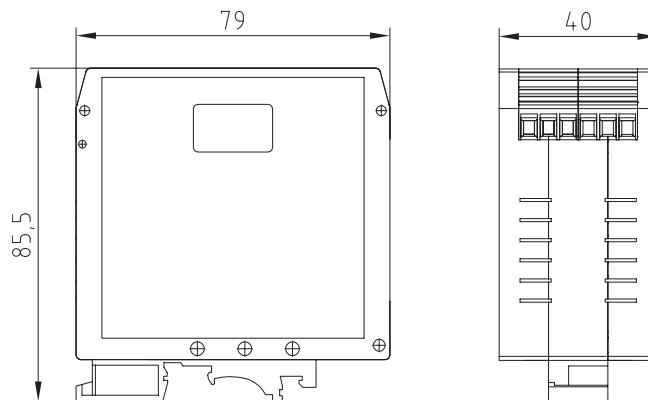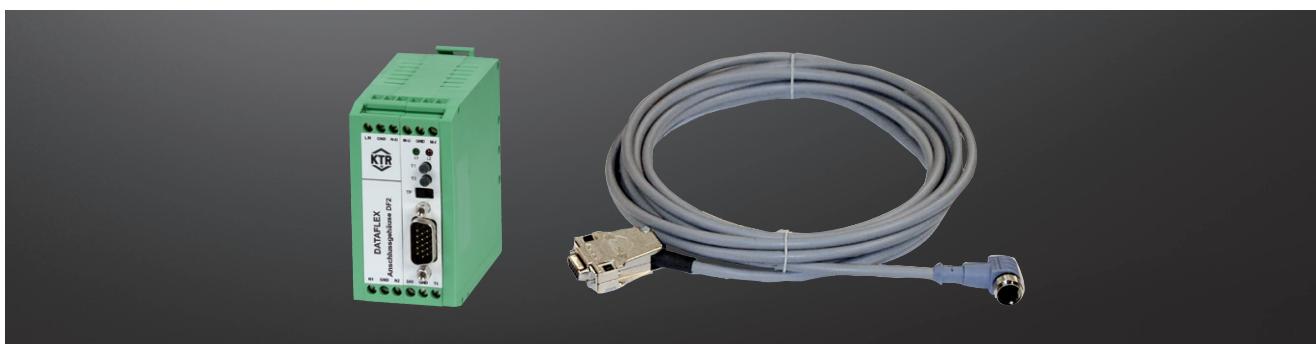

Connection cable and connection housing DF2						
Description	Function	DATAFLEX® 16	DATAFLEX® 32	DATAFLEX® 42	DATAFLEX® 70	DATAFLEX® 110
Connections DF2						
Input of operating voltage						
24 V	Supply voltage +			24 V DC ± 4V / 100mA max.		
GND	Supply voltage -					
Torque output						
M-U	Voltage output +			-10 V ... 10V		
GND				Mass of torque output		
M-I	Current output	-	-	-	-	-
Speed pulsed outputs						
N1	Pulsed output speed track 1	HTL, TTL (24 V, 5 V, 360 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)	HTL, TTL (24 V, 5 V, 450 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)
GND				Mass of pulsed output		
N2	Pulsed output speed track 2	HTL, TTL (24 V, 5 V, 360 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)	HTL, TTL (24 V, 5 V, 450 pulses/rev.)	HTL, TTL (24 V, 5 V, 720 pulses/rev.)
Speed of direct voltage output						
R/L	Direction signal speed			HTL, TTL (24 V, 5 V, CW = 1)		
GND				Mass of direct voltage output speed		
N-U	Voltage output speed			0 V ... 10 V (scalable)		
Other connections / operating devices						
T1	Sensor T1 - connection			External push button connection T1		
L1, L2	Signal LEDs			Condition monitoring		
T1, T2	Sensor T1, T2			Sensor for programming		
TP	Switch low pass			Filter for torque signal to be set in four levels		
Connection cable						
Lengths of connection cable				2, 5, 10 m, other lengths on request		

Summary of literature

No matter if a perfect drive, a brake that takes effect, space-saving cooling or accurate hydraulics is required, if on land, by sea or at an airy height - KTR's product portfolio is just as manifold as its applications. The following catalogues and leaflets provide an overview. Available at www.ktr.com

Product catalogues



Made for Motion **KTR**

Drive Technology

Couplings
Torque Limiters
Clamping Sets
Torque Measuring Shafts

www.ktr.com



Made for Motion **KTR**

Brake Systems

KTR-STOP®
EMB-STOP

www.ktr.com

ATEX leaflet



Made for Motion **KTR**

Explosion Protection

The ATEX standard and the
KTR programme for explosion-proof applications

www.ktr.com

Company leaflet



Made for Motion **KTR**

Achieving Great Things Together

A Company Introduces Itself

www.ktr.com



KTR Germany:

Headquarters:

KTR Systems GmbH
Carl-Zeiss-Straße 25
D-48432 Rheine
Phone: +49 5971 798-0
Fax: +49 5971 798-698 or 798-450
E-mail: mail@ktr.com
Internet: www.ktr.com

KTR Brake Systems GmbH

Competence Center for Brake Systems
Zur Brinke 14
D-33758 Schloß Holte-Stukenbrock
Phone: +49 5207 99161-0
Mobile: +49 175 2650033
Fax: +49 5207 99161-11

Leiter Vertrieb Bremsen Wind

Jürgen Edzards, Dipl.-Ing. (FH)
Zur Brinke 14
D-33758 Schloß Holte-Stukenbrock
Phone: +49 5207 99161-0
Mobile: +49 175 2650033
E-mail: j.edzards@ktr.com

Leiter Vertrieb Bremsen Industrie

Thomas Wienkotte, Dipl.-Ing. (FH)
Am Rott 18
D-50171 Kerpen
Phone: +49 2237 971796
Mobile: +49 172 5859448
E-mail: t.wienkotte@ktr.com

Außendienst Norddeutschland für Hydraulik-Komponenten

Gunnar Ehlers
Finkenstieg 4b
21629 Neu Wulmstorf
Mobile: +49 174 3301536
E-mail: g.ehlers@ktr.com

Außendienst Bayern, Baden-Württemberg und Österreich für Hydraulik-Komponenten

Klaus-Peter Sprödhuber
Hussengutstr. 55
95445 Bayreuth
Phone: +49 921 16388991
Mobile: +49 172 1096496
E-mail: k.sproedhuber@ktr.com

Schleswig-Holstein, Nord-Niedersachsen, Hamburg, Bremen

Martin Lau, Maschinenbautechniker
KTR Ingenieurbüro Hamburg
Geschwister-Scholl-Allee 44
25524 Itzehoe
Phone: +49 4821 4050812
Mobile: +49 172 5310014
E-mail: m.lau@ktr.com

NRW: Großraum Düsseldorf, Köln, Aachen

John Wein,
B. Sc. Wirtschaftsingenieurwesen
Carl-Zeiss-Straße 25
48432 Rheine
Mobile: +49 151 62489605
E-mail: j.wein@ktr.com

Emsland, Mitte- und Süd-Niedersachsen, Ostwestfalen

Rainer Lüttmann
KTR Systems GmbH
Carl-Zeiss-Straße 25
48432 Rheine
Phone: +49 5971 798-340
Mobile: +49 172 5322164
E-mail: r.luettmann@ktr.com

Siegerland

René Szabó, Maschinenbautechniker
Waldstr. 67
57080 Siegen-Niederschelden
Phone: +49 5971 798 7777
Mobile: +49 175 81 64 844
E-mail: r.szabo@ktr.com

Ruhrgebiet, Hessen-Nord

René Pottmann, Maschinenbautechniker
KTR Ingenieurbüro Dortmund
Lindemannstraße 9
44137 Dortmund
Phone: +49 231 91259060
Mobile: +49 162 2186045
E-mail: r.pottmann@ktr.com

Hessen, Rheinland-Pfalz, Saarland

Martin Dietrich, Ingenieur Maschinenbau
KTR Ingenieurbüro Frankfurt
Schorbachstr. 9
35510 Butzbach
Phone: +49 6033 9248494
Mobile: +49 172 5329968
E-mail: m.dietrich@ktr.com

Berlin, Mecklenburg-Vorpommern Südost, Sachsen-Anhalt, Brandenburg

Thüringen Nord, Sachsen
Norman Schlag, Tech. BW (IHK)
KTR Ingenieurbüro Leipzig
Hauptstraße 101
04416 Markkleeberg
Phone: +49 341 35416467
Mobile: +49 173 4716266
E-mail: n.schlag@ktr.com

Baden-Württemberg Nord

Eberhard Maier, Dipl.-Ing. (FH)
Hortensienweg 1
70374 Stuttgart, Sommerrain
Phone: +49 7116 5842957
Mobile: +49 172 5355056
E-mail: e.maier@ktr.com

Baden-Württemberg Süd

Jochen Glöckler, Maschinenbautechniker
KTR Ingenieurbüro Balingen
Hölzlestraße 44
72336 Balingen
Phone: +49 7116 5842957
Mobile: +49 172 5310049
E-mail: j.gloeckler@ktr.com

Bayern-Nord, Thüringen Süd

Alexander Ennulat, Dipl.-Ing.
KTR Ingenieurbüro Römerstein
Grabensteller Str. 28
72587 Römerstein


Phone: +49 7382 9369226
Mobile: +49 162 4160354
E-mail: a.ennulat@ktr.com

Bayern-Süd, Baden-Württemberg Ost

Peter Benkard, Dipl.-Ing. (FH)
KTR Ingenieurbüro Adelsried
Am Mittelfeld 13
86477 Adelsried
Phone: +49 8293 9605-04
Mobile: +49 172 5313059
E-mail: p.benkard@ktr.com

For all representatives and sales partners please refer to www.ktr.com.

NOTES

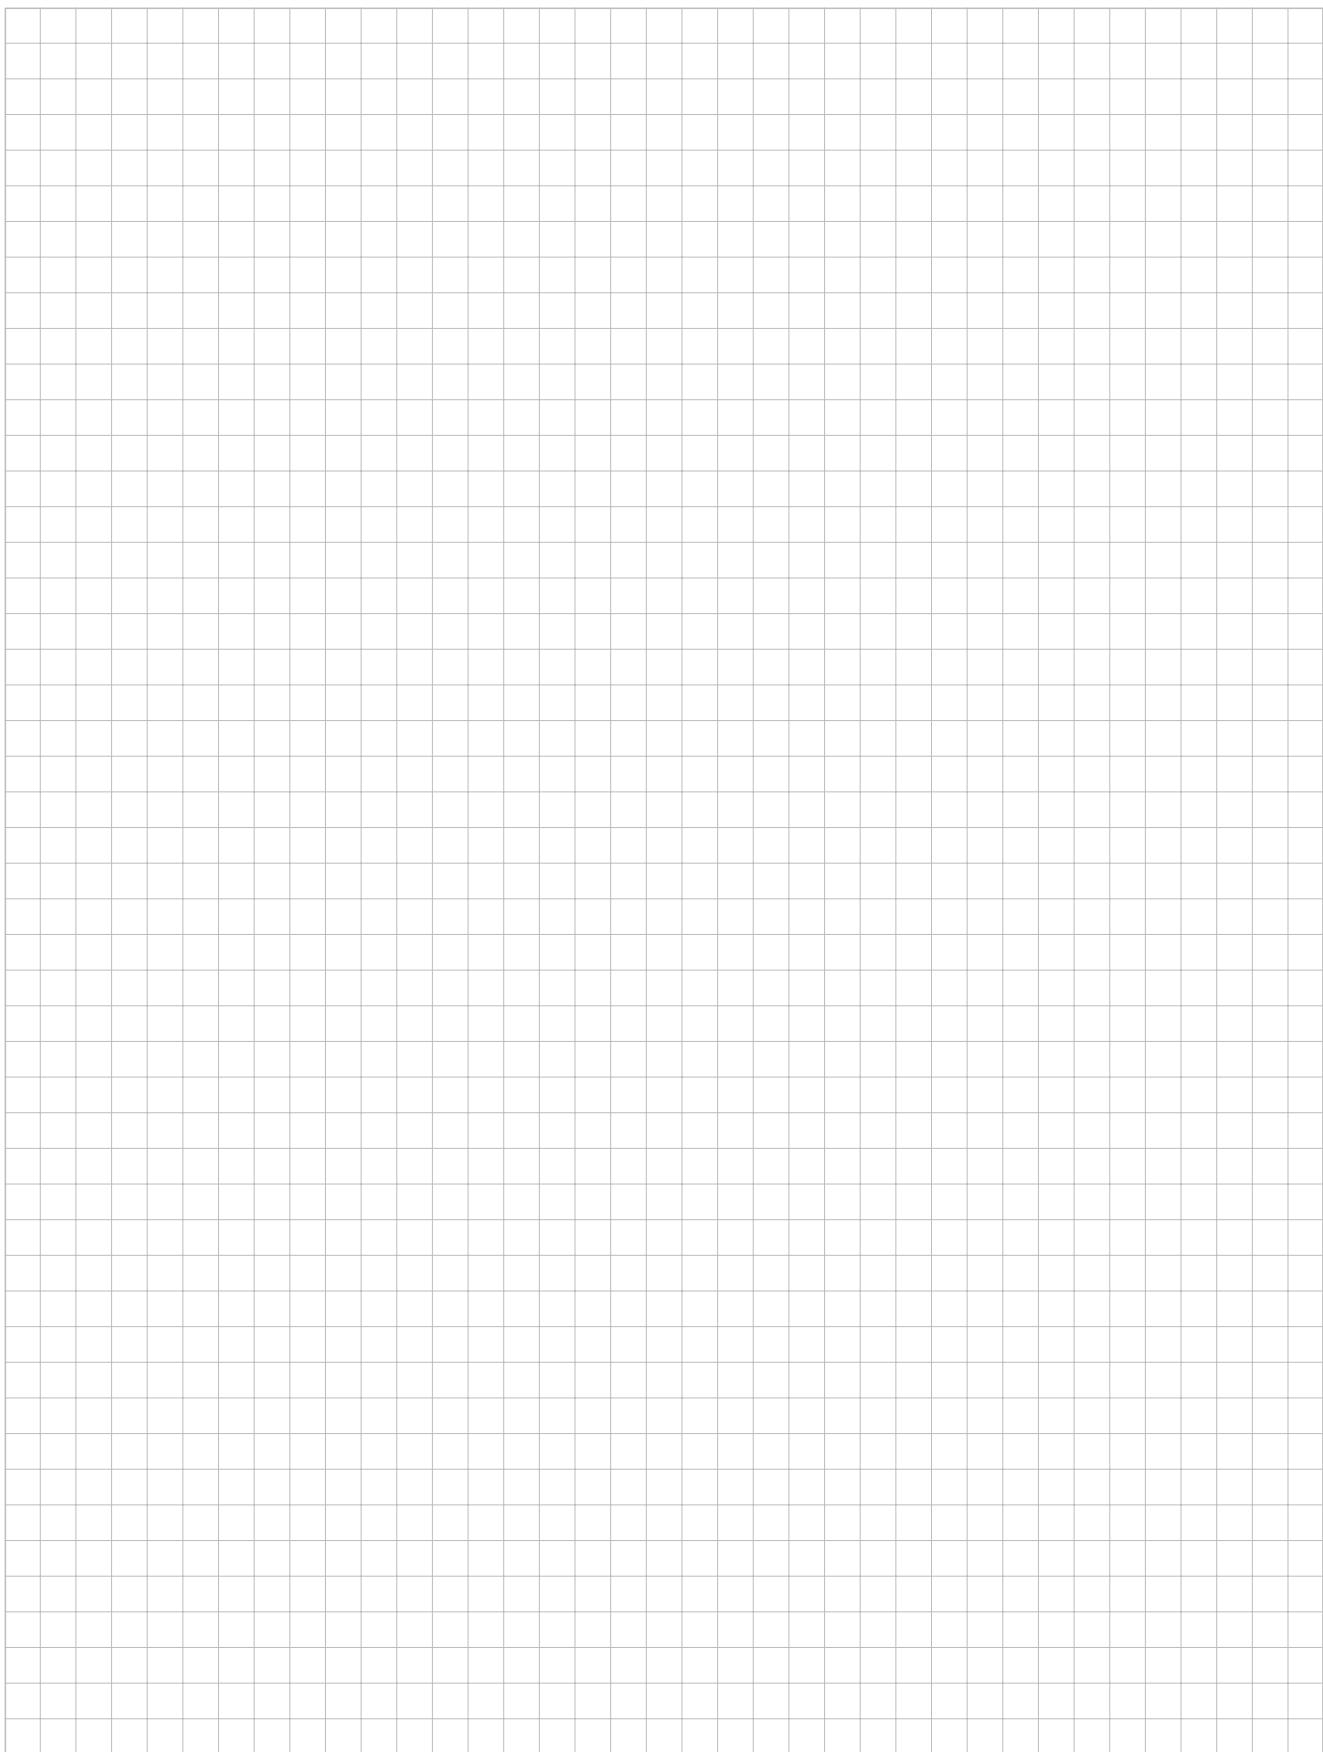

NOTES



KTR worldwide:

Algeria

KTR Algérie
22, Avenue des frères Bouadou
Bir Mourad Rais -16013-Alger.
Phone: +213 661 92 24 00
E-mail: ktr-dz@ktr.com

Brazil

KTR do Brasil Ltda.
Rua Jandaia do Sul 471 -
Bairro Emiliano Perneta
Pinhais - PR - Cep: 83324-040
Phone: +55 41 36 69 57 13
E-mail: ktr-br@ktr.com

Chile

KTR Systems Chile SpA
Calle Bucarest 17
Oficina 33 Providencia
Santiago de Chile
Phone: +56 23 22 46 674
Mobile: +56 9 44 75 57 02
E-mail: ktr-cl@ktr.com

China

KTR Power Transmission Technology
(Shanghai) Co. Ltd.
Building 1005, ZOBON Business Park
999 Wangqiao Road
Pudong
Shanghai 201201
Phone: +86 21 58 38 18 00
Fax: +86 21 58 38 19 00
E-mail: ktr-cn@ktr.com

Czech Republic

KTR CR, spol. s r.o.
Brněnská 559
569 43 Jevíčko
Czech Republic
Phone: +420 461 325 014
E-mail: ktr-cz@ktr.com

Denmark

KTR Systems Danmark ApS
Vejlsøvej 51, Bygning N
8600 Silkeborg
Phone: +45 39 39 10 50
E-mail: ktr-dk@ktr.com

Finland

KTR Finland OY
Tiistinnytntie 4
FIN-02230 Espoo
Phone: +358 2 07 41 46 10
E-mail: ktr-fi@ktr.com

France

KTR France SAS
5 Chemin de la Brocardière
CS 71359
F-69573 DARDILLY CEDEX
Phone: +33 4 78 64 55 26
Fax: +33 4 78 64 54 31
E-mail: ktr-fr@ktr.com

India

KTR Couplings (India) Pvt. Ltd.,
T - 36 / 37 / 38 / 39, MIDC Bhosari,
Pune - 411 026
Phone: +91 20 27 12 73 24/25
Fax: +91 20 27 12 73 23
E-mail: ktr-in@ktr.com; india.sales@ktr.com

Italy

KTR Systems GmbH
Sede Secondaria Italia
Via Giacomo Brodolini, 8
I - 40133 Bologna (BO)
Phone: +39 051 613 32 32
Fax: +39 051 298 55 77
E-mail: ktr-it@ktr.com

Japan

KTR Japan Co., Ltd.
c/o The Sumitomo Warehouse Co., Ltd.
Kobe Branch, Chuo Logistics Center L-6
7-14 Minatojima, Chuo-ku, Kobe City,
Hyogo 650-0045 Japan
Phone: +81 78 381 84 01
Fax: +81 78 945 85 60
E-mail: ktr-jp@ktr.com

Korea

KTR Korea Ltd.
#604, Songwon bldg., 89-10, Galmaejungang-ro, Guri-si, Gyeonggi-do,
11901 Korea
Phone: +82 3 15 69 45 10
Fax: +82 3 15 69 45 25
E-mail: ktr-kr@ktr.com

Netherlands

KTR Benelux B. V.
Postbus 87
Oosterveldsingel 3
NL-7558 PJ Hengelo (O)
Phone: +31 74 2553680
E-mail: ktr-nl@ktr.com

Norway

KTR Systems Norge AS
Lahaugmoveien 81
N-2013 Skjetten
Phone: +47 64 83 54 90
E-mail: ktr-no@ktr.com

Poland

KTR Polska Sp. z.o.o.
ul. Czerwone Maki 65
PL-30-392 Kraków
Phone: +48 12 267 28 83
E-mail: ktr-pl@ktr.com

Russia

KTR RUS LLC
6 Verhnii Pereulok 12
Litera A, Office 229
194292 St. Petersburg
Phone: +7 812 383 51 20
Fax: +7 812 383 51 25
E-mail: ktr-ru@ktr.com
Internet: www.ktr.ru

South Africa

KTR Couplings SA (Pty) Ltd.
28 Spartan Road, Kempton Park,
Spartan Ext. 21
Phone: +27 11 281 3801
Fax: +27 11 281 3812
E-mail: ktr-za@ktr.com

Spain

KTR Systems GmbH
Estartxte, nº 5-Oficina 322
E-48940 Leioa (Vizcaya)
Phone: +34 9 44 80 39 09
Fax: +34 9 44 31 68 07
E-mail: ktr-es@ktr.com

Sweden

KTR Sverige AB
Box 7010
S-187 11 Täby
Phone: +46 86 25 02 90
E-mail: info.se@ktr.com

Switzerland

KTR Systems Schweiz AG
Bahnstr. 60
CH-8105 Regensdorf
Phone: +41 4 33 11 15 55
Fax: +41 4 33 11 15 56
E-mail: ktr-ch@ktr.com

Taiwan

KTR Taiwan Ltd.
No. 30-1, 36 Rd., Taichung Industry Zone,
Xitun Dist., Taichung City 40768,
Taiwan (R.O.C)
Phone: +886 4 23 59 32 78
Fax: +886 4 23 59 75 78
E-mail: ktr-tw@ktr.com

Turkey

KTR Turkey
Güç Aktarma Sistemleri San. ve Tic. Ltd.
Sti. Kayışdagı Cad. No: 117/2
34758 Ataşehir -İstanbul
Phone: +90 216 574 37 80
Fax: +90 216 574 34 45
E-mail: ktr-tr@ktr.com

United Kingdom

KTR U.K. Ltd.
Robert House
Unit 7, Acorn Business Park
Woodseats Close
Sheffield
United Kingdom, S8 0TB
Phone: +44 11 42 58 77 57
Fax: +44 11 42 58 77 40
E-mail: ktr-uk@ktr.com

USA

KTR Corporation
122 Anchor Road
Michigan City, Indiana 46360
Phone: +1 2 19 8 72 91 00
Fax: +1 2 19 8 72 91 50
E-mail: ktr-us@ktr.com



Headquarters
KTR Systems GmbH
Carl-Zeiss-Straße 25
D-48432 Rheine
Phone: +49 5971 798-0
E-mail: mail@ktr.com
Internet: www.ktr.com

Made for Motion



Certificates and Approvals

Being one of the first companies in the field of drive technology, KTR was certified in accordance with DIN EN ISO 9001 already in 1993, including the plants in Poland, China, India and USA.

Currently KTR products have been approved by numerous internationally renowned societies for standardization and classification. Individual approvals by other societies can be implemented on request without fail.



Lloyd's
Register



Original approval date:

17.05.2011

Date of next recertification:

Date of the audit:

08.06.2011

Valid until:

subject to the continual satisfactory operation of the organisation's Management System, this certificate is valid from:

17.06.2008

16.0

07.



Legend of pictograms

	Torsionally stiff		Light-weight		Maintenance-free
	Torsionally flexible		Axial compensation		Protected against corrosion
	Highly flexible		Angular compensation		Electrically insulating
	Damping vibrations		Radial compensation		Maximum speed
	Axial plug-in		Shiftable at standstill		No eddy current losses
	Consider shaft distance		Double-cardanic		Torque limiter slipping
	Relatively short shaft distance		Radial disassembly, ease of service		Torque limiter with synchronous ratching
	Maximum operating temperature		Standard drop-out center lengths available		Torque limiter with idle rotation type
	High speeds		Available in accordance with API		Hardened surface
	Backlash-free		Complying with ATEX For details refer to our ATEX leaflet		Accuracy X %
	Shear type, separating, slipping		Certified in accordance with ABS		Consider axial displacement
					Additional features compared to standard version